



**Perris and Ramona Warehouse
NOISE IMPACT ANALYSIS
(DPR19-00012)
CITY OF PERRIS**

PREPARED BY:

Bill Lawson, PE, INCE
blawson@urbanxroads.com
(949) 584-3148

Sama Shami
sshami@urbanxroads.com
(949) 945-4407

SEPTEMBER 6, 2021

TABLE OF CONTENTS

TABLE OF CONTENTS	III
APPENDICES	IV
LIST OF EXHIBITS	IV
LIST OF TABLES	V
LIST OF ABBREVIATED TERMS	VI
EXECUTIVE SUMMARY	1
1 INTRODUCTION	3
1.1 Site Location.....	3
1.2 Project Description.....	3
2 FUNDAMENTALS	7
2.1 Range of Noise	7
2.2 Noise Descriptors	8
2.3 Sound Propagation.....	8
2.4 Noise Control	10
2.5 Noise Barrier Attenuation	10
2.6 Land Use Compatibility With Noise	10
2.7 Community Response to Noise	10
2.8 Vibration	11
3 REGULATORY SETTING	15
3.1 State of California Noise Requirements.....	15
3.2 State of California Green Building Standards Code	15
3.3 City of Perris General Plan Noise Element	16
3.4 Operational Noise Standards	16
3.5 Construction Noise Standards	17
3.6 Vibration Standards	17
3.7 March Air Reserve Base/Inland Port Airport Land Use Compatibility	17
4 SIGNIFICANCE CRITERIA	21
4.1 CEQA Guidelines Not Further Analyzed	21
4.2 PVCC SP EIR Thresholds	21
4.3 Significance Criteria Summary	22
5 EXISTING NOISE LEVEL MEASUREMENTS	23
5.1 Measurement Procedure and Criteria	23
5.2 Noise Measurement Locations	23
5.3 Noise Measurement Results	24
6 OFF-SITE TRAFFIC NOISE IMPACTS	27
7 SENSITIVE RECEIVER LOCATIONS	29
8 OPERATIONAL NOISE IMPACTS	31
8.1 Operational Noise Sources.....	31
8.2 Reference Noise Levels	31
8.2.1 Measurement Procedures	31
8.3 CadnaA Noise Prediction Model	34
8.4 Project Operational Noise Levels.....	35

8.5 Project Operational Noise Level Compliance..... 35
8.6 Project Operational Noise Level Increases 37
9 CONSTRUCTION IMPACTS..... 39
9.1 Construction Noise Levels..... 39
9.2 Construction Reference Noise Levels 39
9.3 Construction Noise Analysis..... 41
9.4 Typical Construction Noise Level Compliance 42
9.5 Construction Vibration Analysis..... 42
9.6 Construction Mitigation Measures 43
9.6 Cumulative Construction Impacts..... 44
10 REFERENCES..... 45
11 CERTIFICATION..... 47

APPENDICES

- APPENDIX 3.1: CITY OF PERRIS MUNICIPAL CODE
- APPENDIX 5.1: STUDY AREA PHOTOS
- APPENDIX 5.2: NOISE LEVEL MEASUREMENT WORKSHEETS
- APPENDIX 8.1: CADNAA OPERATIONAL NOISE MODEL INPUTS
- APPENDIX 8.2: 24-HOUR CADNAA OPERATIONAL NOISE MODEL INPUTS
- APPENDIX 9.1: CADNAA CONSTRUCTION NOISE MODEL INPUTS

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP4
EXHIBIT 1-B: SITE PLAN 5
EXHIBIT 2-A: TYPICAL NOISE LEVELS7
EXHIBIT 2-B: NOISE LEVEL INCREASE PERCEPTION 11
EXHIBIT 2-C: TYPICAL LEVELS OF GROUND-BORNE VIBRATION..... 13
EXHIBIT 3-A: MARB/IPA FUTURE AIRPORT NOISE CONTOURS 19
EXHIBIT 5-A: NOISE MEASUREMENT LOCATIONS..... 25
EXHIBIT 7-A: SENSITIVE RECEIVER LOCATIONS..... 30
EXHIBIT 8-A: OPERATIONAL NOISE SOURCE LOCATIONS 32
EXHIBIT 9-A: TYPICAL CONSTRUCTION NOISE SOURCE LOCATIONS 40

LIST OF TABLES

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS1
TABLE 3-1: OPERATIONAL NOISE STANDARDS17
TABLE 3-2: CONSTRUCTION NOISE STANDARDS17
TABLE 4-1: SIGNIFICANCE CRITERIA SUMMARY22
TABLE 5-1: 24-HOUR AMBIENT NOISE LEVEL MEASUREMENTS24
TABLE 8-1: REFERENCE NOISE LEVEL MEASUREMENTS.....33
TABLE 8-2: DAYTIME PROJECT OPERATIONAL NOISE LEVELS.....35
TABLE 8-3: NIGHTTIME PROJECT OPERATIONAL NOISE LEVELS35
TABLE 8-4: OPERATIONAL NOISE LEVEL COMPLIANCE.....36
TABLE 8-5: OPERATIONAL NOISE LEVEL COMPLIANCE (CNEL).....36
TABLE 8-6: DAYTIME PROJECT OPERATIONAL NOISE LEVEL INCREASES37
TABLE 8-7: NIGHTTIME OPERATIONAL NOISE LEVEL INCREASES38
TABLE 9-1: CONSTRUCTION REFERENCE NOISE LEVELS41
TABLE 9-2: CONSTRUCTION EQUIPMENT NOISE LEVEL SUMMARY42
TABLE 9-3: TYPICAL CONSTRUCTION NOISE LEVEL COMPLIANCE42
TABLE 9-4: VIBRATION SOURCE LEVELS FOR CONSTRUCTION EQUIPMENT43
TABLE 9-5: CONSTRUCTION EQUIPMENT VIBRATION LEVELS43

LIST OF ABBREVIATED TERMS

(1)	Reference
ADT	Average Daily Traffic
ANSI	American National Standards Institute
Calveno	California Vehicle Noise
CEQA	California Environmental Quality Act
CNEL	Community Noise Equivalent Level
dBA	A-weighted decibels
EPA	Environmental Protection Agency
FHWA	Federal Highway Administration
FTA	Federal Transit Administration
Hz	Hertz
INCE	Institute of Noise Control Engineering
L_{eq}	Equivalent continuous (average) sound level
L_{max}	Maximum level measured over the time interval
L_{min}	Minimum level measured over the time interval
mph	Miles per hour
OPR	Office of Planning and Research
PPV	Peak particle velocity
Project	Perris and Ramona Warehouse
REMEL	Reference Energy Mean Emission Level
RMS	Root-mean-square
VdB	Vibration Decibels

EXECUTIVE SUMMARY

Urban Crossroads, Inc. has prepared this noise study to determine the potential noise impacts and the necessary noise mitigation measures, if any, for the proposed Perris and Ramona Warehouse development (“Project”). The Project is proposed to consist of a 347,918 square foot (sf) high-cube transload/short-term warehouse building . The proposed Project is located within the Perris Valley Commerce Center Specific Plan (PVCC SP). At the time this noise analysis was prepared, the future tenants of the proposed Project were unknown, and therefore, this noise study includes a conservative analysis of the proposed Project uses. This study has been prepared to satisfy applicable City of Perris standards and thresholds of significance based on guidance provided by Appendix G of the California Environmental Quality Act (CEQA) Guidelines. (1)

The results of this Perris and Ramona Warehouse Noise Impact Analysis are summarized below based on the significance criteria in Section 4 of this report. Table ES-1 shows the findings of significance for each potential noise and/or vibration impact under CEQA before and after any required mitigation measures.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Analysis	Significance Findings	
	Unmitigated	Mitigated
Off-Site Traffic Noise	<i>Less Than Significant</i>	-
Operational Noise	<i>Less Than Significant</i>	-
Construction Noise	<i>Less Than Significant</i>	-
Construction Vibration	<i>Less Than Significant</i>	-

This page intentionally left blank

1 INTRODUCTION

This noise analysis has been completed to determine the noise impacts associated with the development of the proposed Perris and Ramona Warehouse (“Project”). This noise study briefly describes the proposed Project, provides information regarding noise fundamentals, sets out the local regulatory setting, presents the study methods and procedures for transportation related CNEL traffic noise analysis, and evaluates the future exterior noise environment. In addition, this study includes an analysis of the potential Project-related long-term stationary-source operational noise and short-term construction noise and vibration impacts.

1.1 SITE LOCATION

The proposed Perris and Ramona Warehouse site is located on the southwest corner of Perris Boulevard and Ramona Expressway, within the City of Perris’ *Perris Valley Commerce Center Specific Plan* (PVCC SP) as shown on Exhibit 1-A. The March Air Reserve Base/Inland Port Airport (MARB/IPA) is located approximately 1.29 miles northwest of the Project site boundary.

The project is located adjacent to existing industrial and commercial land use with noise sensitive residential homes are located to the east of the Project site. As per the City of Perris General Plan, the Project site is located within the PVCC SP area. As per the PVCC SP, the Project site is designated as a Light Industrial use. The Light Industrial designation provides for light industrial uses and related activities including manufacturing, research, warehouse and distribution, assembly of non-hazardous materials and retail related to manufacturing (2).

1.2 PROJECT DESCRIPTION

The Project is proposed to consist of a 347,918 square foot (sf) high-cube transload/short-term warehouse building. The Project is anticipated to be constructed in a single phase by the year 2023. The proposed Project land use is consistent with the PVCC SP, which is Light Industrial. At the time this study was prepared the future tenants of the proposed Project were unknown. It is expected that the Project business operations would primarily be conducted within the enclosed buildings, except for traffic movement, parking, as well as loading and unloading of trucks at designated loading bays. The on-site Project-related noise sources are expected to include: loading dock activity, truck movements, roof-top air conditioning units, and trash enclosure activity. This noise analysis is intended to describe noise level impacts associated with the expected typical operational activities at the Project site. To present a conservative approach, this report assumes the Project will operate 24-hours daily for seven days per week.


EXHIBIT 1-A: LOCATION MAP



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS

LEGEND:
[Yellow dashed box] Site Boundary

EXHIBIT 1-B: SITE PLAN

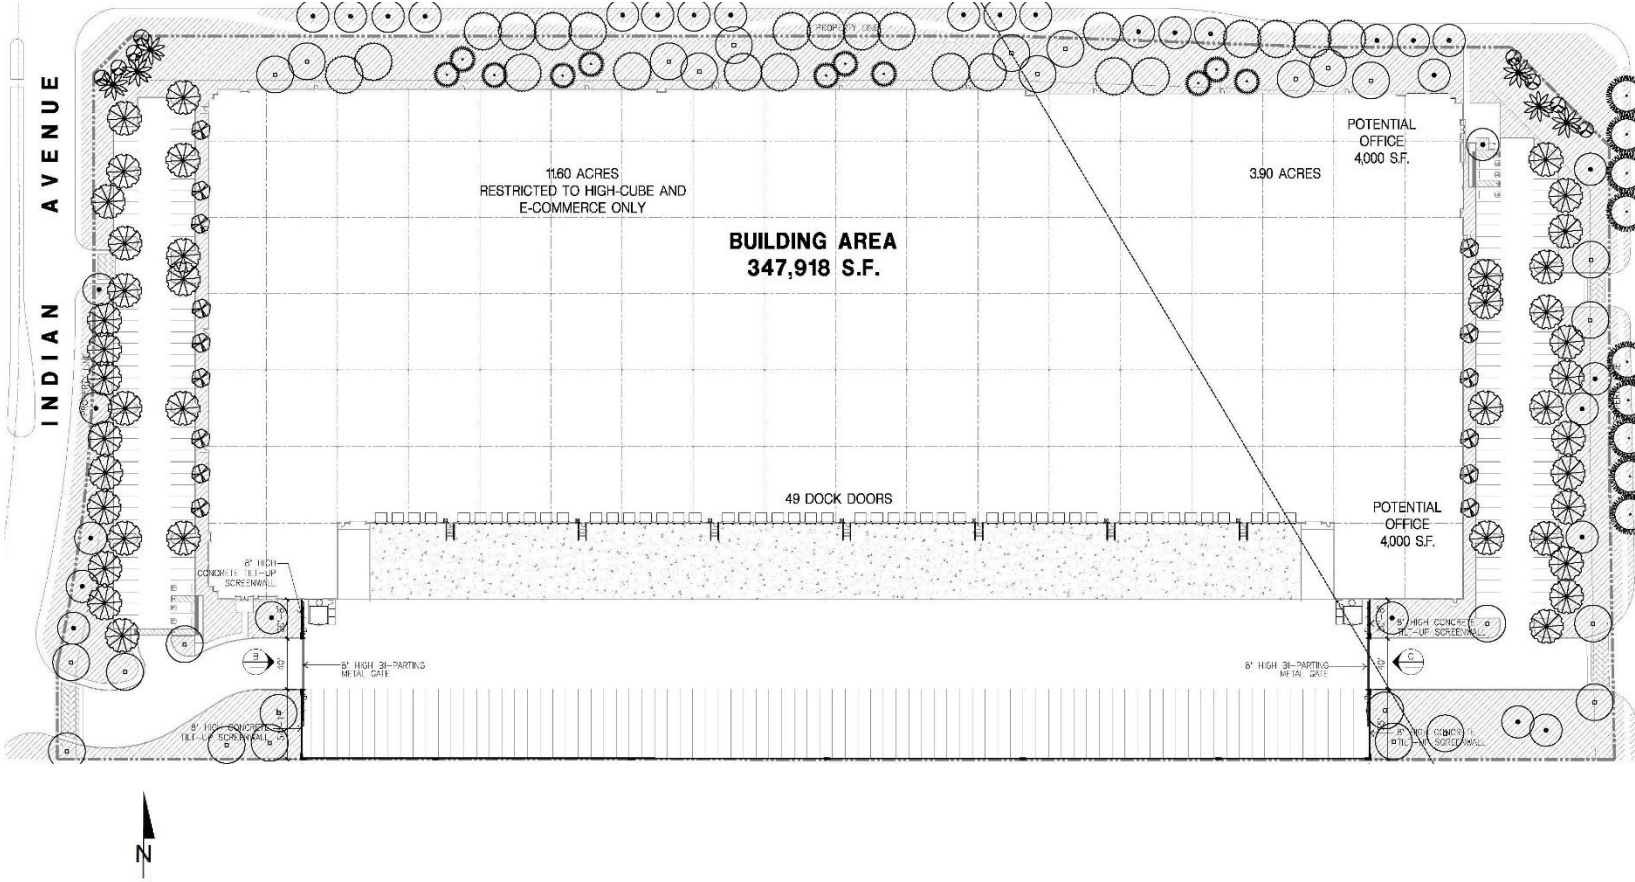

This page intentionally left blank

2 FUNDAMENTALS

Noise is simply defined as "unwanted sound." Sound becomes unwanted when it interferes with normal activities, when it causes actual physical harm or when it has adverse effects on health. Noise is measured on a logarithmic scale of sound pressure level known as a decibel (dB). A-weighted decibels (dBA) approximate the subjective response of the human ear to broad frequency noise source by discriminating against very low and very high frequencies of the audible spectrum. They are adjusted to reflect only those frequencies which are audible to the human ear. Exhibit 2-A presents a summary of the typical noise levels and their subjective loudness and effects that are described in more detail below.

EXHIBIT 2-A: TYPICAL NOISE LEVELS

COMMON OUTDOOR ACTIVITIES	COMMON INDOOR ACTIVITIES	A - WEIGHTED SOUND LEVEL dBA	SUBJECTIVE LOUDNESS	EFFECTS OF NOISE
THRESHOLD OF PAIN		140	INTOLERABLE OR DEAFENING	HEARING LOSS
NEAR JET ENGINE		130		
		120		
JET FLY-OVER AT 300m (1000 ft)	ROCK BAND	110		
LOUD AUTO HORN		100	VERY NOISY	SPEECH INTERFERENCE
GAS LAWN MOWER AT 1m (3 ft)		90		
DIESEL TRUCK AT 15m (50 ft), at 80 km/hr (50 mph)	FOOD BLENDER AT 1m (3 ft)	80	LOUD	
NOISY URBAN AREA, DAYTIME	VACUUM CLEANER AT 3m (10 ft)	70		
HEAVY TRAFFIC AT 90m (300 ft)	NORMAL SPEECH AT 1m (3 ft)	60	MODERATE	SLEEP DISTURBANCE
QUIET URBAN DAYTIME	LARGE BUSINESS OFFICE	50		
QUIET URBAN NIGHTTIME	THEATER, LARGE CONFERENCE ROOM (BACKGROUND)	40	FAINT	NO EFFECT
QUIET SUBURBAN NIGHTTIME	LIBRARY	30		
QUIET RURAL NIGHTTIME	BEDROOM AT NIGHT, CONCERT HALL (BACKGROUND)	20		
	BROADCAST/RECORDING STUDIO	10	VERY FAINT	
LOWEST THRESHOLD OF HUMAN HEARING	LOWEST THRESHOLD OF HUMAN HEARING	0		

Source: Environmental Protection Agency Office of Noise Abatement and Control, *Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare with an Adequate Margin of Safety (EPA/ONAC 550/9-74-004) March 1974.*

2.1 RANGE OF NOISE

Since the range of intensities that the human ear can detect is so large, the scale frequently used to measure intensity is a scale based on multiples of 10, the logarithmic scale. The scale for measuring intensity is the decibel scale. Each interval of 10 decibels indicates a sound energy ten times greater than before, which is perceived by the human ear as being roughly twice as loud (3). The most common sounds vary between 40 dBA (very quiet) to 100 dBA (very loud). Normal conversation at three feet is roughly at 60 dBA, while loud jet engine noises equate to 110 dBA

at approximately 100 feet, which can cause serious discomfort (4). Another important aspect of noise is the duration of the sound and the way it is described and distributed in time.

2.2 NOISE DESCRIPTORS

Environmental noise descriptors are generally based on averages, rather than instantaneous, noise levels. The most used figure is the equivalent level (L_{eq}). Equivalent sound levels are not measured directly but are calculated from sound pressure levels typically measured in A-weighted decibels (dBA). The equivalent sound level (L_{eq}) represents a steady state sound level containing the same total energy as a time varying signal over a given sample period (typically one hour) and is commonly used to describe the “average” noise levels within the environment.

Peak hour or average noise levels, while useful, do not completely describe a given noise environment, however. Noise levels lower than peak hour may be disturbing if they occur during times when quiet is most desirable, namely evening and nighttime (sleeping) hours. To account for this, the Community Noise Equivalent Level (CNEL), representing a composite 24-hour noise level is utilized. The CNEL is the weighted average of the intensity of a sound, with corrections for time of day, and averaged over 24 hours. The time-of-day corrections require the addition of 5 decibels to dBA L_{eq} sound levels in the evening from 7:00 p.m. to 10:00 p.m., and the addition of 10 decibels to dBA L_{eq} sound levels at night between 10:00 p.m. and 7:00 a.m. These additions are made to account for the noise sensitive time periods during the evening and night hours when sound appears louder. CNEL does not represent the actual sound level heard at any time, but rather represents the total sound exposure. The City of Perris relies on the 24-hour CNEL level to assess land use compatibility with transportation related noise sources.

2.3 SOUND PROPAGATION

When sound propagates over a distance, it changes in level and frequency content. Based on guidance from the U.S. Department of Transportation, Federal Highway Administration (FHWA), Office of Environment and Planning, Noise and Air Quality Branch, the way noise reduces with distance depends on the following factors.

2.3.1 GEOMETRIC SPREADING

Sound from a localized source (i.e., a stationary point source) propagates uniformly outward in a spherical pattern. The sound level attenuates (or decreases) at a rate of 6 dB for each doubling of distance from a point source. Highways consist of several localized noise sources on a defined path and hence can be treated as a line source, which approximates the effect of several point sources. Noise from a line source propagates outward in a cylindrical pattern, often referred to as cylindrical spreading. Sound levels attenuate at a rate of 3 dB for each doubling of distance from a line source (3).

2.3.2 GROUND ABSORPTION

The propagation path of noise from a highway to a receiver is usually very close to the ground. Noise attenuation from ground absorption and reflective wave canceling adds to the attenuation

associated with geometric spreading. Traditionally, the excess attenuation has also been expressed in terms of attenuation per doubling of distance. This approximation is usually sufficiently accurate for distances of less than 200 feet. For acoustically hard sites (i.e., sites with a reflective surface between the source and the receiver, such as a parking lot or body of water), no excess ground attenuation is assumed. For acoustically absorptive or soft sites (i.e., those sites with an absorptive ground surface between the source and the receiver such as soft dirt, grass, or scattered bushes and trees), an excess ground attenuation value of 1.5 dB per doubling of distance is normally assumed. When added to the cylindrical spreading, the excess ground attenuation results in an overall drop-off rate of 4.5 dB per doubling of distance from a line source (5).

2.3.3 ATMOSPHERIC EFFECTS

Receivers located downwind from a source can be exposed to increased noise levels relative to calm conditions, whereas locations upwind can have lowered noise levels. Sound levels can be increased at large distances (e.g., more than 500 feet) due to atmospheric temperature inversion (i.e., increasing temperature with elevation). Other factors such as air temperature, humidity, and turbulence can also have significant effects (3).

2.3.4 SHIELDING

A large object or barrier in the path between a noise source and a receiver can substantially attenuate noise levels at the receiver. The amount of attenuation provided by shielding depends on the size of the object and the frequency content of the noise source. Shielding by trees and other such vegetation typically only has an “out of sight, out of mind” effect. That is, the perception of noise impact tends to decrease when vegetation blocks the line-of-sight to nearest residents. However, for vegetation to provide a substantial, or even noticeable, noise reduction, the vegetation area must be at least 15 feet in height, 100 feet wide and dense enough to completely obstruct the line-of sight between the source and the receiver. This size of vegetation may provide up to 5 dBA of noise reduction. The Federal Highway Administration (FHWA) does not consider the planting of vegetation to be a noise abatement measure (5).

2.3.5 REFLECTION

Field studies conducted by the FHWA have shown that the reflection from barriers and buildings does not substantially increase noise levels (5). If all the noise striking a structure was reflected back to a given receiving point, the increase would be theoretically limited to 3 dBA. Further, not all the acoustical energy is reflected back to same point. Some of the energy would go over the structure, some is reflected to points other than the given receiving point, some is scattered by ground coverings (e.g., grass and other plants), and some is blocked by intervening structures and/or obstacles (e.g., the noise source itself). Additionally, some of the reflected energy is lost due to the longer path that the noise must travel. FHWA measurements made to quantify reflective increases in traffic noise have not shown an increase of greater than 1-2 dBA; an increase that is not perceptible to the average human ear.

2.4 NOISE CONTROL

Noise control is the process of obtaining an acceptable noise environment for an observation point or receiver by controlling the noise source, transmission path, receiver, or all three. This concept is known as the source-path-receiver concept. In general, noise control measures can be applied to these three elements.

2.5 NOISE BARRIER ATTENUATION

Effective noise barriers can reduce noise levels by up to 10 to 15 dBA, cutting the loudness of traffic noise in half. A noise barrier is most effective when placed close to the noise source or receiver. Noise barriers, however, do have limitations. For a noise barrier to work, it must be high enough and long enough to block the path of the noise source (5).

2.6 LAND USE COMPATIBILITY WITH NOISE

Some land uses are more tolerant of noise than others. For example, schools, hospitals, churches, and residences are more sensitive to noise intrusion than are commercial or industrial developments and related activities. Sensitive receivers are generally defined as locations where people reside or where the presence of unwanted sound could otherwise adversely affect the use of the land. Noise-sensitive land uses are generally considered to include schools, hospitals, single-family dwellings, mobile home parks, churches, libraries, recreation areas or buildings where people normally sleep. Although the West Valley Detention Center is a temporary holding facility, there are beds at this facility for temporary stays. Therefore, as a conservative measure, the individuals held at the West Valley Detention Center are considered sensitive receptors for the purposes of this analysis.

As ambient noise levels affect the perceived amenity or livability of a development, so too can the mismanagement of noise impacts impair the economic health and growth potential of a community by reducing the area's desirability as a place to live, shop and work. For this reason, land use compatibility with the noise environment is an important consideration in the planning and design process. The FHWA encourages State and Local government to regulate land development in such a way that noise-sensitive land uses are either prohibited from being located adjacent to a highway, or that the developments are planned, designed, and constructed in such a way that noise impacts are minimized (6).

2.7 COMMUNITY RESPONSE TO NOISE


Community responses to noise varies depending upon everyone's susceptibility to noise and personal attitudes about noise. Several factors are related to the level of community annoyance including:

- Fear associated with noise producing activities;
- Socio-economic status and educational level;
- Perception that those affected are being unfairly treated;
- Attitudes regarding the usefulness of the noise-producing activity;

- Belief that the noise source can be controlled.

Approximately ten percent of the population has a very low tolerance for noise and will object to any noise not of their making. Consequently, even in the quietest environment, some complaints will occur. Twenty-five percent of the population will not complain even in very severe noise environments. Thus, a variety of reactions can be expected from people exposed to any given noise environment (7). Surveys have shown that about ten percent of the people exposed to traffic noise of 60 dBA will report being highly annoyed with the noise, and each increase of one dBA is associated with approximately two percent more people being highly annoyed. When traffic noise exceeds 60 dBA or aircraft noise exceeds 55 dBA, people may begin to complain (7). Despite this variability in behavior on an individual level, the population can be expected to exhibit the following responses to changes in noise levels as shown on Exhibit 2-B. A change of 3 dBA is considered *barely perceptible*, and changes of 5 dBA are considered *readily perceptible*. (5)

EXHIBIT 2-B: NOISE LEVEL INCREASE PERCEPTION

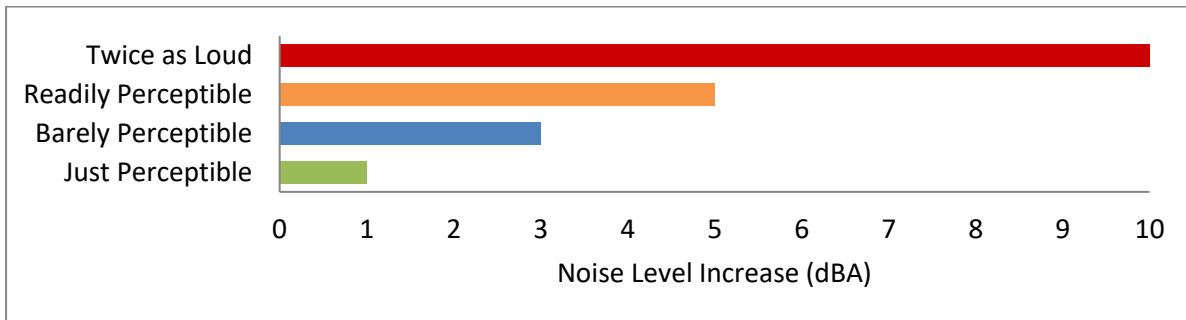

2.8 VIBRATION


Per the Federal Transit Administration (FTA) *Transit Noise and Vibration Impact Assessment Manual* (8), vibration is the periodic oscillation of a medium or object. The rumbling sound caused by the vibration of room surfaces is called structure-borne noise. Sources of ground-borne vibrations include natural phenomena (e.g., earthquakes, volcanic eruptions, sea waves, landslides) or human-made causes (e.g., explosions, machinery, traffic, trains, construction equipment). Vibration sources may be continuous, such as factory machinery, or transient, such as explosions. As is the case with airborne sound, ground-borne vibrations may be described by amplitude and frequency.

There are several different methods that are used to quantify vibration. The peak particle velocity (PPV) is defined as the maximum instantaneous peak of the vibration signal. The PPV is most frequently used to describe vibration impacts to buildings but is not always suitable for evaluating human response (annoyance) because it takes some time for the human body to respond to vibration signals. Instead, the human body responds to average vibration amplitude often described as the root mean square (RMS). The RMS amplitude is defined as the average of the squared amplitude of the signal and is most frequently used to describe the effect of vibration on the human body. Decibel notation (VdB) is commonly used to measure RMS. Decibel notation

(VdB) serves to reduce the range of numbers used to describe human response to vibration. Typically, ground-borne vibration generated by man-made activities attenuates rapidly with distance from the source of the vibration. Sensitive receivers for vibration include structures (especially older masonry structures), people (especially residents, the elderly, and sick), and vibration-sensitive equipment and/or activities.

The background vibration-velocity level in residential areas is generally 50 VdB. Ground-borne vibration is normally perceptible to humans at approximately 65 VdB. For most people, a vibration-velocity level of 75 VdB is the approximate dividing line between barely perceptible and distinctly perceptible levels. Typical outdoor sources of perceptible ground-borne vibration are construction equipment, steel-wheeled trains, and traffic on rough roads. If a roadway is smooth, the ground-borne vibration is rarely perceptible. The range of interest is from approximately 50 VdB, which is the typical background vibration-velocity level, to 100 VdB, which is the general threshold where minor damage can occur in fragile buildings. Exhibit 2-C illustrates common vibration sources and the human and structural response to ground-borne vibration.

EXHIBIT 2-C: TYPICAL LEVELS OF GROUND-BORNE VIBRATION

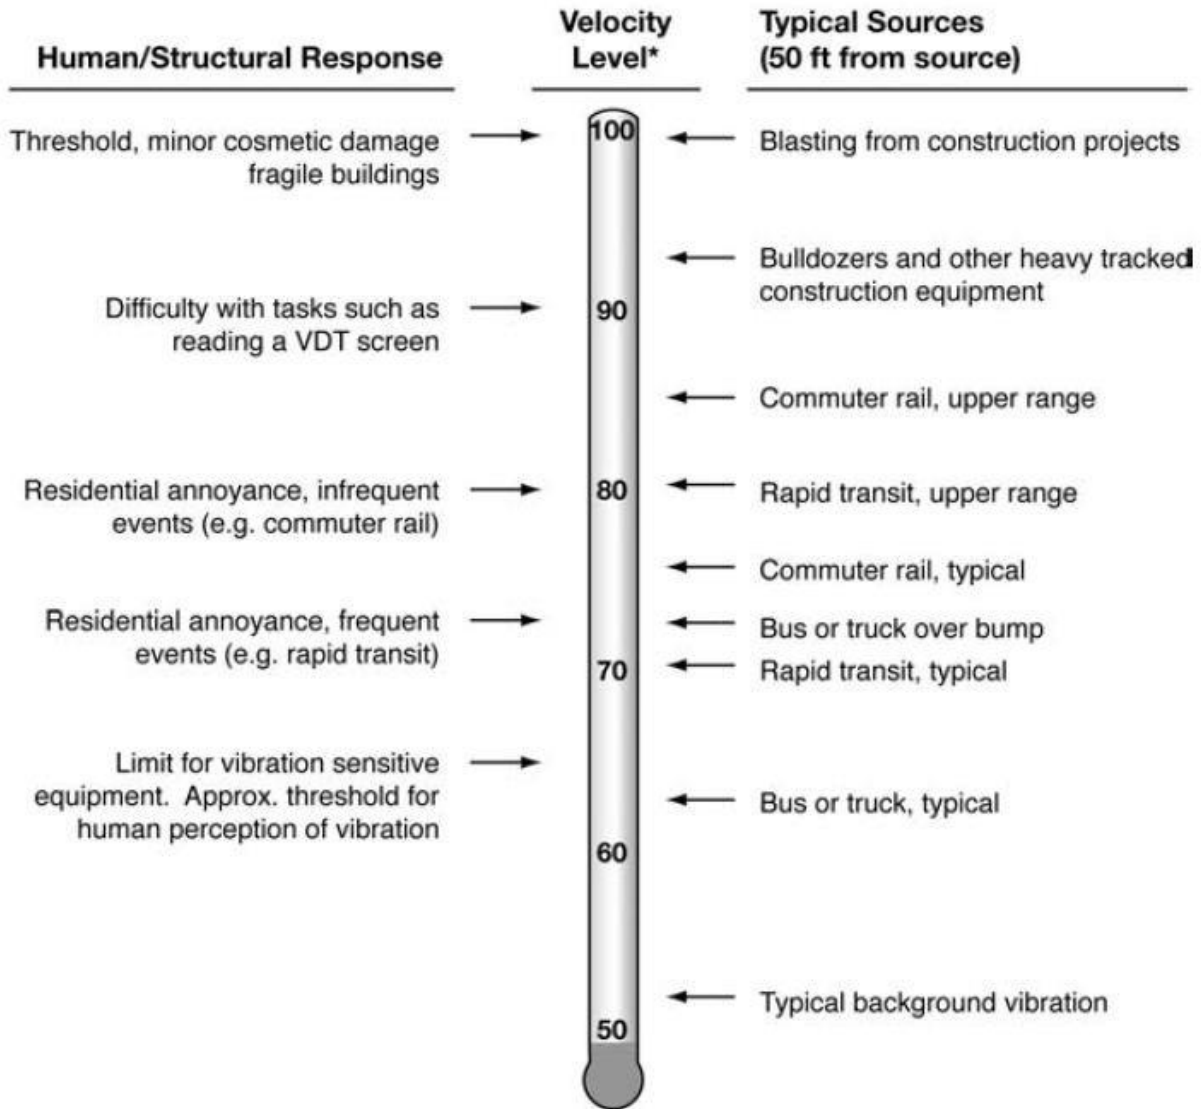

* RMS Vibration Velocity Level in VdB relative to 10^{-6} inches/second

Source: Federal Transit Administration (FTA) Transit Noise and Vibration Impact Assessment Manual.

This page intentionally left blank

3 REGULATORY SETTING

To limit population exposure to physically and/or psychologically damaging as well as intrusive noise levels, the federal government, the State of California, various county governments, and most municipalities in the state have established standards and ordinances to control noise. In most areas, automobile and truck traffic is the major source of environmental noise. Traffic activity generally produces an average sound level that remains constant with time. Air and rail traffic, and commercial and industrial activities are also major sources of noise in some areas. Federal, state, and local agencies regulate different aspects of environmental noise. Federal and state agencies generally set noise standards for mobile sources such as aircraft and motor vehicles, while regulation of stationary sources is left to local agencies.

3.1 STATE OF CALIFORNIA NOISE REQUIREMENTS

The State of California regulates freeway noise, sets standards for sound transmission, provides occupational noise control criteria, identifies noise standards, and provides guidance for local land use compatibility. State law requires that each county and city adopt a General Plan that includes a Noise Element which is to be prepared per guidelines adopted by the Governor's Office of Planning and Research (OPR). (9) The purpose of the Noise and Safety Element is to *limit the exposure of the community to excessive noise levels*. In addition, the California Environmental Quality Act (CEQA) requires that all known environmental effects of a project be analyzed, including environmental noise impacts.

3.2 STATE OF CALIFORNIA GREEN BUILDING STANDARDS CODE

The State of California's Green Building Standards Code (CALGreen) contains mandatory measures for non-residential building construction in Section 5.507 on Environmental Comfort. (10) These noise standards are applied to new construction in California for controlling interior noise levels resulting from exterior noise sources. The regulations specify that acoustical studies must be prepared when non-residential structures are developed in areas where the exterior noise levels exceed 65 dBA CNEL, such as within a noise contour of an airport, freeway, railroad, and other areas where noise contours are not readily available. If the development falls within an airport or freeway 65 dBA CNEL noise contour, the combined sound transmission class (STC) rating of the wall and roof-ceiling assemblies shall be constructed to provide an interior noise environment attributable to exterior sources that does not exceed an hourly equivalent noise level of 50 dBA L_{eq} in occupied areas during any hour of operation (Section 5.507.4.2).

3.3 CITY OF PERRIS GENERAL PLAN NOISE ELEMENT

The City of Perris has adopted a Noise Element of the General Plan (11) to control and abate environmental noise, and to protect the citizens of Perris from excessive exposure to noise. The Noise Element specifies the maximum allowable unmitigated exterior noise levels for new developments impacted by transportation noise sources such as arterial roads, freeways, airports, and railroads. In addition, the Noise Element identifies noise polices and implementation measures designed to protect, create, and maintain an environment free from noise that may jeopardize the health or welfare of sensitive receptors, or degrade quality of life.

The noise standards identified in the City of Perris General Plan are guidelines to evaluate the acceptability of the transportation related noise level impacts. These standards are based on the Governor's Office of Planning and Research (OPR) and are used to assess the long-term traffic noise impacts on land uses. According to the City's Land Use Compatibility for Community Noise Exposure (Exhibit N-1), noise-sensitive land uses such as single-family residences are *normally acceptable* with exterior noise levels below 60 dBA CNEL and *conditionally acceptable* with noise levels below 65 dBA CNEL. Industrial uses, such as the Project, are considered *normally acceptable* with exterior noise levels of up to 70 dBA CNEL, and *conditionally acceptable* with exterior noise levels between 70 to 80 dBA CNEL. (11)

3.4 OPERATIONAL NOISE STANDARDS

To analyze noise impacts originating from a designated fixed location or private property such as the Perris and Ramona Warehouse, operational noise such as the expected loading dock activity, truck movements, roof-top air conditioning units, and trash enclosure activity are typically evaluated against standards established under a City's Municipal Code.

The City of Perris Municipal Code, Chapter 7.34 *Noise Control*, Section 7.34.040, establishes the permissible noise level at any point on the property line of the affected residential receivers. Therefore, for residential properties, the exterior noise level shall not exceed a maximum noise level of 80 dBA L_{max} during daytime hours (7:01 a.m. to 10:00 p.m.) and shall not exceed a maximum noise level of 60 dBA L_{max} during the nighttime hours (10:01 p.m. to 7:00 a.m.), as shown on Table 3-1. (12) The City of Perris Municipal Code is included in Appendix 3.1.

Additional exterior noise level standards are identified in the City of Perris General Plan Noise Element Implementation Measure V.A.1 which requires that new industrial facilities within 160 feet of the property line of existing noise-sensitive land uses must demonstrate compliance with a 60 dBA CNEL exterior noise level standard. Table 3-1 shows the Municipal Code and General Plan standards used in this analysis to evaluate the potential operational noise levels from the Project.

TABLE 3-1: OPERATIONAL NOISE STANDARDS

Jurisdiction	Land Use	Time Period	Noise Level Standard (dBA)
City of Perris	Residential ¹	Daytime (7:01 a.m. - 10:00 p.m.)	80 dBA L _{max}
		Nighttime (10:01 p.m. - 7:00 a.m.)	60 dBA L _{max}
	Within 160 Feet of PL ²	24-Hours	60 dBA CNEL

¹ Source: City of Perris Municipal Code, Sections 7.34.040 & 7.34.050 (Appendix 3.1).

² Source: City of Perris General Plan Noise Element, Implementation Measure V.A.1.

3.5 CONSTRUCTION NOISE STANDARDS

To analyze noise impacts originating from the construction of the Perris and Ramona Warehouse site, noise from construction activities is typically evaluated against standards established under a City's Municipal Code. The City of Perris Municipal Code, Section 7.34.060, identifies the City's construction noise standards and permitted hours of construction activity (refer to Table 3-2). Further, the City of Perris Municipal Code, Section 7.34.060, noise level standard of 80 dBA L_{max} at residential properties shall apply to the noise-sensitive receiver locations located in the City of Perris. (12)

TABLE 3-2: CONSTRUCTION NOISE STANDARDS

Jurisdiction	Permitted Hours of Construction Activity	Construction Noise Level Standard
City of Perris ¹	7:00 a.m. to 7:00 p.m. on any day except Sundays and legal holidays (with the exception of Columbus Day and Washington's birthday).	80 dBA L _{max}

¹ Source: City of Perris Municipal Code, Section 7.34.060 (Appendix 3.1).

3.6 VIBRATION STANDARDS

The City of Perris has not identified or adopted specific vibration level standards. However, the United States Department of Transportation Federal Transit Administration (FTA) *Transit Noise and Vibration Impact Assessment* methodology provides guidelines for maximum-acceptable vibration criteria for different types of land uses. These guidelines allow 90 VdB for industrial (workshop) use, 84 VdB for office use and 78 VdB for daytime residential uses. (8 p. 131)


3.7 MARCH AIR RESERVE BASE/INLAND PORT AIRPORT LAND USE COMPATIBILITY

The March Air Reserve Base/Inland Port Airport (MARB/IPA) is located approximately 1.3 miles northwest of the Project site boundary. The *March Air Reserve Base/Inland Port Airport Land Use Compatibility Plan* (MARB/IPA LUCP) includes the policies for determining the land use compatibility of the Project. (13) The MARB/IPA, Map MA-1, indicates that the Project site is located within Compatibility Zone B-1, and the Table MA-1 Compatibility Zone Factors indicates that this area is considered to have a *high* noise impact, and is mostly within or near the 65 to 70

dBa CNEL noise level contour boundaries. Consistent with the Basic Compatibility Criteria, listed in Table MA-2 of the MARB/IPA LUCP, noise sensitive outdoor uses are not permitted. The MARB/IPA LUCP does not identify industrial-use specific noise compatibility standards, and therefore, the Governor's Office of Planning and Research (OPR) Land Use Compatibility for Community Noise Exposure, previously discussed in Section 3.3, is used to assess potential aircraft-related noise levels at the Project site. The OPR guidelines indicate that industrial uses, such as the Project, are considered *normally acceptable* with exterior noise levels of up to 70 dBA CNEL. (9)

The noise contour boundaries of MARB/IPA are presented on Exhibit 3-A of this report and show that the Project is considered *normally acceptable* land use since it is located outside the 70 dBA CNEL noise level contour boundaries.

EXHIBIT 3-A: MARB/IPA FUTURE AIRPORT NOISE CONTOURS

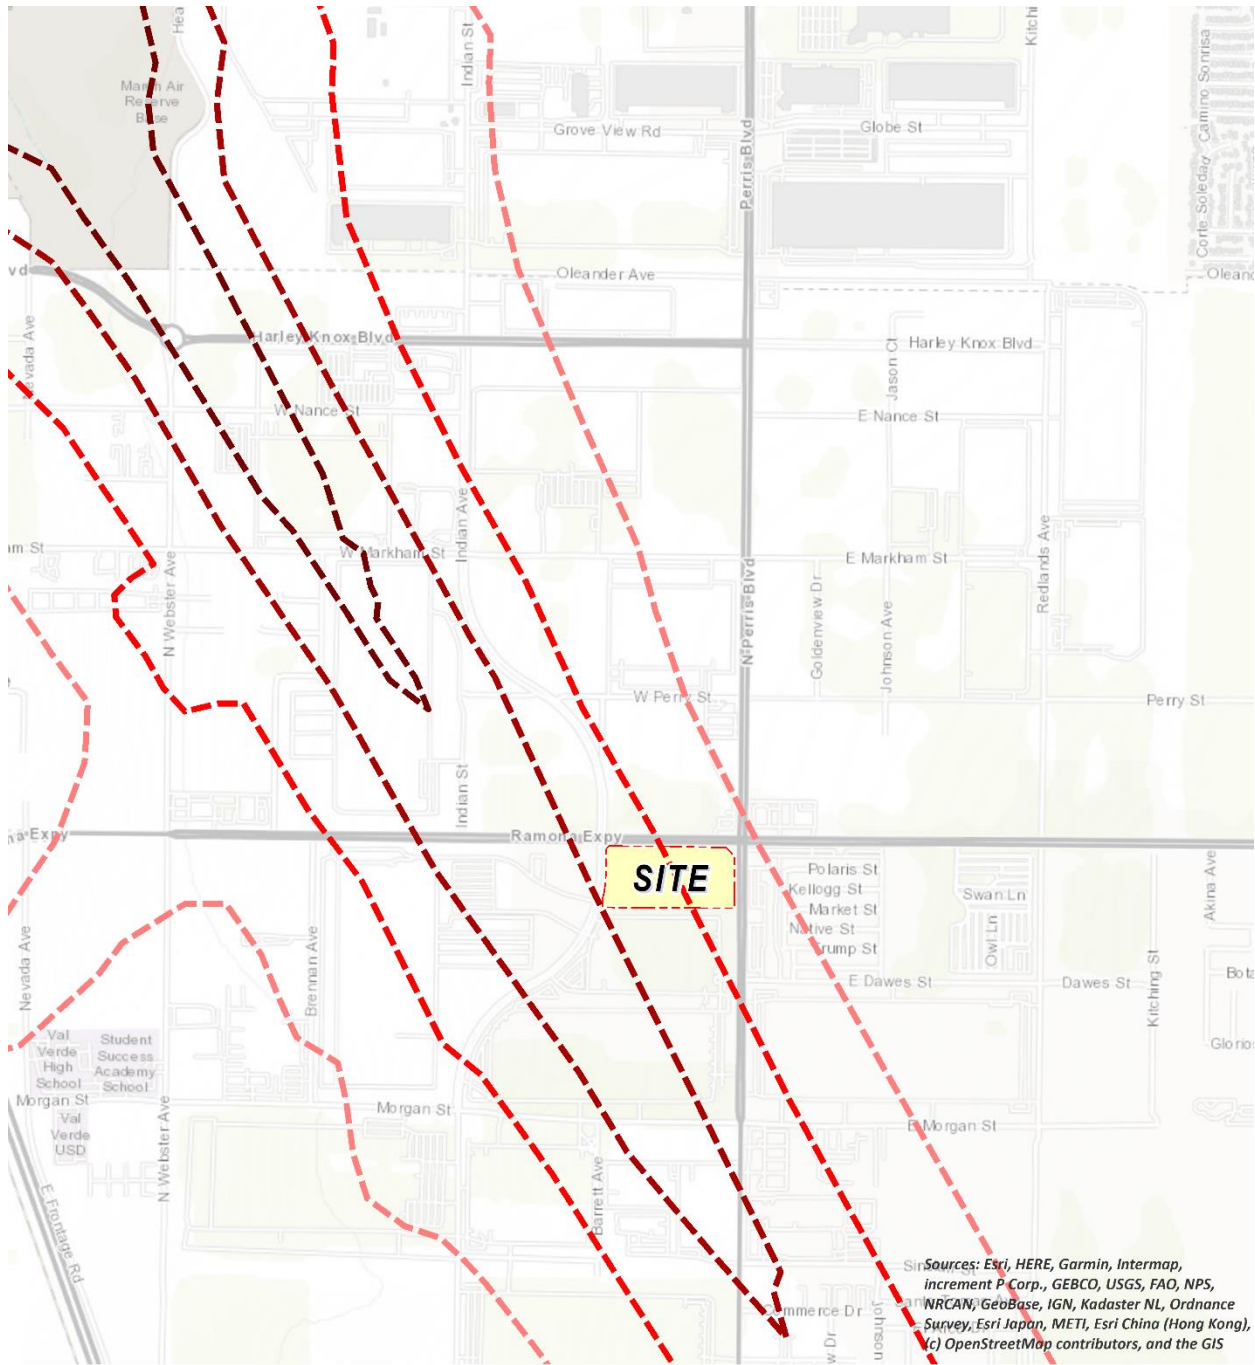

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, WRCAN, GeBCo, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), Swisstopo, Mapbox Contributors, and the GIS

- LEGEND:**
Unmitigated Airport Noise Contour Boundaries
- 55 dBA CNEL
 - 60 dBA CNEL
 - 65 dBA CNEL
 - 70 dBA CNEL
 - 75 dBA CNEL

Source: Riverside County Airport Land Use Compatibility Plan, MA-4

This page intentionally left blank

4 SIGNIFICANCE CRITERIA

The following significance criteria are based on currently adopted guidance provided by Appendix G of the California Environmental Quality Act (CEQA) Guidelines. (1) For the purposes of this report, impacts would be potentially significant if the Project results in or causes:

- A. Generation of a substantial temporary or permanent increase in ambient noise levels in the vicinity of the project in excess of standards established in the local general plan or noise ordinance, or applicable standards of other agencies?
- B. Generation of excessive ground-borne vibration or ground-borne noise levels?
- C. For a project located within the vicinity of a private airstrip or an airport land use plan or, where such a plan has not been adopted, within two miles of a public airport or public use airport, would the project expose people residing or working in the project area to excessive noise levels?

While the City of Perris General Plan Guidelines provide direction on noise compatibility and establish noise standards by land use type that are sufficient to assess the significance of noise impacts, they do not define the levels at which increases are considered substantial for use under Guideline A. CEQA Appendix G Guideline C applies to nearest public and private airports, if any, and the Project's land use compatibility.

4.1 CEQA GUIDELINES NOT FURTHER ANALYZED

The closest airport which would require additional noise analysis under CEQA Appendix G Guideline C is the MARB/IPA. As previously described in Section 3.7, the Project is in Compatibility Zone B-1, and the Table MA-1 Compatibility Zone Factors indicates that this area is considered to have a *high* noise impact. In addition, Table MA-2 indicates that the Project land use satisfies the basic compatibility criteria. Therefore, the potential impacts under CEQA Appendix G Guideline C, are *less than significant* and are not further analyzed in this noise study.

4.2 PVCC SP EIR THRESHOLDS

As identified in the PVCC SP EIR, sensitive receivers are areas where humans are participating in activities that may be subject to the stress of significant interference from noise and often include residential dwellings, mobile homes, hotels, motels, hospitals, nursing homes, educational facilities, and libraries. Other receivers include office and industrial buildings, which are not considered as sensitive as single-family homes, but are still protected by City of Perris land use compatibility standards, as discussed below.

Noise level increases at nearest receiver locations resulting from the Project are evaluated based on the PVCC SP EIR Thresholds described below at nearest sensitive receiver locations. Further, CEQA requires that consideration be given to the magnitude of the increase, the existing ambient noise levels, and the location of noise-sensitive receivers to determine if a noise increase represents a significant adverse environmental impact. This approach recognizes *that there is no single noise increase that renders the noise impact significant.* (14)

According to the PVCC SP EIR, there is no official “industry standard” of determining significance of noise impacts. However, typically, a jurisdiction will identify either 3 dBA or 5 dBA increase as being the threshold because these levels represent varying levels of perceived noise increases. The PVCC SP EIR indicates that a 5 dBA noise level increase is considered discernable to most people in an exterior environment when the resulting noise levels are below 60 dBA. Further, it identifies a 3 dBA increase threshold when the noise levels already exceed 60 dBA. In addition, according to the PVCC SP EIR, an increase of 5 dBA or more above without Project noise levels is considered a significant impact at all other sensitive land uses. (15)

4.3 SIGNIFICANCE CRITERIA SUMMARY

Noise impacts shall be considered significant if any of the following occur as a direct result of the proposed development. Table 4-1 shows the significance criteria summary matrix.

TABLE 4-1: SIGNIFICANCE CRITERIA SUMMARY

Analysis	Receiving Land Use	Condition(s)	Significance Criteria	
			Daytime	Nighttime
Off-Site	Noise-Sensitive ¹	if resulting noise level is < 60 dBA CNEL	≥ 5 dBA CNEL Project increase	
		if resulting noise level is > 60 dBA CNEL	≥ 3 dBA CNEL Project increase	
Operational	Perris	At residential land use ²	80 dBA L _{max}	60 dBA L _{max}
		Within 160 Feet of residential use ³	60 dBA CNEL	
	Noise-Sensitive ¹	if resulting noise level is < 60 dBA L _{eq}	≥ 5 dBA L _{eq} Project increase	
		if resulting noise level is > 60 dBA L _{eq}	≥ 3 dBA L _{eq} Project increase	
Construction	Noise-Sensitive	Noise Level Threshold ⁵	80 dBA L _{max}	
		Vibration Level Threshold ⁴	78 VdB	
	Office ⁴	Vibration Level Threshold	84 VdB	
	Industrial ⁴	Vibration Level Threshold	90 VdB	

¹ PVCC SP EIR, Page 4.9-20.

² City of Perris Municipal Code, Section 7.34.040 (Appendix 3.1).

³ City of Perris General Plan Noise Element, Implementation Measure V.A.1.

⁴ Federal Transit Administration, Transit Noise and Vibration Impact Assessment Manual.

⁵ City of Perris Municipal Code, Section 7.34.060 (Appendix 3.1).

"Daytime" = 7:01 a.m. - 10:00 p.m.; "Nighttime" = 10:01 p.m. - 7:00 a.m.

5 EXISTING NOISE LEVEL MEASUREMENTS

To assess the existing noise level environment, 24-hour noise level measurements were taken at three locations in the Project study area. The receiver locations were selected to describe and document the existing noise environment within the Project study area. Exhibit 5-A provides the boundaries of the Project study area and the noise level measurement locations. To fully describe the existing noise conditions, noise level measurements were collected by Urban Crossroads, Inc. on Wednesday, March 4th, 2020. Appendix 5.1 includes study area photos.

5.1 MEASUREMENT PROCEDURE AND CRITERIA

To describe the existing noise environment, the hourly noise levels were measured during typical weekday conditions over a 24-hour period. By collecting individual hourly noise level measurements, it is possible to describe the daytime and nighttime hourly noise levels and calculate the 24-hour CNEL. The long-term noise readings were recorded using Piccolo Type 2 integrating sound level meter and dataloggers. The Piccolo sound level meters were calibrated using a Larson-Davis calibrator, Model CAL 150. All noise meters were programmed in "slow" mode to record noise levels in "A" weighted form. The sound level meters and microphones were equipped with a windscreen during all measurements. All noise level measurement equipment satisfies the American National Standards Institute (ANSI) standard specifications for sound level meters ANSI S1.4-2014/IEC 61672-1:2013. (16)

5.2 NOISE MEASUREMENT LOCATIONS

The long-term noise level measurements were positioned as close to the nearest sensitive receiver locations as possible to assess the existing ambient hourly noise levels surrounding the Project site. Both Caltrans and the FTA recognize that it is not reasonable to collect noise level measurements that can fully represent every part of a private yard, patio, deck, or balcony normally used for human activity when estimating impacts for new development projects. This is demonstrated in the Caltrans general site location guidelines which indicate that, *sites must be free of noise contamination by sources other than sources of interest. Avoid sites located near sources such as barking dogs, lawnmowers, pool pumps, and air conditioners unless it is the express intent of the analyst to measure these sources.* (3) Further, FTA guidance states, *that it is not necessary nor recommended that existing noise exposure be determined by measuring at every noise-sensitive location in the project area. Rather, the recommended approach is to characterize the noise environment for clusters of sites based on measurements or estimates at representative locations in the community.* (8)

Based on recommendations of Caltrans and the FTA, it is not necessary to collect measurements at each individual building or residence, because each receiver measurement represents a group of buildings that share acoustical equivalence. (8) In other words, the area represented by the receiver shares similar shielding, terrain, and geometric relationship to the reference noise source. Receivers represent a location of noise sensitive areas and are used to estimate the future noise level impacts. Collecting reference ambient noise level measurements at the nearby sensitive receiver locations allows for a comparison of the before and after Project noise levels

and is necessary to assess potential noise impacts due to the Project's contribution to the ambient noise levels.

5.3 NOISE MEASUREMENT RESULTS

The noise measurements presented below focus on the average or equivalent sound levels (L_{eq}). The equivalent sound level (L_{eq}) represents a steady state sound level containing the same total energy as a time varying signal over a given sample period. Table 5-1 identifies the hourly daytime (7:00 a.m. to 10:00 p.m.) and nighttime (10:00 p.m. to 7:00 a.m.) noise levels at each noise level measurement location. Appendix 5.2 provides a summary of the existing hourly ambient noise levels.

TABLE 5-1: 24-HOUR AMBIENT NOISE LEVEL MEASUREMENTS

Location ¹	Description	Energy Average Noise Level (dBA L_{eq}) ²		CNEL
		Daytime	Nighttime	
L1	Located north of the Project site on Barret Avenue near existing single-family residential homes.	57.5	57.2	64.1
L2	Located north of the Project site on Perry Street near existing single-family residential home at 77 Perry Street.	56.7	56.0	62.9
L3	Located east of the Project site and Perris Boulevard near the Sanctuary Church and existing single-family residential homes.	64.3	62.4	69.5

¹ See Exhibit 5-A for the noise level measurement locations.

² Energy (logarithmic) average levels. The long-term 24-hour measurement worksheets are included in Appendix 5.2.

"Daytime" = 7:00 a.m. to 10:00 p.m.; "Nighttime" = 10:00 p.m. to 7:00 a.m.

Table 5-1 provides the (energy average) noise levels used to describe the daytime and nighttime ambient conditions. These daytime and nighttime energy average noise levels represent the average of all hourly noise levels observed during these time periods expressed as a single number. Appendix 5.2 provides summary worksheets of the noise levels for each hour as well as the minimum, maximum, L_1 , L_2 , L_5 , L_8 , L_{25} , L_{50} , L_{90} , L_{95} , and L_{99} percentile noise levels observed during the daytime and nighttime periods.

The background ambient noise levels in the Project study area are dominated by the transportation-related noise associated with surface streets. This includes the auto and heavy truck activities on study area roadway segments near the noise level measurement locations. The 24-hour existing noise level measurement results are shown on Table 5-1.

EXHIBIT 5-A: NOISE MEASUREMENT LOCATIONS



- LEGEND:**
-  **LEGEND:**
 -  Measurement Locations
 -  Existing Barrier
 -  8' Existing Barrier Height (in feet)

This page intentionally left blank

6 OFF-SITE TRAFFIC NOISE IMPACTS

Traffic generated by the operation of the proposed Project will influence the traffic noise levels in surrounding off-site areas and at the Project site. According to the August 2021, Perris and Ramona Warehouse *Traffic Generation Assessment and Vehicle Miles Traveled (VMT) Screening Evaluation* prepared by Urban Crossroads, Inc., the proposed Project is anticipated to generate a total of 492 actual vehicle trip-ends per day with 82 truck trip-ends per day. (17) The *Trip Generation Assessment* determined that the Project is anticipated to generate fewer than 50 peak hour trips.

The City maintains Level of Service (LOS) policies as part of their General Plan and discretionary review process. As such, the *Trip Generation Assessment* was developed to determine whether a full traffic study with LOS is required. Per the City's guidelines, a traffic study for LOS evaluation is required for projects which exceed 50 peak hour trips. The Project is anticipated to generate fewer than 50 peak hour trips. Additionally, the Project meets the Daily Trip Screening criteria and is presumed to have a less than significant VMT impact. As such, traffic and VMT analysis is not required for this Project based on the City's traffic study guidelines.

Therefore, traffic generated by the operation of the proposed Project is not expected to meaningfully influence the traffic noise levels in surrounding off-site areas. The expected Project traffic represents an incremental increase to the existing roadway volumes, which is not expected to generate a *barely perceptible* noise level increase of 3 dBA CNEL at nearby sensitive land uses adjacent to study area roadways, since a doubling of the existing traffic volumes would be required to generate a 3 dBA CNEL increase. (5) Due to the low traffic volumes generated by the Project, the off-site traffic noise levels generated by the Project are considered *less than significant* and no further analysis is required.

This page intentionally left blank


7 SENSITIVE RECEIVER LOCATIONS

To assess the potential for long-term operational and short-term construction impacts, the following receiver locations, as shown on Exhibit 7-A, were identified as representative locations for analysis. As identified in the PVCC SP EIR, sensitive receivers are areas where humans are participating in activities that may be subject to the stress of significant interference from noise and often include residential dwellings, mobile homes, hotels, motels, hospitals, nursing homes, educational facilities, and libraries. Other receivers include office and industrial buildings, which are not considered as sensitive as single-family homes, but are still protected by City of Perris land use compatibility standards.

To describe the potential off-site Project noise levels, four receiver locations in the vicinity of the Project site were identified. All distances are measured from the Project site boundary to the outdoor living areas (e.g., private backyards) or at the building façade, whichever is closer to the Project site. The selection of receiver locations is based on FHWA guidelines and is consistent with additional guidance provided by Caltrans and the FTA, as previously described in Section 5.2. Other sensitive land uses in the Project study area that are located at greater distances than those identified in this noise study will experience lower noise levels than those presented in this report due to the additional attenuation from distance and the shielding of intervening structures. Distance is measured in a straight line from the project boundary to the property line of each receiver location.

- R1: Location R1 represents the property line of the existing noise sensitive residence at 4111 Barrett Avenue, approximately 740 feet north of the Project site. A 24-hour noise measurement was taken near this location, L1, to describe the existing ambient noise environment.
- R2: Location R2 represents the property line of the existing noise sensitive residence at 77 Perry Street, approximately 738 feet north of the Project site. A 24-hour noise measurement was taken near this location, L2, to describe the existing ambient noise environment.
- R3: Location R3 represents the property line of the existing noise sensitive residence at 80 E Dawes Street, approximately 432 feet east of the Project site. A 24-hour noise measurement was taken near this location, L3, to describe the existing ambient noise environment.
- R4: Location R4 represents the property line of The Islamic Center of Perris at 3895 North Perris Boulevard, approximately 273 feet southeast of the Project site. A 24-hour noise measurement was taken near this location, L3, to describe the existing ambient noise environment.

EXHIBIT 7-A: SENSITIVE RECEIVER LOCATIONS

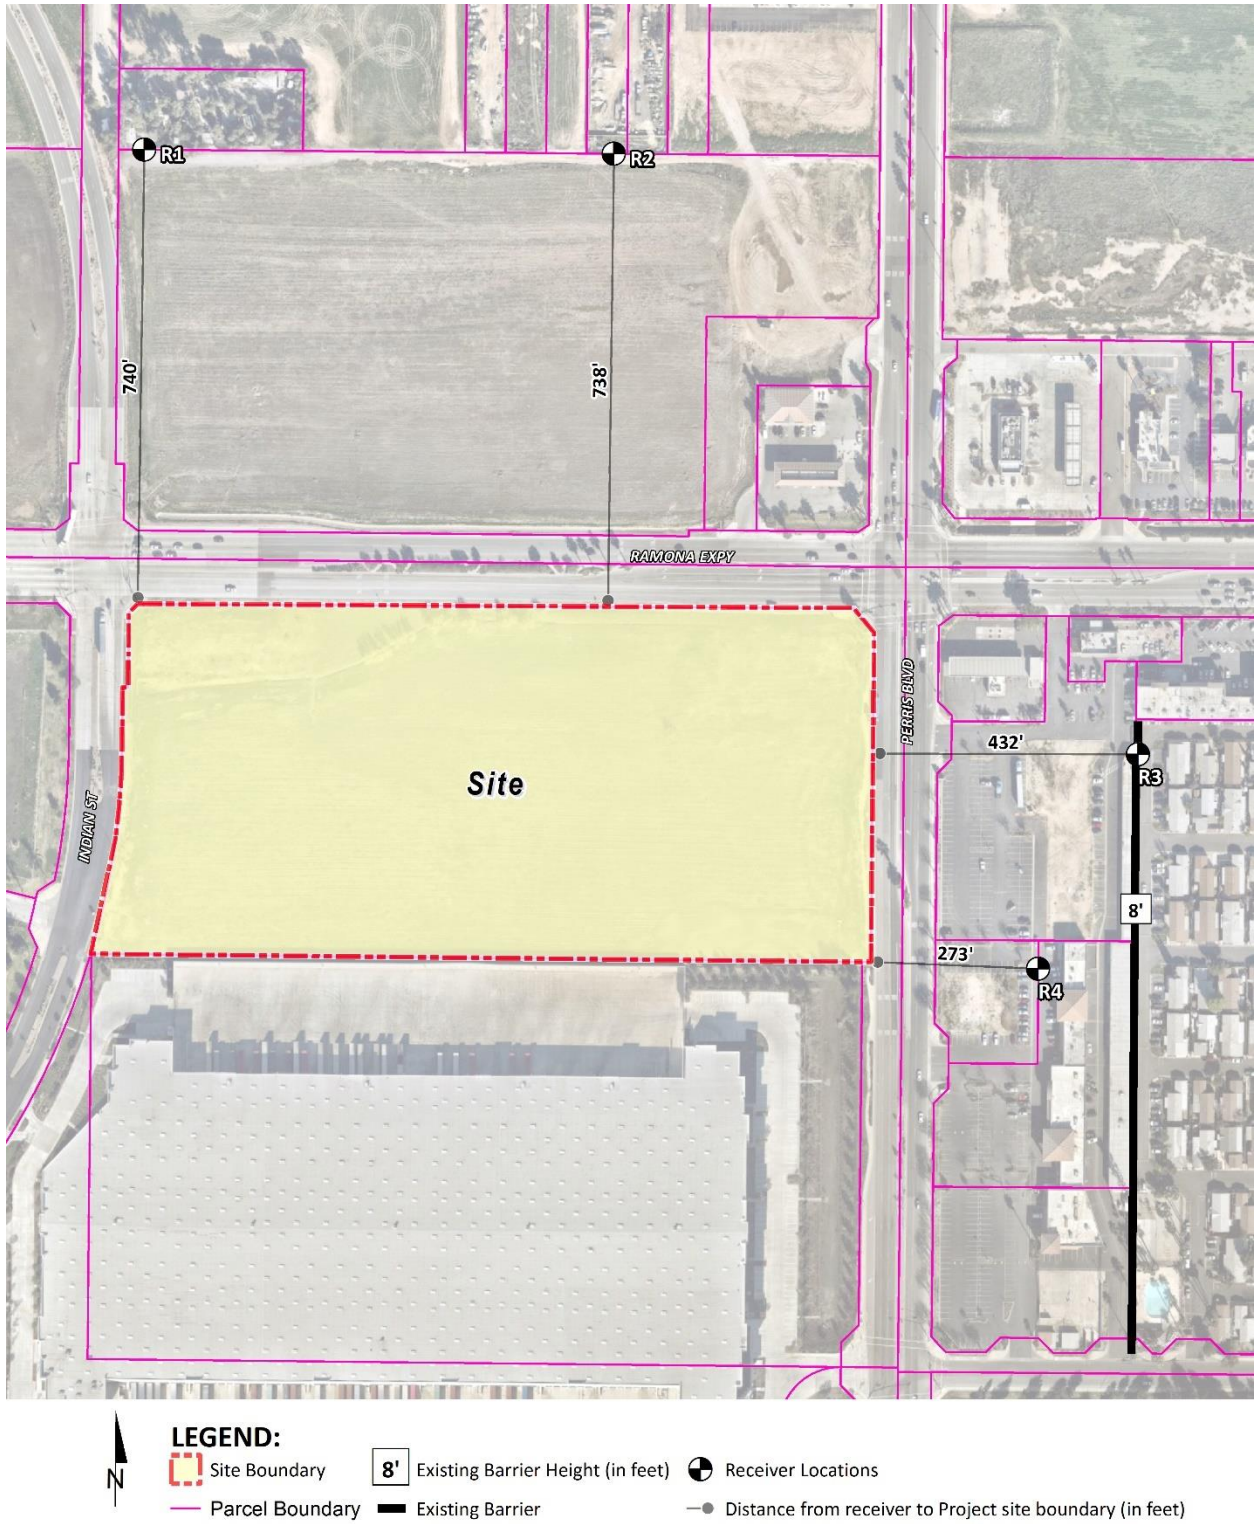

8 OPERATIONAL NOISE IMPACTS

This section analyzes the potential stationary-source operational noise impacts at the nearby receiver locations, identified in Section 7, resulting from the operation of the proposed Perris and Ramona Warehouse Project. Exhibit 8-A identifies the representative noise source locations used to assess the operational noise levels.

8.1 OPERATIONAL NOISE SOURCES

This operational noise analysis is intended to describe noise level impacts associated with the expected typical of daytime and nighttime activities at the Project site. To present the potential worst-case noise conditions, this analysis assumes the Project would be operational 24 hours per day, seven days per week. Consistent with similar warehouse and light industrial uses, the Project business operations would primarily be conducted within the enclosed buildings, except for traffic movement, parking, as well as loading and unloading of trucks at designated loading bays. The on-site Project-related noise sources are expected to include: loading dock activity, truck movements, roof-top air conditioning units, and trash enclosure activity.


8.2 REFERENCE NOISE LEVELS

To estimate the Project operational noise impacts, reference noise level measurements were collected from similar types of activities to represent the noise levels expected with the development of the proposed Project. This section provides a detailed description of the reference noise level measurements shown on Table 9-1 used to estimate the Project operational noise impacts. It is important to note that the following projected noise levels assume the worst-case noise environment with the loading dock activity, truck movements, roof-top air conditioning units, and trash enclosure activity all operating continuously. These sources of noise activity will likely vary throughout the day.

8.2.1 MEASUREMENT PROCEDURES

The reference noise level measurements presented in this section were collected using a Larson Davis LxT Type 1 precision sound level meter (serial number 01146). The LxT sound level meter was calibrated using a Larson-Davis calibrator, Model CAL 200, was programmed in “slow” mode to record noise levels in “A” weighted form and was located at approximately five feet above the ground elevation for each measurement. The sound level meters and microphones were equipped with a windscreen during all measurements. All noise level measurement equipment satisfies the American National Standards Institute (ANSI) standard specifications for sound level meters ANSI S1.4-2014/IEC 61672-1:2013. (16)

EXHIBIT 8-A: OPERATIONAL NOISE SOURCE LOCATIONS

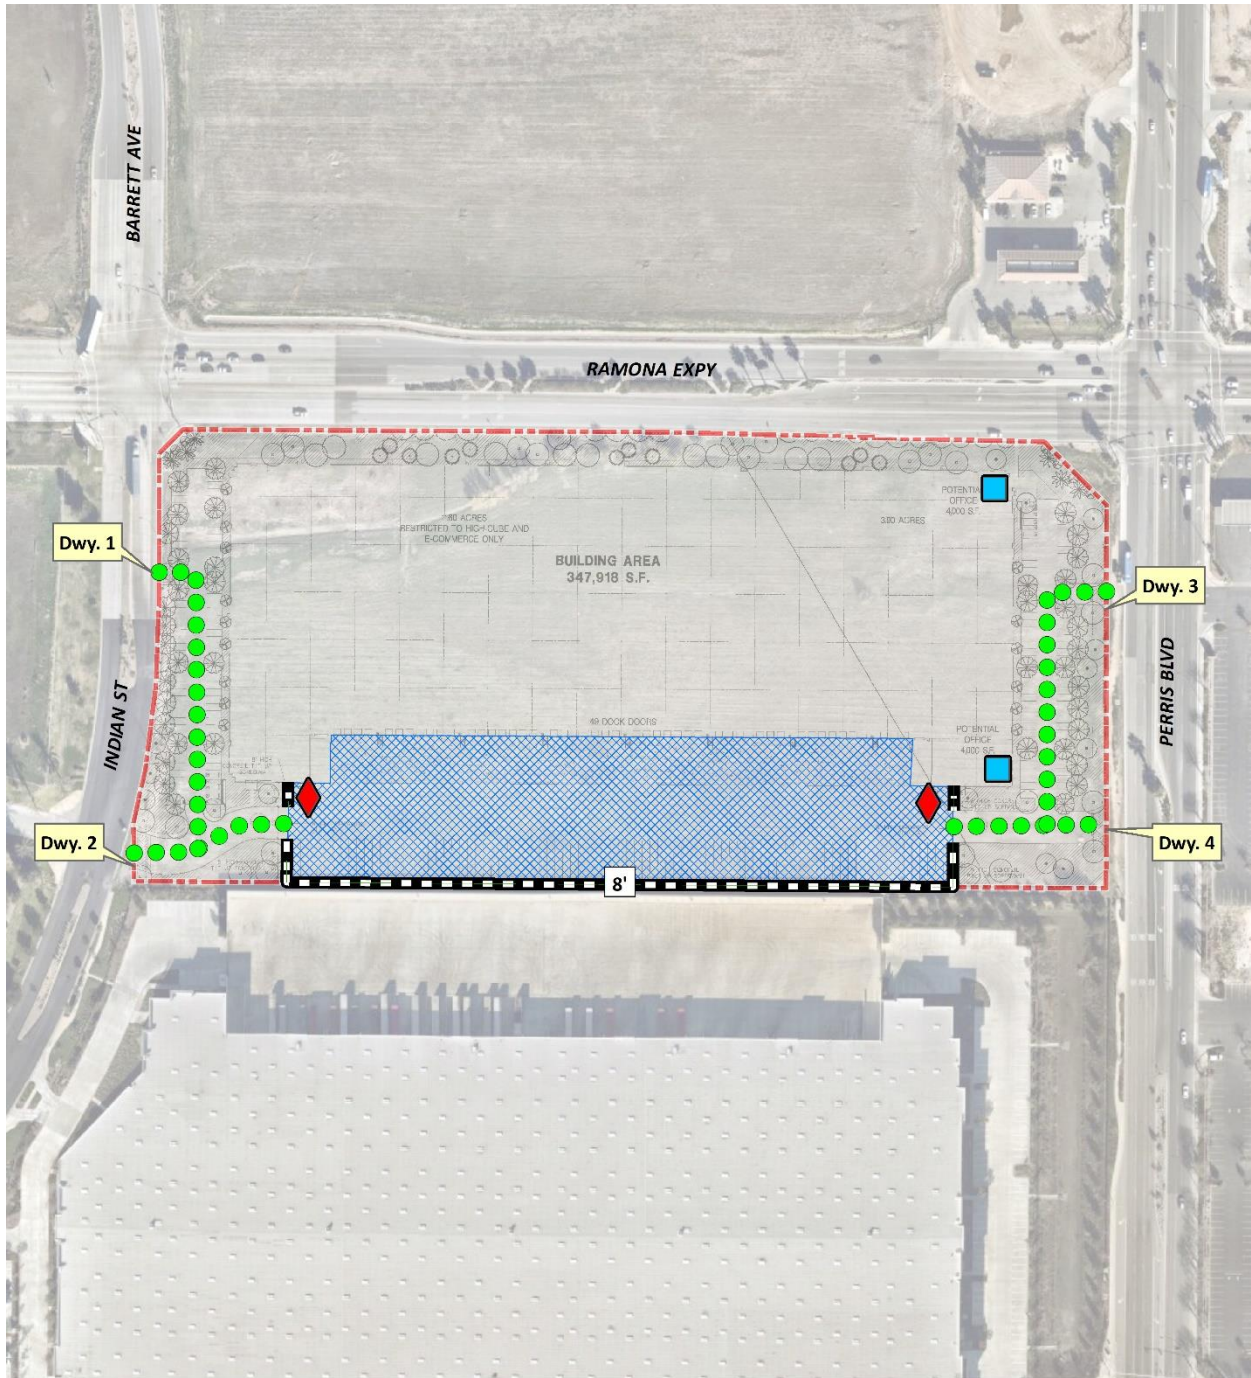

- LEGEND:**
- Site Boundary
 - Dry Goods Loading Dock Activity
 - Planned Noise Barrier
 - 8' Planned Noise Barrier Height (in feet)
 - Roof-Top Air Conditioning Unit
 - Trash Compactor
 - Entry Gate & Truck Movements

TABLE 8-1: REFERENCE NOISE LEVEL MEASUREMENTS

Noise Source ¹	Noise Source Height (Feet)	Min./Hour ³		Reference Noise Level (dBA L _{eq})		Reference Noise Level (dBA L _{max})	
		Day	Night	@ Ref. Dist.	@ 50 Feet	@ Ref. Dist.	@ 50 Feet
Loading Dock Activity	8'	60	60	67.2	62.8	75.6	71.2
Truck Movements	8'	60	60	64.0	58.0	79.1	73.1
Roof-Top Air Conditioning Units ²	5'	39	28	77.2	57.2	77.7	57.7
Trash Enclosure Activity	5'	5	5	72.7	56.8	87.0	71.1

¹ As measured by Urban Crossroads, Inc.

² Lennox SCA120 series 10-ton model packaged air conditioning unit.

³ Anticipated duration (minutes within the hour) of noise activity during typical hourly conditions expected at the Project site. "Daytime" = 7:01 a.m. to 10:00 p.m.; "Nighttime" = 10:01 p.m. to 7:00 a.m.

8.2.2 LOADING DOCK ACTIVITY

The reference loading dock activities are intended to describe the typical operational noise activities associated with the Project. This includes trucks maneuvering, truck loading, truck unloading, backup alarms or beepers, truck docking, a combination of tractor trailer semi-trucks, two-axle delivery trucks, and background forklift operations. To describe the warehouse loading dock activities, short-term reference noise level measurements were collected. The reference loading dock activity noise level measurement was taken over a fifteen-minute period and represents multiple noise sources taken from the center of activity generating a reference noise level of 71.2 dBA L_{max} at a uniform reference distance of 50 feet. At this measurement location, the noise sources associated with employees unloading a docked truck container included the squeaking of the truck's shocks when weight was removed from the truck, employees playing music over a radio, as well as a forklift horn and backup alarm or beeper.

8.2.3 TRUCK MOVEMENTS

The truck movements reference noise level measurement was taken over a 15-minute period and represents multiple noise sources producing a reference noise level of 73.1 dBA L_{max} at 50 feet. The noise sources included at this measurement location account for the rattling and squeaking during normal opening and closing operations, the gate closure equipment, truck engines idling outside the entry gate, truck movements through the entry gate, and background truck court activities and forklift backup alarm noise.

8.2.4 ROOF-TOP AIR CONDITIONING UNITS

To assess the noise levels created by the roof-top air conditioning units, reference noise level measurements were collected from Lennox SCA120 series 10-ton model packaged air conditioning unit. At a uniform reference distance of 50 feet, the roof-top air conditioning units generate a reference noise level of 57.7 dBA L_{max}. Based on the typical operating conditions observed over a four-day measurement period, the roof-top air conditioning units are estimated to operate for an average 39 minutes per hour during the daytime hours, and 28 minutes per

hour during the nighttime hours. These operating conditions reflect summer cooling requirements with measured temperatures approaching 96 degrees Fahrenheit (°F) with average daytime temperatures of 82°F. For this noise analysis, the air conditioning units are expected to be located on the roof of the Project buildings.

8.2.5 TRASH ENCLOSURE ACTIVITY

To describe the noise levels associated with a trash enclosure activity, Urban Crossroads collected a reference noise level measurement at an existing trash enclosure containing two dumpster bins. The trash enclosure noise levels describe metal gates opening and closing, metal scraping against concrete floor sounds, dumpster movement on metal wheels, trash dropping into the metal dumpster. The reference noise levels describe trash enclosure noise activities when trash is dropped into an empty metal dumpster, as would occur at the Project site. The measured reference noise level at the uniform 50-foot reference distance is 71.1 dBA L_{max} for the trash enclosure activity. The reference noise level describes the expected noise source activities associated with the trash enclosures for each of the Project buildings. Typical trash enclosure activities are estimated to occur for 5 minutes per hour.

8.3 CADNAA NOISE PREDICTION MODEL

To fully describe the exterior operational noise levels from the Project, Urban Crossroads, Inc. developed a noise prediction model using the CadnaA (Computer Aided Noise Abatement) computer program. CadnaA can analyze multiple types of noise sources using the spatially accurate Project site plan, georeferenced Nearmap aerial imagery, topography, buildings, and barriers in its calculations to predict outdoor noise levels.

Using the ISO 9613 protocol, CadnaA will calculate the distance from each noise source to the noise receiver locations, using the ground absorption, distance, and barrier/building attenuation inputs to provide a summary of noise level at each receiver and the partial noise level contributions by noise source. Consistent with the ISO 9613 protocol, the CadnaA noise prediction model relies on the reference sound power level (L_w) to describe individual noise sources. While sound pressure levels (e.g., L_{eq}) quantify in decibels the intensity of given sound sources at a reference distance, sound power levels (L_w) are connected to the sound source and are independent of distance. Sound pressure levels vary substantially with distance from the source and diminish from intervening obstacles and barriers, air absorption, wind, and other factors. Sound power is the acoustical energy emitted by the sound source and is an absolute value that is not affected by the environment. The operational noise level calculations provided in this noise study account for the distance attenuation provided due to geometric spreading, when sound from a localized stationary source (i.e., a point source) propagates uniformly outward in a spherical pattern. A default ground attenuation factor of 0.5 was used in the CadnaA noise analysis to account for mixed ground representing a combination of hard and soft site surfaces. Appendix 9.1 includes the detailed noise model inputs.

8.4 PROJECT OPERATIONAL NOISE LEVELS

Using the reference noise levels to represent the proposed Project operations that include loading dock activity, truck movements, roof-top air conditioning units, and trash enclosure activity, Urban Crossroads, Inc. calculated the operational source noise levels that are expected to be generated at the Project site and the Project-related noise level increases that would be experienced at each of the sensitive receiver locations. Table 8-2 shows the Project operational noise levels during the daytime hours of 7:01 a.m. to 10:00 p.m. The daytime hourly noise levels at the off-site receiver locations are expected to range from 47.7 to 57.1 dBA L_{max} .

TABLE 8-2: DAYTIME PROJECT OPERATIONAL NOISE LEVELS

Noise Source ¹	Operational Noise Levels by Receiver Location (dBA L_{max})			
	R1	R2	R3	R4
Loading Dock Activity	56.1	56.8	47.6	57.0
Truck Movements	30.8	23.3	26.8	40.0
Roof-Top Air Conditioning Units	23.5	28.6	22.4	32.7
Trash Enclosure Activity	8.4	8.8	12.0	35.2
Total (All Noise Sources)	56.1	56.8	47.7	57.1

¹ See Exhibit 8-A for the noise source locations. CadnaA noise model calculations are included in Appendix 8.1.

Table 8-3 shows the Project operational noise levels during the nighttime hours of 10:01 p.m. to 7:00 a.m. The nighttime hourly noise levels at the off-site receiver locations are expected to range from 46.7 to 56.1 dBA L_{max} . The differences between the daytime and nighttime noise levels are largely related to the duration of noise activity (Table 8-1).

TABLE 8-3: NIGHTTIME PROJECT OPERATIONAL NOISE LEVELS

Noise Source ¹	Operational Noise Levels by Receiver Location (dBA L_{max})			
	R1	R2	R3	R4
Loading Dock Activity	55.1	55.8	46.6	56.0
Truck Movements	30.8	23.3	26.8	40.0
Roof-Top Air Conditioning Units	21.1	26.2	20.0	30.3
Trash Enclosure Activity	7.4	7.8	11.0	34.2
Total (All Noise Sources)	55.1	55.8	46.7	56.1

¹ See Exhibit 8-A for the noise source locations. CadnaA noise model calculations are included in Appendix 8.1.

8.5 PROJECT OPERATIONAL NOISE LEVEL COMPLIANCE

To demonstrate compliance with local noise regulations, the Project-only operational noise levels are evaluated against exterior noise level thresholds based on the City of Perris exterior noise level standards at nearby noise-sensitive receiver locations. Table 8-4 shows the operational noise levels associated with Perris and Ramona Warehouse Project will satisfy the City of Perris 80 dBA L_{max} daytime and 60 dBA L_{max} nighttime exterior noise level standards at all nearby

receiver locations. Therefore, the operational noise impacts are considered *less than significant* at the nearby noise-sensitive receiver locations.

TABLE 8-4: OPERATIONAL NOISE LEVEL COMPLIANCE

Receiver Location ¹	Project Operational Noise Levels (dBA L _{max}) ²		Exterior Noise Level Standards (dBA L _{max}) ³		Noise Level Standards Exceeded? ⁴	
	Daytime	Nighttime	Daytime	Nighttime	Daytime	Nighttime
R1	56.1	55.1	80	60	No	No
R2	56.8	55.8	80	60	No	No
R3	47.7	46.7	80	60	No	No
R4	57.1	56.1	80	60	No	No

¹ See Exhibit 7-A for the receiver locations.

² Proposed Project operational noise levels as shown on Tables 8-2 and 8-3.

³ Exterior noise level standard as shown on Table 3-1.

⁴ Do the estimated Project operational noise source activities exceed the noise level standards?

⁵ Receiver location and Project operational noise levels provided for informational purposes. Potential impacts analyzed in the Bio report for the Project.

"Daytime" = 7:01 a.m. to 10:00 p.m.; "Nighttime" = 10:01 p.m. to 7:00 a.m.

Consistent with the City of Perris General Plan Noise Element, Implementation Measure V.A.1, Project operational noise levels at nearest sensitive receiver locations cannot exceed 60 dBA CNEL. The CNEL metric is typically used to describe 24-hour transportation-related noise levels, however, the City of Perris General Plan Noise Element requires new industrial land use such as the Project to demonstrate compliance at any noise-sensitive land use within 160 feet of the Project site. Table 8-6 includes the evening and nighttime adjustments made to the operational noise levels during the applicable hours to convert the worst-case hourly operational noise levels (L_{eq}) to 24-hour CNELs. The 24-hour noise level calculations are included in Appendix 9.2.

Table 8-5 indicates that the 24-hour noise levels associated with the Perris and Ramona Warehouse at the nearest receiver locations are expected to range from 39.1 to 49.6 dBA CNEL. The Project-related operational noise levels shown on Table 8-5 will satisfy the City of Perris 60 dBA CNEL exterior noise level standards at the nearest receiver locations.

TABLE 8-5: OPERATIONAL NOISE LEVEL COMPLIANCE (CNEL)

Receiver Location ¹	Project Operational Noise Levels ²			Exterior Noise Level Standards (CNEL) ³	Noise Level Standards Exceeded? ⁴
	Daytime (dBA L _{eq})	Nighttime (dBA L _{eq})	24-Hour (CNEL)		
R1	41.3	40.4	46.8	60	No
R2	41.9	40.9	47.3	60	No
R3	33.5	32.6	39.1	60	No
R4	43.8	43.0	49.6	60	No

¹ See Exhibit 7-A for the receiver locations.

² Proposed Project operational noise level calculations are included in Appendix 8.2.

³ City of Perris General Plan Noise Element Implementation Measure V.A.1

⁴ Do the estimated Project operational noise source activities exceed the noise level standards?

"Daytime" = 7:01 a.m. to 10:00 p.m.; "Nighttime" = 10:01 p.m. to 7:00 a.m.

8.6 PROJECT OPERATIONAL NOISE LEVEL INCREASES

To describe the Project operational noise level increases, the Project operational noise levels are combined with the existing ambient noise levels measurements for the nearby receiver locations potentially impacted by Project operational noise sources. Since the units used to measure noise, decibels (dB), are logarithmic units, the Project-operational and existing ambient noise levels cannot be combined using standard arithmetic equations. (3) Instead, they must be logarithmically added using the following base equation:

$$SPL_{Total} = 10\log_{10}[10^{SPL1/10} + 10^{SPL2/10} + \dots 10^{SPLn/10}]$$

Where “SPL1,” “SPL2,” etc. are equal to the sound pressure levels being combined, or in this case, the Project-operational and existing ambient noise levels. The difference between the combined Project and ambient noise levels describes the Project noise level increases to the existing ambient noise environment. As indicated on Tables 8-6 and 8-7, the Project is not expected to generate a measurable daytime and nighttime operational noise level increase dBA L_{eq} at the nearby receiver locations. Project-related operational noise level increases will satisfy the operational noise level increase significance criteria presented on Table 4-1. Therefore, the incremental Project operational noise level increase is considered *less than significant* at all receiver locations.

TABLE 8-6: DAYTIME PROJECT OPERATIONAL NOISE LEVEL INCREASES

Receiver Location ¹	Total Project Operational Noise Level ²	Measurement Location ³	Reference Ambient Noise Levels ⁴	Combined Project and Ambient ⁵	Project Increase ⁶	Increase Criteria ⁷	Increase Criteria Exceeded?
R1	41.3	L1	57.5	57.6	0.1	5	No
R2	41.9	L2	56.7	56.8	0.1	5	No
R3	33.5	L3	64.3	64.3	0.0	3	No
R4	43.8	L3	64.3	64.3	0.0	3	No

¹ See Exhibit 7-A for the receiver locations.

² Total Project daytime operational noise levels as shown on Table 8-5.

³ Reference noise level measurement locations as shown on Exhibit 5-A.

⁴ Observed daytime ambient noise levels as shown on Table 5-1.

⁵ Represents the combined ambient conditions plus the Project activities.

⁶ The noise level increase expected with the addition of the proposed Project activities.

⁷ Significance increase criteria as shown on Table 4-1.

TABLE 8-7: NIGHTTIME OPERATIONAL NOISE LEVEL INCREASES

Receiver Location ¹	Total Project Operational Noise Level ²	Measurement Location ³	Reference Ambient Noise Levels ⁴	Combined Project and Ambient ⁵	Project Increase ⁶	Increase Criteria ⁷	Increase Criteria Exceeded?
R1	40.4	L1	57.2	57.3	0.1	5	No
R2	40.9	L2	56.0	56.1	0.1	5	No
R3	32.6	L3	62.4	62.4	0.0	3	No
R4	43.0	L3	62.4	62.4	0.0	3	No

¹ See Exhibit 7-A for the receiver locations.

² Total Project nighttime operational noise levels as shown on Table 8-6.

³ Reference noise level measurement locations as shown on Exhibit 5-A.

⁴ Observed nighttime ambient noise levels as shown on Table 5-1.

⁵ Represents the combined ambient conditions plus the Project activities.

⁶ The noise level increase expected with the addition of the proposed Project activities.

⁷ Significance increase criteria as shown on Table 4-1.

9 CONSTRUCTION IMPACTS

This section analyzes potential impacts resulting from the short-term construction activities associated with the development of the Project. Exhibit 9-A shows the construction noise source locations in relation to the nearest sensitive receiver locations previously described in Section 8. To prevent high levels of construction noise from impacting noise-sensitive land uses, City of Perris Municipal Code Section 7.34.060 limits construction activities to the hours of 7:00 a.m. to 7:00 p.m. on any day except Sundays and legal holidays (with the exception of Columbus Day and Washington's birthday).

9.1 CONSTRUCTION NOISE LEVELS

Noise generated by the Project construction equipment will include a combination of trucks, power tools, concrete mixers, and portable generators that when operating at the project site boundaries closest the nearest sensitive receiver locations can reach high levels. The number and mix of construction equipment are expected to occur in the following stages:


- Site Preparation
- Grading
- Building Construction
- Paving
- Architectural Coating

9.2 CONSTRUCTION REFERENCE NOISE LEVELS

This construction noise analysis was prepared using reference construction equipment noise levels from the Federal Highway Administration (FHWA) published the Roadway Construction Noise Model (RCNM), which includes a national database of construction equipment reference noise emission levels. (18) The RCNM equipment database, provides a comprehensive list of the noise generating characteristics for specific types of construction equipment including reference L_{max} noise levels measured at 50 feet.

Noise levels generated by heavy construction equipment can range from approximately 68 dBA to more than 85 dBA L_{max} when measured at 50 feet. However, these noise levels diminish with distance from the construction site at a rate of 6 dBA per doubling of distance. For example, a noise level of 85 dBA L_{max} measured at 50 feet from the noise source to the receiver would be reduced to 79 dBA L_{max} at 100 feet from the source to the receiver and would be further reduced to 73 dBA L_{max} at 200 feet from the source to the receiver. Table 10-1 provides a summary of the construction reference noise levels expected with the Project construction activities.

EXHIBIT 9-A: TYPICAL CONSTRUCTION NOISE SOURCE LOCATIONS

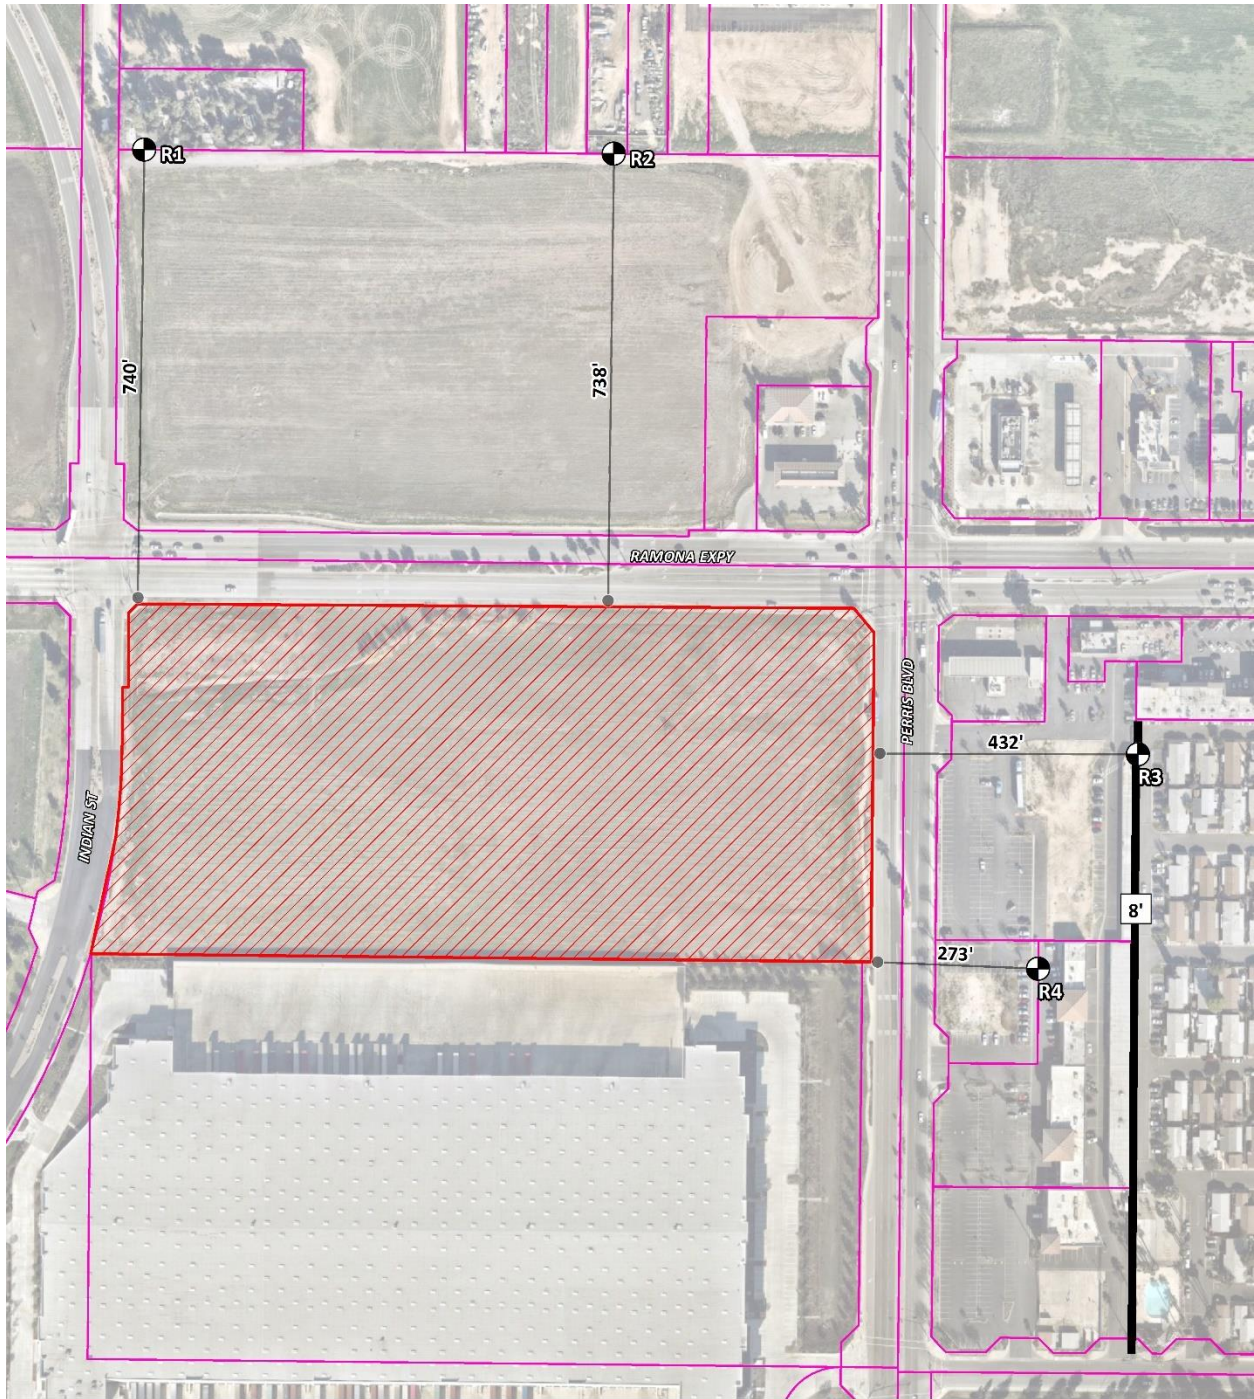

LEGEND:

- Construction Activity
- Parcel Boundary
- Existing Barrier
- 8' Existing Barrier Height (in feet)
- Receiver Locations
- Distance from receiver to Project site boundary (in feet)

TABLE 9-1: CONSTRUCTION REFERENCE NOISE LEVELS

Construction Stage	Construction Activity	Reference Noise Level @ 50 Feet (dBA L _{max}) ¹	Highest Reference Noise Level (dBA L _{max})
Site Preparation	Crawler Tractors	82	82
	Rubber Tired Dozers	79	
Grading	Crawler Tractors	82	85
	Excavators	81	
	Graders	85	
	Rubber Tired Dozers	79	
	Graders	85	
Building Construction	Cranes	81	82
	Crawler Tractors	82	
	Rubber Tired Dozers	79	
	Generator Sets	73	
	Welders	74	
Paving	Pavers	77	80
	Hauling Trucks	76	
	Rollers	80	
Arch. Coating	Air Compressors	78	78

¹ FHWA's Roadway Construction Noise Model, January 2006.

9.3 CONSTRUCTION NOISE ANALYSIS

Using the reference RCNM L_{max} construction equipment noise levels and the CadnaA noise prediction model, calculations of the Project construction noise level impacts with multiple pieces of equipment operating simultaneously at the nearest receiver locations were completed. To assess the worst-case construction noise levels, the Project construction noise analysis relies on the highest noise level impacts when the equipment with the highest reference noise level is operating at the closest point from the edge of primary construction activity (Project site boundary) to each receiver location.

As shown on Table 9-2, the construction noise levels are expected to range from 53.8 to 73.4 dBA L_{max}, and the highest construction levels are expected to range from 60.8 to 73.4 dBA L_{max} at the nearby receiver locations. Appendix 9.1 includes the detailed CadnaA construction noise model inputs.

TABLE 9-2: CONSTRUCTION EQUIPMENT NOISE LEVEL SUMMARY

Receiver Location ¹	Construction Noise Levels (dBA L _{max})					
	Site Preparation	Grading	Building Construction	Paving	Arch. Coating	Highest Levels ²
R1	67.1	70.1	67.1	65.1	63.1	70.1
R2	67.8	70.8	67.8	65.8	63.8	70.8
R3	57.8	60.8	57.8	55.8	53.8	60.8
R4	70.4	73.4	70.4	68.4	66.4	73.4

¹ Noise receiver locations are shown on Exhibit 9-A.

² Construction noise level calculations based on distance from the project site boundaries (construction activity area) to nearby receiver locations. CadnaA construction noise model inputs are included in Appendix 9.1.

9.4 TYPICAL CONSTRUCTION NOISE LEVEL COMPLIANCE

To evaluate whether the Project will generate potentially significant short-term noise levels at nearest noise sensitive receiver locations, a construction-related daytime noise level threshold of 80 dBA L_{max} is used as a reasonable threshold to assess the daytime construction noise level impacts. The construction noise analysis shows that the nearest receiver locations will satisfy the daytime 80 dBA L_{max} significance threshold during Project construction activities as shown on Table 9-3. Therefore, the noise impacts due to Project construction noise is considered *less than significant* at all receiver locations.

TABLE 9-3: TYPICAL CONSTRUCTION NOISE LEVEL COMPLIANCE

Receiver Location ¹	Construction Noise Levels (dBA L _{max})		
	Highest Construction Noise Levels ²	Threshold ³	Threshold Exceeded? ⁴
R1	70.1	80	No
R2	70.8	80	No
R3	60.8	80	No
R4	73.4	80	No

¹ Noise receiver locations are shown on Exhibit 9-A.

² Highest construction noise level calculations based on distance from the construction noise source activity to nearby receiver locations as shown on Table 9-2.

³ Construction noise level thresholds are limited to the noise sensitive receiver locations (Section 3.5).

⁴ Do the estimated Project construction noise levels exceed the construction noise level threshold?

9.5 CONSTRUCTION VIBRATION ANALYSIS

Construction activity can result in varying degrees of ground vibration, depending on the equipment and methods used, distance to the affected structures and soil type. It is expected that ground-borne vibration from Project construction activities would cause only intermittent, localized intrusion. Ground vibration levels associated with various types of construction

equipment are summarized on Table 9-4. Based on the representative vibration levels presented for various construction equipment types, it is possible to estimate the potential Project construction vibration levels using the following vibration assessment methods defined by the FTA. To describe the human response (annoyance) associated with vibration impacts the FTA provides the following equation: $L_{vdB}(D) = L_{vdB}(25 \text{ ft}) - 30\log(D/25)$

TABLE 9-4: VIBRATION SOURCE LEVELS FOR CONSTRUCTION EQUIPMENT

Equipment	Vibration Decibels (VdB) at 25 feet
Small bulldozer	58
Jackhammer	79
Loaded Trucks	86
Large bulldozer	87

Source: Federal Transit Administration, Transit Noise and Vibration Impact Assessment Manual

Table 9-5 presents the expected typical construction equipment vibration levels at the nearby receiver locations. At distances ranging from 273 feet to 740 feet from typical Project construction activities (at the Project site boundary), construction vibration levels are estimated to range from 42.9 to 55.9 VdB and will satisfy the FTA *Transit Noise and Vibration Impact Assessment* methodology provides guidelines for maximum-acceptable vibration criteria for different types of land uses. Therefore, the vibration impacts due to Project construction is considered *less than significant* at all receiver locations.

TABLE 9-5: CONSTRUCTION EQUIPMENT VIBRATION LEVELS

Receiver Location ¹	Distance to Construction Activity (Feet)	Receiver Vibration Levels (VdB) ²					Threshold VdB ³	Threshold Exceeded? ⁴
		Small Bulldozer	Jack-hammer	Loaded Trucks	Large Bulldozer	Highest Vibration Levels		
R1	740'	13.9	34.9	41.9	42.9	42.9	78	No
R2	738'	13.9	34.9	41.9	42.9	42.9	78	No
R3	432'	20.9	41.9	48.9	49.9	49.9	78	No
R4	273'	26.9	47.9	54.9	55.9	55.9	78	No

¹ Noise receiver locations are shown on Exhibit 9-A.

² Based on the Vibration Source Levels of Construction Equipment included on Table 9-4.

³ FTA Transit Noise and Vibration Impact Assessment Manual maximum acceptable vibration criteria as shown on Table 4-1.

⁴ Does the vibration level exceed the maximum acceptable vibration threshold?

9.6 CONSTRUCTION MITIGATION MEASURES

Construction activities can result in varying degrees of ground-borne vibration, depending on the equipment and methods used, distance to the affected structures and soil type. Construction vibration is generally associated with pile driving and rock blasting. Other construction equipment such as air compressors, light trucks, hydraulic loaders, etc., generates little or no

ground vibration. Large bulldozers and loaded trucks can cause perceptible vibration levels proximate receptors.

Although Project construction noise and vibration impacts will be *less than significant*, the Project is required to comply with the following construction-related mitigation measures (MM) from the PVCC Specific Plan Environmental Impact Report:

- MM Noise 1** *During all project site excavation and grading on site, the construction contractors shall equip all construction equipment, fixed or mobile, with properly operating and maintained mufflers consistent with manufacturer's standards. The construction contractor shall place all stationary construction equipment so that emitted noise is directed away from the noise sensitive receptors nearest the project site.*
- MM Noise 2** *During construction, stationary construction equipment, stockpiling and vehicle staging areas would be placed a minimum of 446 feet away from the closest sensitive receptor.*
- MM Noise 3** *No combustion-powered equipment, such as pumps or generators, shall be allowed to operate within 446 feet of any occupied residence unless the equipment is surrounded by a noise protection barrier.*
- MM Noise 4** *Construction contractors of implementing development projects shall limit haul truck deliveries to the same hours specified for construction equipment. To the extent feasible, haul routes shall not pass sensitive land uses or residential dwellings.*

9.6 CUMULATIVE CONSTRUCTION IMPACTS

It is expected that the nearest sensitive receiver locations may also experience additional background construction noise impacts due to other project construction activities. Consistent with the cumulative impact significance thresholds outlined in the *Perris and Ramona Warehouse Air Quality Impact Analysis* (19), this noise analysis uses the same construction significance thresholds for project specific and cumulative impacts. Therefore, since the Project construction-noise and vibration levels satisfy the thresholds. The proposed Project construction-activities are considered less than significant on a project-specific and cumulative basis.

In addition, the Municipal Code Section 7.33.060 limits the days and hours of construction activity to avoid disturbances during the hours when persons are most to noise include recognized sleep hour for residences. Because construction activities are typically limited to weekdays, during daylight hours, this noise impact is considered a nuisance or annoying, rather than a significant impact upon surrounding land uses.

10 REFERENCES

1. **State of California.** *California Environmental Quality Act, Appendix G.* 2019.
2. **City of Perris.** *Perris Valley Commerce Center Specific Plan.* 2018.
3. **California Department of Transportation Environmental Program.** *Technical Noise Supplement - A Technical Supplement to the Traffic Noise Analysis Protocol.* Sacramento, CA : s.n., September 2013.
4. **Environmental Protection Agency Office of Noise Abatement and Control.** *Information on Levels of Environmental Noise Requisite to Protect Public Health and Welfare with an Adequate Margin of Safety.* March 1974. EPA/ONAC 550/9/74-004.
5. **U.S. Department of Transportation, Federal Highway Administration, Office of Environment and Planning, Noise and Air Quality Branch.** *Highway Traffic Noise Analysis and Abatement Policy and Guidance.* December 2011.
6. **U.S. Department of Transportation, Federal Highway Administration.** *Highway Traffic Noise in the United States, Problem and Response.* April 2000. p. 3.
7. **U.S. Environmental Protection Agency Office of Noise Abatement and Control.** *Noise Effects Handbook-A Desk Reference to Health and Welfare Effects of Noise.* October 1979 (revised July 1981). EPA 550/9/82/106.
8. **U.S. Department of Transportation, Federal Transit Administration.** *Transit Noise and Vibration Impact Assessment Manual.* September 2018.
9. **Office of Planning and Research.** *State of California General Plan Guidelines.* 2019.
10. **State of California.** *2016 California Green Building Standards Code.* August 2019 Supplement.
11. **City of Perris.** *General Plan Noise Element.* August 2005.
12. —. *Municipal Code, Chapter 7.34 Noise Control.*
13. **Riverside County Airport Land Use Commission.** *March Air Reserve Base/Inland Port Airport Land Use Compatibility Plan.* November 2014.
14. **California Court of Appeal.** *Gray v. County of Madera, F053661.* 167 Cal.App.4th 1099; - Cal.Rptr.3d, October 2008.
15. **City of Perris.** *Perris Valley Commerce Center Specific Plan Environmental Impact Report.* July 2011.
16. **American National Standards Institute (ANSI).** *Specification for Sound Level Meters ANSI S1.4-2014/IEC 61672-1:2013.*
17. **Urban Crossroads, Inc.** *Traffic Generation Assessment and Vehicle Miles Traveled (VMT) Screening Evaluation.* August 2021.
18. **U.S. Department of Transportation, Federal Highway Administration, Office of Environment and Planning.** *FHWA Roadway Construction Noise Model.* January, 2006.
19. **Urban Crossroads, Inc.** *Perris and Ramona Warehouse Air Quality Impact Analysis.* September 2021.

This page intentionally left blank

11 CERTIFICATION

The contents of this noise study report represent an accurate depiction of the noise environment and impacts associated with the proposed Perris and Ramona Warehouse Project. The information contained in this noise study report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at (949) 336-5979.

Bill Lawson, P.E., INCE
Principal
URBAN CROSSROADS, INC.
260 E. Baker Street, Suite 200
Costa Mesa, CA 92626
(949) 336-5979
blawson@urbanxroads.com



EDUCATION

Master of Science in Civil and Environmental Engineering
California Polytechnic State University, San Luis Obispo • December, 1993

Bachelor of Science in City and Regional Planning
California Polytechnic State University, San Luis Obispo • June, 1992

PROFESSIONAL REGISTRATIONS

PE – Registered Professional Traffic Engineer – TR 2537 • January, 2009
AICP – American Institute of Certified Planners – 013011 • June, 1997–January 1, 2012
PTP – Professional Transportation Planner • May, 2007 – May, 2013
INCE – Institute of Noise Control Engineering • March, 2004

PROFESSIONAL AFFILIATIONS

ASA – Acoustical Society of America
ITE – Institute of Transportation Engineers

PROFESSIONAL CERTIFICATIONS

Certified Acoustical Consultant – County of Orange • February, 2011
FHWA-NHI-142051 Highway Traffic Noise Certificate of Training • February, 2013

This page intentionally left blank

APPENDIX 3.1:

CITY OF PERRIS MUNICIPAL CODE

This page intentionally left blank

CHAPTER 7.34. - NOISE CONTROL

Sec. 7.34.010. - Declaration of policy.

Excessive noise levels are detrimental to the health and safety of individuals. Noise is considered a public nuisance, and the city discourages unnecessary, excessive or annoying noises from all sources. Creating, maintaining, causing, or allowing to be created, caused or maintained, any noise or vibration in a manner prohibited by the provisions of the ordinance codified in this chapter is a public nuisance and shall be punishable as a misdemeanor.

(Code 1972, § 7.34.010; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.020. - Definitions.

- (a) *General.* The following words, terms and phrases, when used in this chapter, shall have the meanings ascribed to them in this section, except where the context clearly indicates a different meaning:

Ambient noise means the all-encompassing noise associated with a given environment usually being composed of sounds from many sources near and far. For the purpose of this chapter, ambient noise level is the level obtained when the noise level is averaged over a period of five minutes without inclusion of noise from isolated identifiable sources at the location and time of day near that at which a comparison is to be made.

Decibel (dB) means an intensity unit which denotes the ratio between two quantities which are proportional to power; the number of decibels corresponding to the ratio is ten times the common logarithm of this ratio.

Sound amplifying equipment means any machine or device for the amplification of the human voice, music or any other sound. The term "sound amplifying equipment" does not include standard vehicle radios when used and heard only by the occupants of the vehicle in which the vehicle radio is installed. The term "sound amplifying equipment," as used in this chapter, does not include warning devices on any vehicle used only for traffic safety purposes and shall not include communications equipment used by public or private utilities when restoring utility service following a public emergency or when doing work required to protect person or property from an imminent exposure to danger.

Sound level (noise level) in decibels is the value of a sound measurement using the "A" weighting network of a sound level meter. Slow response of the sound level meter needle shall be used except where the sound is impulsive or rapidly varying in nature, in which case, fast response shall be used.

Sound level meter means an instrument, including a microphone, an amplifier, an output meter and frequency weighting networks, for the measurement of sound levels, which satisfies the pertinent requirements in American National Standards Institute's specification S1.4-1971 or the most recent revision for type S-2A general purpose sound level meters.

- (b) *Supplementary definitions of technical terms.* Definitions of technical terms not defined in this section shall be obtained from the American National Standards Institute's Acoustical Terminology S1-1971 or the most recent revision thereof.

(Code 1972, § 7.34.020; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.030. - Measurement methods.

- (a) Sound shall be measured with a sound level meter as defined in section 7.34.020.
- (b) Unless otherwise provided, outdoor measurements shall be taken with the microphone **located at any point**

on the property line of the noise source but no closer than five feet from any wall or vertical obstruction and three to five feet above ground level whenever possible.

- (c) Unless otherwise provided, indoor measurements shall be taken inside the structure with the microphone located at any point as follows:
- (1) No less than three feet above floor level;
 - (2) No less than five feet from any wall or vertical obstruction; and
 - (3) Not under common possession and control with the building or portion of the building from which the sound is emanating.

(Code 1972, § 7.34.030; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.040. - Sound amplification.

No person shall amplify sound using sound amplifying equipment contrary to any of the following:

- (1) The only amplified sound permitted shall be either music or the human voice, or both.
- (2) The volume of amplified sound shall not exceed the noise levels set forth in this subsection when measured outdoors at or beyond the property line of the property from which the sound emanates.

Time Period	Maximum Noise Level
10:01 p.m.—7:00 a.m.	60 dBA
7:01 a.m.—10:00 p.m.	80 dBA

(Code 1972, § 7.34.040; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.050. - General prohibition.

- (a) It unlawful for any person to willfully make, cause or suffer, or permit to be made or caused, any loud excessive or offensive noises or sounds which unreasonably disturb the peace and quiet of any residential neighborhood or which are physically annoying to persons of ordinary sensitivity or which are so harsh, prolonged or unnatural or unusual in their use, time or place as to occasion physical discomfort to the inhabitants of the city, or any section thereof. The standards for dBA noise level in section 7.34.040 shall apply to this section. **To the extent that the noise created causes the noise level at the property line to exceed the ambient noise level by more than 1.0 decibels, it shall be presumed that the noise being created also is in violation of this section.**
- (b) The characteristics and conditions which should be considered in determining whether a violation of the provisions of this section exists should include, but not be limited to, the following:
- (1) The level of the noise;
 - (2) Whether the nature of the noise is usual or unusual;
 - (3) Whether the origin of the noise is natural or unnatural;
 - (4) The level of the ambient noise;
 - (5) The proximity of the noise to sleeping facilities;

- (6) The nature and zoning of the area from which the noise emanates and the area where it is received;
- (7) The time of day or night the noise occurs;
- (8) The duration of the noise; and
- (9) Whether the noise is recurrent, intermittent or constant.

(Code 1972, § 7.34.050; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.060. - Construction noise.

It is unlawful for any person between the hours of 7:00 p.m. of any day and 7:00 a.m. of the following day, or on a legal holiday, with the exception of Columbus Day and Washington's birthday, or on Sundays to erect, construct, demolish, excavate, alter or repair any building or structure in such a manner as to create disturbing, excessive or offensive noise. Construction activity shall not exceed 80 dBA in residential zones in the city.

(Code 1972, § 7.34.060; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.070. - Refuse vehicles and parking lot sweepers.

No person shall operate or permit to be operated a refuse compacting, processing or collection vehicle or parking lot sweeper between the hours of 7:00 p.m. to 7:00 a.m. in any residential area unless a permit has been applied for and granted by the city.

(Code 1972, § 7.34.070; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.080. - Disturbing, excessive, offensive noises; declaration of certain acts constituting.

The following activities, among others, are declared to cause loud, disturbing, excessive or offensive noises in violation of this section and are unlawful, namely:

- (1) *Horns, signaling devices, etc.* Unnecessary use or operation of horns, signaling devices or other similar devices on automobiles, motorcycles or any other vehicle.
- (2) *Radios, television sets, phonographs, loud speaking amplifiers and similar devices.* The use or operation of any sound production or reproduction device, radio receiving set, musical instrument, drums, phonograph, television set, loudspeakers, sound amplifier, or other similar machine or device for the producing or reproducing of sound, in such a manner as to disturb the peace, quiet or comfort of any reasonable person of normal sensitivity in any area of the city is prohibited. This provision shall not apply to any participant in a licensed parade or to any person who has been otherwise duly authorized by the city to engage in such conduct.
- (3) *Animals.*
 - a. The keeping or maintenance, or the permitting to be kept or maintained, upon any premises owned, occupied or controlled by any person of any animal or animals which by any frequent or long-continued noise shall cause annoyance or discomfort to a reasonable person of normal sensitiveness in the vicinity.
 - b. The noise from any such animal or animals that disturbs two or more residents residing in separate residences adjacent to any part of the property on which the subject animal or animals are kept or maintained, or three or more residents residing in separate residences in close proximity to the

property on which the subject animal or animals are kept or maintained, shall be prima facie evidence of a violation of this section.

- (4) *Hospitals, schools, libraries, rest homes, long-term medical or mental care facilities.* To make loud, disturbing, excessive noises adjacent to a hospital, school, library, rest home or long-term medical or mental care facility, which noise unreasonably interferes with the workings of such institutions or which disturbs or unduly annoys occupants in said institutions.
- (5) *Playing of radios on buses and trolleys.* The operation of any radio, phonograph or tape player on an urban transit bus or trolley so as to emit noise that is audible to any other person in the vehicle is prohibited.
- (6) *Playing of radios, phonographs and other sound production or reproduction devices in public parks and public parking lots and streets adjacent thereto.* The operation of any radio, phonograph, television set or any other sound production or reproduction device in any public park or any public parking lot, or street adjacent to such park or beach, without the prior written approval of the city manager or the administrator, in such a manner that such radio, phonograph, television set or sound production or reproduction device emits a sound level exceeding those found in the table in section 7.34.040.
- (7) *Leaf blowers.*
 - a. The term "leaf blower" means any portable, hand-held or backpack, engine-powered device with a nozzle that creates a directable airstream which is capable of and intended for moving leaves and light materials.
 - b. No person shall operate a leaf blower in any residential zoned area between the hours of 7:00 p.m. and 8:00 a.m. on weekdays and 5:00 p.m. and 9:00 a.m. on weekends or on legal holidays.
 - c. No person may operate any leaf blower at a sound level in excess of 80 decibels measured at a distance of 50 feet or greater from the point of noise origin.
 - d. Leaf blowers shall be equipped with functional mufflers and an approved sound limiting device required to ensure that the leaf blower is not capable of generating a sound level exceeding any limit prescribed in this section.

(Code 1972, § 7.34.080; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.090. - Burglar alarms.

- (a) Audible burglar alarms for structures or motor vehicles are prohibited unless the operation of such burglar alarm can be terminated within 20 minutes of being activated.
- (b) Notwithstanding the requirements of this provision, any member of the county sheriff's department, Perris Division, shall have the right to take such steps as may be reasonable and necessary to disconnect any such alarm installed in any building, dwelling or motor vehicle at any time during the period of its activation. On or after 30 days from the effective date of the ordinance codified in this chapter, any building, dwelling or motor vehicle upon which a burglar alarm has been installed shall prominently display the telephone number at which communication may be made with the owner of such building, dwelling or motor vehicle.

(Code 1972, § 7.34.090; Ord. No. 1082, § 2(part), 2000)

Sec. 7.34.100. - Motor vehicles.

- (a) Off-highway.
 - (1) Except as otherwise provided for in this chapter, it shall be unlawful to operate any motor vehicle of any

type on any site, other than on a public street or highway as defined in the California Vehicle Code, in any manner so as to cause noise in excess of those noise levels permitted for on-highway motor vehicles as specified in the table for "45-mile-per-hour or less speed limits" contained in section 23130 of the California Vehicle Code and as corrected for distances set forth in subsection (a)(2) of this section.

- (2) The maximum noise level as the on-highway vehicle passes may be measured at a distance of other than 50 feet from the centerline of travel, provided the measurement is further adjusted by adding algebraically the application correction as follows:

Distance (feet)	Correction (decibels)
25	-6
28	-5
32	-4
35	-3
40	-2
45	-1
50 (preferred distance)	0
56	+1
63	+2
70	+3
80	+4
90	+5
100	+6

- (b) Nothing in this section shall apply to authorized emergency vehicles when being used in emergency situations including the blowing of sirens and/or horns.

(Code 1972, § 7.34.100; Ord. No. 1082, § 2(part), 2000)

This page intentionally left blank

APPENDIX 5.1:
STUDY AREA PHOTOS

This page intentionally left blank

JN:13235 Study Area Photos



L1_E

33, 50' 50.960000", 117, 13' 49.330000"



L1_N

33, 50' 50.990000", 117, 13' 49.360000"



L1_S

33, 50' 50.970000", 117, 13' 49.360000"



L1_W

33, 50' 50.960000", 117, 13' 49.330000"



L2_E

33, 50' 53.860000", 117, 13' 38.730000"



L2_N

,

JN:13235 Study Area Photos



L2_S

33, 50' 53.840000", 117, 13' 38.730000"



L2_W

33, 50' 53.860000", 117, 13' 38.730000"



L3_E

33, 50' 30.800000", 117, 13' 31.830000"



L3_N

33, 50' 30.690000", 117, 13' 31.700000"



L3_S

33, 50' 30.830000", 117, 13' 31.810000"



L3_W

33, 50' 30.770000", 117, 13' 31.830000"

APPENDIX 5.2:
NOISE LEVEL MEASUREMENT WORKSHEETS

This page intentionally left blank

24-Hour Noise Level Measurement Summary


Date: Wednesday, March 04, 2020
Project: Perris and Ramona Avenue

Location: L1 - Located north of the Project site on Barret Avenue near existing single-family residential homes

Meter: Piccolo II

JN: 13235
Analyst: P. Mara

Hourly L_{eq} dBA Readings (unadjusted)

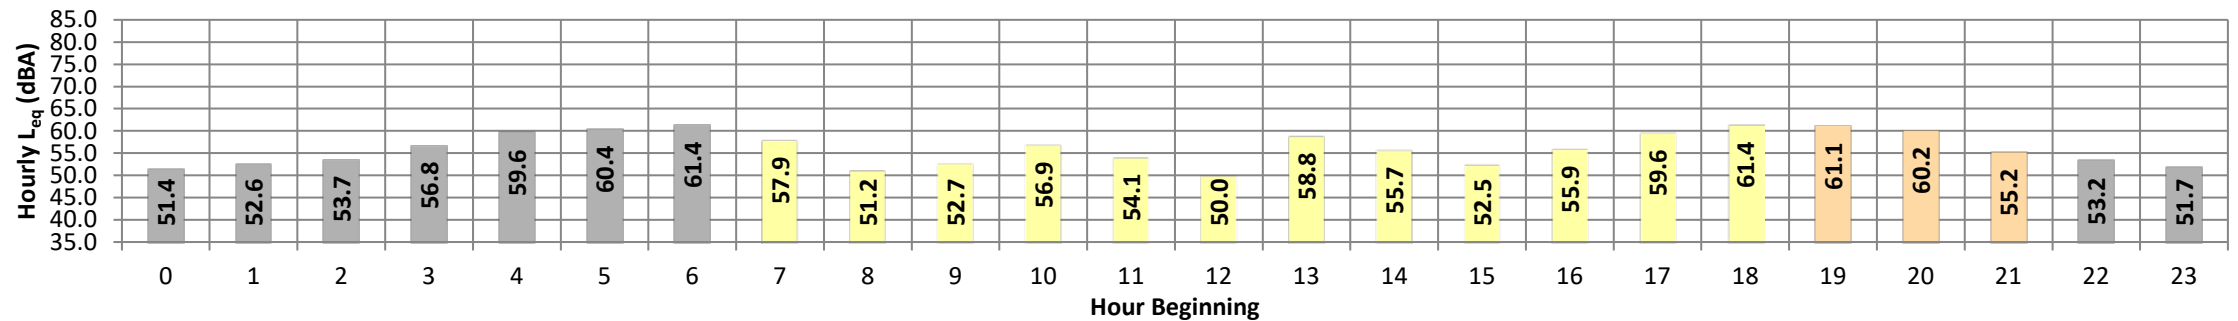

Timeframe	Hour	L_{eq}	L_{max}	L_{min}	L1%	L2%	L5%	L8%	L25%	L50%	L90%	L95%	L99%	L_{eq}	Adj.	Adj. L_{eq}
Night	0	51.4	56.7	47.5	56.4	56.2	55.3	54.6	52.2	50.2	48.2	47.9	47.6	51.4	10.0	61.4
	1	52.6	58.4	48.2	58.2	57.9	56.9	56.0	53.2	51.3	49.0	48.7	48.4	52.6	10.0	62.6
	2	53.7	58.7	49.5	58.5	58.2	57.4	56.7	54.5	52.8	50.2	49.9	49.6	53.7	10.0	63.7
	3	56.8	61.3	52.9	61.1	61.0	60.4	59.9	57.7	55.8	53.7	53.3	53.0	56.8	10.0	66.8
	4	59.6	64.5	55.5	64.3	63.9	63.0	62.3	60.3	58.8	56.3	55.9	55.5	59.6	10.0	69.6
	5	60.4	65.3	56.7	65.1	64.9	64.0	63.3	61.1	59.4	57.4	57.1	56.8	60.4	10.0	70.4
Day	6	61.4	71.0	59.7	70.1	69.6	68.4	67.9	65.9	64.1	61.4	60.8	60.0	61.4	10.0	71.4
	7	57.9	65.3	52.7	65.1	64.7	63.1	62.1	58.5	55.7	53.4	53.1	52.8	57.9	0.0	57.9
	8	51.2	57.5	47.7	57.3	56.9	55.9	54.8	51.3	49.8	48.2	48.0	47.8	51.2	0.0	51.2
	9	52.7	60.4	45.1	60.1	59.8	59.0	58.2	53.6	48.0	45.8	45.5	45.2	52.7	0.0	52.7
	10	56.9	64.4	44.8	64.0	63.6	63.0	62.5	58.6	51.7	45.8	45.3	44.9	56.9	0.0	56.9
	11	54.1	65.4	44.4	64.8	63.9	61.5	59.8	51.9	47.7	45.1	44.7	44.4	54.1	0.0	54.1
	12	50.0	56.6	44.3	56.3	56.0	55.3	54.5	50.8	47.8	45.0	44.7	44.4	50.0	0.0	50.0
	13	58.8	67.3	46.7	66.9	66.5	65.6	64.8	59.2	52.8	47.9	47.3	46.8	58.8	0.0	58.8
	14	55.7	64.6	45.7	64.1	63.6	62.1	61.0	56.0	50.6	46.7	46.2	45.8	55.7	0.0	55.7
	15	52.5	60.3	45.7	59.9	59.3	57.8	56.9	53.1	49.9	46.5	46.2	45.8	52.5	0.0	52.5
	16	55.9	62.7	49.5	62.0	61.5	60.4	59.8	56.9	53.1	49.9	46.5	46.2	55.9	0.0	55.9
	17	59.6	66.1	51.3	65.8	65.4	64.9	64.5	60.6	56.7	52.7	52.1	51.5	59.6	0.0	59.6
Evening	18	61.4	68.6	50.1	68.3	68.0	67.3	66.6	63.2	56.3	51.1	50.6	50.2	61.4	0.0	61.4
	19	61.1	68.5	47.7	68.3	68.0	67.5	66.8	62.5	55.5	48.9	48.3	47.8	61.1	5.0	66.1
	20	60.2	68.0	48.8	67.7	67.4	66.9	65.9	61.5	55.3	49.8	49.3	48.9	60.2	5.0	65.2
Night	21	55.2	60.7	51.2	60.4	60.1	58.9	58.2	56.0	54.2	51.8	51.5	51.3	55.2	5.0	60.2
	22	53.2	58.1	50.0	57.9	57.6	56.7	56.1	53.9	52.3	50.5	50.3	50.1	53.2	10.0	63.2
	23	51.7	57.4	47.0	57.3	57.1	56.3	55.7	52.4	50.0	47.6	47.3	47.0	51.7	10.0	61.7
Timeframe	Hour	L_{eq}	L_{max}	L_{min}	L1%	L2%	L5%	L8%	L25%	L50%	L90%	L95%	L99%	L_{eq} (dBA)		
Day	Min	50.0	56.6	44.3	56.3	56.0	55.3	54.5	50.8	47.7	45.0	44.7	44.4	24-Hour	Daytime	Nighttime
	Max	61.4	68.6	52.7	68.3	68.0	67.3	66.6	63.2	56.7	53.4	53.1	52.8			
Energy Average		56.8	Average:		62.9	62.4	61.3	60.5	56.1	51.8	48.3	47.8	47.4	24-Hour CNEL (dBA)		
Evening	Min	55.2	60.7	47.7	60.4	60.1	58.9	58.2	56.0	54.2	48.9	48.3	47.8			
	Max	61.1	68.5	51.2	68.3	68.0	67.5	66.8	62.5	55.5	51.8	51.5	51.3			
Energy Average		59.5	Average:		65.5	65.2	64.4	63.7	60.0	55.0	50.2	49.7	49.3	64.1		
Night	Min	51.4	56.7	47.0	56.4	56.2	55.3	54.6	52.2	50.0	47.6	47.3	47.0			
	Max	61.4	71.0	59.7	70.1	69.6	68.4	67.9	65.9	64.1	61.4	60.8	60.0			
Energy Average		57.2	Average:		61.0	60.7	59.8	59.2	56.8	55.0	52.7	52.4	52.0			



24-Hour Noise Level Measurement Summary


Date: Wednesday, March 04, 2020
Project: Perris and Ramona Avenue

Location: L2 - Located north of the Project site on Perry Street near existing single-family residential home at 77 Perry Street.

Meter: Piccolo II

JN: 13235
Analyst: P. Mara

Hourly L_{eq} dBA Readings (unadjusted)

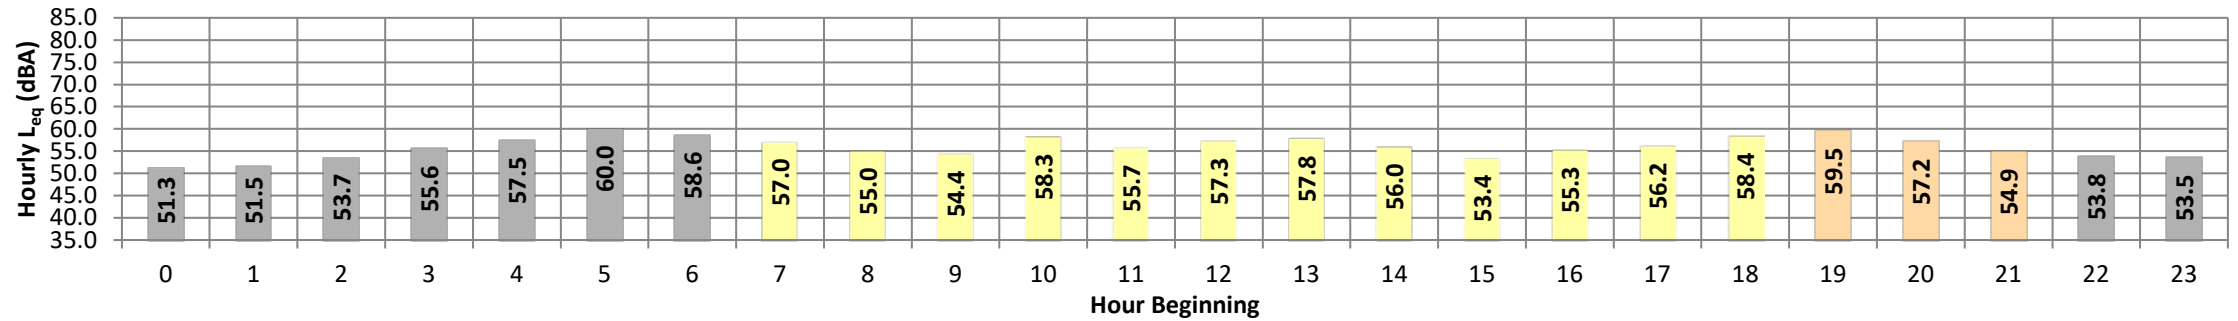

Timeframe	Hour	L_{eq}	L_{max}	L_{min}	L1%	L2%	L5%	L8%	L25%	L50%	L90%	L95%	L99%	L_{eq}	Adj.	Adj. L_{eq}
Night	0	51.3	58.2	47.4	57.7	57.2	55.8	54.9	51.5	49.7	48.0	47.8	47.5	51.3	10.0	61.3
	1	51.5	57.7	48.7	57.3	56.6	55.2	54.6	51.6	50.5	49.1	49.0	48.8	51.5	10.0	61.5
	2	53.7	58.1	51.2	57.9	57.5	56.7	56.2	54.1	52.9	51.6	51.4	51.3	53.7	10.0	63.7
	3	55.6	62.5	52.3	62.0	61.4	60.0	58.3	55.5	54.4	53.0	52.7	52.4	55.6	10.0	65.6
	4	57.5	62.7	54.5	62.3	61.8	60.5	59.7	58.0	56.8	55.2	54.9	54.6	57.5	10.0	67.5
	5	60.0	67.5	55.9	67.0	66.5	64.9	63.6	63.6	60.2	58.3	56.6	56.3	60.0	10.0	70.0
Day	6	58.6	65.9	55.5	65.3	64.6	62.3	60.9	58.7	57.5	56.1	55.9	55.6	58.6	10.0	68.6
	7	57.0	65.3	52.6	64.7	64.0	61.4	60.1	57.2	55.3	53.3	53.0	52.7	57.0	0.0	57.0
	8	55.0	61.9	49.6	61.5	61.0	59.7	58.8	55.6	53.6	50.5	50.1	49.8	55.0	0.0	55.0
	9	54.4	62.9	47.8	62.5	62.1	60.7	59.4	53.9	51.1	48.8	48.4	48.0	54.4	0.0	54.4
	10	58.3	70.2	46.7	69.5	68.5	65.2	63.0	56.9	51.4	47.9	47.4	46.9	58.3	0.0	58.3
	11	55.7	68.6	45.5	67.7	65.8	63.0	60.0	52.5	49.3	46.6	46.1	45.7	55.7	0.0	55.7
	12	57.3	67.9	44.8	67.4	66.9	65.2	63.3	54.5	50.1	46.2	45.5	44.9	57.3	0.0	57.3
	13	57.8	66.6	49.0	66.1	65.6	63.9	62.8	58.2	54.3	50.3	49.8	49.2	57.8	0.0	57.8
	14	56.0	65.1	47.6	64.6	63.9	61.9	60.4	56.6	52.9	48.9	48.3	47.8	56.0	0.0	56.0
	15	53.4	63.6	45.8	63.0	62.4	60.1	58.2	52.4	49.8	46.9	46.4	46.0	53.4	0.0	53.4
	16	55.3	64.0	49.3	63.5	62.9	60.9	59.3	55.0	52.9	50.1	49.8	49.4	55.3	0.0	55.3
	17	56.2	63.7	48.2	63.3	63.0	61.8	60.8	57.3	53.1	49.3	48.9	48.3	56.2	0.0	56.2
18	58.4	65.8	46.8	65.5	64.9	64.1	63.5	60.0	54.3	47.8	47.3	46.9	58.4	0.0	58.4	
Evening	19	59.5	68.1	46.8	67.6	67.0	65.8	65.1	60.4	55.2	48.1	47.5	47.0	59.5	5.0	64.5
	20	57.2	64.1	47.3	63.9	63.7	63.0	62.0	58.5	53.8	48.4	47.9	47.4	57.2	5.0	62.2
	21	54.9	62.9	49.5	62.4	61.6	60.0	58.9	55.3	52.8	50.4	50.0	49.6	54.9	5.0	59.9
Night	22	53.8	62.0	49.0	61.5	60.8	58.5	56.6	53.9	52.3	50.0	49.6	49.2	53.8	10.0	63.8
	23	53.5	65.0	46.5	64.3	63.0	60.9	57.3	51.3	49.5	47.4	47.0	46.7	53.5	10.0	63.5
Timeframe	Hour	L_{eq}	L_{max}	L_{min}	L1%	L2%	L5%	L8%	L25%	L50%	L90%	L95%	L99%	L_{eq} (dBA)		
Day	Min	53.4	61.9	44.8	61.5	61.0	59.7	58.2	52.4	49.3	46.2	45.5	44.9	24-Hour	Daytime	Nighttime
	Max	58.4	70.2	52.6	69.5	68.5	65.2	63.5	60.0	55.3	53.3	53.0	52.7			
Energy Average		56.5	Average:		65.0	64.3	62.3	60.8	55.8	52.4	48.9	48.4	48.0	56.5		
Evening	Min	54.9	62.9	46.8	62.4	61.6	60.0	58.9	55.3	52.8	48.1	47.5	47.0	56.7		
	Max	59.5	68.1	49.5	67.6	67.0	65.8	65.1	60.4	55.2	50.4	50.0	49.6	56.0		
Energy Average		57.6	Average:		64.6	64.1	62.9	62.0	58.1	53.9	49.0	48.5	48.0	62.9		
Night	Min	51.3	57.7	46.5	57.3	56.6	55.2	54.6	51.3	49.5	47.4	47.0	46.7	62.9		
	Max	60.0	67.5	55.9	67.0	66.5	64.9	63.6	60.2	58.3	56.6	56.3	56.0	62.9		
Energy Average		56.0	Average:		61.7	61.0	59.4	58.0	55.0	53.5	51.9	51.6	51.3	62.9		



24-Hour Noise Level Measurement Summary


Date: Wednesday, March 04, 2020
Project: Perris and Ramona Avenue

Location: L3 - Located east of the Project site and Perris Boulevard near the Sanctuary Church and existing single-family residential homes.

Meter: Piccolo II

JN: 13235
Analyst: P. Mara

Hourly L_{eq} dBA Readings (unadjusted)

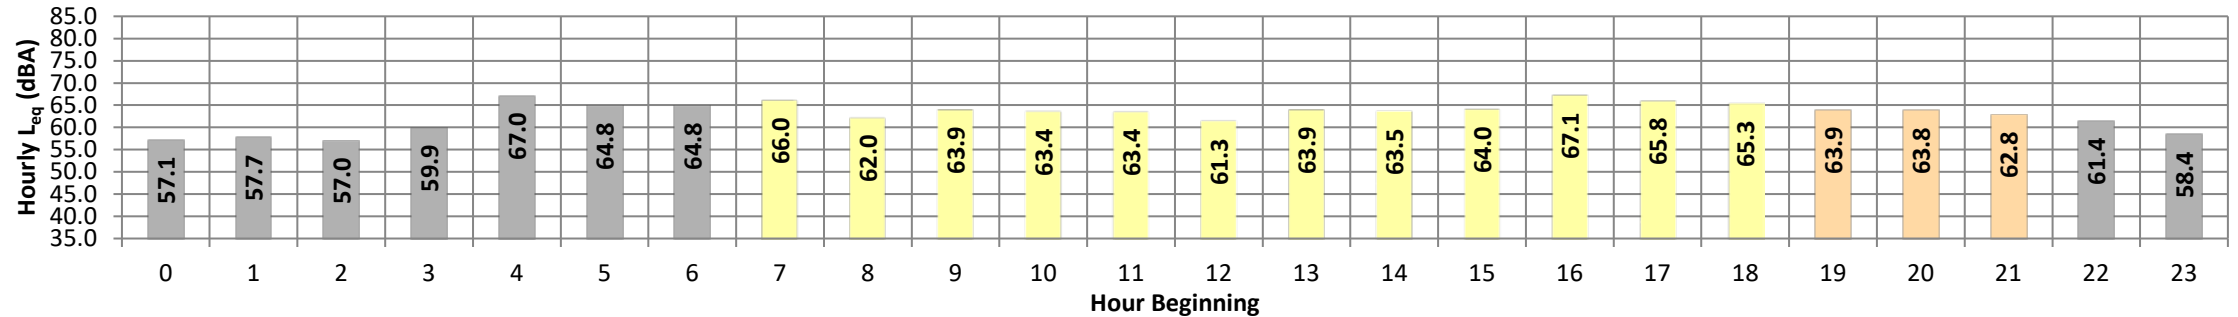

Timeframe	Hour	L_{eq}	L_{max}	L_{min}	L1%	L2%	L5%	L8%	L25%	L50%	L90%	L95%	L99%	L_{eq}	Adj.	Adj. L_{eq}
Night	0	57.1	64.9	49.3	64.5	63.9	62.5	61.6	57.9	54.7	50.5	49.9	49.5	57.1	10.0	67.1
	1	57.7	64.3	52.7	64.0	63.7	62.6	61.8	58.2	55.9	53.3	53.0	52.8	57.7	10.0	67.7
	2	57.0	62.9	52.0	62.7	62.4	61.5	60.7	58.1	55.6	52.7	52.4	52.1	57.0	10.0	67.0
	3	59.9	65.6	53.8	65.3	64.9	64.1	63.6	61.0	58.7	54.8	54.3	53.9	59.9	10.0	69.9
	4	67.0	79.2	57.9	78.5	77.6	73.3	70.1	65.2	63.1	59.2	58.5	58.1	67.0	10.0	77.0
	5	64.8	72.3	58.8	71.8	71.1	69.5	68.3	65.4	63.3	60.1	59.5	58.9	64.8	10.0	74.8
	6	64.8	70.0	58.9	69.6	69.3	68.4	67.9	66.0	64.0	60.1	59.5	59.1	64.8	10.0	74.8
Day	7	66.0	73.6	58.7	73.2	72.7	71.1	70.2	66.4	64.0	60.2	59.5	58.9	66.0	0.0	66.0
	8	62.0	67.9	55.4	67.6	67.2	66.3	65.6	63.1	60.8	56.7	56.1	55.6	62.0	0.0	62.0
	9	63.9	73.8	54.1	73.1	72.4	70.3	68.7	63.3	60.6	56.0	55.1	54.3	63.9	0.0	63.9
	10	63.4	71.7	52.7	71.3	70.9	69.6	68.6	63.9	60.8	54.7	53.9	53.1	63.4	0.0	63.4
	11	63.4	72.2	54.8	71.7	71.0	69.2	68.3	63.6	60.4	56.2	55.5	55.0	63.4	0.0	63.4
	12	61.3	68.3	53.3	67.9	67.5	66.3	65.3	62.2	59.7	54.9	54.2	53.5	61.3	0.0	61.3
	13	63.9	71.5	56.5	71.0	70.6	69.1	68.1	64.5	61.8	57.9	57.2	56.7	63.9	0.0	63.9
	14	63.5	71.9	55.9	71.5	70.9	69.3	68.1	63.6	61.1	57.6	56.8	56.1	63.5	0.0	63.5
	15	64.0	72.5	55.6	72.1	71.6	70.2	68.2	64.0	61.5	57.1	56.4	55.8	64.0	0.0	64.0
	16	67.1	77.9	57.1	77.4	76.5	73.6	71.3	66.4	63.3	58.8	58.0	57.3	67.1	0.0	67.1
	17	65.8	73.2	58.7	72.7	72.1	71.0	69.9	66.7	63.9	60.2	59.6	58.9	65.8	0.0	65.8
	18	65.3	72.6	57.6	72.3	71.7	70.3	69.4	66.6	63.2	58.9	58.3	57.7	65.3	0.0	65.3
Evening	19	63.9	71.1	55.3	70.7	70.4	69.5	68.6	64.5	61.7	57.0	56.2	55.5	63.9	5.0	68.9
	20	63.8	73.3	53.3	72.8	72.2	70.1	68.6	64.0	59.5	55.1	54.4	53.6	63.8	5.0	68.8
	21	62.8	71.8	53.3	71.6	71.2	69.4	67.0	62.7	59.3	54.7	54.1	53.5	62.8	5.0	67.8
Night	22	61.4	68.7	54.0	68.4	67.9	66.6	65.4	62.1	59.7	55.1	54.5	54.1	61.4	10.0	71.4
	23	58.4	65.0	51.6	64.7	64.3	63.1	62.3	59.4	56.6	52.7	52.1	51.7	58.4	10.0	68.4
Timeframe	Hour	L_{eq}	L_{max}	L_{min}	L1%	L2%	L5%	L8%	L25%	L50%	L90%	L95%	L99%	L_{eq} (dBA)		
Day	Min	61.3	67.9	52.7	67.6	67.2	66.3	65.3	62.2	59.7	54.7	53.9	53.1	24-Hour	Daytime	Nighttime
	Max	67.1	77.9	58.7	77.4	76.5	73.6	71.3	66.7	64.0	60.2	59.6	58.9			
Energy Average		64.4	Average:		71.8	71.3	69.7	68.5	64.5	61.7	57.4	56.7	56.1	63.7	64.3	62.4
Evening	Min	62.8	71.1	53.3	70.7	70.4	69.4	67.0	62.7	59.3	54.7	54.1	53.5			
	Max	63.9	73.3	55.3	72.8	72.2	70.1	68.6	64.5	61.7	57.0	56.2	55.5	24-Hour CNEL (dBA)		
Energy Average		63.5	Average:		71.7	71.3	69.7	68.1	63.8	60.2	55.6	54.9	54.2	69.5		
Night	Min	57.0	62.9	49.3	62.7	62.4	61.5	60.7	57.9	54.7	50.5	49.9	49.5			
	Max	67.0	79.2	58.9	78.5	77.6	73.3	70.1	66.0	64.0	60.1	59.5	59.1			
Energy Average		62.4	Average:		67.7	67.2	65.7	64.6	61.5	59.0	55.4	54.9	54.5			



This page intentionally left blank

APPENDIX 8.1:

CADNAA OPERATIONAL NOISE MODEL INPUTS

This page intentionally left blank

13235 - Perris and Ramona Warehouse DPR19-00012

CadnaA Noise Prediction Model: 13235_06.cna

Date: 04.09.21

Analyst: B. Lawson

Calculation Configuration

Configuration	
Parameter	Value
General	
Country	(user defined)
Max. Error (dB)	0.00
Max. Search Radius (#(Unit,LEN))	2000.01
Min. Dist Src to Rcvr	0.00
Partition	
Raster Factor	0.50
Max. Length of Section (#(Unit,LEN))	999.99
Min. Length of Section (#(Unit,LEN))	1.01
Min. Length of Section (%)	0.00
Proj. Line Sources	On
Proj. Area Sources	On
Ref. Time	
Reference Time Day (min)	960.00
Reference Time Night (min)	480.00
Daytime Penalty (dB)	0.00
Recr. Time Penalty (dB)	5.00
Night-time Penalty (dB)	10.00
DTM	
Standard Height (m)	0.00
Model of Terrain	Triangulation
Reflection	
max. Order of Reflection	2
Search Radius Src	100.00
Search Radius Rcvr	100.00
Max. Distance Source - Rcvr	1000.00 1000.00
Min. Distance Rcvr - Reflector	1.00 1.00
Min. Distance Source - Reflector	0.10
Industrial (ISO 9613)	
Lateral Diffraction	some Obj
Obst. within Area Src do not shield	On
Screening	
	Incl. Ground Att. over Barrier
	Dz with limit (20/25)
Barrier Coefficients C1,2,3	3.0 20.0 0.0
Temperature (#(Unit,TEMP))	10
rel. Humidity (%)	70
Ground Absorption G	0.50
Wind Speed for Dir. (#(Unit,SPEED))	3.0
Roads (RLS-90)	
Strictly acc. to RLS-90	
Railways (FTA/FRA)	
Aircraft (???)	
Strictly acc. to AzB	

Receiver Noise Levels

Name	M.	ID	Level Lr			Limit. Value			Land Use			Height (ft)	Coordinates			
			Day (dBA)	Night (dBA)	CNEL (dBA)	Day (dBA)	Night (dBA)	CNEL (dBA)	Type	Auto	Noise Type		X (ft)	Y (ft)	Z (ft)	
RECEIVERS	R1		56.1	55.1	61.6	80.0	60.0	0.0				5.00	a	6264043.28	2253005.64	5.00
RECEIVERS	R2		56.8	55.8	62.2	80.0	60.0	0.0				5.00	a	6264808.43	2252998.87	5.00
RECEIVERS	R3		47.6	46.6	53.1	80.0	60.0	0.0				5.00	a	6265662.45	2252020.85	5.00
RECEIVERS	R4		57.1	56.2	62.6	80.0	60.0	0.0				5.00	a	6265499.72	2251671.63	5.00

Point Source(s)

Name	M.	ID	Result. PWL			Lw / Li		Operating Time			KO	Height		Coordinates			
			Day (dBA)	Evening (dBA)	Night (dBA)	Type	Value (dBA)	norm.	Day (min)	Special (min)		Night (min)	(dB)	(ft)	X (ft)	Y (ft)	Z (ft)
POINTSOURCE		AC02	89.4	89.4	89.4	Lw	89.4		585.00	0.00	252.00	0.0	5.00	g	6265066.13	2252194.49	50.00
POINTSOURCE		AC01	89.4	89.4	89.4	Lw	89.4		585.00	0.00	252.00	0.0	5.00	g	6265070.19	2251838.22	50.00
POINTSOURCE		TRASH01	102.8	102.8	102.8	Lw	102.8		75.00	0.00	45.00	0.0	8.00	a	6264988.91	2251792.16	8.00
POINTSOURCE		TRASH02	102.8	102.8	102.8	Lw	102.8		75.00	0.00	45.00	0.0	8.00	a	6264182.92	2251808.68	8.00

Line Source(s)

Name	M.	ID	Result. PWL			Result. PWL'			Lw / Li		Operating Time			Moving Pt. Src			Height (ft)			
			Day (dBA)	Evening (dBA)	Night (dBA)	Day (dBA)	Evening (dBA)	Night (dBA)	Type	Value (dBA)	norm.	Day (min)	Special (min)	Night (min)	Day	Evening		Night	Number	Speed (mph)
LINESOURCE		DWY01	91.4	91.4	91.4	70.6	70.6	70.6	Lw	91.4										8
LINESOURCE		DWY02	91.4	91.4	91.4	73.4	73.4	73.4	Lw	91.4										8

Name	M.	ID	Result. PWL			Result. PWL'			Lw / Li			Operating Time			Moving Pt. Src			Height
			Day	Evening	Night	Day	Evening	Night	Type	Value	norm.	Day	Special	Night	Number		Speed	
			(dBA)	(dBA)	(dBA)	(dBA)	(dBA)	(dBA)			dB(A)	(min)	(min)	(min)	Day	Evening	Night	
LINESOURCE		DWY03	91.4	91.4	91.4	70.9	70.9	70.9	Lw	91.4								8
LINESOURCE		DWY04	91.4	91.4	91.4	73.7	73.7	73.7	Lw	91.4								8

Name	Height		Coordinates			
	Begin	End	x	y	z	Ground
	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
LINESOURCE	8.00	a	6264053.77	2251736.66	8.00	0.00
			6264051.01	2252087.50	8.00	0.00
			6264004.76	2252087.57	8.00	0.00
LINESOURCE	8.00	a	6264168.03	2251769.10	8.00	0.00
			6264107.03	2251766.42	8.00	0.00
			6264070.46	2251747.46	8.00	0.00
			6264047.43	2251732.56	8.00	0.00
			6263972.24	2251731.19	8.00	0.00
LINESOURCE	8.00	a	6265132.92	2251766.74	8.00	0.00
			6265132.84	2252061.57	8.00	0.00
			6265208.10	2252062.79	8.00	0.00
LINESOURCE	8.00	a	6265012.92	2251765.07	8.00	0.00
			6265207.80	2251767.78	8.00	0.00

Area Source(s)

Name	M.	ID	Result. PWL			Result. PWL''			Lw / Li			Operating Time			Height
			Day	Evening	Night	Day	Evening	Night	Type	Value	norm.	Day	Special	Night	
			(dBA)	(dBA)	(dBA)	(dBA)	(dBA)	(dBA)			dB(A)	(min)	(min)	(min)	
AREASOURCE		DOCK01	118.5	118.5	118.5	77.0	77.0	77.0	Lw	118.5		900.00	0.00	540.00	8

Name	Height		Coordinates			
	Begin	End	x	y	z	Ground
	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
AREASOURCE	8.00	a	6264958.59	2251817.17	8.00	0.00
			6265012.97	2251815.00	8.00	0.00
			6265012.84	2251688.33	8.00	0.00
			6264167.47	2251694.39	8.00	0.00
			6264168.42	2251820.64	8.00	0.00
			6264221.76	2251819.84	8.00	0.00
			6264222.65	2251881.24	8.00	0.00
			6264962.15	2251876.79	8.00	0.00

Barrier(s)

Name	M.	ID	Absorption		Z-Ext.	Cantilever		Height		Coordinates					
			left	right		horz.	vert.	Begin	End	x	y	z	Ground		
							(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
Existing Barrier		BARRIERS00001						8.00	a			6265662.38	2252074.09	8.00	0.00
												6265662.35	2252020.93	8.00	0.00
												6265658.90	2252020.90	8.00	0.00
												6265651.75	2251044.47	8.00	0.00
Planned Barrier		BARRIERS00002						8.00	a			6265014.18	2251816.63	8.00	0.00
												6265014.18	2251785.19	8.00	0.00
Planned Barrier		BARRIERS00003						8.00	a			6265013.10	2251744.35	8.00	0.00
												6265013.09	2251688.33	8.00	0.00
												6264166.64	2251694.40	8.00	0.00
												6264167.01	2251749.77	8.00	0.00
Planned Barrier		BARRIERS00004						8.00	a			6264168.10	2251821.69	8.00	0.00
												6264168.82	2251789.52	8.00	0.00

Building(s)

Name	M.	ID	RB	Residents	Absorption	Height	Coordinates				
							Begin	x	y	z	Ground
						(ft)	(ft)	(ft)	(ft)	(ft)	
BUILDING		BUILDING00001	x	0		45.00	a	6264222.65	2251881.24	45.00	0.00
								6264221.76	2251819.84	45.00	0.00
								6264102.51	2251821.62	45.00	0.00
								6264101.62	2251828.74	45.00	0.00
								6264098.06	2251826.96	45.00	0.00
								6264098.06	2251830.52	45.00	0.00
								6264092.72	2251830.52	45.00	0.00
								6264095.39	2252214.95	45.00	0.00
								6264098.95	2252215.84	45.00	0.00
								6264098.95	2252221.18	45.00	0.00
								6264104.29	2252222.07	45.00	0.00
								6264105.18	2252227.41	45.00	0.00
								6264119.42	2252227.41	45.00	0.00
								6264119.42	2252223.85	45.00	0.00
								6264128.32	2252223.85	45.00	0.00

Name	M.	ID	RB	Residents	Absorption	Height	Coordinates			
							Begin	x	y	z
						(ft)	(ft)	(ft)	(ft)	(ft)
							6264130.10	2252226.52	45.00	0.00
							6264743.24	2252222.96	45.00	0.00
							6264742.35	2252215.84	45.00	0.00
							6265080.51	2252219.40	45.00	0.00
							6265080.51	2252214.06	45.00	0.00
							6265083.18	2252214.06	45.00	0.00
							6265083.18	2252207.84	45.00	0.00
							6265091.19	2252207.84	45.00	0.00
							6265092.08	2251811.83	45.00	0.00
							6264958.59	2251817.17	45.00	0.00
							6264962.15	2251876.79	45.00	0.00

This page intentionally left blank

APPENDIX 8.2:

24-HOUR CADNAA OPERATIONAL NOISE MODEL INPUTS

This page intentionally left blank

13235 - Perris and Ramona Warehouse DPR19-00012

CadnaA Noise Prediction Model: 13235_06_CNEL.cna

Date: 04.09.21

Analyst: B. Lawson

Calculation Configuration

Configuration	
Parameter	Value
General	
Country	(user defined)
Max. Error (dB)	0.00
Max. Search Radius (#(Unit,LEN))	2000.01
Min. Dist Src to Rcvr	0.00
Partition	
Raster Factor	0.50
Max. Length of Section (#(Unit,LEN))	999.99
Min. Length of Section (#(Unit,LEN))	1.01
Min. Length of Section (%)	0.00
Proj. Line Sources	On
Proj. Area Sources	On
Ref. Time	
Reference Time Day (min)	960.00
Reference Time Night (min)	480.00
Daytime Penalty (dB)	0.00
Recr. Time Penalty (dB)	5.00
Night-time Penalty (dB)	10.00
DTM	
Standard Height (m)	0.00
Model of Terrain	Triangulation
Reflection	
max. Order of Reflection	2
Search Radius Src	100.00
Search Radius Rcvr	100.00
Max. Distance Source - Rcvr	1000.00 1000.00
Min. Distance Rcvr - Reflector	1.00 1.00
Min. Distance Source - Reflector	0.10
Industrial (ISO 9613)	
Lateral Diffraction	some Obj
Obst. within Area Src do not shield	On
Screening	
	Incl. Ground Att. over Barrier
	Dz with limit (20/25)
Barrier Coefficients C1,2,3	3.0 20.0 0.0
Temperature (#(Unit,TEMP))	10
rel. Humidity (%)	70
Ground Absorption G	0.50
Wind Speed for Dir. (#(Unit,SPEED))	3.0
Roads (RLS-90)	
Strictly acc. to RLS-90	
Railways (FTA/FRA)	
Aircraft (???)	
Strictly acc. to AzB	

Receiver Noise Levels

Name	M.	ID	Level Lr			Limit. Value			Land Use			Height (ft)	Coordinates			
			Day (dBA)	Night (dBA)	CNEL (dBA)	Day (dBA)	Night (dBA)	CNEL (dBA)	Type	Auto	Noise Type		X (ft)	Y (ft)	Z (ft)	
RECEIVERS	R1		41.3	40.4	46.8	80.0	60.0	0.0				5.00	a	6264043.28	2253005.64	5.00
RECEIVERS	R2		41.9	40.9	47.3	80.0	60.0	0.0				5.00	a	6264808.43	2252998.87	5.00
RECEIVERS	R3		33.5	32.6	39.1	80.0	60.0	0.0				5.00	a	6265662.45	2252020.85	5.00
RECEIVERS	R4		43.8	43.0	49.6	80.0	60.0	0.0				5.00	a	6265499.72	2251671.63	5.00

Point Source(s)

Name	M.	ID	Result. PWL			Lw / Li		Operating Time			KO	Height (ft)	Coordinates				
			Day (dBA)	Evening (dBA)	Night (dBA)	Type	Value (dBA)	norm.	Day (min)	Special (min)			Night (min)	X (ft)	Y (ft)	Z (ft)	
POINTSOURCE		AC02	88.9	88.9	88.9	Lw	88.9		585.00	0.00	252.00	0.0	5.00	g	6265066.13	2252194.49	50.00
POINTSOURCE		AC01	88.9	88.9	88.9	Lw	88.9		585.00	0.00	252.00	0.0	5.00	g	6265070.19	2251838.22	50.00
POINTSOURCE		TRASH01	88.5	88.5	88.5	Lw	88.5		75.00	0.00	45.00	0.0	8.00	a	6264988.91	2251792.16	8.00
POINTSOURCE		TRASH02	88.5	88.5	88.5	Lw	88.5		75.00	0.00	45.00	0.0	8.00	a	6264182.92	2251808.68	8.00

Line Source(s)

Name	M.	ID	Result. PWL			Result. PWL'			Lw / Li		Operating Time			Moving Pt. Src			Height (ft)	
			Day (dBA)	Evening (dBA)	Night (dBA)	Day (dBA)	Evening (dBA)	Night (dBA)	Type	Value (dBA)	norm.	Day (min)	Special (min)	Night (min)	Number	Speed (mph)		
LINESOURCE		DWY01	89.7	89.7	89.7	68.9	68.9	68.9	Lw	89.7								8
LINESOURCE		DWY02	89.7	89.7	89.7	71.7	71.7	71.7	Lw	89.7								8

Name	M.	ID	Result. PWL			Result. PWL'			Lw / Li			Operating Time			Moving Pt. Src			Height
			Day	Evening	Night	Day	Evening	Night	Type	Value	norm.	Day	Special	Night	Number		Speed	
			(dBA)	(dBA)	(dBA)	(dBA)	(dBA)	(dBA)			dB(A)	(min)	(min)	(min)	Day	Evening	Night	
LINESOURCE		DWY03	89.7	89.7	89.7	69.2	69.2	69.2	Lw	89.7								8
LINESOURCE		DWY04	89.7	89.7	89.7	72.0	72.0	72.0	Lw	89.7								8

Name	Height		Coordinates			
	Begin	End	x	y	z	Ground
	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
LINESOURCE	8.00	a	6264053.77	2251736.66	8.00	0.00
			6264051.01	2252087.50	8.00	0.00
			6264004.76	2252087.57	8.00	0.00
LINESOURCE	8.00	a	6264168.03	2251769.10	8.00	0.00
			6264107.03	2251766.42	8.00	0.00
			6264070.46	2251747.46	8.00	0.00
			6264047.43	2251732.56	8.00	0.00
			6263972.24	2251731.19	8.00	0.00
LINESOURCE	8.00	a	6265132.92	2251766.74	8.00	0.00
			6265132.84	2252061.57	8.00	0.00
			6265208.10	2252062.79	8.00	0.00
LINESOURCE	8.00	a	6265012.92	2251765.07	8.00	0.00
			6265207.80	2251767.78	8.00	0.00

Area Source(s)

Name	M.	ID	Result. PWL			Result. PWL''			Lw / Li			Operating Time			Height
			Day	Evening	Night	Day	Evening	Night	Type	Value	norm.	Day	Special	Night	
			(dBA)	(dBA)	(dBA)	(dBA)	(dBA)	(dBA)			dB(A)	(min)	(min)	(min)	
AREASOURCE		DOCK01	103.4	103.4	103.4	61.9	61.9	61.9	Lw	103.4		900.00	0.00	540.00	8

Name	Height		Coordinates			
	Begin	End	x	y	z	Ground
	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
AREASOURCE	8.00	a	6264958.59	2251817.17	8.00	0.00
			6265012.97	2251815.00	8.00	0.00
			6265012.84	2251688.33	8.00	0.00
			6264167.47	2251694.39	8.00	0.00
			6264168.42	2251820.64	8.00	0.00
			6264221.76	2251819.84	8.00	0.00
			6264222.65	2251881.24	8.00	0.00
			6264962.15	2251876.79	8.00	0.00

Barrier(s)

Name	M.	ID	Absorption		Z-Ext.	Cantilever		Height		Coordinates				
			left	right		horz.	vert.	Begin	End	x	y	z	Ground	
							(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
Existing Barrier		BARRIERS00001						8.00	a	6265662.38	2252074.09	8.00	0.00	
										6265662.35	2252020.93	8.00	0.00	
										6265658.90	2252020.90	8.00	0.00	
										6265651.75	2251044.47	8.00	0.00	
Planned Barrier		BARRIERS00002						8.00	a	6265014.18	2251816.63	8.00	0.00	
										6265014.18	2251785.19	8.00	0.00	
Planned Barrier		BARRIERS00003						8.00	a	6265013.10	2251744.35	8.00	0.00	
										6265013.09	2251688.33	8.00	0.00	
										6264166.64	2251694.40	8.00	0.00	
										6264167.01	2251749.77	8.00	0.00	
Planned Barrier		BARRIERS00004						8.00	a	6264168.10	2251821.69	8.00	0.00	
										6264168.82	2251789.52	8.00	0.00	

Building(s)

Name	M.	ID	RB	Residents	Absorption	Height	Coordinates				
							Begin	x	y	z	Ground
						(ft)	(ft)	(ft)	(ft)	(ft)	
BUILDING		BUILDING00001	x	0		45.00	a	6264222.65	2251881.24	45.00	0.00
								6264221.76	2251819.84	45.00	0.00
								6264102.51	2251821.62	45.00	0.00
								6264101.62	2251828.74	45.00	0.00
								6264098.06	2251826.96	45.00	0.00
								6264098.06	2251830.52	45.00	0.00
								6264092.72	2251830.52	45.00	0.00
								6264095.39	2252214.95	45.00	0.00
								6264098.95	2252215.84	45.00	0.00
								6264098.95	2252221.18	45.00	0.00
								6264104.29	2252222.07	45.00	0.00
								6264105.18	2252227.41	45.00	0.00
								6264119.42	2252227.41	45.00	0.00
								6264119.42	2252223.85	45.00	0.00
								6264128.32	2252223.85	45.00	0.00

Name	M.	ID	RB	Residents	Absorption	Height	Coordinates			
							Begin	x	y	z
						(ft)	(ft)	(ft)	(ft)	(ft)
							6264130.10	2252226.52	45.00	0.00
							6264743.24	2252222.96	45.00	0.00
							6264742.35	2252215.84	45.00	0.00
							6265080.51	2252219.40	45.00	0.00
							6265080.51	2252214.06	45.00	0.00
							6265083.18	2252214.06	45.00	0.00
							6265083.18	2252207.84	45.00	0.00
							6265091.19	2252207.84	45.00	0.00
							6265092.08	2251811.83	45.00	0.00
							6264958.59	2251817.17	45.00	0.00
							6264962.15	2251876.79	45.00	0.00

This page intentionally left blank

APPENDIX 9.1:
CADNAA CONSTRUCTION NOISE MODEL INPUTS

This page intentionally left blank

13235 - Perris and Ramona Warehouse DPR19-00012

CadnaA Noise Prediction Model: 13235_06_Construction.cna

Date: 06.09.21

Analyst: B. Lawson

Calculation Configuration

Configuration	
Parameter	Value
General	
Country	(user defined)
Max. Error (dB)	0.00
Max. Search Radius (#(Unit,LEN))	2000.01
Min. Dist Src to Rcvr	0.00
Partition	
Raster Factor	0.50
Max. Length of Section (#(Unit,LEN))	999.99
Min. Length of Section (#(Unit,LEN))	1.01
Min. Length of Section (%)	0.00
Proj. Line Sources	On
Proj. Area Sources	On
Ref. Time	
Reference Time Day (min)	960.00
Reference Time Night (min)	480.00
Daytime Penalty (dB)	0.00
Recr. Time Penalty (dB)	5.00
Night-time Penalty (dB)	10.00
DTM	
Standard Height (m)	0.00
Model of Terrain	Triangulation
Reflection	
max. Order of Reflection	2
Search Radius Src	100.00
Search Radius Rcvr	100.00
Max. Distance Source - Rcvr	1000.00 1000.00
Min. Distance Rcvr - Reflector	1.00 1.00
Min. Distance Source - Reflector	0.10
Industrial (ISO 9613)	
Lateral Diffraction	some Obj
Obst. within Area Src do not shield	On
Screening	
	Incl. Ground Att. over Barrier
	Dz with limit (20/25)
Barrier Coefficients C1,2,3	3.0 20.0 0.0
Temperature (#(Unit,TEMP))	10
rel. Humidity (%)	70
Ground Absorption G	0.50
Wind Speed for Dir. (#(Unit,SPEED))	3.0
Roads (RLS-90)	
Strictly acc. to RLS-90	
Railways (FTA/FRA)	
Aircraft (???)	
Strictly acc. to AzB	

Receiver Noise Levels

Name	M.	ID	Level Lr			Limit. Value			Land Use			Height (ft)	Coordinates			
			Day (dBA)	Night (dBA)	CNEL (dBA)	Day (dBA)	Night (dBA)	CNEL (dBA)	Type	Auto	Noise Type		X (ft)	Y (ft)	Z (ft)	
RECEIVERS	R1		70.1	70.1	76.8	80.0	60.0	0.0				5.00	a	6264043.28	2253005.64	5.00
RECEIVERS	R2		70.8	70.8	77.5	80.0	60.0	0.0				5.00	a	6264808.43	2252998.87	5.00
RECEIVERS	R3		60.8	60.8	67.5	80.0	60.0	0.0				5.00	a	6265662.45	2252020.85	5.00
RECEIVERS	R4		73.4	73.4	80.1	80.0	60.0	0.0				5.00	a	6265499.72	2251671.63	5.00

Area Source(s)

Name	M.	ID	Result. PWL			Result. PWL"			Lw / Li			Operating Time			Height (ft)
			Day (dBA)	Evening (dBA)	Night (dBA)	Day (dBA)	Evening (dBA)	Night (dBA)	Type	Value dB(A)	norm.	Day (min)	Special (min)	Night (min)	
SITEBOUNDARY		CONSTRUCTION	133.1	133.1	133.1	85.0	85.0	85.0	Lw"	85					8

Name	Height		Coordinates			
	Begin (ft)	End (ft)	x (ft)	y (ft)	z (ft)	Ground (ft)
SITEBOUNDARY	8.00	a	6264004.95	2252238.61	8.00	0.00
			6264034.48	2252268.63	8.00	0.00
			6264653.09	2252265.19	8.00	0.00
			6265129.47	2252252.88	8.00	0.00
			6265208.21	2252172.67	8.00	0.00
			6265207.72	2251686.93	8.00	0.00
			6263972.47	2251695.79	8.00	0.00

Name	Height		Coordinates			
	Begin	End	x	y	z	Ground
	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
			6263971.98	2251771.09	8.00	0.00
			6263987.24	2251837.03	8.00	0.00
			6264000.53	2251942.35	8.00	0.00
			6264004.46	2252044.22	8.00	0.00
			6264004.95	2252116.07	8.00	0.00

Barrier(s)

Name	M.	ID	Absorption		Z-Ext.	Cantilever			Height		Coordinates				
			left	right		horz.	vert.	Begin	End	x	y	z	Ground		
						(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)
Existing Barrier		BARRIERS00001						8.00	a			6265662.38	2252074.09	8.00	0.00
												6265662.35	2252020.93	8.00	0.00
												6265658.90	2252020.90	8.00	0.00
												6265651.75	2251044.47	8.00	0.00