

APPENDIX B

EXISTING WITH PROJECT TRAFFIC CONDITIONS LEVEL OF SERVICE CALCULATION WORKSHEETS

APPENDIX B-1

EXISTING TRAFFIC CONDITIONS

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	17.2
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.868

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	56	1122	40	8	2148	80	106	0	151	18	0	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	56	1122	40	8	2148	80	106	0	151	18	0	8
Peak Hour Factor	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	15	300	11	2	575	21	28	0	40	5	0	2
Total Analysis Volume [veh/h]	60	1201	43	9	2300	86	113	0	162	19	0	9
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	50	0	52	91	0	0	18	0	0	18	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	92	92	2	88	88	14	14	14	14
g / C, Green / Cycle	0.05	0.77	0.77	0.02	0.73	0.73	0.12	0.12	0.12	0.12
(v / s)_i Volume / Saturation Flow Rate	0.03	0.33	0.33	0.01	0.65	0.05	0.08	0.00	0.10	0.02
s, saturation flow rate [veh/h]	1781	1870	1847	1781	3560	1589	1406	1870	1589	1389
c, Capacity [veh/h]	91	1435	1417	28	2606	1163	172	218	186	213
d1, Uniform Delay [s]	55.87	4.89	4.89	58.36	12.17	4.56	51.21	0.00	52.08	47.94
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.82	0.97	0.98	6.18	4.76	0.12	4.23	0.00	11.87	0.28
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.66	0.44	0.44	0.32	0.88	0.07	0.66	0.00	0.87	0.13
d, Delay for Lane Group [s/veh]	63.69	5.85	5.87	64.54	16.93	4.68	55.43	0.00	63.95	48.22
Lane Group LOS	E	A	A	E	B	A	E	A	E	D
Critical Lane Group	Yes	No	No	No	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	1.98	4.95	4.90	0.32	21.32	0.59	3.48	0.00	5.40	0.78
50th-Percentile Queue Length [ft/ln]	49.57	123.73	122.60	7.99	533.00	14.71	86.99	0.00	135.03	19.50
95th-Percentile Queue Length [veh/ln]	3.57	8.60	8.54	0.58	28.89	1.06	6.26	0.00	9.21	1.40
95th-Percentile Queue Length [ft/ln]	89.23	214.94	213.40	14.38	722.31	26.48	156.59	0.00	230.32	35.11

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	63.69	5.86	5.87	64.54	16.93	4.68	55.43	0.00	63.95	48.22	48.22	48.22
Movement LOS	E	A	A	E	B	A	E	A	E	D	D	D
d_A, Approach Delay [s/veh]	8.52			16.67			60.45			48.22		
Approach LOS	A			B			E			D		
d_I, Intersection Delay [s/veh]	17.25											
Intersection LOS	B											
Intersection V/C	0.868											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.232			2.247			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	767			1450			233			233		
d_b, Bicycle Delay [s]	22.82			4.54			46.82			46.82		
I_b,int, Bicycle LOS Score for Intersection	2.635			3.535			2.013			1.606		
Bicycle LOS	B			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

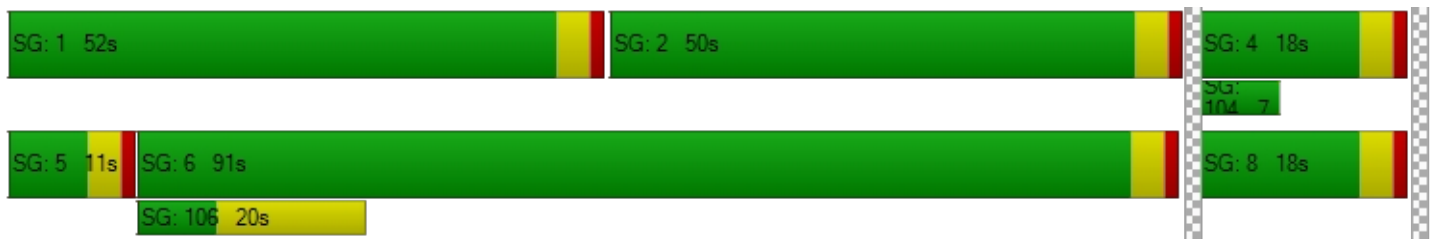

Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	28.6
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.825

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	161	1012	1	12	2222	51	71	1	388	1	2	2
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	161	1012	1	12	2222	51	71	1	388	1	2	2
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	41	257	0	3	563	13	18	0	98	0	1	1
Total Analysis Volume [veh/h]	163	1026	1	12	2254	52	72	1	394	1	2	2
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	19	33	0	67	81	0	0	15	15	0	15	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	15	90	90	2	77	77	11	30	11
g / C, Green / Cycle	0.13	0.78	0.78	0.02	0.67	0.67	0.10	0.26	0.10
(v / s)_i Volume / Saturation Flow Rate	0.09	0.27	0.27	0.01	0.62	0.62	0.09	0.25	0.01
s, saturation flow rate [veh/h]	1781	1870	1869	1781	1870	1855	775	1589	911
c, Capacity [veh/h]	233	1458	1458	35	1251	1241	137	416	125
d1, Uniform Delay [s]	47.82	3.84	3.84	55.60	16.43	16.64	51.88	41.69	47.24
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.41	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.80	0.67	0.67	5.56	12.50	13.38	3.22	29.14	0.13
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.70	0.35	0.35	0.34	0.92	0.93	0.53	0.95	0.04
d, Delay for Lane Group [s/veh]	51.62	4.51	4.51	61.17	28.94	30.03	55.10	70.83	47.37
Lane Group LOS	D	A	A	E	C	C	E	E	D
Critical Lane Group	No	No	No	No	No	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	4.71	3.20	3.20	0.40	27.42	27.99	2.22	14.22	0.13
50th-Percentile Queue Length [ft/ln]	117.80	79.99	79.97	9.95	685.52	699.72	55.47	355.48	3.37
95th-Percentile Queue Length [veh/ln]	8.27	5.76	5.76	0.72	36.01	36.67	3.99	20.40	0.24
95th-Percentile Queue Length [ft/ln]	206.80	143.99	143.95	17.91	900.22	916.63	99.84	510.09	6.07

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	51.62	4.51	4.51	61.17	29.47	30.03	55.10	55.10	70.83	47.37	47.37	47.37
Movement LOS	D	A	A	E	C	C	E	E	E	D	D	D
d_A, Approach Delay [s/veh]	10.97			29.65			68.37			47.37		
Approach LOS	B			C			E			D		
d_I, Intersection Delay [s/veh]	28.63											
Intersection LOS	C											
Intersection V/C	0.825											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.081	2.174	1.736
Crosswalk LOS	F	C	B	A
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	504	1339	191	191
d_b, Bicycle Delay [s]	32.16	6.28	47.03	47.03
I_b,int, Bicycle LOS Score for Intersection	2.541	3.472	2.330	1.568
Bicycle LOS	B	C	B	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

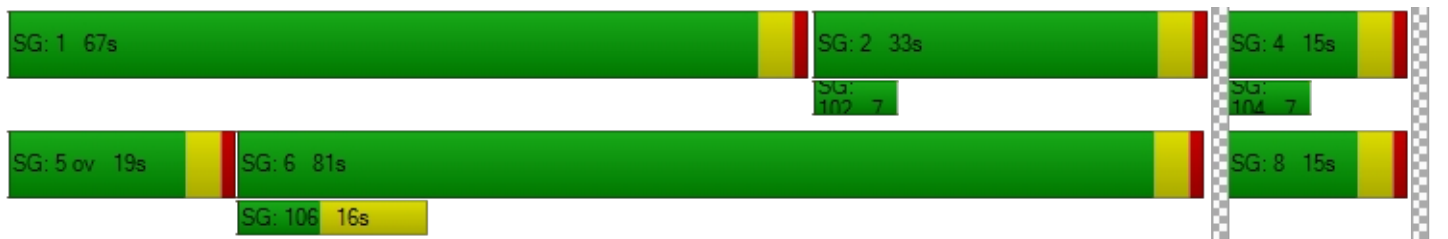

Intersection Level Of Service Report

Intersection 3: Winchester Rd at Robert Trent Jones Pkwy

Control Type:	Signalized	Delay (sec / veh):	12.3
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.599

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	29	1054	146	271	2343	24	23	33	59	23	7	97
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	29	1054	146	271	2343	24	23	33	59	23	7	97
Peak Hour Factor	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	7	266	37	68	591	6	6	8	15	6	2	24
Total Analysis Volume [veh/h]	29	1064	147	273	2364	24	23	33	60	23	7	98
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	11	0	68	68	0	0	11	0	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	55	55	16	67	67	7	7	7	7	7	7
g / C, Green / Cycle	0.04	0.61	0.61	0.18	0.75	0.75	0.08	0.08	0.08	0.08	0.08	0.08
(v / s)_i Volume / Saturation Flow Rate	0.02	0.23	0.23	0.15	0.44	0.44	0.02	0.02	0.04	0.02	0.00	0.06
s, saturation flow rate [veh/h]	1781	3560	1756	1781	3560	1860	1289	1870	1589	1303	1870	1589
c, Capacity [veh/h]	74	2170	1071	318	2658	1389	83	147	125	111	147	125
d1, Uniform Delay [s]	42.06	8.89	8.89	35.89	5.16	5.17	45.01	38.90	39.71	43.70	38.36	40.72
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.39	0.49	1.00	6.74	0.97	1.86	1.81	0.76	2.83	0.92	0.13	10.16
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.39	0.37	0.37	0.86	0.59	0.59	0.28	0.22	0.48	0.21	0.05	0.78
d, Delay for Lane Group [s/veh]	45.46	9.38	9.89	42.64	6.13	7.03	46.82	39.66	42.54	44.62	38.49	50.88
Lane Group LOS	D	A	A	D	A	A	D	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	0.69	3.75	3.86	6.29	5.15	5.75	0.56	0.71	1.36	0.53	0.15	2.46
50th-Percentile Queue Length [ft/ln]	17.29	93.77	96.44	157.27	128.67	143.83	13.97	17.71	33.89	13.32	3.68	61.48
95th-Percentile Queue Length [veh/ln]	1.24	6.75	6.94	10.40	8.87	9.69	1.01	1.28	2.44	0.96	0.26	4.43
95th-Percentile Queue Length [ft/ln]	31.12	168.79	173.58	260.10	221.68	242.17	25.14	31.88	61.01	23.98	6.62	110.67

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	45.46	9.50	9.89	42.64	6.43	7.03	46.82	39.66	42.54	44.62	38.49	50.88
Movement LOS	D	A	A	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	10.39			10.15			42.57			49.08		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	12.33											
Intersection LOS	B											
Intersection V/C	0.599											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	3.140	0.000	2.334	2.413
Crosswalk LOS	C	F	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	156	1422	156	156
d_b, Bicycle Delay [s]	38.27	3.76	38.27	38.27
I_b,int, Bicycle LOS Score for Intersection	2.242	3.023	1.655	1.665
Bicycle LOS	B	C	A	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 4: Winchester Rd at Murrieta Hot Springs Rd

Control Type:	Signalized	Delay (sec / veh):	39.7
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.878

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	133	665	131	194	1627	600	464	503	121	311	628	90
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	133	665	131	194	1627	600	464	503	121	311	628	90
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	35	174	34	51	426	157	121	132	32	81	164	24
Total Analysis Volume [veh/h]	139	696	137	203	1704	628	486	527	127	326	658	94
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	38	0	20	47	0	24	30	0	32	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	51	51	9	53	53	19	30	30	14	25	25
g / C, Green / Cycle	0.06	0.42	0.42	0.08	0.44	0.44	0.16	0.25	0.25	0.12	0.21	0.21
(v / s)_i Volume / Saturation Flow Rate	0.04	0.14	0.09	0.06	0.33	0.40	0.14	0.10	0.08	0.09	0.18	0.06
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	202	2153	672	267	2249	702	544	1278	399	401	746	333
d1, Uniform Delay [s]	55.44	23.17	21.89	54.30	28.14	30.96	49.62	37.58	36.62	51.80	46.01	39.86
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.10	0.40	0.68	4.43	2.45	16.26	5.42	0.21	0.46	4.03	3.64	0.46
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.69	0.32	0.20	0.76	0.76	0.89	0.89	0.41	0.32	0.81	0.88	0.28
d, Delay for Lane Group [s/veh]	59.54	23.57	22.57	58.73	30.59	47.21	55.04	37.79	37.07	55.83	49.64	40.32
Lane Group LOS	E	C	C	E	C	D	E	D	D	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.18	4.47	2.58	3.17	13.92	19.49	7.54	4.35	3.10	5.01	9.85	2.39
50th-Percentile Queue Length [ft/ln]	54.51	111.78	64.45	79.30	348.11	487.15	188.52	108.87	77.51	125.29	246.26	59.69
95th-Percentile Queue Length [veh/ln]	3.92	7.94	4.64	5.71	20.04	26.73	12.04	7.78	5.58	8.68	15.00	4.30
95th-Percentile Queue Length [ft/ln]	98.12	198.48	116.02	142.74	501.10	668.13	301.11	194.43	139.52	217.07	374.95	107.44

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	59.54	23.57	22.57	58.73	30.59	47.21	55.04	37.79	37.07	55.83	49.64	40.32
Movement LOS	E	C	C	E	C	D	E	D	D	E	D	D
d_A, Approach Delay [s/veh]	28.57			36.96			45.07			50.70		
Approach LOS	C			D			D			D		
d_I, Intersection Delay [s/veh]	39.74											
Intersection LOS	D											
Intersection V/C	0.878											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.276	3.052	2.976
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	567	717	433	567
d_b, Bicycle Delay [s]	30.82	24.70	36.82	30.82
I_b,int, Bicycle LOS Score for Intersection	2.094	2.954	2.187	2.449
Bicycle LOS	B	C	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

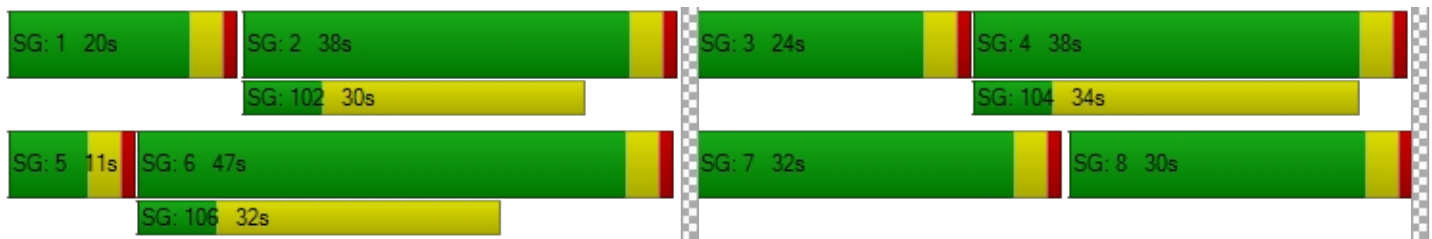

Intersection Level Of Service Report
Intersection 5: Winchester Rd at Winchester Square Drive

Control Type:	Signalized	Delay (sec / veh):	10.5
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.585

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	6	1085	129	47	2038	3	3	5	5	106	2	57
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	1085	129	47	2038	3	3	5	5	106	2	57
Peak Hour Factor	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	293	35	13	550	1	1	1	1	29	1	15
Total Analysis Volume [veh/h]	6	1170	139	51	2198	3	3	5	5	114	2	61
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	23	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	1	59	59	5	63	63	2	8	8
g / C, Green / Cycle	0.01	0.65	0.65	0.06	0.70	0.70	0.02	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.00	0.25	0.25	0.03	0.41	0.41	0.01	0.07	0.04
s, saturation flow rate [veh/h]	1781	3560	1770	1781	3560	1869	1732	1782	1589
c, Capacity [veh/h]	22	2325	1156	102	2486	1305	40	159	142
d1, Uniform Delay [s]	44.14	7.19	7.19	41.24	6.90	6.90	43.36	40.02	38.91
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.68	0.47	0.94	3.73	1.00	1.89	4.65	6.32	2.06
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.28	0.38	0.38	0.50	0.58	0.58	0.33	0.73	0.43
d, Delay for Lane Group [s/veh]	50.82	7.66	8.13	44.97	7.90	8.79	48.02	46.34	40.97
Lane Group LOS	D	A	A	D	A	A	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.17	3.48	3.62	1.19	5.95	6.57	0.33	2.75	1.35
50th-Percentile Queue Length [ft/ln]	4.30	87.07	90.41	29.84	148.82	164.36	8.35	68.78	33.63
95th-Percentile Queue Length [veh/ln]	0.31	6.27	6.51	2.15	9.95	10.78	0.60	4.95	2.42
95th-Percentile Queue Length [ft/ln]	7.74	156.73	162.74	53.72	248.85	269.49	15.04	123.80	60.53

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	50.82	7.77	8.13	44.97	8.21	8.79	48.02	48.02	48.02	46.34	46.34	40.97
Movement LOS	D	A	A	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	8.01			9.04			48.02			44.49		
Approach LOS	A			A			D			D		
d_I, Intersection Delay [s/veh]	10.48											
Intersection LOS	B											
Intersection V/C	0.585											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	3.099	0.000	1.726	2.061
Crosswalk LOS	C	F	A	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	356	356	711	422
d_b, Bicycle Delay [s]	30.42	30.42	18.69	28.01
I_b,int, Bicycle LOS Score for Intersection	2.283	2.798	1.581	1.852
Bicycle LOS	B	C	A	A

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	19.8
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.737

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration	← ↑ →			← ↑ →			← ↑			← ↑ →		
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	53	1010	80	29	1849	201	135	23	36	144	43	52
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	53	1010	80	29	1849	201	135	23	36	144	43	52
Peak Hour Factor	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	15	280	22	8	513	56	37	6	10	40	12	14
Total Analysis Volume [veh/h]	59	1121	89	32	2052	223	150	26	40	160	48	58
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	24	0	11	24	0	0	19	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	5	53	53	4	51	51	10	10	8	8	8
g / C, Green / Cycle	0.06	0.58	0.58	0.04	0.57	0.57	0.11	0.11	0.09	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.03	0.23	0.23	0.02	0.42	0.43	0.08	0.04	0.06	0.06	0.04
s, saturation flow rate [veh/h]	1781	3560	1800	1781	3560	1779	1781	1689	1781	1821	1589
c, Capacity [veh/h]	109	2072	1048	79	2011	1005	196	186	153	157	137
d1, Uniform Delay [s]	41.09	10.18	10.18	41.94	14.81	14.99	38.97	37.14	39.98	39.97	39.09
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.11	0.55	1.08	3.33	2.62	5.47	6.05	1.14	5.04	4.87	2.08
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.54	0.39	0.39	0.41	0.75	0.76	0.76	0.35	0.67	0.67	0.42
d, Delay for Lane Group [s/veh]	45.21	10.72	11.26	45.27	17.43	20.47	45.03	38.28	45.02	44.84	41.17
Lane Group LOS	D	B	B	D	B	C	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	1.38	4.07	4.27	0.76	11.16	12.25	3.51	1.39	2.40	2.44	1.28
50th-Percentile Queue Length [ft/ln]	34.58	101.70	106.83	18.97	278.95	306.25	87.68	34.78	60.07	60.97	32.07
95th-Percentile Queue Length [veh/ln]	2.49	7.32	7.66	1.37	16.64	17.99	6.31	2.50	4.33	4.39	2.31
95th-Percentile Queue Length [ft/ln]	62.24	183.05	191.58	34.15	415.91	449.75	157.82	62.60	108.13	109.74	57.73

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	45.21	10.88	11.26	45.27	18.24	20.47	45.03	38.28	38.28	44.95	44.84	41.17
Movement LOS	D	B	B	D	B	C	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	12.50			18.83			42.97			44.11		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	19.79											
Intersection LOS	B											
Intersection V/C	0.737											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			34.67			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.100			2.117			2.231		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	444			444			333			711		
d_b, Bicycle Delay [s]	27.22			27.22			31.25			18.69		
I_b,int, Bicycle LOS Score for Intersection	2.258			2.828			1.916			1.999		
Bicycle LOS	B			C			A			A		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

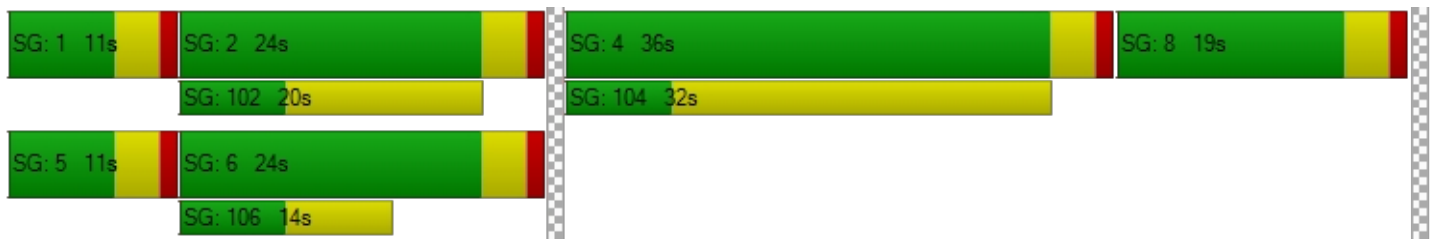

**Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd**

Control Type:	Signalized	Delay (sec / veh):	41.2
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.893

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Base Volume Input [veh/h]	207	737	125	142	1644	278	157	84	89	296	242	121
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	207	737	125	142	1644	278	157	84	89	296	242	121
Peak Hour Factor	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	57	203	34	39	453	77	43	23	25	82	67	33
Total Analysis Volume [veh/h]	228	813	138	157	1813	307	173	93	98	326	267	133
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	22	29	0	36	43	0	17	38	0	17	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	17	59	59	13	54	54	13	20	20	13	20	20
g / C, Green / Cycle	0.14	0.49	0.49	0.11	0.45	0.45	0.11	0.16	0.16	0.11	0.16	0.16
(v / s)_i Volume / Saturation Flow Rate	0.13	0.16	0.09	0.09	0.40	0.41	0.10	0.05	0.06	0.09	0.14	0.08
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1737	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	255	2490	777	188	1606	784	194	306	260	376	306	260
d1, Uniform Delay [s]	50.53	18.66	17.18	52.66	30.00	30.46	52.81	44.21	44.77	52.64	49.01	45.85
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.49	0.35	0.50	9.28	7.27	15.47	13.12	0.56	0.90	6.07	7.74	1.56
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.89	0.33	0.18	0.83	0.88	0.90	0.89	0.30	0.38	0.87	0.87	0.51
d, Delay for Lane Group [s/veh]	61.02	19.01	17.68	61.94	37.27	45.93	65.92	44.76	45.67	58.71	56.74	47.41
Lane Group LOS	E	B	B	E	D	D	E	D	D	E	E	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.46	4.64	2.24	5.12	19.69	21.67	5.85	2.50	2.68	5.15	8.45	3.74
50th-Percentile Queue Length [ft/ln]	186.51	116.00	56.11	128.10	492.13	541.67	146.21	62.38	66.94	128.68	211.19	93.57
95th-Percentile Queue Length [veh/ln]	11.94	8.17	4.04	8.84	26.96	29.30	9.81	4.49	4.82	8.87	13.21	6.74
95th-Percentile Queue Length [ft/ln]	298.49	204.32	101.01	220.91	674.04	732.52	245.37	112.28	120.49	221.70	330.36	168.43

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	61.02	19.01	17.68	61.94	39.17	45.93	65.92	44.76	45.67	58.71	56.74	47.41
Movement LOS	E	B	B	E	D	D	E	D	D	E	E	D
d_A, Approach Delay [s/veh]	26.98			41.65			55.06			55.92		
Approach LOS	C			D			E			E		
d_I, Intersection Delay [s/veh]	41.20											
Intersection LOS	D											
Intersection V/C	0.893											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	49.50	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	3.156	3.081	2.429	2.531
Crosswalk LOS	C	C	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	417	650	567	567
d_b, Bicycle Delay [s]	37.60	27.34	30.82	30.82
I_b,int, Bicycle LOS Score for Intersection	2.208	2.812	2.160	2.758
Bicycle LOS	B	C	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

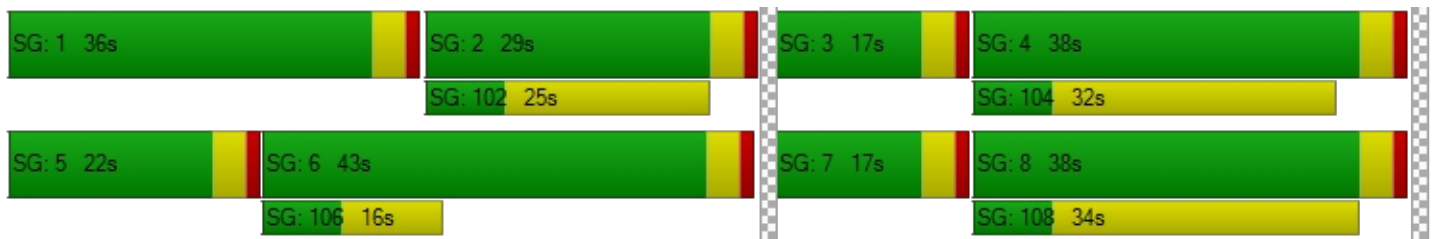

Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	34.0
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.690

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	97	515	118	693	1681	80	80	541	212	180	426	358
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	97	515	118	693	1681	80	80	541	212	180	426	358
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	26	137	31	184	447	21	21	144	56	48	113	95
Total Analysis Volume [veh/h]	103	548	126	737	1788	85	85	576	226	191	453	381
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	11	33	33	37	59	0	11	37	37	13	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	7	44	57	29	66	66	7	23	34	9	25	57
g / C, Green / Cycle	0.06	0.37	0.47	0.24	0.55	0.55	0.06	0.19	0.28	0.07	0.20	0.48
(v / s)_i Volume / Saturation Flow Rate	0.03	0.11	0.08	0.21	0.35	0.35	0.02	0.16	0.14	0.06	0.13	0.24
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1827	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	204	1864	749	832	1950	1001	193	670	446	249	728	760
d1, Uniform Delay [s]	54.78	27.04	18.23	43.99	18.79	18.93	54.88	47.19	36.22	54.73	43.53	21.48
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.13	0.11	0.11	0.36
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	1.92	0.40	0.49	3.39	1.57	3.15	1.59	3.37	1.11	4.95	0.88	1.70
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.50	0.29	0.17	0.89	0.63	0.64	0.44	0.86	0.51	0.77	0.62	0.50
d, Delay for Lane Group [s/veh]	56.70	27.44	18.72	47.38	20.36	22.08	56.47	50.57	37.33	59.69	44.41	23.18
Lane Group LOS	E	C	B	D	C	C	E	D	D	E	D	C
Critical Lane Group	Yes	No	No	No	No	Yes	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	1.57	3.80	2.12	10.90	11.89	12.91	1.29	8.62	5.70	3.01	6.22	7.63
50th-Percentile Queue Length [ft/ln]	39.18	95.07	52.96	272.49	297.30	322.66	32.23	215.57	142.51	75.21	155.59	190.77
95th-Percentile Queue Length [veh/ln]	2.82	6.85	3.81	16.31	17.55	18.80	2.32	13.44	9.62	5.42	10.32	12.16
95th-Percentile Queue Length [ft/ln]	70.53	171.13	95.33	407.85	438.69	469.96	58.01	335.96	240.40	135.38	257.88	304.03

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	56.70	27.44	18.72	47.38	20.89	22.08	56.47	50.57	37.33	59.69	44.41	23.18
Movement LOS	E	C	B	D	C	C	E	D	D	E	D	C
d_A, Approach Delay [s/veh]	29.91			28.41			47.76			39.37		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	33.99											
Intersection LOS	C											
Intersection V/C	0.690											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.181	2.821	2.951
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	483	917	550	583
d_b, Bicycle Delay [s]	34.50	17.60	31.54	30.10
I_b,int, Bicycle LOS Score for Intersection	1.987	2.995	2.291	2.405
Bicycle LOS	A	C	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

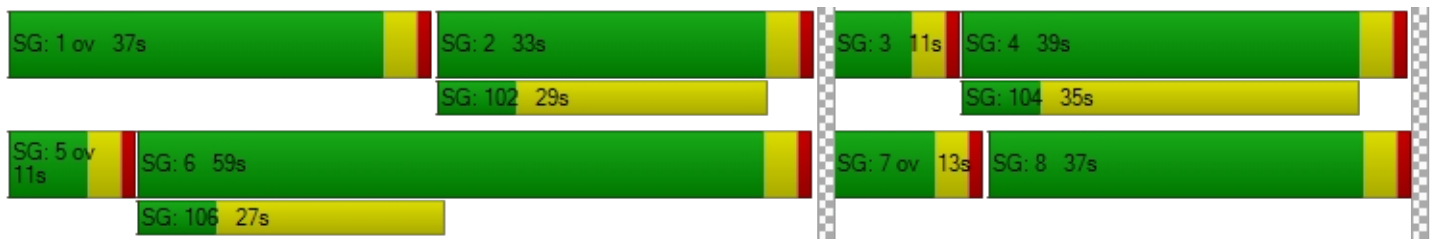

**Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd**

Control Type:	Signalized	Delay (sec / veh):	32.3
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.787

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration	[Diagram]			[Diagram]			[Diagram]			[Diagram]		
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	263	956	556	341	1593	73	104	387	433	253	173	127
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	263	956	556	341	1593	73	104	387	433	253	173	127
Peak Hour Factor	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	71	257	150	92	429	20	28	104	117	68	47	34
Total Analysis Volume [veh/h]	283	1029	598	367	1715	79	112	417	466	272	186	137
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	15	42	42	21	48	0	11	41	0	11	41	41
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	11	54	65	14	58	58	7	23	23	23	7	23	42
g / C, Green / Cycle	0.10	0.47	0.57	0.13	0.50	0.50	0.06	0.20	0.20	0.20	0.06	0.20	0.36
(v / s)_i Volume / Saturation Flow Rate	0.08	0.15	0.38	0.11	0.26	0.26	0.03	0.17	0.17	0.17	0.05	0.05	0.09
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1816	3459	1870	1673	1589	5188	3560	1589
c, Capacity [veh/h]	333	3197	901	437	2551	910	207	378	338	322	320	726	580
d1, Uniform Delay [s]	51.19	18.99	17.28	49.15	19.37	19.37	52.55	44.22	44.22	44.22	53.47	38.47	25.39
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.12	0.12	0.12	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.09	0.27	3.84	4.42	0.76	2.11	2.18	5.77	6.40	6.71	6.35	0.18	0.21
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.85	0.32	0.66	0.84	0.52	0.52	0.54	0.85	0.85	0.85	0.85	0.26	0.24
d, Delay for Lane Group [s/veh]	57.28	19.26	21.12	53.57	20.12	21.48	54.73	49.99	50.62	50.92	59.82	38.65	25.60
Lane Group LOS	E	B	C	D	C	C	D	D	D	D	E	D	C
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	Yes	Yes	No	No
50th-Percentile Queue Length [veh/ln]	4.29	4.31	11.45	5.41	7.94	8.84	1.64	9.39	8.46	8.07	2.78	2.23	2.64
50th-Percentile Queue Length [ft/ln]	107.23	107.64	286.15	135.24	198.62	221.12	40.88	234.8	211.5	201.6	69.56	55.80	66.12
95th-Percentile Queue Length [veh/ln]	7.69	7.71	16.99	9.22	12.57	13.72	2.94	14.42	13.23	12.73	5.01	4.02	4.76
95th-Percentile Queue Length [ft/ln]	192.14	192.71	424.87	230.61	314.19	343.05	73.58	360.4	330.7	318.1	125.21	100.43	119.02

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	57.28	19.26	21.12	53.57	20.44	21.48	54.73	50.13	50.81	59.82	38.65	25.60
Movement LOS	E	B	C	D	C	C	D	D	D	E	D	C
d_A, Approach Delay [s/veh]	25.48			26.10			50.96			45.32		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	32.28											
Intersection LOS	C											
Intersection V/C	0.787											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.313			2.821			2.978		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	661			765			643			643		
d_b, Bicycle Delay [s]	25.78			21.92			26.45			26.45		
I_b,int, Bicycle LOS Score for Intersection	2.347			2.451			2.380			2.050		
Bicycle LOS	B			B			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	14.8
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.790

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	199	2115	48	4	1388	94	55	3	119	43	4	11
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	199	2115	48	4	1388	94	55	3	119	43	4	11
Peak Hour Factor	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	52	548	12	1	360	24	14	1	31	11	1	3
Total Analysis Volume [veh/h]	206	2194	50	4	1440	98	57	3	123	45	4	11
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	53	34	0	43	24	0	0	13	0	0	13	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	13	69	69	1	57	57	9	9	9	9
g / C, Green / Cycle	0.14	0.76	0.76	0.01	0.63	0.63	0.10	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.12	0.60	0.60	0.00	0.40	0.06	0.04	0.00	0.08	0.05
s, saturation flow rate [veh/h]	1781	1870	1855	1781	3560	1589	1398	1870	1589	1289
c, Capacity [veh/h]	249	1422	1411	15	2240	1000	124	183	155	196
d1, Uniform Delay [s]	37.68	6.47	6.55	44.34	10.39	6.60	38.53	36.71	39.72	38.97
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.90	4.52	4.72	8.53	1.43	0.20	2.62	0.04	8.69	0.87
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.83	0.79	0.80	0.26	0.64	0.10	0.46	0.02	0.79	0.31
d, Delay for Lane Group [s/veh]	44.58	10.99	11.27	52.87	11.83	6.79	41.16	36.74	48.41	39.84
Lane Group LOS	D	B	B	D	B	A	D	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	4.82	10.44	10.61	0.12	8.15	0.72	1.27	0.06	3.00	1.30
50th-Percentile Queue Length [ft/ln]	120.44	261.09	265.23	3.11	203.76	18.00	31.76	1.52	74.99	32.44
95th-Percentile Queue Length [veh/ln]	8.42	15.74	15.95	0.22	12.83	1.30	2.29	0.11	5.40	2.34
95th-Percentile Queue Length [ft/ln]	210.43	393.58	398.77	5.61	320.81	32.39	57.17	2.74	134.99	58.39

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	44.58	11.13	11.27	52.87	11.83	6.79	41.16	36.74	48.41	39.84	39.84	39.84
Movement LOS	D	B	B	D	B	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	13.94			11.61			45.96			39.84		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	14.84											
Intersection LOS	B											
Intersection V/C	0.790											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	0.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	34.67	34.67	0.00
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.152	2.250	0.000
Crosswalk LOS	F	C	B	F
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	667	444	200	200
d_b, Bicycle Delay [s]	20.00	27.22	36.45	36.45
I_b,int, Bicycle LOS Score for Intersection	3.581	2.832	1.862	1.659
Bicycle LOS	D	C	A	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

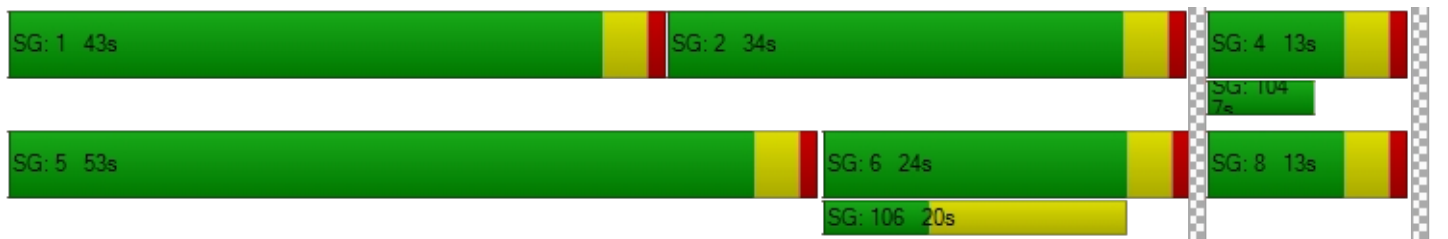

Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	17.8
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.872

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	365	2335	2	2	1449	69	69	0	245	0	7	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	365	2335	2	2	1449	69	69	0	245	0	7	8
Peak Hour Factor	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	93	596	1	1	370	18	18	0	63	0	2	2
Total Analysis Volume [veh/h]	373	2385	2	2	1480	70	70	0	250	0	7	8
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	59	29	0	50	20	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	22	71	71	0	49	49	7	33	7
g / C, Green / Cycle	0.24	0.78	0.78	0.00	0.55	0.55	0.08	0.36	0.08
(v / s)_i Volume / Saturation Flow Rate	0.21	0.64	0.64	0.00	0.42	0.42	0.04	0.16	0.01
s, saturation flow rate [veh/h]	1781	1870	1869	1781	1870	1840	1741	1589	1635
c, Capacity [veh/h]	431	1464	1464	9	1021	1005	217	580	169
d1, Uniform Delay [s]	32.74	5.87	5.87	44.62	15.89	15.96	39.78	21.55	38.55
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.37	5.11	5.12	11.74	5.39	5.59	0.85	0.51	0.22
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.87	0.82	0.82	0.22	0.76	0.77	0.32	0.43	0.09
d, Delay for Lane Group [s/veh]	38.11	10.98	10.99	56.36	21.28	21.55	40.63	22.05	38.78
Lane Group LOS	D	B	B	E	C	C	D	C	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	8.23	10.38	10.39	0.07	12.81	12.77	1.52	3.94	0.32
50th-Percentile Queue Length [ft/ln]	205.71	259.57	259.75	1.84	320.26	319.32	38.02	98.54	7.89
95th-Percentile Queue Length [veh/ln]	12.93	15.67	15.68	0.13	18.68	18.63	2.74	7.09	0.57
95th-Percentile Queue Length [ft/ln]	323.32	391.68	391.91	3.31	467.01	465.84	68.43	177.37	14.21

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	38.11	10.98	10.99	56.36	21.41	21.55	40.63	40.63	22.05	38.78	38.78	38.78
Movement LOS	D	B	B	E	C	C	D	D	C	D	D	D
d_A, Approach Delay [s/veh]	14.65			21.46			26.12			38.78		
Approach LOS	B			C			C			D		
d_I, Intersection Delay [s/veh]	17.79											
Intersection LOS	B											
Intersection V/C	0.872											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			34.67			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.182			2.190			1.724		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	556			356			156			156		
d_b, Bicycle Delay [s]	23.47			30.42			38.27			38.27		
I_b,int, Bicycle LOS Score for Intersection	3.837			2.840			2.088			1.584		
Bicycle LOS	D			C			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

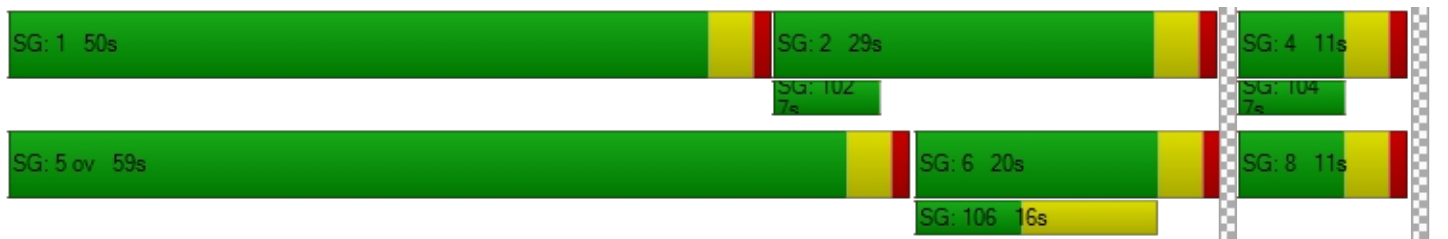

Intersection Level Of Service Report

Intersection 3: Winchester Rd at Robert Trent Jones Pkwy

Control Type:	Signalized	Delay (sec / veh):	28.7
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.853

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	55	2272	108	145	1477	15	16	37	51	151	59	333
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	55	2272	108	145	1477	15	16	37	51	151	59	333
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	14	592	28	38	385	4	4	10	13	39	15	87
Total Analysis Volume [veh/h]	57	2367	113	151	1539	16	17	39	53	157	61	347
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	12	65	0	16	69	0	0	39	0	0	39	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	65	65	12	71	71	31	31	31	31	31	31
g / C, Green / Cycle	0.05	0.54	0.54	0.10	0.59	0.59	0.26	0.26	0.26	0.26	0.26	0.26
(v / s)_i Volume / Saturation Flow Rate	0.03	0.46	0.46	0.08	0.29	0.29	0.02	0.02	0.03	0.12	0.03	0.22
s, saturation flow rate [veh/h]	1781	3560	1827	1781	3560	1860	977	1870	1589	1304	1870	1589
c, Capacity [veh/h]	89	1939	995	177	2115	1105	86	479	407	334	479	407
d1, Uniform Delay [s]	55.93	22.98	23.23	53.15	13.87	13.87	57.85	33.90	34.34	42.57	34.32	42.47
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.27
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.44	4.64	9.19	10.90	0.79	1.51	1.11	0.07	0.14	1.03	0.12	11.77
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.64	0.84	0.85	0.85	0.48	0.48	0.20	0.08	0.13	0.47	0.13	0.85
d, Delay for Lane Group [s/veh]	63.37	27.62	32.42	64.06	14.66	15.38	58.96	33.98	34.49	43.60	34.44	54.24
Lane Group LOS	E	C	C	E	B	B	E	C	C	D	C	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.88	19.80	22.02	5.01	7.86	8.44	0.54	0.88	1.22	4.28	1.40	11.05
50th-Percentile Queue Length [ft/ln]	46.97	494.90	550.59	125.32	196.59	210.98	13.44	22.04	30.42	106.96	34.91	276.27
95th-Percentile Queue Length [veh/ln]	3.38	27.09	29.72	8.68	12.46	13.20	0.97	1.59	2.19	7.67	2.51	16.50
95th-Percentile Queue Length [ft/ln]	84.55	677.32	743.00	217.11	311.56	330.09	24.20	39.68	54.75	191.76	62.84	412.57

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	63.37	29.11	32.42	64.06	14.90	15.38	58.96	33.98	34.49	43.60	34.44	54.24
Movement LOS	E	C	C	E	B	B	E	C	C	D	C	D
d_A, Approach Delay [s/veh]	30.03			19.26			38.12			49.15		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	28.67											
Intersection LOS	C											
Intersection V/C	0.853											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	49.50	0.00	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	3.428	0.000	2.361	2.483
Crosswalk LOS	C	F	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	1017	1083	583	583
d_b, Bicycle Delay [s]	14.50	12.60	30.10	30.10
I_b,int, Bicycle LOS Score for Intersection	2.955	2.498	1.650	2.026
Bicycle LOS	C	B	A	B

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 4: Winchester Rd at Murrieta Hot Springs Rd

Control Type:	Signalized	Delay (sec / veh):	42.1
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.903

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration	[Diagram]			[Diagram]			[Diagram]			[Diagram]		
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	181	1719	213	131	1110	520	554	729	157	285	696	102
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	181	1719	213	131	1110	520	554	729	157	285	696	102
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	48	454	56	35	293	137	146	193	41	75	184	27
Total Analysis Volume [veh/h]	191	1817	225	138	1173	550	586	771	166	301	736	108
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	41	0	11	41	0	25	32	0	31	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	44	44	7	44	44	21	35	35	13	27	27
g / C, Green / Cycle	0.06	0.38	0.38	0.06	0.38	0.38	0.18	0.31	0.31	0.11	0.23	0.23
(v / s)_i Volume / Saturation Flow Rate	0.06	0.36	0.14	0.04	0.23	0.35	0.17	0.15	0.10	0.09	0.21	0.07
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	216	1954	610	213	1950	609	633	1558	486	380	829	370
d1, Uniform Delay [s]	53.59	34.01	25.49	52.81	28.49	33.53	46.28	32.68	30.97	49.97	42.72	36.36
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	11.44	9.41	1.72	3.28	1.38	19.23	6.45	0.24	0.41	3.75	3.47	0.43
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.89	0.93	0.37	0.65	0.60	0.90	0.93	0.49	0.34	0.79	0.89	0.29
d, Delay for Lane Group [s/veh]	65.03	43.42	27.20	56.09	29.87	52.76	52.73	32.93	31.39	53.72	46.19	36.79
Lane Group LOS	E	D	C	E	C	D	D	C	C	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.08	17.51	4.69	2.05	8.79	17.39	8.77	5.88	3.63	4.42	10.44	2.55
50th-Percentile Queue Length [ft/ln]	77.09	437.65	117.25	51.19	219.69	434.66	219.13	147.00	90.83	110.40	261.04	63.82
95th-Percentile Queue Length [veh/ln]	5.55	24.37	8.24	3.69	13.65	24.22	13.62	9.86	6.54	7.86	15.74	4.60
95th-Percentile Queue Length [ft/ln]	138.75	609.19	206.04	92.13	341.24	605.61	340.51	246.42	163.50	196.55	393.53	114.88

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	65.03	43.42	27.20	56.09	29.87	52.76	52.73	32.93	31.39	53.72	46.19	36.79
Movement LOS	E	D	C	E	C	D	D	C	C	D	D	D
d_A, Approach Delay [s/veh]	43.63			38.58			40.38			47.28		
Approach LOS	D			D			D			D		
d_I, Intersection Delay [s/veh]	42.13											
Intersection LOS	D											
Intersection V/C	0.903											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.335	3.103	3.015
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	643	643	487	591
d_b, Bicycle Delay [s]	26.45	26.45	32.91	28.53
I_b,int, Bicycle LOS Score for Intersection	2.788	2.583	2.397	2.504
Bicycle LOS	C	B	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

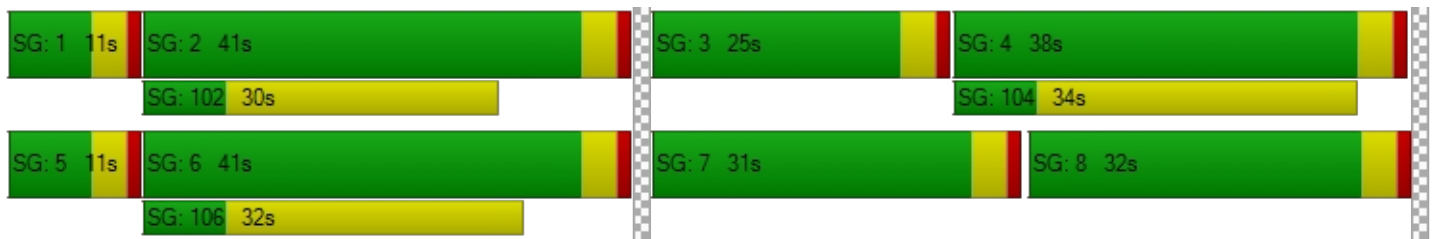

Intersection Level Of Service Report
Intersection 5: Winchester Rd at Winchester Square Drive

Control Type:	Signalized	Delay (sec / veh):	21.9
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.801

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	31	2050	291	56	1463	14	19	19	27	200	6	142
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	31	2050	291	56	1463	14	19	19	27	200	6	142
Peak Hour Factor	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	543	77	15	388	4	5	5	7	53	2	38
Total Analysis Volume [veh/h]	33	2174	309	59	1551	15	20	20	29	212	6	151
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	100
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	23	0	11	23	0	0	36	0	0	30	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	100	100	100	100	100	100	100	100	100
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	58	58	6	59	59	6	15	15
g / C, Green / Cycle	0.04	0.58	0.58	0.06	0.59	0.59	0.06	0.15	0.15
(v / s)_i Volume / Saturation Flow Rate	0.02	0.46	0.48	0.03	0.29	0.29	0.04	0.12	0.09
s, saturation flow rate [veh/h]	1781	3560	1756	1781	3560	1861	1718	1783	1589
c, Capacity [veh/h]	77	2046	1009	102	2097	1096	104	263	234
d1, Uniform Delay [s]	46.70	16.83	17.32	46.00	11.89	11.89	46.02	41.48	40.23
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.74	3.47	7.92	5.03	0.82	1.57	6.96	6.66	2.96
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.43	0.80	0.83	0.58	0.49	0.49	0.66	0.83	0.65
d, Delay for Lane Group [s/veh]	50.44	20.30	25.24	51.04	12.72	13.46	52.98	48.14	43.20
Lane Group LOS	D	C	C	D	B	B	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.88	14.59	16.49	1.57	6.39	6.90	1.87	5.66	3.67
50th-Percentile Queue Length [ft/ln]	21.94	364.82	412.20	39.17	159.68	172.61	46.81	141.48	91.71
95th-Percentile Queue Length [veh/ln]	1.58	20.86	23.15	2.82	10.53	11.21	3.37	9.56	6.60
95th-Percentile Queue Length [ft/ln]	39.50	521.44	578.68	70.50	263.30	280.34	84.25	239.02	165.08

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	50.44	21.50	25.24	51.04	12.97	13.46	52.98	52.98	52.98	48.14	48.14	43.20
Movement LOS	D	C	C	D	B	B	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	22.34			14.35			52.98			46.11		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	21.89											
Intersection LOS	C											
Intersection V/C	0.801											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	39.61	0.00	39.61	39.61
I_p,int, Pedestrian LOS Score for Intersection	3.199	0.000	1.780	2.191
Crosswalk LOS	C	F	A	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	380	380	640	520
d_b, Bicycle Delay [s]	32.81	32.81	23.12	27.38
I_b,int, Bicycle LOS Score for Intersection	2.943	2.453	1.673	2.168
Bicycle LOS	C	B	A	B

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

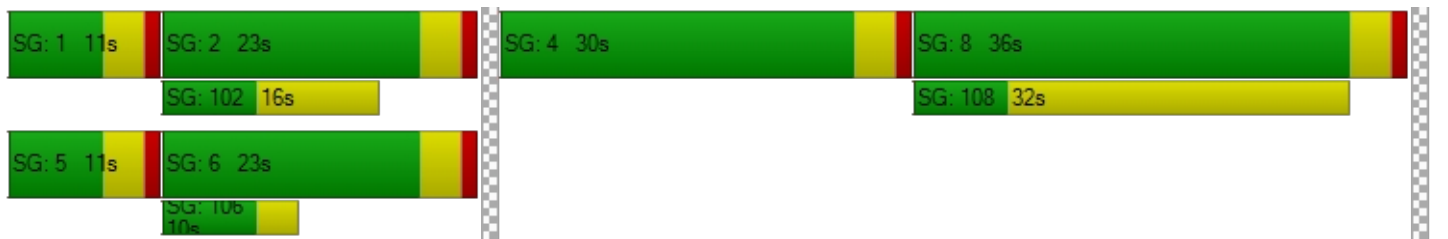

Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	22.9
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.767

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	82	2160	131	57	1420	181	209	48	48	104	36	38
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	82	2160	131	57	1420	181	209	48	48	104	36	38
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	21	551	33	15	362	46	53	12	12	27	9	10
Total Analysis Volume [veh/h]	84	2204	134	58	1449	185	213	49	49	106	37	39
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	32	0	11	32	0	0	11	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	49	49	5	48	48	13	13	7	7	7
g / C, Green / Cycle	0.07	0.54	0.54	0.06	0.53	0.53	0.15	0.15	0.08	0.08	0.08
(v / s)_i Volume / Saturation Flow Rate	0.05	0.43	0.44	0.03	0.31	0.31	0.12	0.06	0.04	0.04	0.02
s, saturation flow rate [veh/h]	1781	3560	1816	1781	3560	1764	1781	1718	1781	1826	1589
c, Capacity [veh/h]	124	1912	975	108	1881	932	262	252	139	142	124
d1, Uniform Delay [s]	40.98	17.05	17.21	41.11	14.46	14.47	37.27	34.80	39.93	39.92	39.31
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.39	3.76	7.53	4.06	1.31	2.64	6.07	0.97	2.90	2.78	1.44
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.68	0.81	0.82	0.54	0.58	0.58	0.81	0.39	0.51	0.51	0.32
d, Delay for Lane Group [s/veh]	47.37	20.80	24.74	45.17	15.78	17.12	43.35	35.77	42.84	42.70	40.75
Lane Group LOS	D	C	C	D	B	B	D	D	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	2.02	12.78	14.33	1.36	7.34	7.63	4.91	1.99	1.60	1.63	0.86
50th-Percentile Queue Length [ft/ln]	50.48	319.51	358.28	33.98	183.53	190.80	122.79	49.72	40.12	40.63	21.43
95th-Percentile Queue Length [veh/ln]	3.63	18.64	20.54	2.45	11.78	12.16	8.55	3.58	2.89	2.93	1.54
95th-Percentile Queue Length [ft/ln]	90.87	466.08	513.50	61.16	294.62	304.06	213.66	89.49	72.22	73.13	38.58

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	47.37	21.99	24.74	45.17	16.11	17.12	43.35	35.77	35.77	42.79	42.70	40.75
Movement LOS	D	C	C	D	B	B	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	23.02			17.22			40.96			42.33		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	22.86											
Intersection LOS	C											
Intersection V/C	0.767											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	34.67	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.171	2.140	2.234
Crosswalk LOS	F	C	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	622	622	156	711
d_b, Bicycle Delay [s]	21.36	21.36	38.27	18.69
I_b,int, Bicycle LOS Score for Intersection	2.892	2.490	2.073	1.860
Bicycle LOS	C	B	B	A

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

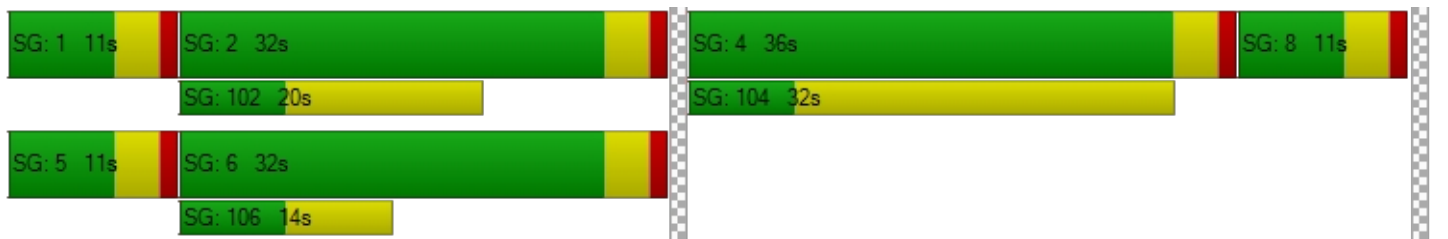

Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd

Control Type:	Signalized	Delay (sec / veh):	24.5
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.772

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
	84	2034	398	155	1217	118	92	56	31	368	69	164
Base Volume Input [veh/h]	84	2034	398	155	1217	118	92	56	31	368	69	164
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	84	2034	398	155	1217	118	92	56	31	368	69	164
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	21	519	102	40	310	30	23	14	8	94	18	42
Total Analysis Volume [veh/h]	86	2076	406	158	1242	120	94	57	32	376	70	167
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	105
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	29	0	17	35	0	12	38	0	21	47	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	105	105	105	105	105	105	105	105	105	105	105	105
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	57	57	11	62	62	7	7	7	14	13	13
g / C, Green / Cycle	0.06	0.55	0.55	0.11	0.59	0.59	0.07	0.06	0.06	0.13	0.13	0.13
(v / s)_i Volume / Saturation Flow Rate	0.05	0.41	0.26	0.09	0.25	0.25	0.05	0.03	0.02	0.11	0.04	0.11
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1787	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	111	2782	868	190	2102	1055	120	122	103	450	239	203
d1, Uniform Delay [s]	48.57	18.28	14.54	46.05	11.84	11.84	48.25	47.39	46.89	44.62	41.54	44.68
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.97	1.87	1.81	9.15	0.65	1.29	10.48	2.78	1.67	4.14	0.67	8.05
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.75	0.47	0.83	0.43	0.43	0.78	0.47	0.31	0.84	0.29	0.82
d, Delay for Lane Group [s/veh]	59.53	20.15	16.35	55.20	12.49	13.13	58.73	50.17	48.56	48.76	42.22	52.73
Lane Group LOS	E	C	B	E	B	B	E	D	D	D	D	D
Critical Lane Group	No	Yes	No	Yes	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.55	12.55	6.07	4.51	5.69	5.90	2.77	1.53	0.85	5.01	1.69	4.67
50th-Percentile Queue Length [ft/ln]	63.78	313.68	151.71	112.63	142.17	147.41	69.14	38.24	21.14	125.18	42.17	116.70
95th-Percentile Queue Length [veh/ln]	4.59	18.36	10.11	7.99	9.60	9.88	4.98	2.75	1.52	8.68	3.04	8.21
95th-Percentile Queue Length [ft/ln]	114.80	458.91	252.71	199.65	239.95	246.97	124.46	68.82	38.04	216.93	75.91	205.29

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	59.53	20.15	16.35	55.20	12.66	13.13	58.73	50.17	48.56	48.76	42.22	52.73
Movement LOS	E	C	B	E	B	B	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	20.87			17.12			54.29			49.09		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	24.50											
Intersection LOS	C											
Intersection V/C	0.772											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	42.08			42.08			42.08			42.08		
l_p,int, Pedestrian LOS Score for Intersection	3.247			3.138			2.250			2.548		
Crosswalk LOS	C			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	476			590			648			819		
d_b, Bicycle Delay [s]	30.48			26.08			24.00			18.30		
l_b,int, Bicycle LOS Score for Intersection	2.972			2.396			1.862			2.571		
Bicycle LOS	C			B			A			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

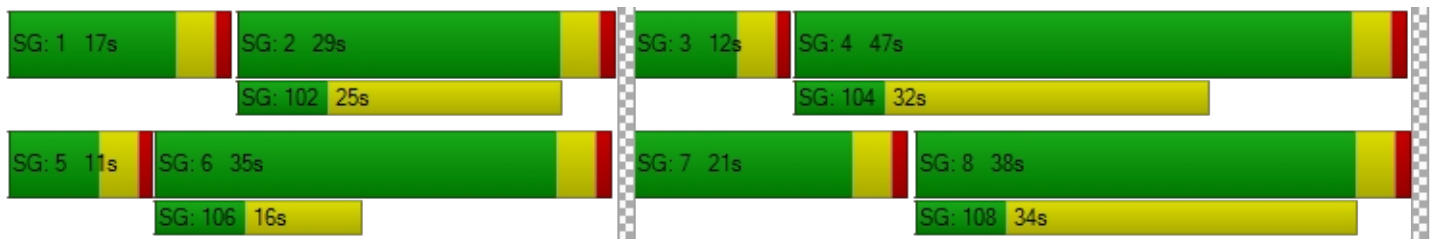

Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	46.0
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.661

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	361	1568	186	582	1046	135	162	485	148	263	811	801
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	361	1568	186	582	1046	135	162	485	148	263	811	801
Peak Hour Factor	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	92	400	47	148	267	34	41	124	38	67	207	204
Total Analysis Volume [veh/h]	368	1598	190	593	1066	138	165	494	151	268	827	817
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	23	37	37	28	42	0	11	19	19	31	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	15	37	53	24	46	46	7	26	45	12	31	59
g / C, Green / Cycle	0.13	0.32	0.46	0.21	0.40	0.40	0.06	0.23	0.39	0.10	0.27	0.51
(v / s)_i Volume / Saturation Flow Rate	0.11	0.31	0.12	0.17	0.23	0.23	0.05	0.14	0.09	0.08	0.23	0.51
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1763	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	444	1627	727	722	1424	705	212	817	624	357	967	819
d1, Uniform Delay [s]	48.91	38.82	19.22	43.47	26.76	26.79	53.23	39.66	23.46	50.14	39.76	27.84
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.05	18.43	0.87	2.41	1.63	3.29	6.10	0.73	0.20	3.18	2.30	31.00
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.83	0.98	0.26	0.82	0.57	0.57	0.78	0.60	0.24	0.75	0.86	1.00
d, Delay for Lane Group [s/veh]	52.96	57.25	20.10	45.87	28.39	30.07	59.33	40.38	23.66	53.31	42.06	58.84
Lane Group LOS	D	E	C	D	C	C	E	D	C	D	D	E
Critical Lane Group	No	Yes	No	No	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	5.39	17.41	3.29	8.26	8.78	9.05	2.53	6.32	2.79	3.90	11.29	28.26
50th-Percentile Queue Length [ft/ln]	134.78	435.15	82.32	206.41	219.50	226.26	63.21	157.94	69.84	97.52	282.37	706.48
95th-Percentile Queue Length [veh/ln]	9.20	24.25	5.93	12.97	13.64	13.98	4.55	10.44	5.03	7.02	16.81	36.98
95th-Percentile Queue Length [ft/ln]	229.98	606.21	148.17	324.22	340.98	349.61	113.78	261.00	125.71	175.54	420.16	924.43

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	52.96	57.25	20.10	45.87	28.80	30.07	59.33	40.38	23.66	53.31	42.06	58.84
Movement LOS	D	E	C	D	C	C	E	D	C	D	D	E
d_A, Approach Delay [s/veh]	53.24			34.53			41.12			50.81		
Approach LOS	D			C			D			D		
d_I, Intersection Delay [s/veh]	46.04											
Intersection LOS	D											
Intersection V/C	0.661											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.271	2.904	3.050
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	574	661	261	609
d_b, Bicycle Delay [s]	29.23	25.78	43.48	27.83
I_b,int, Bicycle LOS Score for Intersection	2.745	2.548	2.228	3.137
Bicycle LOS	B	B	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

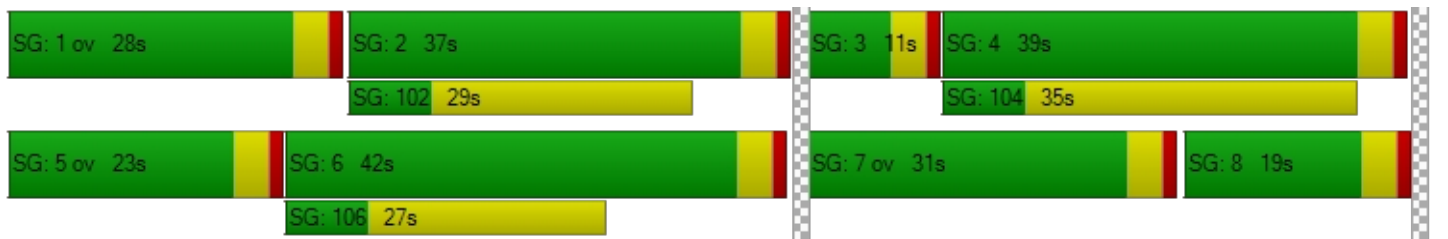

**Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd**

Control Type:	Signalized	Delay (sec / veh):	37.3
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.826

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration	[Diagram]			[Diagram]			[Diagram]			[Diagram]		
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	458	1695	624	230	1242	178	193	388	309	799	878	482
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	458	1695	624	230	1242	178	193	388	309	799	878	482
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	116	430	158	58	315	45	49	98	78	203	223	122
Total Analysis Volume [veh/h]	465	1719	633	233	1260	181	196	394	313	810	890	489
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	25	48	48	14	37	0	12	26	0	27	41	41
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	18	48	75	10	40	40	8	18	18	18	23	33	47
g / C, Green / Cycle	0.15	0.41	0.65	0.09	0.35	0.35	0.07	0.16	0.16	0.16	0.20	0.29	0.41
(v / s)_i Volume / Saturation Flow Rate	0.13	0.25	0.40	0.07	0.21	0.21	0.06	0.14	0.14	0.14	0.16	0.25	0.31
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1719	3459	1870	1744	1589	5188	3560	1589
c, Capacity [veh/h]	536	2812	1031	305	1769	597	245	297	277	252	1039	1025	653
d1, Uniform Delay [s]	47.52	26.47	11.79	51.33	31.10	31.11	52.69	47.17	47.17	47.17	43.65	38.93	28.87
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.45	1.00	2.73	3.98	1.57	4.59	5.90	7.03	7.51	8.18	1.31	2.40	7.70
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.87	0.61	0.61	0.76	0.61	0.61	0.80	0.86	0.86	0.86	0.78	0.87	0.75
d, Delay for Lane Group [s/veh]	51.97	27.47	14.52	55.31	32.67	35.70	58.59	54.20	54.67	55.35	44.96	41.33	36.57
Lane Group LOS	D	C	B	E	C	D	E	D	D	E	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	6.82	9.30	9.53	3.45	8.43	9.05	2.99	7.64	7.16	6.58	7.38	12.13	12.67
50th-Percentile Queue Length [ft/ln]	170.44	232.45	238.15	86.29	210.77	226.34	74.73	190.9	179.0	164.4	184.62	303.26	316.68
95th-Percentile Queue Length [veh/ln]	11.10	14.30	14.59	6.21	13.19	13.99	5.38	12.17	11.55	10.79	11.84	17.84	18.50
95th-Percentile Queue Length [ft/ln]	277.50	357.47	364.69	155.33	329.82	349.70	134.5	304.2	288.8	269.6	296.03	446.06	462.60

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	51.97	27.47	14.52	55.31	33.11	35.70	58.59	54.37	55.17	44.96	41.33	36.57
Movement LOS	D	C	B	E	C	D	E	D	E	D	D	D
d_A, Approach Delay [s/veh]	28.61			36.48			55.55			41.61		
Approach LOS	C			D			E			D		
d_I, Intersection Delay [s/veh]	37.31											
Intersection LOS	D											
Intersection V/C	0.826											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.376	2.945	3.158
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	765	574	383	643
d_b, Bicycle Delay [s]	21.92	29.23	37.60	26.45
I_b,int, Bicycle LOS Score for Intersection	2.722	2.250	2.305	3.366
Bicycle LOS	B	B	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

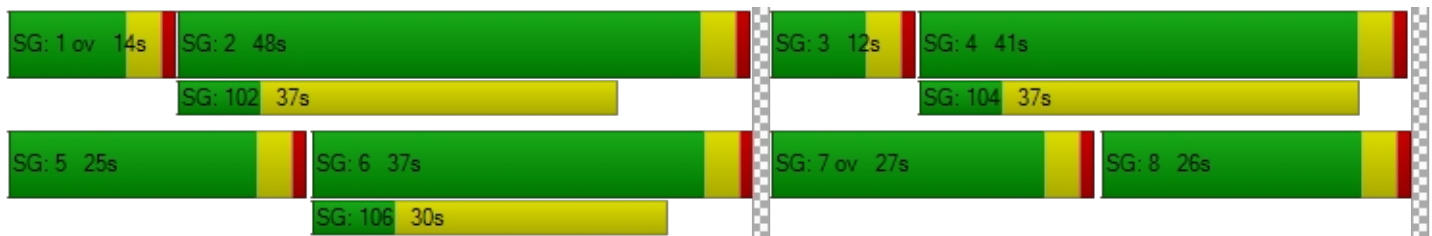

APPENDIX B-II

**EXISTING WITH PROJECT
TRAFFIC CONDITIONS**

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	17.5
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.874

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	56	1136	40	8	2165	80	106	0	151	18	0	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	56	1136	40	8	2165	80	106	0	151	18	0	8
Peak Hour Factor	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340	0.9340
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	15	304	11	2	579	21	28	0	40	5	0	2
Total Analysis Volume [veh/h]	60	1216	43	9	2318	86	113	0	162	19	0	9
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	50	0	52	91	0	0	18	0	0	18	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	92	92	2	88	88	14	14	14	14
g / C, Green / Cycle	0.05	0.77	0.77	0.02	0.73	0.73	0.12	0.12	0.12	0.12
(v / s)_i Volume / Saturation Flow Rate	0.03	0.34	0.34	0.01	0.65	0.05	0.08	0.00	0.10	0.02
s, saturation flow rate [veh/h]	1781	1870	1848	1781	3560	1589	1406	1870	1589	1389
c, Capacity [veh/h]	91	1435	1417	28	2606	1163	172	218	186	213
d1, Uniform Delay [s]	55.87	4.92	4.92	58.36	12.35	4.56	51.21	0.00	52.08	47.94
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.82	0.99	1.00	6.18	5.05	0.12	4.23	0.00	11.87	0.28
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.66	0.44	0.44	0.32	0.89	0.07	0.66	0.00	0.87	0.13
d, Delay for Lane Group [s/veh]	63.69	5.90	5.92	64.54	17.39	4.68	55.43	0.00	63.95	48.22
Lane Group LOS	E	A	A	E	B	A	E	A	E	D
Critical Lane Group	Yes	No	No	No	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	1.98	5.04	5.00	0.32	21.86	0.59	3.48	0.00	5.40	0.78
50th-Percentile Queue Length [ft/ln]	49.57	125.99	124.89	7.99	546.56	14.71	86.99	0.00	135.03	19.50
95th-Percentile Queue Length [veh/ln]	3.57	8.72	8.66	0.58	29.53	1.06	6.26	0.00	9.21	1.40
95th-Percentile Queue Length [ft/ln]	89.23	218.03	216.52	14.38	738.26	26.48	156.59	0.00	230.32	35.11

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	63.69	5.91	5.92	64.54	17.39	4.68	55.43	0.00	63.95	48.22	48.22	48.22
Movement LOS	E	A	A	E	B	A	E	A	E	D	D	D
d_A, Approach Delay [s/veh]	8.54			17.12			60.45			48.22		
Approach LOS	A			B			E			D		
d_I, Intersection Delay [s/veh]	17.48											
Intersection LOS	B											
Intersection V/C	0.874											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.237			2.247			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	767			1450			233			233		
d_b, Bicycle Delay [s]	22.82			4.54			46.82			46.82		
I_b,int, Bicycle LOS Score for Intersection	2.648			3.550			2.013			1.606		
Bicycle LOS	B			D			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

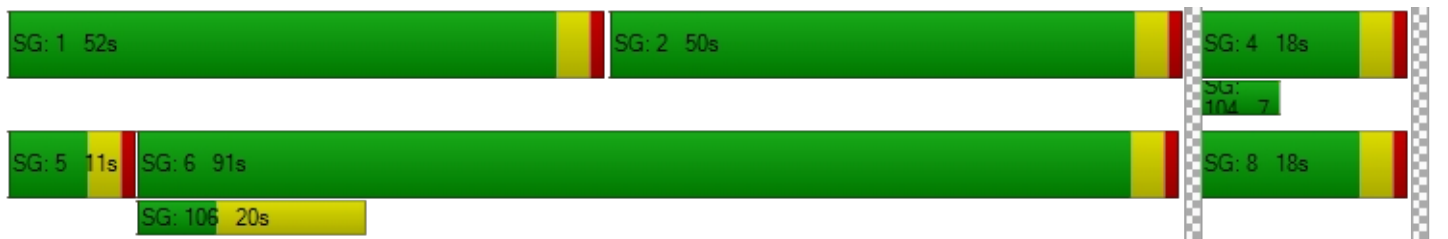

Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd

Control Type:	Signalized	Delay (sec / veh):	27.5
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.867

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	161	1026	1	12	2239	51	71	1	388	1	2	2
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	161	1026	1	12	2239	51	71	1	388	1	2	2
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	41	260	0	3	568	13	18	0	98	0	1	1
Total Analysis Volume [veh/h]	163	1041	1	12	2271	52	72	1	394	1	2	2
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	26	26	0	53	53	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	12	69	69	2	59	59	7	23	7
g / C, Green / Cycle	0.14	0.77	0.77	0.02	0.65	0.65	0.08	0.26	0.08
(v / s)_i Volume / Saturation Flow Rate	0.09	0.28	0.28	0.01	0.62	0.63	0.07	0.25	0.00
s, saturation flow rate [veh/h]	1781	1870	1869	1781	1870	1855	1073	1589	1086
c, Capacity [veh/h]	242	1436	1436	36	1220	1211	163	411	133
d1, Uniform Delay [s]	36.98	3.35	3.35	43.47	14.34	14.52	41.04	32.90	38.41
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.26	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.23	0.71	0.71	5.14	16.52	17.78	1.91	23.59	0.11
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.67	0.36	0.36	0.33	0.95	0.96	0.45	0.96	0.04
d, Delay for Lane Group [s/veh]	40.21	4.06	4.06	48.61	30.86	32.30	42.96	56.49	38.52
Lane Group LOS	D	A	A	D	C	C	D	E	D
Critical Lane Group	No	No	No	No	No	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.58	2.38	2.38	0.31	23.30	23.91	1.67	10.91	0.11
50th-Percentile Queue Length [ft/ln]	89.49	59.56	59.54	7.83	582.53	597.77	41.67	272.69	2.63
95th-Percentile Queue Length [veh/ln]	6.44	4.29	4.29	0.56	31.22	31.93	3.00	16.32	0.19
95th-Percentile Queue Length [ft/ln]	161.09	107.20	107.17	14.09	780.44	798.26	75.00	408.09	4.74

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	40.21	4.06	4.06	48.61	31.56	32.30	42.96	42.96	56.49	38.52	38.52	38.52
Movement LOS	D	A	A	D	C	C	D	D	E	D	D	D
d_A, Approach Delay [s/veh]	8.95			31.67			54.37			38.52		
Approach LOS	A			C			D			D		
d_I, Intersection Delay [s/veh]	27.50											
Intersection LOS	C											
Intersection V/C	0.867											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			34.67			34.67			34.67		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.075			2.162			1.724		
Crosswalk LOS	F			C			B			A		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	489			1089			156			156		
d_b, Bicycle Delay [s]	25.69			9.34			38.27			38.27		
I_b,int, Bicycle LOS Score for Intersection	2.554			3.486			2.330			1.568		
Bicycle LOS	B			C			B			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

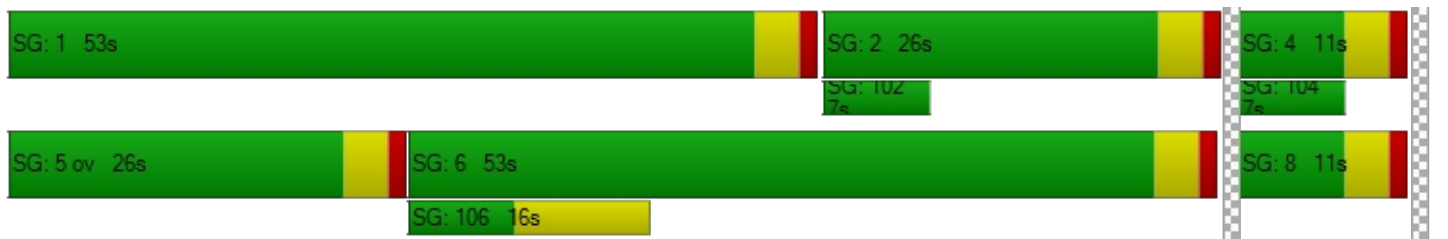

Intersection Level Of Service Report

Intersection 3: Winchester Rd at Robert Trent Jones Pkwy

Control Type:	Signalized	Delay (sec / veh):	12.3
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.603

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	29	1068	146	271	2360	24	23	33	59	23	7	97
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	29	1068	146	271	2360	24	23	33	59	23	7	97
Peak Hour Factor	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910	0.9910
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	7	269	37	68	595	6	6	8	15	6	2	24
Total Analysis Volume [veh/h]	29	1078	147	273	2381	24	23	33	60	23	7	98
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	11	0	68	68	0	0	11	0	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	55	55	16	67	67	7	7	7	7	7	7
g / C, Green / Cycle	0.04	0.61	0.61	0.18	0.75	0.75	0.08	0.08	0.08	0.08	0.08	0.08
(v / s)_i Volume / Saturation Flow Rate	0.02	0.23	0.23	0.15	0.44	0.44	0.02	0.02	0.04	0.02	0.00	0.06
s, saturation flow rate [veh/h]	1781	3560	1757	1781	3560	1860	1289	1870	1589	1303	1870	1589
c, Capacity [veh/h]	74	2170	1071	318	2658	1389	83	147	125	111	147	125
d1, Uniform Delay [s]	42.06	8.92	8.92	35.89	5.19	5.20	45.01	38.90	39.71	43.70	38.36	40.72
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.39	0.50	1.02	6.74	0.98	1.89	1.81	0.76	2.83	0.92	0.13	10.16
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.39	0.38	0.38	0.86	0.59	0.60	0.28	0.22	0.48	0.21	0.05	0.78
d, Delay for Lane Group [s/veh]	45.46	9.42	9.94	42.64	6.17	7.09	46.82	39.66	42.54	44.62	38.49	50.88
Lane Group LOS	D	A	A	D	A	A	D	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	0.69	3.81	3.92	6.29	5.21	5.83	0.56	0.71	1.36	0.53	0.15	2.46
50th-Percentile Queue Length [ft/ln]	17.29	95.17	97.93	157.27	130.35	145.77	13.97	17.71	33.89	13.32	3.68	61.48
95th-Percentile Queue Length [veh/ln]	1.24	6.85	7.05	10.40	8.96	9.79	1.01	1.28	2.44	0.96	0.26	4.43
95th-Percentile Queue Length [ft/ln]	31.12	171.30	176.27	260.10	223.96	244.77	25.14	31.88	61.01	23.98	6.62	110.67

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	45.46	9.54	9.94	42.64	6.48	7.09	46.82	39.66	42.54	44.62	38.49	50.88
Movement LOS	D	A	A	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	10.42			10.17			42.57			49.08		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	12.34											
Intersection LOS	B											
Intersection V/C	0.603											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	3.144	0.000	2.334	2.413
Crosswalk LOS	C	F	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	156	1422	156	156
d_b, Bicycle Delay [s]	38.27	3.76	38.27	38.27
I_b,int, Bicycle LOS Score for Intersection	2.249	3.033	1.655	1.665
Bicycle LOS	B	C	A	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 4: Winchester Rd at Murrieta Hot Springs Rd

Control Type:	Signalized	Delay (sec / veh):	39.9
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.883

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	147	679	131	194	1644	600	464	503	138	311	628	90
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	147	679	131	194	1644	600	464	503	138	311	628	90
Peak Hour Factor	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550	0.9550
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	38	178	34	51	430	157	121	132	36	81	164	24
Total Analysis Volume [veh/h]	154	711	137	203	1721	628	486	527	145	326	658	94
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	36	0	22	47	0	24	15	0	47	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	51	51	9	53	53	19	30	30	14	25	25
g / C, Green / Cycle	0.06	0.42	0.42	0.08	0.44	0.44	0.16	0.25	0.25	0.12	0.21	0.21
(v / s)_i Volume / Saturation Flow Rate	0.04	0.14	0.09	0.06	0.34	0.40	0.14	0.10	0.09	0.09	0.18	0.06
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	204	2151	671	269	2246	701	544	1273	397	404	746	333
d1, Uniform Delay [s]	55.63	23.28	21.92	54.26	28.34	31.02	49.62	37.67	37.17	51.69	46.01	39.86
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.56	0.41	0.69	4.32	2.56	16.39	5.42	0.22	0.56	3.85	3.64	0.46
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.75	0.33	0.20	0.76	0.77	0.90	0.89	0.41	0.37	0.81	0.88	0.28
d, Delay for Lane Group [s/veh]	61.19	23.69	22.61	58.57	30.90	47.41	55.04	37.89	37.73	55.54	49.64	40.32
Lane Group LOS	E	C	C	E	C	D	E	D	D	E	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	2.45	4.59	2.58	3.17	14.17	19.53	7.54	4.36	3.59	5.00	9.85	2.39
50th-Percentile Queue Length [ft/ln]	61.36	114.69	64.51	79.18	354.16	488.20	188.52	109.03	89.82	124.93	246.26	59.69
95th-Percentile Queue Length [veh/ln]	4.42	8.10	4.64	5.70	20.34	26.78	12.04	7.79	6.47	8.66	15.00	4.30
95th-Percentile Queue Length [ft/ln]	110.45	202.51	116.11	142.52	508.47	669.38	301.11	194.65	161.67	216.59	374.95	107.44

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	61.19	23.69	22.61	58.57	30.90	47.41	55.04	37.89	37.73	55.54	49.64	40.32
Movement LOS	E	C	C	E	C	D	E	D	D	E	D	D
d_A, Approach Delay [s/veh]	29.31			37.17			45.07			50.61		
Approach LOS	C			D			D			D		
d_I, Intersection Delay [s/veh]	39.89											
Intersection LOS	D											
Intersection V/C	0.883											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.279	3.056	2.976
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	533	717	183	567
d_b, Bicycle Delay [s]	32.27	24.70	49.50	30.82
I_b,int, Bicycle LOS Score for Intersection	2.111	2.963	2.197	2.449
Bicycle LOS	B	C	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

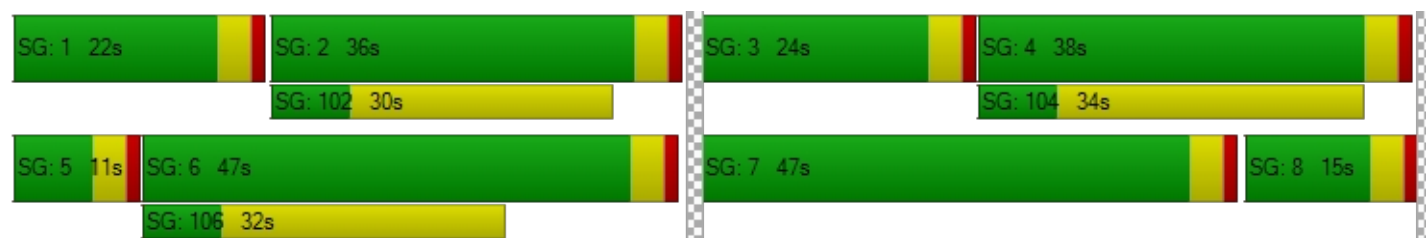

Intersection Level Of Service Report
Intersection 5: Winchester Rd at Winchester Square Drive

Control Type:	Signalized	Delay (sec / veh):	10.5
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.592

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	6	1113	129	47	2072	3	3	5	5	104	2	57
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	6	1113	129	47	2072	3	3	5	5	104	2	57
Peak Hour Factor	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270	0.9270
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	2	300	35	13	559	1	1	1	1	28	1	15
Total Analysis Volume [veh/h]	6	1201	139	51	2235	3	3	5	5	112	2	61
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	23	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	1	59	59	5	63	63	2	8	8
g / C, Green / Cycle	0.01	0.66	0.66	0.06	0.70	0.70	0.02	0.09	0.09
(v / s)_i Volume / Saturation Flow Rate	0.00	0.25	0.25	0.03	0.41	0.41	0.01	0.06	0.04
s, saturation flow rate [veh/h]	1781	3560	1772	1781	3560	1869	1732	1782	1589
c, Capacity [veh/h]	22	2330	1160	102	2490	1307	40	157	140
d1, Uniform Delay [s]	44.14	7.20	7.20	41.24	6.93	6.93	43.36	40.08	39.01
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.68	0.48	0.96	3.73	1.03	1.96	4.65	6.31	2.14
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.28	0.38	0.38	0.50	0.59	0.59	0.33	0.73	0.44
d, Delay for Lane Group [s/veh]	50.82	7.68	8.16	44.97	7.96	8.89	48.02	46.39	41.15
Lane Group LOS	D	A	A	D	A	A	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.17	3.57	3.72	1.19	6.09	6.73	0.33	2.71	1.35
50th-Percentile Queue Length [ft/ln]	4.30	89.36	92.90	29.84	152.23	168.25	8.35	67.63	33.72
95th-Percentile Queue Length [veh/ln]	0.31	6.43	6.69	2.15	10.14	10.98	0.60	4.87	2.43
95th-Percentile Queue Length [ft/ln]	7.74	160.85	167.22	53.72	253.40	274.61	15.04	121.73	60.70

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	50.82	7.80	8.16	44.97	8.28	8.89	48.02	48.02	48.02	46.39	46.39	41.15
Movement LOS	D	A	A	D	A	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	8.03			9.10			48.02			44.56		
Approach LOS	A			A			D			D		
d_I, Intersection Delay [s/veh]	10.48											
Intersection LOS	B											
Intersection V/C	0.592											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	3.108	0.000	1.726	2.060
Crosswalk LOS	C	F	A	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	356	356	711	422
d_b, Bicycle Delay [s]	30.42	30.42	18.69	28.01
I_b,int, Bicycle LOS Score for Intersection	2.300	2.819	1.581	1.848
Bicycle LOS	B	C	A	A

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	22.4
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.752

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	53	1055	80	69	1841	201	141	29	36	192	52	52
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	53	1055	80	69	1841	201	141	29	36	192	52	52
Peak Hour Factor	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010	0.9010
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	15	293	22	19	511	56	39	8	10	53	14	14
Total Analysis Volume [veh/h]	59	1171	89	77	2043	223	156	32	40	213	58	58
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	95
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	24	0	11	24	0	0	24	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	95	95	95	95	95	95	95	95	95	95	95
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	53	53	6	53	53	11	11	10	10	10
g / C, Green / Cycle	0.06	0.55	0.55	0.06	0.56	0.56	0.11	0.11	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.03	0.23	0.23	0.04	0.42	0.43	0.09	0.04	0.08	0.08	0.04
s, saturation flow rate [veh/h]	1781	3560	1803	1781	3560	1778	1781	1703	1781	1818	1589
c, Capacity [veh/h]	106	1962	994	116	1983	990	201	192	183	187	164
d1, Uniform Delay [s]	43.54	12.53	12.53	43.46	16.16	16.37	41.07	39.12	41.41	41.40	39.73
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.55	0.68	1.34	6.36	2.76	5.80	6.39	1.21	5.54	5.39	1.30
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.56	0.43	0.43	0.66	0.76	0.77	0.78	0.38	0.73	0.73	0.35
d, Delay for Lane Group [s/veh]	48.09	13.21	13.87	49.82	18.92	22.18	47.45	40.34	46.94	46.79	41.03
Lane Group LOS	D	B	B	D	B	C	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	1.47	5.07	5.32	1.96	12.17	13.36	3.87	1.61	3.31	3.36	1.31
50th-Percentile Queue Length [ft/ln]	36.86	126.70	132.94	49.02	304.19	333.90	96.80	40.27	82.63	83.97	32.81
95th-Percentile Queue Length [veh/ln]	2.65	8.76	9.10	3.53	17.89	19.35	6.97	2.90	5.95	6.05	2.36
95th-Percentile Queue Length [ft/ln]	66.35	219.00	227.48	88.24	447.20	483.73	174.25	72.49	148.73	151.15	59.05

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	48.09	13.40	13.87	49.82	19.78	22.18	47.45	40.34	40.34	46.89	46.79	41.03
Movement LOS	D	B	B	D	B	C	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	14.98			21.00			45.21			45.84		
Approach LOS	B			C			D			D		
d_I, Intersection Delay [s/veh]	22.36											
Intersection LOS	C											
Intersection V/C	0.752											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			37.14			37.14			37.14		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.115			2.127			2.262		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	421			421			421			674		
d_b, Bicycle Delay [s]	29.61			29.61			29.61			20.89		
I_b,int, Bicycle LOS Score for Intersection	2.285			2.848			1.936			2.102		
Bicycle LOS	B			C			A			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

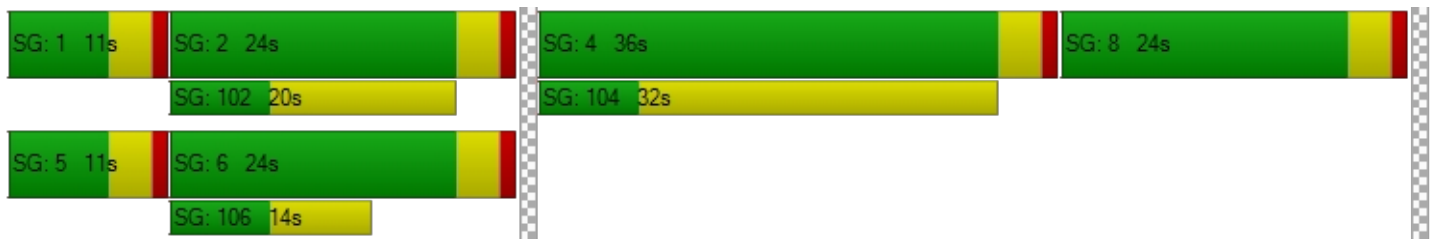

Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd

Control Type:	Signalized	Delay (sec / veh):	40.5
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.906

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Base Volume Input [veh/h]	207	771	125	151	1672	278	157	84	89	296	242	132
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	207	771	125	151	1672	278	157	84	89	296	242	132
Peak Hour Factor	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070	0.9070
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	57	213	34	42	461	77	43	23	25	82	67	36
Total Analysis Volume [veh/h]	228	850	138	166	1843	307	173	93	98	326	267	146
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	20	29	0	25	34	0	16	38	0	23	45	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	16	55	55	13	52	52	12	18	18	13	19	19
g / C, Green / Cycle	0.14	0.48	0.48	0.11	0.45	0.45	0.10	0.16	0.16	0.11	0.17	0.17
(v / s)_i Volume / Saturation Flow Rate	0.13	0.17	0.09	0.09	0.40	0.41	0.10	0.05	0.06	0.09	0.14	0.09
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1739	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	248	2445	763	197	1607	785	187	291	247	397	309	263
d1, Uniform Delay [s]	48.86	18.67	17.04	50.18	28.99	29.49	51.06	43.19	43.74	49.79	46.77	44.15
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	12.93	0.39	0.52	9.28	7.94	16.95	17.21	0.63	1.03	4.29	7.15	1.83
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.92	0.35	0.18	0.84	0.89	0.91	0.93	0.32	0.40	0.82	0.86	0.56
d, Delay for Lane Group [s/veh]	61.80	19.06	17.56	59.46	36.93	46.43	68.27	43.82	44.77	54.08	53.91	45.98
Lane Group LOS	E	B	B	E	D	D	E	D	D	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	7.33	4.75	2.18	5.18	19.31	21.55	5.82	2.41	2.59	4.81	8.03	3.96
50th-Percentile Queue Length [ft/ln]	183.25	118.77	54.55	129.60	482.86	538.72	145.57	60.26	64.72	120.25	200.64	98.99
95th-Percentile Queue Length [veh/ln]	11.77	8.33	3.93	8.92	26.52	29.16	9.78	4.34	4.66	8.41	12.67	7.13
95th-Percentile Queue Length [ft/ln]	294.26	208.13	98.18	222.95	663.05	729.05	244.50	108.46	116.49	210.17	316.79	178.18

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	61.80	19.06	17.56	59.46	39.05	46.43	68.27	43.82	44.77	54.08	53.91	45.98
Movement LOS	E	B	B	E	D	D	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	26.90			41.49			55.69			52.42		
Approach LOS	C			D			E			D		
d_I, Intersection Delay [s/veh]	40.52											
Intersection LOS	D											
Intersection V/C	0.906											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	47.03			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	3.162			3.091			2.427			2.533		
Crosswalk LOS	C			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	435			522			591			713		
d_b, Bicycle Delay [s]	35.22			31.41			28.53			23.81		
I_b,int, Bicycle LOS Score for Intersection	2.228			2.833			2.160			2.779		
Bicycle LOS	B			C			B			C		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

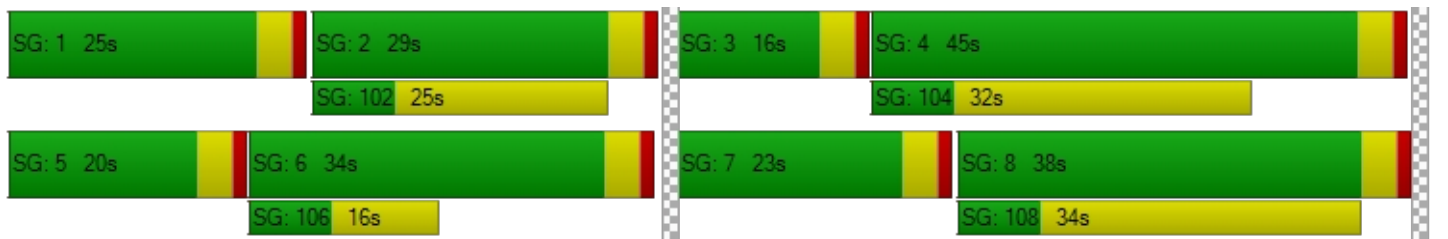

Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	34.0
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.693

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	97	532	118	707	1695	80	80	541	212	180	426	375
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	97	532	118	707	1695	80	80	541	212	180	426	375
Peak Hour Factor	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400	0.9400
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	26	141	31	188	451	21	21	144	56	48	113	100
Total Analysis Volume [veh/h]	103	566	126	752	1803	85	85	576	226	191	453	399
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	11	33	33	37	59	0	11	37	37	13	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	7	44	56	29	66	66	7	23	34	9	25	58
g / C, Green / Cycle	0.06	0.36	0.47	0.24	0.55	0.55	0.06	0.19	0.28	0.07	0.20	0.48
(v / s)_i Volume / Saturation Flow Rate	0.03	0.11	0.08	0.22	0.35	0.35	0.02	0.16	0.14	0.06	0.13	0.25
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1828	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	204	1845	743	846	1950	1001	193	670	446	249	728	767
d1, Uniform Delay [s]	54.78	27.48	18.50	43.78	18.86	19.02	54.88	47.19	36.22	54.73	43.53	21.49
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.13	0.11	0.11	0.39
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	1.92	0.43	0.49	3.45	1.60	3.22	1.59	3.37	1.11	4.95	0.88	1.98
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.50	0.31	0.17	0.89	0.64	0.65	0.44	0.86	0.51	0.77	0.62	0.52
d, Delay for Lane Group [s/veh]	56.70	27.91	18.99	47.24	20.47	22.24	56.47	50.57	37.33	59.69	44.41	23.46
Lane Group LOS	E	C	B	D	C	C	E	D	D	E	D	C
Critical Lane Group	Yes	No	No	No	No	Yes	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	1.57	3.97	2.14	11.12	12.04	13.08	1.29	8.62	5.70	3.01	6.22	8.08
50th-Percentile Queue Length [ft/ln]	39.18	99.31	53.43	278.12	300.92	327.12	32.23	215.57	142.51	75.21	155.59	202.06
95th-Percentile Queue Length [veh/ln]	2.82	7.15	3.85	16.59	17.73	19.02	2.32	13.44	9.62	5.42	10.32	12.74
95th-Percentile Queue Length [ft/ln]	70.53	178.76	96.17	414.87	443.17	475.42	58.01	335.96	240.40	135.38	257.88	318.62

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	56.70	27.91	18.99	47.24	21.02	22.24	56.47	50.57	37.33	59.69	44.41	23.46
Movement LOS	E	C	B	D	C	C	E	D	D	E	D	C
d_A, Approach Delay [s/veh]	30.23			28.53			47.76			39.19		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	34.03											
Intersection LOS	C											
Intersection V/C	0.693											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			49.50			49.50			49.50		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.189			2.821			2.955		
Crosswalk LOS	F			C			C			C		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	483			917			550			583		
d_b, Bicycle Delay [s]	34.50			17.60			31.54			30.10		
I_b,int, Bicycle LOS Score for Intersection	1.997			3.012			2.291			2.420		
Bicycle LOS	A			C			B			B		

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

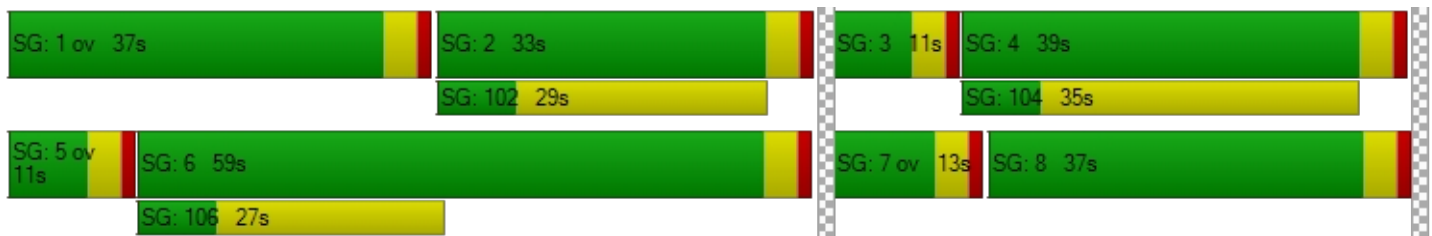

**Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd**

Control Type:	Signalized	Delay (sec / veh):	32.2
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.788

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration	[Diagram]			[Diagram]			[Diagram]			[Diagram]		
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	263	967	556	346	1602	73	104	387	433	253	173	133
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	263	967	556	346	1602	73	104	387	433	253	173	133
Peak Hour Factor	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290	0.9290
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	71	260	150	93	431	20	28	104	117	68	47	36
Total Analysis Volume [veh/h]	283	1041	598	372	1724	79	112	417	466	272	186	143
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	15	41	41	20	46	0	11	43	0	11	43	43
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	11	54	65	15	58	58	7	23	23	23	7	24	42
g / C, Green / Cycle	0.10	0.47	0.57	0.13	0.50	0.50	0.06	0.20	0.20	0.20	0.06	0.20	0.37
(v / s)_i Volume / Saturation Flow Rate	0.08	0.15	0.38	0.11	0.26	0.26	0.03	0.17	0.17	0.17	0.05	0.05	0.09
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1817	3459	1870	1673	1589	5188	3560	1589
c, Capacity [veh/h]	333	3194	901	437	2549	909	207	379	339	322	320	728	581
d1, Uniform Delay [s]	51.19	19.07	17.33	49.21	19.43	19.44	52.55	44.17	44.17	44.17	53.47	38.43	25.45
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.09	0.27	3.85	4.75	0.77	2.14	2.18	5.33	5.91	6.20	6.35	0.18	0.22
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.85	0.33	0.66	0.85	0.52	0.52	0.54	0.85	0.85	0.85	0.85	0.26	0.25
d, Delay for Lane Group [s/veh]	57.28	19.35	21.18	53.96	20.20	21.58	54.73	49.50	50.08	50.37	59.82	38.61	25.67
Lane Group LOS	E	B	C	D	C	C	D	D	D	D	E	D	C
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	Yes	Yes	No	No
50th-Percentile Queue Length [veh/ln]	4.29	4.37	11.47	5.51	8.01	8.92	1.64	9.34	8.41	8.02	2.78	2.23	2.77
50th-Percentile Queue Length [ft/ln]	107.23	109.26	286.63	137.69	200.17	222.92	40.88	233.5	210.2	200.4	69.56	55.76	69.24
95th-Percentile Queue Length [veh/ln]	7.69	7.80	17.02	9.36	12.65	13.81	2.94	14.35	13.17	12.66	5.01	4.02	4.99
95th-Percentile Queue Length [ft/ln]	192.14	194.97	425.45	233.91	316.19	345.35	73.58	358.8	329.1	316.5	125.21	100.38	124.64

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	57.28	19.35	21.18	53.96	20.52	21.58	54.73	49.63	50.26	59.82	38.61	25.67
Movement LOS	E	B	C	D	C	C	D	D	D	E	D	C
d_A, Approach Delay [s/veh]	25.50			26.27			50.50			45.13		
Approach LOS	C			C			D			D		
d_I, Intersection Delay [s/veh]	32.24											
Intersection LOS	C											
Intersection V/C	0.788											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.317	2.821	2.979
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	643	730	678	678
d_b, Bicycle Delay [s]	26.45	23.17	25.11	25.11
I_b,int, Bicycle LOS Score for Intersection	2.352	2.457	2.380	2.055
Bicycle LOS	B	B	B	B

Sequence

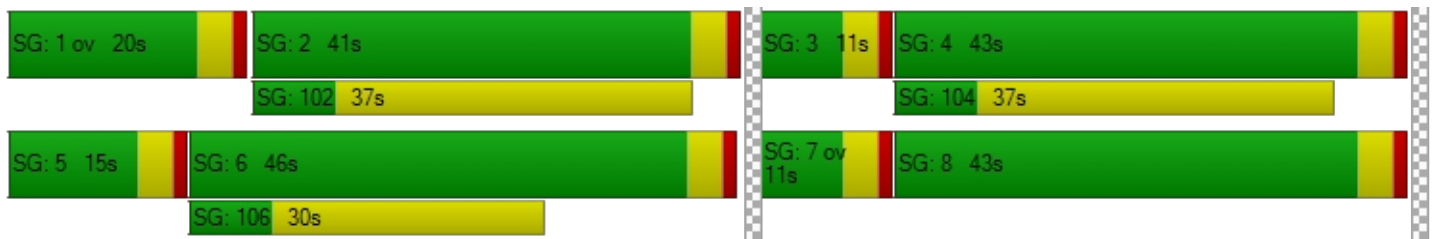


Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 10: Sky Canyon Dr at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	13.5
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.115

Intersection Setup

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Approach	Southbound		Eastbound		Westbound	
Lane Configuration						
Turning Movement	Left	Right	Left	Thru	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00		30.00		30.00	
Grade [%]	0.00		0.00		0.00	
Curb Present	No		No		No	
Crosswalk	Yes		No		No	

Volumes

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Base Volume Input [veh/h]	15	58	17	127	238	20
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	15	58	17	127	238	20
Peak Hour Factor	0.9500	0.9500	0.9500	0.9500	0.9500	0.9500
Other Adjustment Factor	1.0000	1.0000	1.0000	0.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	4	15	4	0	63	5
Total Analysis Volume [veh/h]	16	61	18	0	251	21
Presence of On-Street Parking	No	No	No	No	No	No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_di, Inbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_co, Outbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ci, Inbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ab, Corner Pedestrian Volume [ped/h]	0		0		0	
Bicycle Volume [bicycles/h]	0		0		0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Split	Split	Protected	Permissive	Permissive	Permissive
Signal Group	1	0	3	8	4	0
Auxiliary Signal Groups						
Lead / Lag	Lead	-	Lead	-	-	-
Minimum Green [s]	7	0	7	7	7	0
Maximum Green [s]	30	0	30	30	30	0
Amber [s]	3.0	0.0	3.0	3.0	3.0	0.0
All red [s]	1.0	0.0	1.0	1.0	1.0	0.0
Split [s]	34	0	12	56	44	0
Vehicle Extension [s]	3.0	0.0	3.0	3.0	3.0	0.0
Walk [s]	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	18	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk	No			No	No	
I1, Start-Up Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
Minimum Recall	No		No	No	No	
Maximum Recall	No		No	No	No	
Pedestrian Recall	No		No	No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	R	L	C	C	C
C, Cycle Length [s]	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00
I1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00
I2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	6	3	76	69	69
g / C, Green / Cycle	0.07	0.07	0.03	0.84	0.77	0.77
(v / s)_i Volume / Saturation Flow Rate	0.01	0.04	0.01	0.00	0.05	0.05
s, saturation flow rate [veh/h]	1781	1589	1781	1870	3560	1797
c, Capacity [veh/h]	120	107	52	1578	2741	1383
d1, Uniform Delay [s]	39.50	40.71	42.84	0.00	2.51	2.51
k, delay calibration	0.11	0.11	0.11	0.50	0.50	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	0.50	4.66	3.83	0.00	0.05	0.09
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.13	0.57	0.34	0.00	0.07	0.07
d, Delay for Lane Group [s/veh]	40.00	45.37	46.67	0.00	2.56	2.60
Lane Group LOS	D	D	D	A	A	A
Critical Lane Group	No	Yes	Yes	No	Yes	No
50th-Percentile Queue Length [veh/ln]	0.35	1.44	0.44	0.00	0.29	0.31
50th-Percentile Queue Length [ft/ln]	8.67	35.90	11.12	0.00	7.24	7.67
95th-Percentile Queue Length [veh/ln]	0.62	2.58	0.80	0.00	0.52	0.55
95th-Percentile Queue Length [ft/ln]	15.60	64.62	20.02	0.00	13.03	13.80

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	40.00	45.37	46.67	0.00	2.57	2.60
Movement LOS	D	D	D	A	A	A
d_A, Approach Delay [s/veh]	44.26		46.67		2.58	
Approach LOS	D		D		A	
d_I, Intersection Delay [s/veh]	13.48					
Intersection LOS	B					
Intersection V/C	0.115					

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	0.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	0.00
I_p,int, Pedestrian LOS Score for Intersection	1.977	0.000	0.000
Crosswalk LOS	A	F	F
s_b, Saturation Flow Rate of the bicycle lane [bicycles/h]	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	667	1156	889
d_b, Bicycle Delay [s]	20.00	8.02	13.89
I_b,int, Bicycle LOS Score for Intersection	1.560	1.589	1.709
Bicycle LOS	A	A	A

Sequence

Ring 1	1	3	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	-	-	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

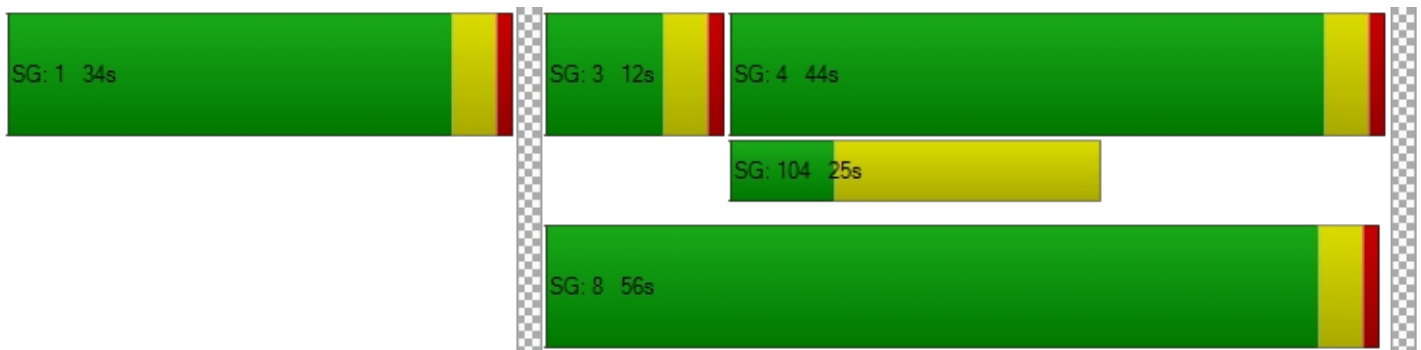

Intersection Level Of Service Report
Intersection 1: Winchester Rd at La Alba Dr

Control Type:	Signalized	Delay (sec / veh):	15.1
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.798

Intersection Setup

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			No		

Volumes

Name	Winchester Road			Winchester Road			La Alba Drive			Sparkman Way		
Base Volume Input [veh/h]	199	2142	48	4	1412	94	55	3	119	43	4	11
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	199	2142	48	4	1412	94	55	3	119	43	4	11
Peak Hour Factor	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640	0.9640
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	52	555	12	1	366	24	14	1	31	11	1	3
Total Analysis Volume [veh/h]	206	2222	50	4	1465	98	57	3	123	45	4	11
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	53	34	0	43	24	0	0	13	0	0	13	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	0	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	13	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	R	L	C	R	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	13	69	69	1	57	57	9	9	9	9
g / C, Green / Cycle	0.14	0.76	0.76	0.01	0.63	0.63	0.10	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.12	0.61	0.61	0.00	0.41	0.06	0.04	0.00	0.08	0.05
s, saturation flow rate [veh/h]	1781	1870	1856	1781	3560	1589	1398	1870	1589	1289
c, Capacity [veh/h]	249	1422	1411	15	2240	1000	124	183	155	196
d1, Uniform Delay [s]	37.68	6.59	6.67	44.34	10.52	6.60	38.53	36.71	39.72	38.97
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	6.90	4.78	4.99	8.53	1.50	0.20	2.62	0.04	8.69	0.87
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.83	0.80	0.81	0.26	0.65	0.10	0.46	0.02	0.79	0.31
d, Delay for Lane Group [s/veh]	44.58	11.37	11.66	52.87	12.02	6.79	41.16	36.74	48.41	39.84
Lane Group LOS	D	B	B	D	B	A	D	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	4.82	10.82	11.00	0.12	8.40	0.72	1.27	0.06	3.00	1.30
50th-Percentile Queue Length [ft/ln]	120.44	270.51	274.92	3.11	209.99	18.00	31.76	1.52	74.99	32.44
95th-Percentile Queue Length [veh/ln]	8.42	16.21	16.44	0.22	13.15	1.30	2.29	0.11	5.40	2.34
95th-Percentile Queue Length [ft/ln]	210.43	405.37	410.88	5.61	328.82	32.39	57.17	2.74	134.99	58.39

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	44.58	11.52	11.66	52.87	12.02	6.79	41.16	36.74	48.41	39.84	39.84	39.84
Movement LOS	D	B	B	D	B	A	D	D	D	D	D	D
d_A, Approach Delay [s/veh]	14.27			11.80			45.96			39.84		
Approach LOS	B			B			D			D		
d_I, Intersection Delay [s/veh]	15.08											
Intersection LOS	B											
Intersection V/C	0.798											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			0.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			34.67			34.67			0.00		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.160			2.250			0.000		
Crosswalk LOS	F			C			B			F		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	667			444			200			200		
d_b, Bicycle Delay [s]	20.00			27.22			36.45			36.45		
I_b,int, Bicycle LOS Score for Intersection	3.604			2.852			1.862			1.659		
Bicycle LOS	D			C			A			A		

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

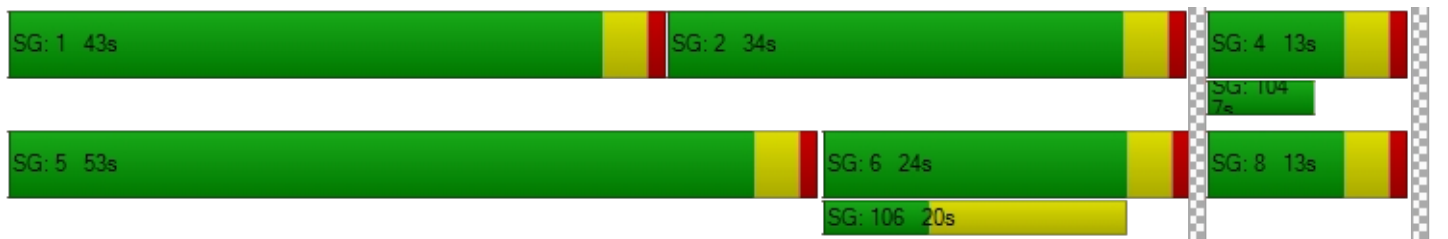

**Intersection Level Of Service Report
Intersection 2: Winchester Rd at Hunter Rd**

Control Type:	Signalized	Delay (sec / veh):	18.2
Analysis Method:	HCM 6th Edition	Level Of Service:	B
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.880

Intersection Setup

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Hunter Road			Hunter Road		
Base Volume Input [veh/h]	365	2362	2	2	1473	69	69	0	245	0	7	8
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	365	2362	2	2	1473	69	69	0	245	0	7	8
Peak Hour Factor	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790	0.9790
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	93	603	1	1	376	18	18	0	63	0	2	2
Total Analysis Volume [veh/h]	373	2413	2	2	1505	70	70	0	250	0	7	8
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Overlap	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	8	0	4	0
Auxiliary Signal Groups									5,8			
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	7	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	30	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	1.0	0.0	1.0	0.0
Split [s]	59	29	0	50	20	0	0	11	11	0	11	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	3.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	9	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	2.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No	No		No	
Maximum Recall	No	No		No	No			No	No		No	
Pedestrian Recall	No	No		No	No			No	No		No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	R	C
C, Cycle Length [s]	90	90	90	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	2.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00
g_i, Effective Green Time [s]	22	71	71	0	49	49	7	33	7
g / C, Green / Cycle	0.24	0.78	0.78	0.00	0.55	0.55	0.08	0.36	0.08
(v / s)_i Volume / Saturation Flow Rate	0.21	0.65	0.65	0.00	0.42	0.43	0.04	0.16	0.01
s, saturation flow rate [veh/h]	1781	1870	1869	1781	1870	1841	1741	1589	1635
c, Capacity [veh/h]	431	1464	1464	9	1021	1006	217	580	169
d1, Uniform Delay [s]	32.74	5.99	5.99	44.62	16.07	16.15	39.78	21.55	38.55
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	5.37	5.42	5.42	11.74	5.74	5.97	0.85	0.51	0.22
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.87	0.82	0.83	0.22	0.77	0.78	0.32	0.43	0.09
d, Delay for Lane Group [s/veh]	38.11	11.40	11.42	56.36	21.81	22.11	40.63	22.05	38.78
Lane Group LOS	D	B	B	E	C	C	D	C	D
Critical Lane Group	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	8.23	10.78	10.79	0.07	13.22	13.20	1.52	3.94	0.32
50th-Percentile Queue Length [ft/ln]	205.71	269.55	269.74	1.84	330.43	329.90	38.02	98.54	7.89
95th-Percentile Queue Length [veh/ln]	12.93	16.17	16.18	0.13	19.18	19.15	2.74	7.09	0.57
95th-Percentile Queue Length [ft/ln]	323.32	404.17	404.42	3.31	479.49	478.84	68.43	177.37	14.21

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	38.11	11.41	11.42	56.36	21.95	22.11	40.63	40.63	22.05	38.78	38.78	38.78
Movement LOS	D	B	B	E	C	C	D	D	C	D	D	D
d_A, Approach Delay [s/veh]	14.98			22.00			26.12			38.78		
Approach LOS	B			C			C			D		
d_I, Intersection Delay [s/veh]	18.17											
Intersection LOS	B											
Intersection V/C	0.880											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	34.67	34.67	34.67
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.192	2.190	1.724
Crosswalk LOS	F	C	B	A
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	556	356	156	156
d_b, Bicycle Delay [s]	23.47	30.42	38.27	38.27
I_b,int, Bicycle LOS Score for Intersection	3.860	2.861	2.088	1.584
Bicycle LOS	D	C	B	A

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

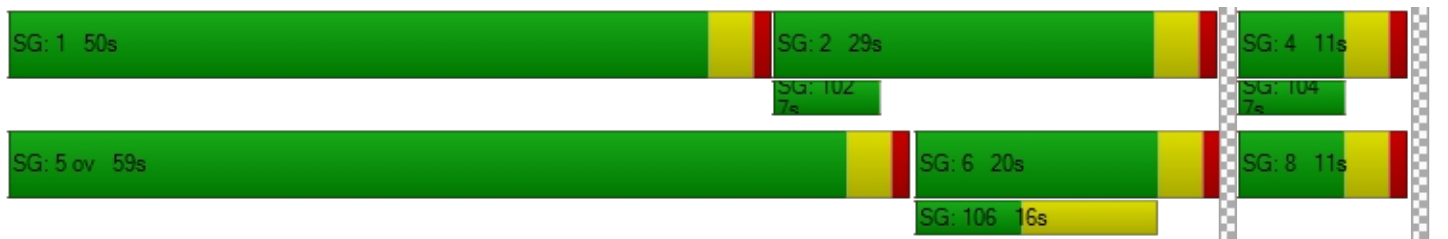

Intersection Level Of Service Report

Intersection 3: Winchester Rd at Robert Trent Jones Pkwy

Control Type:	Signalized	Delay (sec / veh):	29.1
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.858

Intersection Setup

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ro Tr			Technology Drive		
Base Volume Input [veh/h]	55	2299	108	145	1501	15	16	37	51	151	59	333
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	55	2299	108	145	1501	15	16	37	51	151	59	333
Peak Hour Factor	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600	0.9600
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	14	599	28	38	391	4	4	10	13	39	15	87
Total Analysis Volume [veh/h]	57	2395	113	151	1564	16	17	39	53	157	61	347
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss	Permiss
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	12	69	0	16	73	0	0	35	0	0	35	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	0	0	0	17	0	0	0	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	C	L	C	C
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	2.00	0.00	0.00	2.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	65	65	12	71	71	31	31	31	31	31	31
g / C, Green / Cycle	0.05	0.55	0.55	0.10	0.59	0.59	0.26	0.26	0.26	0.26	0.26	0.26
(v / s)_i Volume / Saturation Flow Rate	0.03	0.46	0.47	0.08	0.29	0.29	0.02	0.02	0.03	0.12	0.03	0.22
s, saturation flow rate [veh/h]	1781	3560	1828	1781	3560	1860	977	1870	1589	1304	1870	1589
c, Capacity [veh/h]	89	1941	996	177	2117	1106	86	478	406	334	478	406
d1, Uniform Delay [s]	55.93	23.13	23.40	53.15	13.92	13.92	57.81	33.96	34.40	42.56	34.37	42.54
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.34
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	7.44	4.91	9.72	10.90	0.81	1.55	1.10	0.07	0.14	1.03	0.12	14.44
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.64	0.85	0.86	0.85	0.49	0.49	0.20	0.08	0.13	0.47	0.13	0.85
d, Delay for Lane Group [s/veh]	63.37	28.04	33.12	64.06	14.73	15.47	58.91	34.03	34.54	43.59	34.49	56.98
Lane Group LOS	E	C	C	E	B	B	E	C	C	D	C	E
Critical Lane Group	No	No	Yes	Yes	No	No	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.88	20.20	22.55	5.01	8.02	8.61	0.54	0.88	1.22	4.28	1.40	11.36
50th-Percentile Queue Length [ft/ln]	46.97	504.94	563.69	125.32	200.46	215.21	13.44	22.08	30.47	107.00	34.97	284.09
95th-Percentile Queue Length [veh/ln]	3.38	27.57	30.34	8.68	12.66	13.42	0.97	1.59	2.19	7.67	2.52	16.89
95th-Percentile Queue Length [ft/ln]	84.55	689.20	758.38	217.11	316.56	335.51	24.19	39.74	54.84	191.82	62.94	422.30

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	63.37	29.62	33.12	64.06	14.98	15.47	58.91	34.03	34.54	43.59	34.49	56.98
Movement LOS	E	C	C	E	B	B	E	C	C	D	C	E
d_A, Approach Delay [s/veh]	30.52			19.27			38.16			50.83		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	29.08											
Intersection LOS	C											
Intersection V/C	0.858											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	49.50	0.00	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	3.435	0.000	2.361	2.483
Crosswalk LOS	C	F	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	1083	1150	517	517
d_b, Bicycle Delay [s]	12.60	10.84	33.00	33.00
I_b,int, Bicycle LOS Score for Intersection	2.970	2.512	1.650	2.026
Bicycle LOS	C	B	A	B

Sequence

Ring 1	1	2	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report

Intersection 4: Winchester Rd at Murrieta Hot Springs Rd

Control Type:	Signalized	Delay (sec / veh):	43.2
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.913

Intersection Setup

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Murrieta Hot Springs Road			Murrieta Hot Springs Road		
Base Volume Input [veh/h]	208	1746	213	131	1134	520	554	729	181	285	696	102
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	208	1746	213	131	1134	520	554	729	181	285	696	102
Peak Hour Factor	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460	0.9460
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	55	461	56	35	300	137	146	193	48	75	184	27
Total Analysis Volume [veh/h]	220	1846	225	138	1199	550	586	771	191	301	736	108
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	12	41	0	11	40	0	25	36	0	27	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	23	0	0	25	0	0	0	0	0	27	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	R	L	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	8	44	44	7	43	43	21	35	35	13	27	27
g / C, Green / Cycle	0.07	0.38	0.38	0.06	0.38	0.38	0.18	0.31	0.31	0.11	0.23	0.23
(v / s)_i Volume / Saturation Flow Rate	0.06	0.36	0.14	0.04	0.24	0.35	0.17	0.15	0.12	0.09	0.21	0.07
s, saturation flow rate [veh/h]	3459	5094	1589	3459	5094	1589	3459	5094	1589	3459	3560	1589
c, Capacity [veh/h]	245	1954	610	213	1907	595	633	1562	487	378	829	370
d1, Uniform Delay [s]	53.08	34.31	25.49	52.81	29.49	34.47	46.28	32.62	31.46	50.05	42.72	36.36
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	11.08	10.94	1.72	3.28	1.58	22.35	6.45	0.24	0.51	3.88	3.47	0.43
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.90	0.94	0.37	0.65	0.63	0.92	0.93	0.49	0.39	0.80	0.89	0.29
d, Delay for Lane Group [s/veh]	64.16	45.25	27.20	56.09	31.07	56.82	52.73	32.86	31.98	53.93	46.19	36.79
Lane Group LOS	E	D	C	E	C	E	D	C	C	D	D	D
Critical Lane Group	Yes	No	No	No	No	Yes	Yes	No	No	No	Yes	No
50th-Percentile Queue Length [veh/ln]	3.53	18.18	4.69	2.05	9.21	18.06	8.77	5.87	4.25	4.43	10.44	2.55
50th-Percentile Queue Length [ft/ln]	88.26	454.44	117.25	51.19	230.25	451.55	219.13	146.83	106.36	110.63	261.04	63.82
95th-Percentile Queue Length [veh/ln]	6.35	25.17	8.24	3.69	14.19	25.03	13.62	9.85	7.64	7.87	15.74	4.60
95th-Percentile Queue Length [ft/ln]	158.87	629.24	206.04	92.13	354.68	625.80	340.51	246.19	190.93	196.87	393.53	114.88

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	64.16	45.25	27.20	56.09	31.07	56.82	52.73	32.86	31.98	53.93	46.19	36.79
Movement LOS	E	D	C	E	C	E	D	C	C	D	D	D
d_A, Approach Delay [s/veh]	45.29			40.41			40.27			47.33		
Approach LOS	D			D			D			D		
d_I, Intersection Delay [s/veh]	43.16											
Intersection LOS	D											
Intersection V/C	0.913											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.341	3.109	3.015
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	643	626	557	591
d_b, Bicycle Delay [s]	26.45	27.13	29.95	28.53
I_b,int, Bicycle LOS Score for Intersection	2.820	2.597	2.411	2.504
Bicycle LOS	C	B	B	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

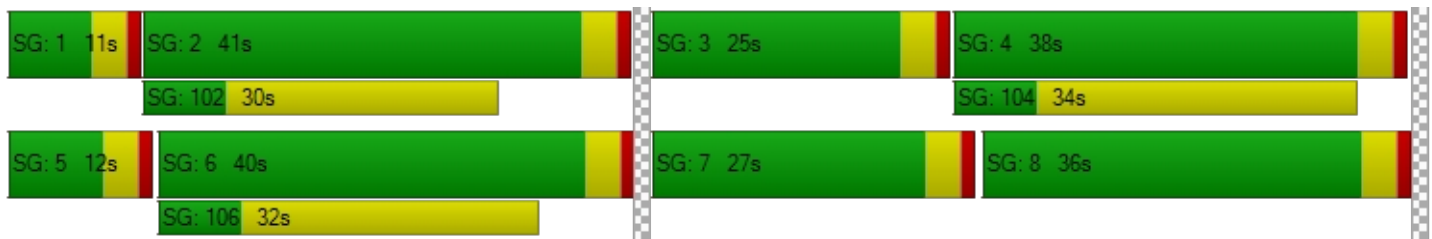

Intersection Level Of Service Report
Intersection 5: Winchester Rd at Winchester Square Drive

Control Type:	Signalized	Delay (sec / veh):	21.5
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.798

Intersection Setup

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			No			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Frontage Drive			Winchester Square Drive		
Base Volume Input [veh/h]	31	2104	291	56	1511	14	19	19	27	187	6	142
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	31	2104	291	56	1511	14	19	19	27	187	6	142
Peak Hour Factor	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430	0.9430
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	8	558	77	15	401	4	5	5	7	50	2	38
Total Analysis Volume [veh/h]	33	2231	309	59	1602	15	20	20	29	198	6	151
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	105
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	20	0	11	20	0	0	36	0	0	38	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	0	0
Pedestrian Clearance [s]	0	9	0	0	3	0	0	25	0	0	0	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	C	C	R
C, Cycle Length [s]	105	105	105	105	105	105	105	105	105
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	4	63	63	6	64	64	6	15	15
g / C, Green / Cycle	0.04	0.60	0.60	0.06	0.61	0.61	0.06	0.14	0.14
(v / s)_i Volume / Saturation Flow Rate	0.02	0.47	0.49	0.03	0.30	0.30	0.04	0.11	0.09
s, saturation flow rate [veh/h]	1781	3560	1758	1781	3560	1861	1718	1783	1589
c, Capacity [veh/h]	75	2116	1045	99	2164	1131	101	248	221
d1, Uniform Delay [s]	49.12	16.38	16.93	48.47	11.52	11.52	48.52	43.99	43.05
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	3.96	3.17	7.32	5.57	0.80	1.52	7.91	6.72	3.70
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.44	0.79	0.82	0.59	0.49	0.49	0.68	0.82	0.68
d, Delay for Lane Group [s/veh]	53.08	19.55	24.24	54.04	12.32	13.05	56.43	50.71	46.75
Lane Group LOS	D	B	C	D	B	B	E	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	Yes	No
50th-Percentile Queue Length [veh/ln]	0.93	15.12	17.13	1.66	6.69	7.22	1.99	5.59	3.94
50th-Percentile Queue Length [ft/ln]	23.15	378.07	428.20	41.50	167.27	180.59	49.75	139.71	98.50
95th-Percentile Queue Length [veh/ln]	1.67	21.50	23.92	2.99	10.93	11.63	3.58	9.47	7.09
95th-Percentile Queue Length [ft/ln]	41.68	537.51	597.88	74.70	273.32	290.78	89.55	236.63	177.30

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	53.08	20.71	24.24	54.04	12.57	13.05	56.43	56.43	56.43	50.71	50.71	46.75
Movement LOS	D	C	C	D	B	B	E	E	E	D	D	D
d_A, Approach Delay [s/veh]	21.55			14.03			56.43			49.03		
Approach LOS	C			B			E			D		
d_I, Intersection Delay [s/veh]	21.46											
Intersection LOS	C											
Intersection V/C	0.798											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	42.08	0.00	42.08	42.08
I_p,int, Pedestrian LOS Score for Intersection	3.214	0.000	1.782	2.189
Crosswalk LOS	C	F	A	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	305	305	610	648
d_b, Bicycle Delay [s]	37.72	37.72	25.38	24.00
I_b,int, Bicycle LOS Score for Intersection	2.975	2.481	1.673	2.145
Bicycle LOS	C	B	A	B

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

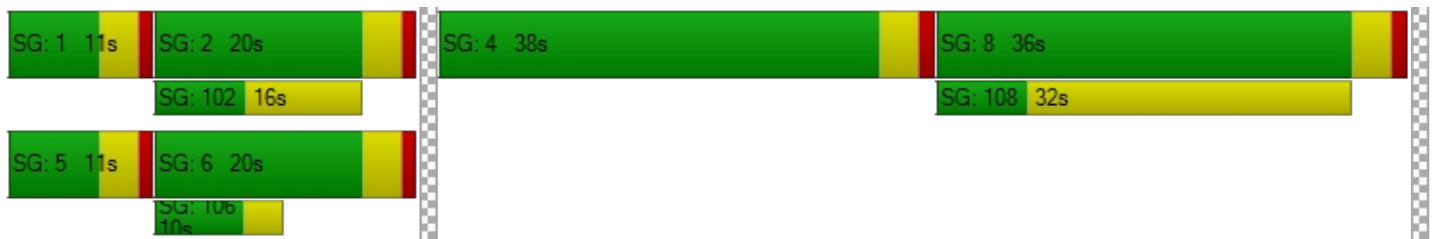

**Intersection Level Of Service Report
Intersection 6: Winchester Rd at Willows Ave**

Control Type:	Signalized	Delay (sec / veh):	30.3
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.841

Intersection Setup

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration	← ↑ →			← ↑ →			← ↑			← ↑ →		
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Winchester Creek Avenue			Willows Avenue		
Base Volume Input [veh/h]	82	2224	131	126	1386	181	219	54	48	213	54	38
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	82	2224	131	126	1386	181	219	54	48	213	54	38
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	21	567	33	32	354	46	56	14	12	54	14	10
Total Analysis Volume [veh/h]	84	2269	134	129	1414	185	223	55	49	217	55	39
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Split	Split	Split	Split	Split	Split
Signal Group	5	2	0	1	6	0	0	8	0	0	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	-	-	-	-	-	-
Minimum Green [s]	7	7	0	7	7	0	0	7	0	0	7	0
Maximum Green [s]	30	30	0	30	30	0	0	30	0	0	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	0.0	1.0	0.0	0.0	1.0	0.0
Split [s]	11	24	0	14	27	0	0	41	0	0	36	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	0.0	3.0	0.0	0.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	0	0	0	7	0
Pedestrian Clearance [s]	0	13	0	0	7	0	0	0	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	0.0	2.0	0.0	0.0	2.0	0.0
Minimum Recall	No	No		No	No			No			No	
Maximum Recall	No	No		No	No			No			No	
Pedestrian Recall	No	No		No	No			No			No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	C	L	C	C	L	C	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	7	61	61	10	64	64	17	17	11	11	11
g / C, Green / Cycle	0.06	0.53	0.53	0.09	0.56	0.56	0.15	0.15	0.10	0.10	0.10
(v / s)_i Volume / Saturation Flow Rate	0.05	0.44	0.45	0.07	0.30	0.30	0.13	0.06	0.08	0.08	0.02
s, saturation flow rate [veh/h]	1781	3560	1818	1781	3560	1761	1781	1726	1781	1816	1589
c, Capacity [veh/h]	107	1883	961	156	1980	979	261	253	174	178	155
d1, Uniform Delay [s]	53.32	23.01	23.27	51.65	16.21	16.22	47.88	44.57	50.67	50.66	48.01
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	11.58	4.74	9.49	10.51	1.06	2.14	7.73	1.06	7.15	6.95	0.84
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.84	0.85	0.83	0.54	0.54	0.85	0.41	0.77	0.77	0.25
d, Delay for Lane Group [s/veh]	64.91	27.75	32.76	62.16	17.27	18.37	55.61	45.64	57.82	57.62	48.85
Lane Group LOS	E	C	C	E	B	B	E	D	E	E	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	Yes	No	No
50th-Percentile Queue Length [veh/ln]	2.74	18.56	20.67	4.11	8.91	9.13	6.78	2.77	4.13	4.19	1.07
50th-Percentile Queue Length [ft/ln]	68.50	464.01	516.79	102.77	222.65	228.27	169.46	69.35	103.32	104.84	26.84
95th-Percentile Queue Length [veh/ln]	4.93	25.63	28.13	7.40	13.80	14.09	11.05	4.99	7.44	7.55	1.93
95th-Percentile Queue Length [ft/ln]	123.29	640.64	703.20	184.98	345.01	352.16	276.21	124.82	185.98	188.71	48.32

Movement, Approach, & Intersection Results

d_M, Delay for Movement [s/veh]	64.91	29.26	32.76	62.16	17.54	18.37	55.61	45.64	45.64	57.74	57.62	48.85
Movement LOS	E	C	C	E	B	B	E	D	D	E	E	D
d_A, Approach Delay [s/veh]	30.66			20.96			52.44			56.61		
Approach LOS	C			C			D			E		
d_I, Intersection Delay [s/veh]	30.33											
Intersection LOS	C											
Intersection V/C	0.841											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0			11.0			11.0			11.0		
M_corner, Corner Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00			0.00			0.00			0.00		
d_p, Pedestrian Delay [s]	0.00			47.03			47.03			47.03		
I_p,int, Pedestrian LOS Score for Intersection	0.000			3.199			2.163			2.296		
Crosswalk LOS	F			C			B			B		
s_b, Saturation Flow Rate of the bicycle lane	2000			2000			2000			2000		
c_b, Capacity of the bicycle lane [bicycles/h]	348			400			643			557		
d_b, Bicycle Delay [s]	39.24			36.80			26.45			29.95		
I_b,int, Bicycle LOS Score for Intersection	2.927			2.510			2.099			2.073		
Bicycle LOS	C			B			B			B		

Sequence

Ring 1	1	2	4	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Intersection Level Of Service Report
Intersection 7: Winchester Rd at Nicolas Rd

Control Type:	Signalized	Delay (sec / veh):	26.1
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.808

Intersection Setup

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	Yes			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Nicolas Road			Nicolas Road		
Base Volume Input [veh/h]	84	2082	398	173	1271	118	92	56	31	368	69	180
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	84	2082	398	173	1271	118	92	56	31	368	69	180
Peak Hour Factor	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800	0.9800
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	21	531	102	44	324	30	23	14	8	94	18	46
Total Analysis Volume [veh/h]	86	2124	406	177	1297	120	94	57	32	376	70	184
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing	0			0			0			0		
v_di, Inbound Pedestrian Volume crossing in	0			0			0			0		
v_co, Outbound Pedestrian Volume crossing	0			0			0			0		
v_ci, Inbound Pedestrian Volume crossing mi	0			0			0			0		
v_ab, Corner Pedestrian Volume [ped/h]	0			0			0			0		
Bicycle Volume [bicycles/h]	0			0			0			0		

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	105
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss
Signal Group	5	2	0	1	6	0	3	8	0	7	4	0
Auxiliary Signal Groups												
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	0	7	7	0	7	7	0	7	7	0
Maximum Green [s]	30	30	0	30	30	0	30	30	0	30	30	0
Amber [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
All red [s]	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	0.0
Split [s]	11	29	0	19	37	0	11	38	0	19	46	0
Vehicle Extension [s]	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	0.0
Walk [s]	0	7	0	0	7	0	0	7	0	0	7	0
Pedestrian Clearance [s]	0	18	0	0	9	0	0	27	0	0	25	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	0.0
Minimum Recall	No	No		No	No		No	No		No	No	
Maximum Recall	No	No		No	No		No	No		No	No	
Pedestrian Recall	No	No		No	No		No	No		No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	105	105	105	105	105	105	105	105	105	105	105	105
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	6	55	55	12	61	61	7	8	8	13	15	15
g / C, Green / Cycle	0.06	0.53	0.53	0.12	0.58	0.58	0.07	0.08	0.08	0.13	0.14	0.14
(v / s)_i Volume / Saturation Flow Rate	0.05	0.42	0.26	0.10	0.26	0.26	0.05	0.03	0.02	0.11	0.04	0.12
s, saturation flow rate [veh/h]	1781	5094	1589	1781	3560	1790	1781	1870	1589	3459	1870	1589
c, Capacity [veh/h]	111	2671	833	209	2064	1038	120	145	123	444	259	220
d1, Uniform Delay [s]	48.57	20.40	15.98	45.44	12.63	12.63	48.27	46.14	45.65	44.79	40.52	44.11
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	10.97	2.55	2.03	8.98	0.73	1.45	10.59	1.73	1.11	4.52	0.55	8.08
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.78	0.80	0.49	0.85	0.46	0.46	0.78	0.39	0.26	0.85	0.27	0.84
d, Delay for Lane Group [s/veh]	59.53	22.95	18.01	54.42	13.36	14.09	58.85	47.87	46.76	49.32	41.07	52.19
Lane Group LOS	E	C	B	D	B	B	E	D	D	D	D	D
Critical Lane Group	No	Yes	No	Yes	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	2.55	13.95	6.45	5.02	6.20	6.45	2.77	1.48	0.82	5.04	1.66	5.13
50th-Percentile Queue Length [ft/ln]	63.78	348.72	161.28	125.47	155.11	161.23	69.22	37.09	20.58	125.95	41.48	128.19
95th-Percentile Queue Length [veh/ln]	4.59	20.07	10.62	8.69	10.29	10.61	4.98	2.67	1.48	8.72	2.99	8.84
95th-Percentile Queue Length [ft/ln]	114.80	501.84	265.42	217.33	257.24	265.35	124.60	66.76	37.05	217.98	74.66	221.03

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	59.53	22.95	18.01	54.42	13.56	14.09	58.85	47.87	46.76	49.32	41.07	52.19
Movement LOS	E	C	B	D	B	B	E	D	D	D	D	D
d_A, Approach Delay [s/veh]	23.39			18.14			53.32			49.24		
Approach LOS	C			B			D			D		
d_I, Intersection Delay [s/veh]	26.05											
Intersection LOS	C											
Intersection V/C	0.808											

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	42.08	42.08	42.08	42.08
I_p,int, Pedestrian LOS Score for Intersection	3.259	3.158	2.250	2.555
Crosswalk LOS	C	C	B	B
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	476	629	648	800
d_b, Bicycle Delay [s]	30.48	24.69	24.00	18.90
I_b,int, Bicycle LOS Score for Intersection	2.998	2.436	1.862	2.599
Bicycle LOS	C	B	A	B

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

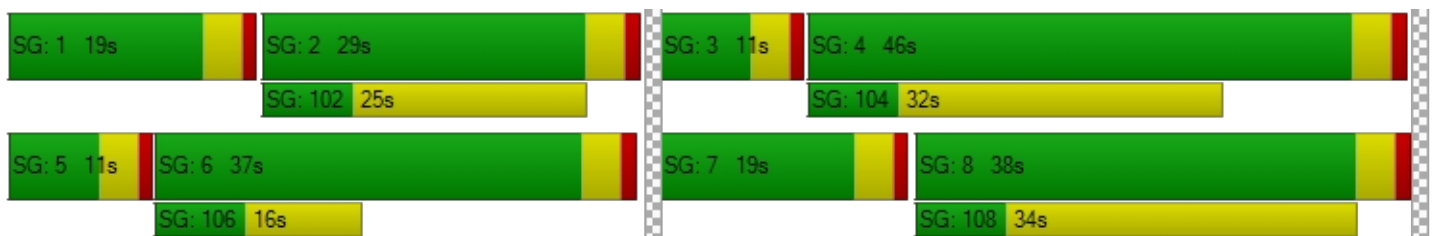

Intersection Level Of Service Report
Intersection 8: Winchester Rd at Margarita Rd

Control Type:	Signalized	Delay (sec / veh):	48.7
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.682

Intersection Setup

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration												
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Margarita Road			Margarita Road		
Base Volume Input [veh/h]	361	1592	186	609	1073	135	162	485	148	263	811	825
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	361	1592	186	609	1073	135	162	485	148	263	811	825
Peak Hour Factor	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810	0.9810
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	92	406	47	155	273	34	41	124	38	67	207	210
Total Analysis Volume [veh/h]	368	1623	190	621	1094	138	165	494	151	268	827	841
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	120
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	8	7	4	4
Auxiliary Signal Groups			2,7						5,8			1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	7	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	30	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	1.0	1.0	1.0	1.0
Split [s]	24	40	40	30	46	0	11	20	20	30	39	39
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	22	22	0	20	0	0	0	0	0	28	28
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	2.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No	No	No	No	No
Maximum Recall	No	No	No	No	No		No	No	No	No	No	No
Pedestrian Recall	No	No	No	No	No		No	No	No	No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	R	L	C	R
C, Cycle Length [s]	120	120	120	120	120	120	120	120	120	120	120	120
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	0.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	15	38	55	26	49	49	7	27	47	12	33	63
g / C, Green / Cycle	0.13	0.32	0.46	0.22	0.41	0.41	0.06	0.23	0.39	0.10	0.27	0.52
(v / s)_i Volume / Saturation Flow Rate	0.11	0.32	0.12	0.18	0.23	0.23	0.05	0.14	0.09	0.08	0.23	0.53
s, saturation flow rate [veh/h]	3459	5094	1589	3459	3560	1765	3459	3560	1589	3459	3560	1589
c, Capacity [veh/h]	442	1633	725	749	1458	723	203	810	618	353	964	828
d1, Uniform Delay [s]	51.10	40.67	20.19	44.88	27.21	27.25	55.84	41.58	24.79	52.47	41.57	28.76
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.17	20.91	0.88	2.43	1.59	3.20	7.63	0.75	0.20	3.38	2.35	35.31
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.83	0.99	0.26	0.83	0.56	0.57	0.81	0.61	0.24	0.76	0.86	1.02
d, Delay for Lane Group [s/veh]	55.27	61.58	21.07	47.32	28.80	30.45	63.47	42.33	25.00	55.85	43.91	64.07
Lane Group LOS	E	E	C	D	C	C	E	D	C	E	D	F
Critical Lane Group	No	Yes	No	No	No	No	Yes	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	5.65	18.87	3.47	9.04	9.32	9.61	2.68	6.64	2.95	4.10	11.84	30.69
50th-Percentile Queue Length [ft/ln]	141.26	471.81	86.87	226.12	232.90	240.21	67.11	165.90	73.79	102.40	296.01	767.31
95th-Percentile Queue Length [veh/ln]	9.55	26.00	6.25	13.98	14.32	14.69	4.83	10.86	5.31	7.37	17.48	40.30
95th-Percentile Queue Length [ft/ln]	238.72	649.92	156.36	349.43	358.04	367.30	120.80	271.51	132.82	184.32	437.09	1007.56

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	55.27	61.58	21.07	47.32	29.21	30.45	63.47	42.33	25.00	55.85	43.91	64.07
Movement LOS	E	E	C	D	C	C	E	D	C	E	D	F
d_A, Approach Delay [s/veh]	56.99			35.37			43.40			54.32		
Approach LOS	E			D			D			D		
d_I, Intersection Delay [s/veh]	48.69											
Intersection LOS	D											
Intersection V/C	0.682											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	49.50	49.50	49.50
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.285	2.906	3.059
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	600	700	267	583
d_b, Bicycle Delay [s]	29.40	25.35	45.07	30.10
I_b,int, Bicycle LOS Score for Intersection	2.759	2.579	2.228	3.157
Bicycle LOS	C	B	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

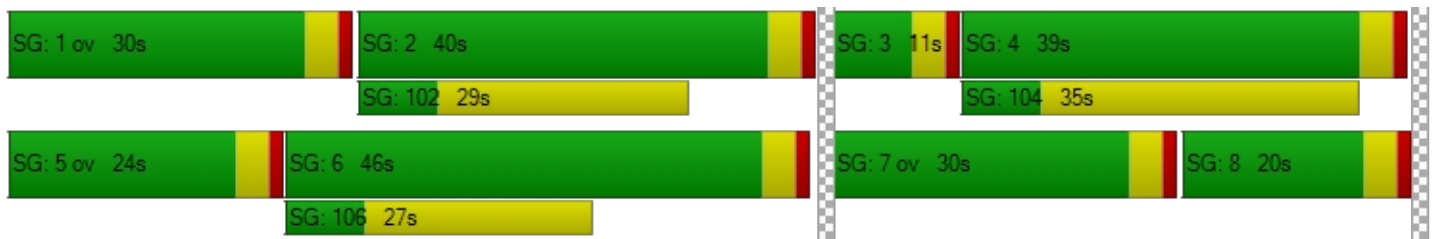

**Intersection Level Of Service Report
Intersection 9: Winchester Rd at Ynez Rd**

Control Type:	Signalized	Delay (sec / veh):	37.4
Analysis Method:	HCM 6th Edition	Level Of Service:	D
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.834

Intersection Setup

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Approach	Northbound			Southbound			Eastbound			Westbound		
Lane Configuration	[Diagram]			[Diagram]			[Diagram]			[Diagram]		
Turning Movement	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right	Left	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00			30.00			30.00			30.00		
Grade [%]	0.00			0.00			0.00			0.00		
Curb Present	No			No			No			No		
Crosswalk	No			Yes			Yes			Yes		

Volumes

Name	Winchester Road			Winchester Road			Ynez Road			Ynez Road		
Base Volume Input [veh/h]	458	1711	624	239	1260	178	193	388	309	799	878	490
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0	0	0	0	0	0	0
Total Hourly Volume [veh/h]	458	1711	624	239	1260	178	193	388	309	799	878	490
Peak Hour Factor	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860	0.9860
Other Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	116	434	158	61	319	45	49	98	78	203	223	124
Total Analysis Volume [veh/h]	465	1735	633	242	1278	181	196	394	313	810	890	497
Presence of On-Street Parking	No		No	No		No	No		No	No		No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing		0			0			0			0	
v_di, Inbound Pedestrian Volume crossing in		0			0			0			0	
v_co, Outbound Pedestrian Volume crossing		0			0			0			0	
v_ci, Inbound Pedestrian Volume crossing mi		0			0			0			0	
v_ab, Corner Pedestrian Volume [ped/h]		0			0			0			0	
Bicycle Volume [bicycles/h]		0			0			0			0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	115
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	16.00

Phasing & Timing

Control Type	Protecte	Permiss	Overlap	Protecte	Permiss	Permiss	Protecte	Permiss	Permiss	Protecte	Permiss	Overlap
Signal Group	5	2	2	1	6	0	3	8	0	7	4	4
Auxiliary Signal Groups			2,7									1,4
Lead / Lag	Lead	-	-	Lead	-	-	Lead	-	-	Lead	-	-
Minimum Green [s]	7	7	7	7	7	0	7	7	0	7	7	7
Maximum Green [s]	30	30	30	30	30	0	30	30	0	30	30	30
Amber [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
All red [s]	1.0	1.0	1.0	1.0	1.0	0.0	1.0	1.0	0.0	1.0	1.0	1.0
Split [s]	25	48	48	14	37	0	12	26	0	27	41	41
Vehicle Extension [s]	3.0	3.0	3.0	3.0	3.0	0.0	3.0	3.0	0.0	3.0	3.0	3.0
Walk [s]	0	7	7	0	7	0	0	0	0	0	7	7
Pedestrian Clearance [s]	0	30	30	0	23	0	0	0	0	0	30	30
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk		No			No			No			No	
I1, Start-Up Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
I2, Clearance Lost Time [s]	2.0	2.0	2.0	2.0	2.0	0.0	2.0	2.0	0.0	2.0	2.0	2.0
Minimum Recall	No	No	No	No	No		No	No		No	No	No
Maximum Recall	No	No	No	No	No		No	No		No	No	No
Pedestrian Recall	No	No	No	No	No		No	No		No	No	No
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	C	R	L	C	C	L	C	C	R	L	C	R
C, Cycle Length [s]	115	115	115	115	115	115	115	115	115	115	115	115	115
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00
l1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
l2, Clearance Lost Time [s]	2.00	2.00	0.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	0.00
g_i, Effective Green Time [s]	18	48	75	10	40	40	8	18	18	18	23	33	47
g / C, Green / Cycle	0.15	0.41	0.65	0.09	0.35	0.35	0.07	0.16	0.16	0.16	0.20	0.29	0.41
(v / s)_i Volume / Saturation Flow Rate	0.13	0.26	0.40	0.07	0.21	0.21	0.06	0.14	0.14	0.14	0.16	0.25	0.31
s, saturation flow rate [veh/h]	3459	6792	1589	3459	5094	1721	3459	1870	1744	1589	5188	3560	1589
c, Capacity [veh/h]	536	2812	1031	305	1769	598	245	297	277	252	1039	1025	653
d1, Uniform Delay [s]	47.52	26.56	11.79	51.48	31.20	31.21	52.69	47.17	47.17	47.17	43.65	38.93	29.08
k, delay calibration	0.11	0.50	0.50	0.11	0.50	0.50	0.11	0.11	0.11	0.11	0.11	0.11	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	4.45	1.03	2.73	4.66	1.62	4.72	5.90	7.03	7.51	8.18	1.31	2.40	8.16
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.87	0.62	0.61	0.79	0.62	0.62	0.80	0.86	0.86	0.86	0.78	0.87	0.76
d, Delay for Lane Group [s/veh]	51.97	27.58	14.52	56.14	32.82	35.93	58.59	54.20	54.67	55.35	44.96	41.33	37.25
Lane Group LOS	D	C	B	E	C	D	E	D	D	E	D	D	D
Critical Lane Group	No	No	Yes	Yes	No	No	Yes	No	No	No	No	No	Yes
50th-Percentile Queue Length [veh/ln]	6.82	9.42	9.53	3.62	8.57	9.21	2.99	7.64	7.16	6.58	7.38	12.13	13.02
50th-Percentile Queue Length [ft/ln]	170.44	235.41	238.15	90.43	214.18	230.29	74.73	190.9	179.0	164.4	184.62	303.26	325.50
95th-Percentile Queue Length [veh/ln]	11.10	14.45	14.59	6.51	13.37	14.19	5.38	12.17	11.55	10.79	11.84	17.84	18.94
95th-Percentile Queue Length [ft/ln]	277.50	361.23	364.69	162.77	334.18	354.73	134.5	304.2	288.8	269.6	296.03	446.06	473.44

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	51.97	27.58	14.52	56.14	33.28	35.93	58.59	54.37	55.17	44.96	41.33	37.25
Movement LOS	D	C	B	E	C	D	E	D	E	D	D	D
d_A, Approach Delay [s/veh]	28.67			36.81			55.55			41.75		
Approach LOS	C			D			E			D		
d_I, Intersection Delay [s/veh]	37.43											
Intersection LOS	D											
Intersection V/C	0.834											

Other Modes

g_Walk,mi, Effective Walk Time [s]	0.0	11.0	11.0	11.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	0.00	47.03	47.03	47.03
I_p,int, Pedestrian LOS Score for Intersection	0.000	3.381	2.945	3.160
Crosswalk LOS	F	C	C	C
s_b, Saturation Flow Rate of the bicycle lane	2000	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	765	574	383	643
d_b, Bicycle Delay [s]	21.92	29.23	37.60	26.45
I_b,int, Bicycle LOS Score for Intersection	2.728	2.261	2.305	3.372
Bicycle LOS	B	B	B	C

Sequence

Ring 1	1	2	3	4	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	5	6	7	8	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

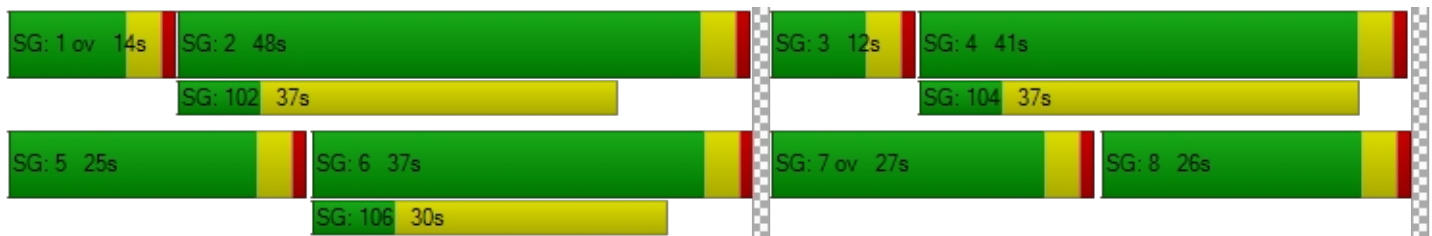

Intersection Level Of Service Report
Intersection 10: Sky Canyon Dr at Willows Ave

Control Type:	Signalized	Delay (sec / veh):	23.7
Analysis Method:	HCM 6th Edition	Level Of Service:	C
Analysis Period:	15 minutes	Volume to Capacity (v/c):	0.174

Intersection Setup

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Approach	Southbound		Eastbound		Westbound	
Lane Configuration						
Turning Movement	Left	Right	Left	Thru	Thru	Right
Lane Width [ft]	12.00	12.00	12.00	12.00	12.00	12.00
No. of Lanes in Entry Pocket	0	0	0	0	0	0
Entry Pocket Length [ft]	100.00	100.00	100.00	100.00	100.00	100.00
No. of Lanes in Exit Pocket	0	0	0	0	0	0
Exit Pocket Length [ft]	0.00	0.00	0.00	0.00	0.00	0.00
Speed [mph]	30.00		30.00		30.00	
Grade [%]	0.00		0.00		0.00	
Curb Present	No		No		No	
Crosswalk	Yes		No		No	

Volumes

Name	Sky Canyon Drive		Willows Avenue		Willows Avenue	
Base Volume Input [veh/h]	48	130	33	221	175	44
Base Volume Adjustment Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
Heavy Vehicles Percentage [%]	2.00	2.00	2.00	2.00	2.00	2.00
Growth Factor	1.0000	1.0000	1.0000	1.0000	1.0000	1.0000
In-Process Volume [veh/h]	0	0	0	0	0	0
Site-Generated Trips [veh/h]	0	0	0	0	0	0
Diverted Trips [veh/h]	0	0	0	0	0	0
Pass-by Trips [veh/h]	0	0	0	0	0	0
Existing Site Adjustment Volume [veh/h]	0	0	0	0	0	0
Other Volume [veh/h]	0	0	0	0	0	0
Right Turn on Red Volume [veh/h]	0	0	0	0	0	0
Total Hourly Volume [veh/h]	48	130	33	221	175	44
Peak Hour Factor	0.9500	0.9500	0.9500	0.9500	0.9500	0.9500
Other Adjustment Factor	1.0000	1.0000	1.0000	0.0000	1.0000	1.0000
Total 15-Minute Volume [veh/h]	13	34	9	0	46	12
Total Analysis Volume [veh/h]	51	137	35	0	184	46
Presence of On-Street Parking	No	No	No	No	No	No
On-Street Parking Maneuver Rate [/h]	0	0	0	0	0	0
Local Bus Stopping Rate [/h]	0	0	0	0	0	0
v_do, Outbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_di, Inbound Pedestrian Volume crossing major street [ped/h]	0		0		0	
v_co, Outbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ci, Inbound Pedestrian Volume crossing minor street [ped/h]	0		0		0	
v_ab, Corner Pedestrian Volume [ped/h]	0		0		0	
Bicycle Volume [bicycles/h]	0		0		0	

Intersection Settings

Located in CBD	No
Signal Coordination Group	-
Cycle Length [s]	90
Coordination Type	Time of Day Pattern Coordinated
Actuation Type	Fully actuated
Offset [s]	0.0
Offset Reference	Lead Green - Beginning of First Green
Permissive Mode	SingleBand
Lost time [s]	12.00

Phasing & Timing

Control Type	Split	Split	Protected	Permissive	Permissive	Permissive
Signal Group	1	0	3	8	4	0
Auxiliary Signal Groups						
Lead / Lag	Lead	-	Lead	-	-	-
Minimum Green [s]	7	0	7	7	7	0
Maximum Green [s]	30	0	30	30	30	0
Amber [s]	3.0	0.0	3.0	3.0	3.0	0.0
All red [s]	1.0	0.0	1.0	1.0	1.0	0.0
Split [s]	50	0	11	40	29	0
Vehicle Extension [s]	3.0	0.0	3.0	3.0	3.0	0.0
Walk [s]	0	0	0	0	7	0
Pedestrian Clearance [s]	0	0	0	0	18	0
Delayed Vehicle Green [s]	0.0	0.0	0.0	0.0	0.0	0.0
Rest In Walk	No			No	No	
I1, Start-Up Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
I2, Clearance Lost Time [s]	2.0	0.0	2.0	2.0	2.0	0.0
Minimum Recall	No		No	No	No	
Maximum Recall	No		No	No	No	
Pedestrian Recall	No		No	No	No	
Detector Location [ft]	0.0	0.0	0.0	0.0	0.0	0.0
Detector Length [ft]	0.0	0.0	0.0	0.0	0.0	0.0
I, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00

Exclusive Pedestrian Phase

Pedestrian Signal Group	0
Pedestrian Walk [s]	0
Pedestrian Clearance [s]	0

Lane Group Calculations

Lane Group	L	R	L	C	C	C
C, Cycle Length [s]	90	90	90	90	90	90
L, Total Lost Time per Cycle [s]	4.00	4.00	4.00	4.00	4.00	4.00
I1_p, Permitted Start-Up Lost Time [s]	0.00	0.00	0.00	0.00	0.00	0.00
I2, Clearance Lost Time [s]	2.00	2.00	2.00	2.00	2.00	2.00
g_i, Effective Green Time [s]	10	10	4	72	64	64
g / C, Green / Cycle	0.11	0.11	0.05	0.80	0.71	0.71
(v / s)_i Volume / Saturation Flow Rate	0.03	0.09	0.02	0.00	0.04	0.05
s, saturation flow rate [veh/h]	1781	1589	1781	1870	3560	1691
c, Capacity [veh/h]	198	176	83	1496	2525	1199
d1, Uniform Delay [s]	36.63	38.94	41.75	0.00	3.98	3.99
k, delay calibration	0.11	0.11	0.11	0.50	0.50	0.50
l, Upstream Filtering Factor	1.00	1.00	1.00	1.00	1.00	1.00
d2, Incremental Delay [s]	0.68	7.16	3.38	0.00	0.05	0.10
d3, Initial Queue Delay [s]	0.00	0.00	0.00	0.00	0.00	0.00
Rp, platoon ratio	1.00	1.00	1.00	1.00	1.00	1.00
PF, progression factor	1.00	1.00	1.00	1.00	1.00	1.00

Lane Group Results

X, volume / capacity	0.26	0.78	0.42	0.00	0.06	0.06
d, Delay for Lane Group [s/veh]	37.32	46.10	45.13	0.00	4.02	4.09
Lane Group LOS	D	D	D	A	A	A
Critical Lane Group	No	Yes	Yes	No	No	Yes
50th-Percentile Queue Length [veh/ln]	1.05	3.25	0.83	0.00	0.37	0.38
50th-Percentile Queue Length [ft/ln]	26.34	81.31	20.67	0.00	9.15	9.62
95th-Percentile Queue Length [veh/ln]	1.90	5.85	1.49	0.00	0.66	0.69
95th-Percentile Queue Length [ft/ln]	47.42	146.36	37.20	0.00	16.47	17.31

Movement, Approach, & Intersection Results


d_M, Delay for Movement [s/veh]	37.32	46.10	45.13	0.00	4.04	4.09
Movement LOS	D	D	D	A	A	A
d_A, Approach Delay [s/veh]	43.72		45.13		4.05	
Approach LOS	D		D		A	
d_I, Intersection Delay [s/veh]	23.69					
Intersection LOS	C					
Intersection V/C	0.174					

Other Modes

g_Walk,mi, Effective Walk Time [s]	11.0	0.0	0.0
M_corner, Corner Circulation Area [ft ² /ped]	0.00	0.00	0.00
M_CW, Crosswalk Circulation Area [ft ² /ped]	0.00	0.00	0.00
d_p, Pedestrian Delay [s]	34.67	0.00	0.00
I_p,int, Pedestrian LOS Score for Intersection	2.027	0.000	0.000
Crosswalk LOS	B	F	F
s_b, Saturation Flow Rate of the bicycle lane [bicycles/h]	2000	2000	2000
c_b, Capacity of the bicycle lane [bicycles/h]	1022	800	556
d_b, Bicycle Delay [s]	10.76	16.20	23.47
I_b,int, Bicycle LOS Score for Intersection	1.560	1.617	1.686
Bicycle LOS	A	A	A

Sequence

Ring 1	1	3	4	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 2	-	-	8	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Ring 4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

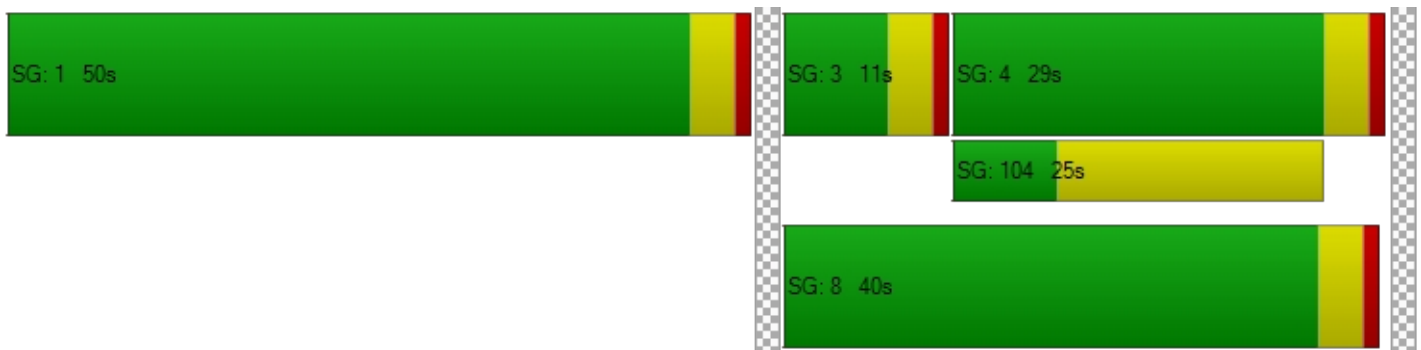

APPENDIX B-III

**EXISTING WITH PROJECT WITH MITIGATION
TRAFFIC CONDITIONS**

THIS PAGE LEFT BLANK INTENTIONALLY