

APPENDIX 5



Whittier Residential

AIR QUALITY IMPACT ANALYSIS

CITY OF WHITTIER

PREPARED BY:

Haseeb Qureshi
hqureshi@urbanxroads.com

Michael Tirohn
mtirohn@urbanxroads.com

Ali Dadabhoy
adadabhoy@urbanxroads.com

JUNE 21, 2022

TABLE OF CONTENTS

TABLE OF CONTENTS	I
APPENDICES	II
LIST OF EXHIBITS	II
LIST OF TABLES	II
LIST OF ABBREVIATED TERMS	III
EXECUTIVE SUMMARY	V
ES.1 Summary of Findings.....	v
ES.2 Standard Regulatory Requirements/Best Available Control Measures.....	v
ES.3 Operational-Source Mitigation Measures	vi
1 INTRODUCTION	1
1.1 Site Location.....	1
1.2 Project Description.....	1
2 AIR QUALITY SETTING	5
2.1 South Coast Air Basin	5
2.2 Regional Climate	5
2.3 Wind Patterns and Project Location	6
2.4 Criteria Pollutants	7
2.5 Existing Air Quality	14
2.6 Regional Air Quality	17
2.7 Local Air Quality	17
2.8 Regulatory Background.....	18
3 PROJECT AIR QUALITY IMPACT	23
3.1 Introduction	23
3.2 Standards of Significance	23
3.3 California Emissions Estimator Model™ Employed To Analyze Air Quality.....	24
3.4 Construction Emissions	24
3.5 Operational Emissions	27
3.6 Localized Emissions.....	29
3.7 CO “Hot Spot” Analysis	35
3.8 Air Quality Management Planning.....	36
3.9 Toxic Air Contaminants	39
3.10 Potential Impacts to Sensitive Receptors	39
3.11 Odors.....	40
3.12 Cumulative Impacts	41
4 REFERENCES	43
5 CERTIFICATIONS	47

APPENDICES

APPENDIX 3.1: CALEEMOD EMISSIONS MODEL OUTPUTS

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP 2
EXHIBIT 1-B: SITE PLAN..... 3
EXHIBIT 3-A: SENSITIVE RECEPTOR LOCATIONS 33

LIST OF TABLES

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS..... V
TABLE 2-1: CRITERIA POLLUTANTS 7
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2) 15
TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2) 16
TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SCAB 17
TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2018-2020..... 18
TABLE 3-1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS..... 23
TABLE 3-2: CONSTRUCTION DURATION..... 25
TABLE 3-3: CONSTRUCTION EQUIPMENT ASSUMPTIONS..... 26
TABLE 3-4: OVERALL CONSTRUCTION EMISSIONS SUMMARY..... 27
TABLE 3-5: SUMMARY OPERATIONAL EMISSIONS 29
TABLE 3-6 : MAXIMUM DAILY DISTURBED-ACREAGE 31
TABLE 3-7: MAXIMUM DAILY LOCALIZED EMISSIONS THRESHOLDS 34
TABLE 3-8: LOCALIZED SIGNIFICANCE SUMMARY OF CONSTRUCTION 34
TABLE 3-9: CO MODEL RESULTS..... 35
TABLE 3-10: TRAFFIC VOLUMES..... 36

LIST OF ABBREVIATED TERMS

%	Percent
°F	degrees Fahrenheit
µg/m ³	Microgram per Cubic Meter
1992 CO Plan	1992 Federal Attainment Plan for Carbon Monoxide
AB 2595	California Clean Air Act
AQIA	air quality impact analysis
AQP	Air Quality Plans
BAAQMD	Bay Area Air Quality Management District
BACM	Best Available Control Measure
C ₂ H ₃ Cl	vinyl chloride
CAA	Clean Air Act
CAAQS	California Ambient Air Quality Standards
CalEEMod	California Emissions Estimator Model
CalEPA	California EPA
CALGreen	California Green Building Standards Code
CAPCOA	California Air Pollution Control Officers Association
CARB	California Air Resources Board
CCR	California Code of Regulations
CEC	California Energy Commission
CEQA	California Environmental Quality Act
CO	carbon monoxide
COHb	carboxyhemoglobin
EIR	Environmental Impact Report
EMFAC	EMissions FACTor model
EPA	Environmental Protection Agency
g/L	gram/liter
GHG	greenhouse gas
H ₂ S	hydrogen sulfide
LST	Localized Significance Thresholds
LST Methodology	Final Localized Significance Threshold Methodology
MM	Mitigation Measures
Mph	miles per hour
MWELO	Model Water Efficient Landscape Ordinance
NAAQS	National Ambient Air Quality Standards
NO	nitric oxide
NO ₂	nitrogen dioxide

NO _x	nitrogen oxides
O ₂	oxygen
O ₂ deficiency	chronic hypoxemia
O ₃	ozone
Pb	Lead
PM	Particulate Matter
PM ₁₀	Particulate matter 10 microns or less
PM _{2.5}	Particulate matter 2.5 microns or less
ppm	parts per million
Project	Whittier Residential
RECLAIM	Regional Clean Air Incentives Market
ROG	reactive organic gases
RTP	Regional Transportation Plan
Rule 1113	SCAQMD Rule 1113 - Architectural Coatings
Rule 403	SCAQMD Rule 403 - Fugitive Dust
Rule 445	SCAQMD Rule 445 – Wood-Burning Devices
SCAB	South Coast Air Basin
SCAQMD	South Coast Air Quality Management District
SCS	Sustainable Communities Strategy
SIP	State Implementation Plan
SO ₂	sulfur dioxide
SO ₄	sulfates
SOX	sulfur oxides
SRA	Source Receptor Area
TAC	toxic air contaminant
Title I	Non-Attainment Provisions
Title II	Mobile Source Provisions
VOC	Volatile Organic Compounds
vph	vehicles per hour

EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this *Whittier Residential Air Quality Impact Analysis* are summarized below based on the significance criteria in Section 3 of this report consistent with Appendix G of the California Environmental Quality Act (CEQA) Guidelines (1). Table ES-1 shows the findings of significance for each potential air quality impact under CEQA.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Analysis	Report	Significance Findings	
	Section	Unmitigated	Mitigated
Regional Construction Emissions	3.4	<i>Less Than Significant</i>	<i>n/a</i>
Regional Operational Emissions	3.5	<i>Less Than Significant</i>	<i>n/a</i>
Localized Construction Emissions	3.6	<i>Significant</i>	<i>Less Than Significant</i>
Localized Operation Emissions	3.6	<i>Less Than Significant</i>	<i>n/a</i>
CO "Hot Spot" Analysis	3.7	<i>Less Than Significant</i>	<i>n/a</i>
Air Quality Management Plan	3.8	<i>Less Than Significant</i>	<i>n/a</i>
Toxic Air Contaminants Analysis	3.9	<i>Less Than Significant</i>	<i>n/a</i>
Sensitive Receptors	3.10	<i>Less Than Significant</i>	<i>n/a</i>
Odors	3.11	<i>Less Than Significant</i>	<i>n/a</i>
Cumulative Impacts	3.12	<i>Less Than Significant</i>	<i>n/a</i>

ES.2 STANDARD REGULATORY REQUIREMENTS/BEST AVAILABLE CONTROL MEASURES

Measures listed below (or equivalent language) shall appear on all Project grading plans, construction specifications and bid documents, and the City of Whittier will ensure such language is incorporated prior to issuance of any development permits. South Coast Air Quality Management District (SCAQMD) Rules that are currently applicable during construction activity for this Project include but are not limited to Rule 403 (Fugitive Dust), Rule 445 (Wood-Burning Devices), and Rule 1113 (Architectural Coatings) (2) (3) (4). It should be noted that these Rules represent Best Available Control Measures (BACMs) and are not mitigation since they are regulatory requirements. As such, compliance with Rule 403, Rule 445, and Rule 1113 have been assumed in this analysis.

RULE 403

The contractor shall adhere to applicable measures contained in Table 1 of Rule 403 including, but not limited to (2):

- All clearing, grading, earth-moving, or excavation activities shall cease when winds exceed 25 miles per hour (mph) per SCAQMD guidelines in order to limit fugitive dust emissions.

- The contractor shall ensure that all disturbed unpaved roads and disturbed areas within the Project are watered at least three (3) times daily during dry weather. Watering, with complete coverage of disturbed areas, shall occur at least three times a day, preferably in the mid-morning, afternoon, and after work is done for the day.
- All access points to the Project site shall have track out devices installed.
- The contractor shall ensure that traffic speeds on unpaved roads and Project site areas are limited to 15 mph or less.

RULE 445

The following measures shall be incorporated into Project plans and specifications as implementation of SCAQMD Rule 445 (3):

- No wood burning devices shall be installed and any dwelling units consistent with SCAQMD Rule 445.

RULE 113

The following measures shall be incorporated into Project plans and specifications as implementation of SCAQMD Rule 1113 (4):

- Only “Low-Volatile Organic Compounds (VOC)” paints consistent with SCAQMD Rule 1113 shall be used.

ES.3 OPERATIONAL-SOURCE MITIGATION MEASURES

Project operational emissions would not exceed applicable SCAQMD regional thresholds of significance. Therefore, Project operational-source emissions would be considered less than significant on a project-specific and cumulative basis.

1 INTRODUCTION

This report presents the results of the air quality impact analysis (AQIA) prepared by Urban Crossroads, Inc., for the proposed Whittier Residential (Project). The purpose of this AQIA is to evaluate the potential air quality impacts associated with construction and operation of the proposed Project and identify measures, as necessary, to reduce emissions in comparison to thresholds established by the SCAQMD.

1.1 SITE LOCATION

The proposed Whittier Residential (“Project”) is located south of Philadelphia Street and west of Comstock Avenue in the City of Whittier. The Project’s location in relation to the surrounding area is shown on Exhibit 1-A.

The Project site is generally surrounded by commercial, medical, and residential land uses, with the nearest residential land use is approximately 36 feet west of the Project site and the Whittier Hospital Women’s Health Center is located 80 feet north of the Project site.


1.2 PROJECT DESCRIPTION


Exhibit 1-B illustrates the preliminary Project site plan. The proposed Project consists of the development of a 52-unit multifamily development within a single four-story building with units ranging from studios to two bedrooms.

EXHIBIT 1-A: LOCATION MAP



EXHIBIT 1-B: SITE PLAN

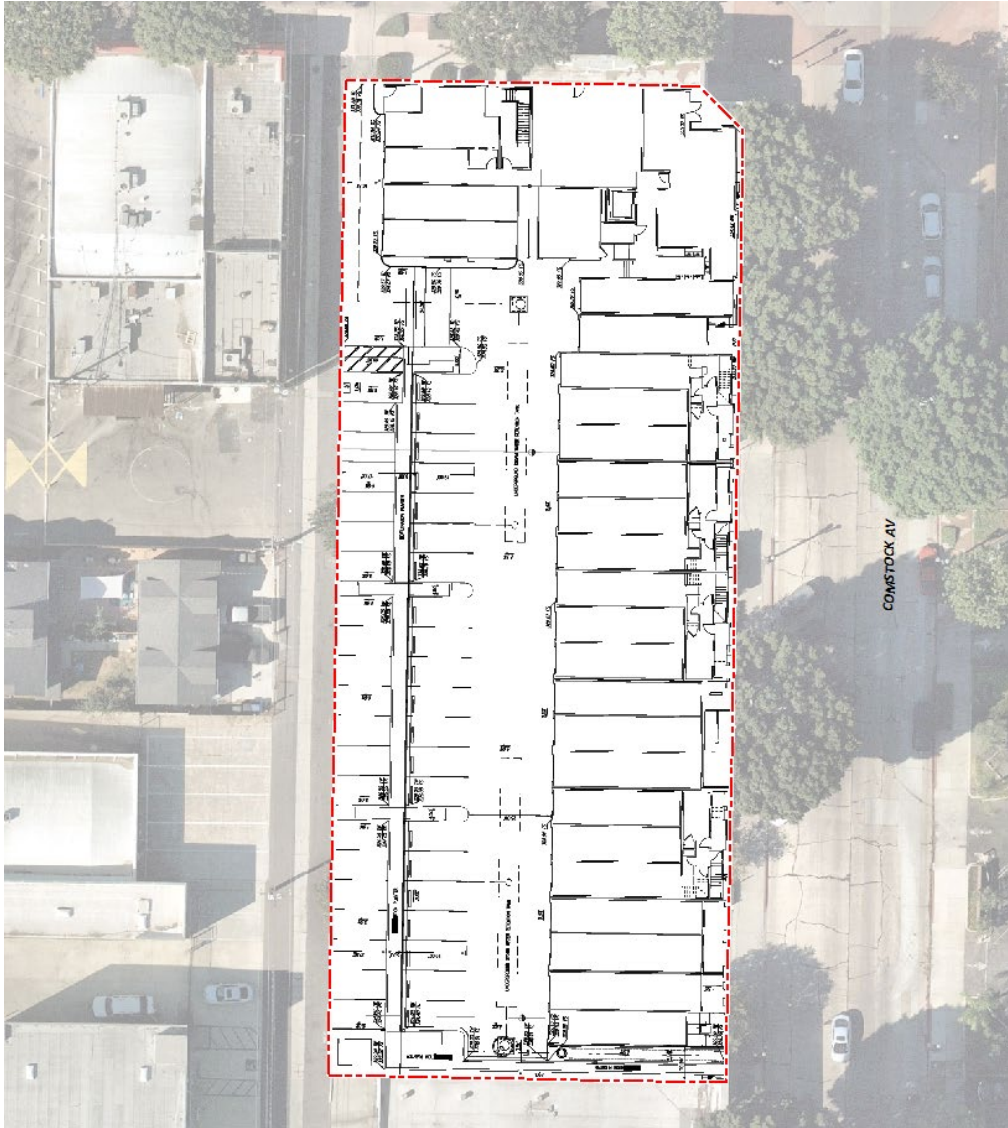

 **LEGEND:**
 Site Boundary

This page intentionally left blank.

2 AIR QUALITY SETTING

This section provides an overview of the existing air quality conditions in the Project area and region.

2.1 SOUTH COAST AIR BASIN

The Project site is located in the South Coast Air Basin (SCAB) within the jurisdiction of SCAQMD (5). The SCAQMD was created by the 1977 Lewis-Presley Air Quality Management Act, which merged four county air pollution control bodies into one regional district. Under the Act, the SCAQMD is responsible for bringing air quality in areas under its jurisdiction into conformity with federal and state air quality standards. As previously stated, the Project site is located within the SCAB, a 6,745-square mile subregion of the SCAQMD, which includes portions of Los Angeles, Riverside, and San Bernardino Counties, and all of Orange County.

The SCAB is bounded by the Pacific Ocean to the west and the San Gabriel, San Bernardino, and San Jacinto Mountains to the north and east. The Los Angeles County portion of the Mojave Desert Air Basin is bounded by the San Gabriel Mountains to the south and west, the Los Angeles / Kern County border to the north, and the Los Angeles / San Bernardino County border to the east. The Riverside County portion of the Salton Sea Air Basin is bounded by the San Jacinto Mountains in the west and spans eastward up to the Palo Verde Valley.

2.2 REGIONAL CLIMATE

The regional climate has a substantial influence on air quality in the SCAB. In addition, the temperature, wind, humidity, precipitation, and amount of sunshine influence the air quality.

The annual average temperatures throughout the SCAB vary from the low to middle 60s degrees Fahrenheit (°F). Due to a decreased marine influence, the eastern portion of the SCAB shows greater variability in average annual minimum and maximum temperatures. January is the coldest month throughout the SCAB, with average minimum temperatures of 47°F in downtown Los Angeles and 36°F in San Bernardino. All portions of the SCAB have recorded maximum temperatures above 100°F.

Although the climate of the SCAB can be characterized as semi-arid, the air near the land surface is quite moist on most days because of the presence of a marine layer. This shallow layer of sea air is an important modifier of SCAB climate. Humidity restricts visibility in the SCAB, and the conversion of sulfur dioxide (SO₂) to sulfates (SO₄) is heightened in air with high relative humidity. The marine layer provides an environment for that conversion process, especially during the spring and summer months. The annual average relative humidity within the SCAB is 71% along the coast and 59% inland. Since the ocean effect is dominant, periods of heavy early morning fog are frequent and low stratus clouds are a characteristic feature. These effects decrease with distance from the coast.

More than 90% of the SCAB's rainfall occurs from November through April. The annual average rainfall varies from approximately nine inches in Riverside to fourteen inches in downtown Los

Angeles. Monthly and yearly rainfall totals are extremely variable. Summer rainfall usually consists of widely scattered thunderstorms near the coast and slightly heavier shower activity in the eastern portion of the SCAB with frequency being higher near the coast.

Due to its generally clear weather, about three-quarters of available sunshine is received in the SCAB. The remaining one-quarter is absorbed by clouds. The ultraviolet portion of this abundant radiation is a key factor in photochemical reactions. On the shortest day of the year there are approximately 10 hours of possible sunshine, and on the longest day of the year there are approximately 14½ hours of possible sunshine.

The importance of wind to air pollution is considerable. The direction and speed of the wind determines the horizontal dispersion and transport of the air pollutants. During the late fall to early spring rainy season, the SCAB is subjected to wind flows associated with the traveling storms moving through the region from the northwest. This period also brings five to ten periods of strong, dry offshore winds, locally termed “Santa Anas” each year. During the dry season, which coincides with the months of maximum photochemical smog concentrations, the wind flow is bimodal, typified by a daytime onshore sea breeze and a nighttime offshore drainage wind. Summer wind flows are created by the pressure differences between the relatively cold ocean and the unevenly heated and cooled land surfaces that modify the general northwesterly wind circulation over southern California. Nighttime drainage begins with the radiational cooling of the mountain slopes. Heavy, cool air descends the slopes and flows through the mountain passes and canyons as it follows the lowering terrain toward the ocean. Another characteristic wind regime in the SCAB is the “Catalina Eddy,” a low level cyclonic (counterclockwise) flow centered over Santa Catalina Island which results in an offshore flow to the southwest. On most spring and summer days, some indication of an eddy is apparent in coastal sections.

In the SCAB, there are two distinct temperature inversion structures that control vertical mixing of air pollution. During the summer, warm high-pressure descending (subsiding) air is undercut by a shallow layer of cool marine air. The boundary between these two layers of air is a persistent marine subsidence/inversion. This boundary prevents vertical mixing which effectively acts as an impervious lid to pollutants over the entire SCAB. The mixing height for the inversion structure is normally situated 1,000 to 1,500 feet above mean sea level.

A second inversion-type forms in conjunction with the drainage of cool air off the surrounding mountains at night followed by the seaward drift of this pool of cool air. The top of this layer forms a sharp boundary with the warmer air aloft and creates nocturnal radiation inversions. These inversions occur primarily in the winter, when nights are longer and onshore flow is weakest. They are typically only a few hundred feet above mean sea level. These inversions effectively trap pollutants, such as nitrogen oxides (NO_x) and carbon monoxide (CO) from vehicles, as the pool of cool air drifts seaward. Winter is therefore a period of elevated levels of primary pollutants along the coastline.

2.3 WIND PATTERNS AND PROJECT LOCATION

The distinctive climate of the Project area and the SCAB is determined by its terrain and geographical location. The SCAB is located in a coastal plain with connecting broad valleys and

low hills, bounded by the Pacific Ocean in the southwest quadrant with high mountains forming the remainder of the perimeter.

Wind patterns across the south coastal region are characterized by westerly and southwesterly onshore winds during the day and easterly or northeasterly breezes at night. Winds are characteristically light although the speed is somewhat greater during the dry summer months than during the rainy winter season.

2.4 CRITERIA POLLUTANTS

Criteria pollutants are pollutants that are regulated through the development of human health based and/or environmentally based criteria for setting permissible levels. Criteria pollutants, their typical sources, and health effects are identified below (6):

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
CO	CO is a colorless, odorless gas produced by the incomplete combustion of carbon-containing fuels, such as gasoline or wood. CO concentrations tend to be the highest during the winter morning, when little to no wind and surface-based inversions trap the pollutant at ground levels. Because CO is emitted directly from internal combustion engines, unlike ozone (O ₃), motor vehicles operating at slow speeds are the primary source of CO in the SCAB. The highest ambient CO concentrations are generally found near congested transportation corridors and intersections.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	Individuals with a deficient blood supply to the heart are the most susceptible to the adverse effects of CO exposure. The effects observed include earlier onset of chest pain with exercise, and electrocardiograph changes indicative of decreased oxygen (O ₂) supply to the heart. Inhaled CO has no direct toxic effect on the lungs but exerts its effect on tissues by interfering with O ₂ transport and competing with O ₂ to combine with hemoglobin present in the blood to form carboxyhemoglobin (COHb). Hence, conditions with an increased demand for O ₂ supply can be adversely affected by exposure to CO. Individuals most at risk include fetuses, patients with diseases involving heart and blood vessels, and patients with chronic hypoxemia (O ₂ deficiency) as seen at high altitudes.

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
SO ₂	SO ₂ is a colorless, extremely irritating gas or liquid. It enters the atmosphere as a pollutant mainly as a result of burning high sulfur-content fuel oils and coal and from chemical processes occurring at chemical plants and refineries. When SO ₂ oxidizes in the atmosphere, it forms SO ₄ . Collectively, these pollutants are referred to as sulfur oxides (SO _x).	Coal or oil burning power plants and industries, refineries, diesel engines	<p>A few minutes of exposure to low levels of SO₂ can result in airway constriction in some asthmatics, all of whom are sensitive to its effects. In asthmatics, increase in resistance to air flow, as well as reduction in breathing capacity leading to severe breathing difficulties, are observed after acute exposure to SO₂. In contrast, healthy individuals do not exhibit similar acute responses even after exposure to higher concentrations of SO₂.</p> <p>Animal studies suggest that despite SO₂ being a respiratory irritant, it does not cause substantial lung injury at ambient concentrations. However, very high levels of exposure can cause lung edema (fluid accumulation), lung tissue damage, and sloughing off of cells lining the respiratory tract.</p> <p>Some population-based studies indicate that the mortality and morbidity effects associated with fine particles show a similar association with ambient SO₂ levels. In these studies, efforts to separate the effects of SO₂ from those of fine particles have not been successful. It is not clear whether the two pollutants act synergistically, or one pollutant alone is the predominant factor.</p>

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
NO _x	NO _x consist of nitric oxide (NO) and nitrogen dioxide (NO ₂) and five other compounds, which are formed when nitrogen (N) combines with oxygen. Their lifespan in the atmosphere ranges from one to seven days for NO and NO ₂ . NO _x is typically created during combustion processes and are major contributors to smog formation and acid deposition. NO ₂ is a criteria air pollutant and may result in numerous adverse health effects; it absorbs blue light, resulting in a brownish-red cast to the atmosphere and reduced visibility. Of the seven types of nitrogen oxide compounds, NO ₂ is the most abundant in the atmosphere. As ambient concentrations of NO ₂ are related to traffic density, commuters in heavy traffic may be exposed to higher concentrations of NO ₂ than those indicated by regional monitoring station.	Any source that burns fuel such as automobiles, trucks, heavy construction equipment, farming equipment and residential heating.	<p>Population-based studies suggest that an increase in acute respiratory illness, including infections and respiratory symptoms in children (not infants), is associated with long-term exposure to NO₂ at levels found in homes with gas stoves, which are higher than ambient levels found in Southern California. Increase in resistance to air flow and airway contraction is observed after short-term exposure to NO₂ in healthy subjects. Larger decreases in lung functions are observed in individuals with asthma or chronic obstructive pulmonary disease (e.g., chronic bronchitis, emphysema) than in healthy individuals, indicating a greater susceptibility of these sub-groups.</p> <p>In animals, exposure to levels of NO₂ considerably higher than ambient concentrations result in increased susceptibility to infections, possibly due to the observed changes in cells involved in maintaining immune functions. The severity of lung tissue damage associated with high levels of O₃ exposure increases when animals are exposed to a combination of O₃ and NO₂.</p>
O ₃	O ₃ is a highly reactive and unstable gas that is formed when VOCs and NO _x , both byproducts of internal combustion engine exhaust, undergo slow photochemical reactions in the	Formed when reactive organic gases (ROG) and NO _x react in the presence of	Individuals exercising outdoors, children, and people with preexisting lung disease, such as asthma and chronic pulmonary lung disease, are considered to be

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
	<p>presence of sunlight. O₃ concentrations are generally highest during the summer months when direct sunlight, light wind, and warm temperature conditions are favorable to the formation of this pollutant.</p>	<p>sunlight. ROG sources include any source that burns fuels, (e.g., gasoline, natural gas, wood, oil) solvents, petroleum processing and storage and pesticides.</p>	<p>the most susceptible sub-groups for O₃ effects. Short-term exposure (lasting for a few hours) to O₃ at levels typically observed in Southern California can result in breathing pattern changes, reduction of breathing capacity, increased susceptibility to infections, inflammation of the lung tissue, and some immunological changes. Elevated O₃ levels are associated with increased school absences. In recent years, a correlation between elevated ambient O₃ levels and increases in daily hospital admission rates, as well as mortality, has also been reported. An increased risk for asthma has been found in children who participate in multiple outdoor sports and live-in communities with high O₃ levels.</p> <p>O₃ exposure under exercising conditions is known to increase the severity of the responses described above. Animal studies suggest that exposure to a combination of pollutants that includes O₃ may be more toxic than exposure to O₃ alone. Although lung volume and resistance changes observed after a single exposure diminish with repeated exposures, biochemical and cellular changes appear to persist, which can lead to subsequent lung structural changes.</p>

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
Particulate Matter (PM)	<p>PM₁₀: A major air pollutant consisting of tiny solid or liquid particles of soot, dust, smoke, fumes, and aerosols. PM pollution is a major cause of reduce visibility (haze) which is caused by the scattering of light and consequently the significant reduction air clarity. The size of the particles (10 microns or smaller, about 0.0004 inches or less) allows them to easily enter the lungs where they may be deposited, resulting in adverse health effects. Additionally, it should be noted that PM₁₀ is considered a criteria air pollutant.</p> <p>PM_{2.5}: A similar air pollutant to PM₁₀ consisting of tiny solid or liquid particles which are 2.5 microns or smaller (which is often referred to as fine particles). These particles are formed in the atmosphere from primary gaseous emissions that include SO₄ formed from SO₂ release from power plants and industrial facilities and nitrates that are formed from NO_x release from power plants, automobiles and other types of combustion sources. The chemical composition of fine particles highly depends on location, time of year, and weather conditions. PM_{2.5} is a criteria air pollutant.</p>	<p>Sources of PM₁₀ include road dust, windblown dust and construction. Also formed from other pollutants (acid rain, NO_x, SO_x, organics). Incomplete combustion of any fuel.</p> <p>PM_{2.5} comes from fuel combustion in motor vehicles, equipment and industrial sources, residential and agricultural burning. Also formed from reaction of other pollutants (acid rain, NO_x, SO_x, organics).</p>	<p>A consistent correlation between elevated ambient fine PM (PM₁₀ and PM_{2.5}) levels and an increase in mortality rates, respiratory infections, number and severity of asthma attacks and the number of hospital admissions has been observed in different parts of the United States and various areas around the world. In recent years, some studies have reported an association between long-term exposure to air pollution dominated by fine particles and increased mortality, reduction in lifespan, and an increased mortality from lung cancer.</p> <p>Daily fluctuations in PM_{2.5} concentration levels have also been related to hospital admissions for acute respiratory conditions in children, to school and kindergarten absences, to a decrease in respiratory lung volumes in normal children, and to increased medication use in children and adults with asthma. Recent studies show lung function growth in children is reduced with long term exposure to PM.</p> <p>The elderly, people with pre-existing respiratory or cardiovascular disease, and children appear to be more susceptible to the effects of high levels of PM₁₀ and PM_{2.5}.</p>
VOC	VOCs are hydrocarbon compounds (any compound containing various combinations of hydrogen and carbon atoms)	Organic chemicals are widely used as ingredients in household	Breathing VOCs can irritate the eyes, nose and throat, can cause difficulty breathing and nausea, and can damage

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
	<p>that exist in the ambient air. VOCs contribute to the formation of smog through atmospheric photochemical reactions and/or may be toxic. Compounds of carbon (also known as organic compounds) have different levels of reactivity; that is, they do not react at the same speed or do not form O₃ to the same extent when exposed to photochemical processes. VOCs often have an odor, and some examples include gasoline, alcohol, and the solvents used in paints. Exceptions to the VOC designation include CO, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate. VOCs are a criteria pollutant since they are a precursor to O₃, which is a criteria pollutant. The terms VOC and ROG (see below) interchangeably.</p>	<p>products. Paints, varnishes and wax all contain organic solvents, as do many cleaning, disinfecting, cosmetic, degreasing and hobby products. Fuels are made up of organic chemicals. All of these products can release organic compounds while you are using them, and, to some degree, when they are stored.</p>	<p>the central nervous system as well as other organs. Some VOCs can cause cancer. Not all VOCs have all these health effects, though many have several.</p>
ROG	<p>Similar to VOC, ROG are also precursors in forming O₃ and consist of compounds containing methane, ethane, propane, butane, and longer chain hydrocarbons, which are typically the result of some type of combustion/decomposition process. Smog is formed when ROG and NO_x react in the presence of sunlight. ROG are a criteria pollutant since they are a precursor to O₃, which is a criteria pollutant. The terms ROG and VOC (see previous) interchangeably.</p>	<p>Sources similar to VOCs.</p>	<p>Health effects similar to VOCs.</p>
Lead (Pb)	<p>Pb is a heavy metal that is highly persistent in the environment and is considered a criteria pollutant. In the past, the primary source of Pb in the air was</p>	<p>Metal smelters, resource recovery, leaded gasoline,</p>	<p>Fetuses, infants, and children are more sensitive than others to the adverse effects of Pb exposure. Exposure to low levels of Pb can adversely</p>

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
	<p>emissions from vehicles burning leaded gasoline. The major sources of Pb emissions are ore and metals processing, particularly Pb smelters, and piston-engine aircraft operating on leaded aviation gasoline. Other stationary sources include waste incinerators, utilities, and lead-acid battery manufacturers. It should be noted that the Project does not include operational activities such as metal processing or Pb acid battery manufacturing. As such, the Project is not anticipated to generate a quantifiable amount of Pb emissions.</p>	deterioration of Pb paint.	<p>affect the development and function of the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased Pb levels are associated with increased blood pressure.</p> <p>Pb poisoning can cause anemia, lethargy, seizures, and death; although it appears that there are no direct effects of Pb on the respiratory system. Pb can be stored in the bone from early age environmental exposure, and elevated blood Pb levels can occur due to breakdown of bone tissue during pregnancy, hyperthyroidism (increased secretion of hormones from the thyroid gland) and osteoporosis (breakdown of bony tissue). Fetuses and breast-fed babies can be exposed to higher levels of Pb because of previous environmental Pb exposure of their mothers.</p>
Odor	<p>Odor means the perception experienced by a person when one or more chemical substances in the air come into contact with the human olfactory nerves (7).</p>	<p>Odors can come from many sources including animals, human activities, industry, nature, and vehicles.</p>	<p>Offensive odors can potentially affect human health in several ways. First, odorant compounds can irritate the eye, nose, and throat, which can reduce respiratory volume. Second, studies have shown that the VOCs that cause odors can stimulate sensory nerves to cause neurochemical changes that might influence health, for instance, by compromising the immune system. Finally, unpleasant</p>

TABLE 2-1: CRITERIA POLLUTANTS

Criteria Pollutant	Description	Sources	Health Effects
			odors can trigger memories or attitudes linked to unpleasant odors, causing cognitive and emotional effects such as stress.

2.5 EXISTING AIR QUALITY

Existing air quality is measured at established SCAQMD air quality monitoring stations. Monitored air quality is evaluated in the context of ambient air quality standards. These standards are the levels of air quality that are considered safe, with an adequate margin of safety, to protect the public health and welfare. National Ambient Air Quality Standards (NAAQS) and California Ambient Air Quality Standards (CAAQS) currently in effect are shown in Table 2-2 (8).

The determination of whether a region's air quality is healthful or unhealthful is determined by comparing contaminant levels in ambient air samples to the state and federal standards. The most recent state and federal standards and are presented in Table 2-2. Attainment status for a pollutant means that the SCAQMD meets the standards set by the U.S. Environmental Protection Agency (EPA) or the California EPA (CalEPA). Conversely, nonattainment means that an area has monitored air quality that does not meet the NAAQS or CAAQS standards. In order to improve air quality and meet the NAAQS in nonattainment areas, The federal Clean Air Act (CAA) requires the preparation of a State Implementation Plan (SIP) by CARB. The SIP outlines the measures that the state will take to improve air quality. Once nonattainment areas meet the standards and additional redesignation requirements, the EPA will designate the area as a maintenance area (9).

TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (1 OF 2)

Ambient Air Quality Standards						
Pollutant	Averaging Time	California Standards ¹		National Standards ²		
		Concentration ³	Method ⁴	Primary ^{3,5}	Secondary ^{3,6}	Method ⁷
Ozone (O ₃) ⁸	1 Hour	0.09 ppm (180 µg/m ³)	Ultraviolet Photometry	—	Same as Primary Standard	Ultraviolet Photometry
	8 Hour	0.070 ppm (137 µg/m ³)		0.070 ppm (137 µg/m ³)		
Respirable Particulate Matter (PM ₁₀) ⁹	24 Hour	50 µg/m ³	Gravimetric or Beta Attenuation	150 µg/m ³	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	20 µg/m ³		—		
Fine Particulate Matter (PM _{2.5}) ⁹	24 Hour	—	—	35 µg/m ³	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	12 µg/m ³	Gravimetric or Beta Attenuation	12.0 µg/m ³	15 µg/m ³	
Carbon Monoxide (CO)	1 Hour	20 ppm (23 mg/m ³)	Non-Dispersive Infrared Photometry (NDIR)	35 ppm (40 mg/m ³)	—	Non-Dispersive Infrared Photometry (NDIR)
	8 Hour	9.0 ppm (10 mg/m ³)		9 ppm (10 mg/m ³)	—	
	8 Hour (Lake Tahoe)	6 ppm (7 mg/m ³)		—	—	
Nitrogen Dioxide (NO ₂) ¹⁰	1 Hour	0.18 ppm (339 µg/m ³)	Gas Phase Chemiluminescence	100 ppb (188 µg/m ³)	—	Gas Phase Chemiluminescence
	Annual Arithmetic Mean	0.030 ppm (57 µg/m ³)		0.053 ppm (100 µg/m ³)	Same as Primary Standard	
Sulfur Dioxide (SO ₂) ¹¹	1 Hour	0.25 ppm (655 µg/m ³)	Ultraviolet Fluorescence	75 ppb (196 µg/m ³)	—	Ultraviolet Fluorescence; Spectrophotometry (Pararosaniline Method)
	3 Hour	—		—	0.5 ppm (1300 µg/m ³)	
	24 Hour	0.04 ppm (105 µg/m ³)		0.14 ppm (for certain areas) ¹¹	—	
	Annual Arithmetic Mean	—		0.030 ppm (for certain areas) ¹¹	—	
Lead ^{12,13}	30 Day Average	1.5 µg/m ³	Atomic Absorption	—	—	High Volume Sampler and Atomic Absorption
	Calendar Quarter	—		1.5 µg/m ³ (for certain areas) ¹²	Same as Primary Standard	
	Rolling 3-Month Average	—		0.15 µg/m ³		
Visibility Reducing Particles ¹⁴	8 Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape	No National Standards		
Sulfates	24 Hour	25 µg/m ³	Ion Chromatography			
Hydrogen Sulfide	1 Hour	0.03 ppm (42 µg/m ³)	Ultraviolet Fluorescence			
Vinyl Chloride ¹²	24 Hour	0.01 ppm (26 µg/m ³)	Gas Chromatography			

See footnotes on next page ...

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)

TABLE 2-2: AMBIENT AIR QUALITY STANDARDS (2 OF 2)

1. California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1 and 24 hour), nitrogen dioxide, and particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the California Code of Regulations.
2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24 hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above $150 \mu\text{g}/\text{m}^3$ is equal to or less than one. For PM2.5, the 24 hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.
3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr: ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.
4. Any equivalent measurement method which can be shown to the satisfaction of the ARB to give equivalent results at or near the level of the air quality standard may be used.
5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.
6. National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.
7. Reference method as described by the U.S. EPA. An "equivalent method" of measurement may be used but must have a "consistent relationship to the reference method" and must be approved by the U.S. EPA.
8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.
9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from $15 \mu\text{g}/\text{m}^3$ to $12.0 \mu\text{g}/\text{m}^3$. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at $35 \mu\text{g}/\text{m}^3$, as was the annual secondary standard of $15 \mu\text{g}/\text{m}^3$. The existing 24-hour PM10 standards (primary and secondary) of $150 \mu\text{g}/\text{m}^3$ also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.
10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.
11. On June 2, 2010, a new 1-hour SO_2 standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO_2 national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.
Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.
12. The ARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.
13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard ($1.5 \mu\text{g}/\text{m}^3$ as a quarterly average) remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.
14. In 1989, the ARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)

2.6 REGIONAL AIR QUALITY

Air pollution contributes to a wide variety of adverse health effects. The EPA has established NAAQS for six of the most common air pollutants: CO, Pb, O₃, PM₁₀, PM_{2.5}, NO₂, and SO₂ which are known as criteria pollutants. The SCAQMD monitors levels of various criteria pollutants at 37 permanent monitoring stations and 5 single-pollutant source Pb air monitoring sites throughout the air district (10). On February 21, 2019, CARB posted the 2018 amendments to the state and national area designations. See Table 2-3 for attainment designations for the SCAB (11).

TABLE 2-3: ATTAINMENT STATUS OF CRITERIA POLLUTANTS IN THE SCAB

Criteria Pollutant	State Designation	Federal Designation
O ₃ – 1-hour standard	Nonattainment	--
O ₃ – 8-hour standard	Nonattainment	Nonattainment
PM ₁₀	Nonattainment	Attainment
PM _{2.5}	Nonattainment	Nonattainment
CO	Attainment	Unclassifiable/Attainment
NO ₂	Attainment	Unclassifiable/Attainment
SO ₂	Unclassifiable/Attainment	Unclassifiable/Attainment
Pb ¹	Attainment	Unclassifiable/Attainment

"--" = The national 1-hour O₃ standard was revoked effective June 15, 2005.

2.7 LOCAL AIR QUALITY

The Project site is located within the Source Receptor Area (SRA) 11. Within SRA 11, the SCAQMD South San Gabriel Valley monitoring station, located 6.18 miles southeast of the Project site, is the nearest long-term air quality monitoring station for CO, NO₂, O₃ and PM_{2.5}. The South San Gabriel Valley monitoring station does not include data for PM₁₀. As such, the next nearest monitoring station will be used. The East San Gabriel Valley 2 monitoring station, located in SRA 9, is the next nearest monitoring station for PM₁₀ and is located approximately 12.71 miles northeast of the Project site. It should be noted that the East San Gabriel Valley 2 monitoring station was utilized in lieu of the South San Gabriel Valley monitoring station only in instances where data was not available.

The most recent three (3) years of data available is shown on Table 2-4 and identifies the number of days ambient air quality standards were exceeded for the study area, which is considered to be representative of the local air quality at the Project site. Data for O₃, CO, NO₂, PM₁₀, and PM_{2.5} for 2018 through 2020 was obtained from the SCAQMD Air Quality Data Tables (12). Additionally, data for SO₂ has been omitted as attainment is regularly met in the SCAB and few monitoring stations measure SO₂ concentrations.

¹ The Federal nonattainment designation for lead is only applicable towards the Los Angeles County portion of the SCAB.

TABLE 2-4: PROJECT AREA AIR QUALITY MONITORING SUMMARY 2018-2020

Pollutant	Standard	Year		
		2018	2019	2020
O₃				
Maximum Federal 1-Hour Concentration (ppm)		0.115	0.108	0.169
Maximum Federal 8-Hour Concentration (ppm)		0.082	0.091	0.114
Number of Days Exceeding State 1-Hour Standard	> 0.09 ppm	3	5	20
Number of Days Exceeding State/Federal 8-Hour Standard	> 0.070 ppm	5	7	23
CO				
Maximum Federal 1-Hour Concentration	> 35 ppm	2.0	1.9	3.1
Maximum Federal 8-Hour Concentration	> 20 ppm	1.8	1.5	1.7
NO₂				
Maximum Federal 1-Hour Concentration	> 0.100 ppm	76.8	61.8	69.2
Annual Federal Standard Design Value		18.3	17.6	17.8
PM₁₀				
Maximum Federal 24-Hour Concentration (µg/m ³)	> 150 µg/m ³	101	97	105
Annual Federal Arithmetic Mean (µg/m ³)		27.1	20.8	25.2
Number of Days Exceeding Federal 24-Hour Standard	> 150 µg/m ³	0	0	0
Number of Days Exceeding State 24-Hour Standard	> 50 µg/m ³	20	3	9
PM_{2.5}				
Maximum Federal 24-Hour Concentration (µg/m ³)	> 35 µg/m ³	35.40	29.60	35.40
Annual Federal Arithmetic Mean (µg/m ³)	> 12 µg/m ³	12.31	10.34	13.22
Number of Days Exceeding Federal 24-Hour Standard	> 35 µg/m ³	0	0	0

ppm= Parts Per Million

Source: SCAQMD Historical Air Quality Data by Year, Air Quality Data Tables

2.8 REGULATORY BACKGROUND

2.8.1 FEDERAL REGULATIONS

The EPA is responsible for setting and enforcing the NAAQS for O₃, CO, NO_x, SO₂, PM₁₀, and Pb (13). The EPA has jurisdiction over emissions sources that are under the authority of the federal government including aircraft, locomotives, and emissions sources outside state waters (Outer Continental Shelf). The EPA also establishes emission standards for vehicles sold in states other than California. Automobiles sold in California must meet the stricter emission requirements of the CARB.

The federal CAA was first enacted in 1955 and has been amended numerous times in subsequent years (1963, 1965, 1967, 1970, 1977, and 1990). The federal CAA establishes the federal air quality standards, the NAAQS, and specifies future dates for achieving compliance₍₁₄₎. The federal CAA also mandates that states submit and implement SIPs for local areas not meeting these standards. These plans must include pollution control measures that demonstrate how the standards will be met.

The 1990 amendments to the CAA that identify specific emission reduction goals for areas not meeting the NAAQS require a demonstration of reasonable further progress toward attainment and incorporate additional sanctions for failure to attain or to meet interim milestones. The sections of the CAA most directly applicable to the development of the Project site include Title I (Non-Attainment Provisions) and Title II (Mobile Source Provisions) (15) (16). Title I provisions were established with the goal of attaining the NAAQS for the following criteria pollutants O₃, NO₂, SO₂, PM₁₀, CO, PM_{2.5}, and Pb. The NAAQS were amended in July 1997 to include an additional standard for O₃ and to adopt a NAAQS for PM_{2.5}. Table 2-3 (previously presented) provides the NAAQS within the SCAB.

Mobile source emissions are regulated in accordance with Title II provisions. These provisions require the use of cleaner burning gasoline and other cleaner burning fuels such as methanol and natural gas. Automobile manufacturers are also required to reduce tailpipe emissions of hydrocarbons and NO_x. NO_x is a collective term that includes all forms of NO_x which are emitted as byproducts of the combustion process.

2.8.2 CALIFORNIA REGULATIONS

CALIFORNIA AIR RESOURCES BOARD

The CARB, which became part of the CalEPA in 1991, is responsible for ensuring implementation of the California Clean Air Act (AB 2595), responding to the federal CAA, and for regulating emissions from consumer products and motor vehicles. AB 2595 mandates achievement of the maximum degree of emissions reductions possible from vehicular and other mobile sources in order to attain the state ambient air quality standards by the earliest practical date. The CARB established the CAAQS for all pollutants for which the federal government has NAAQS and, in addition, establishes standards for SO₄, visibility, hydrogen sulfide (H₂S), and vinyl chloride (C₂H₃Cl). However, at this time, H₂S and C₂H₃Cl are not measured at any monitoring stations in the SCAB because they are not considered to be a regional air quality problem. Generally, the CAAQS are more stringent than the NAAQS (17) (13).

Local air quality management districts, such as the SCAQMD, regulate air emissions from stationary sources such as commercial and industrial facilities. All air pollution control districts have been formally designated as attainment or non-attainment for each CAAQS.

Serious non-attainment areas are required to prepare Air Quality Plans (AQP) that include specified emission reduction strategies in an effort to meet clean air goals. These plans are required to include:

- Application of Best Available Retrofit Control Technology to existing sources;
- Developing control programs for area sources (e.g., architectural coatings and solvents) and indirect sources (e.g., motor vehicle use generated by residential and commercial development);
- A District permitting system designed to allow no net increase in emissions from any new or modified permitted sources of emissions;
- Implementing reasonably available transportation control measures and assuring a substantial reduction in growth rate of vehicle trips and miles traveled;

- Significant use of low emissions vehicles by fleet operators;
- Sufficient control strategies to achieve a 5% or more annual reduction in emissions or 15% or more in a period of three years for ROG_s, NO_x, CO and PM₁₀. However, air basins may use alternative emission reduction strategy that achieves a reduction of less than 5% per year under certain circumstances.

TITLE 24 ENERGY EFFICIENCY STANDARDS AND CALIFORNIA GREEN BUILDING STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: California's Energy Efficiency Standards for Residential and Nonresidential Buildings, was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption. The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on January 1, 2011, and is administered by the California Building Standards Commission. CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2019 California Green Building Code Standards which became effective January 1, 2020. Local jurisdictions are permitted to adopt more stringent requirements, as state law provides methods for local enhancements. CALGreen recognizes that many jurisdictions have developed existing construction and demolition ordinances and defers to them as the ruling guidance provided, they establish a minimum 65% diversion requirement. The code also provides exemptions for areas not served by construction and demolition recycling infrastructure. The State Building Code provides the minimum standard that buildings must meet in order to be certified for occupancy, which is generally enforced by the local building official.

Energy efficient buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases greenhouse gas (GHG) emissions. The 2019 version of Title 24 was adopted by the California Energy Commission (CEC) and became effective on January 1, 2020.

The 2019 Title 24 standards will result in less energy use, thereby reducing air pollutant emissions associated with energy consumption in the SCAB and across the State of California. For example, the 2019 Title 24 standards will require solar photovoltaic systems for new homes, establish requirements for newly constructed healthcare facilities, encourage demand responsive technologies for residential buildings, and update indoor and outdoor lighting requirements for nonresidential buildings. The CEC anticipates that nonresidential buildings and high-rise residential buildings (four-stories and higher), such as the Project, will use approximately 30% less energy due to lighting upgrade requirements (18).

The 2019 CALGreen standards are applicable to the Project and require, among other items (19):

- Short-term bicycle parking. If the new project or an additional alteration is anticipated to generate visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors' entrance, readily visible to passers-by, for 5% of new visitor motorized vehicle parking spaces being added, with a minimum of one two-bike capacity rack (5.106.4.1.1).

- Long-term bicycle parking. For new buildings with tenant spaces that have ten or more tenant-occupants, provide secure bicycle parking for 5% of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility (5.106.4.1.2).
- Designated parking. In new projects or additions to alterations that add ten or more vehicular parking spaces, provide designated parking for any combination of low-emitting, fuel-efficient and carpool/van pool vehicles as shown in Table 5.106.5.2 (5.106.5.2).
- Construction waste management. Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste in accordance with Section 5.408.1.1, 5.405.1.2, or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent (5.408.1).
- Excavated soil and land clearing debris. 100% of trees, stumps, rocks and associated vegetation and soils resulting primarily from land clearing shall be reused or recycled. For a phased project, such material may be stockpiled on site until the storage site is developed (5.408.3).
- Recycling by Occupants. Provide readily accessible areas that serve the entire building and are identified for the depositing, storage and collection of non-hazardous materials for recycling, including (at a minimum) paper, corrugated cardboard, glass, plastics, organic waste, and metals or meet a lawfully enacted local recycling ordinance, if more restrictive (5.410.1).
- Water conserving plumbing fixtures and fittings. Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following:
 - Water Closets. The effective flush volume of all water closets shall not exceed 1.28 gallons per flush (5.303.3.1)
 - Urinals. The effective flush volume of wall-mounted urinals shall not exceed 0.125 gallons per flush (5.303.3.2.1). The effective flush volume of floor-mounted or other urinals shall not exceed 0.5 gallons per flush (5.303.3.2.2).
 - Showerheads. Single showerheads shall have a minimum flow rate of not more than 1.8 gallons per minute and 80 psi (5.303.3.3.1). When a shower is served by more than one showerhead, the combine flow rate of all showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi (5.303.3.3.2).
 - Faucets and fountains. Nonresidential lavatory faucets shall have a maximum flow rate of not more than 0.5 gallons per minute at 60 psi (5.303.3.4.1). Kitchen faucets shall have a maximum flow rate of not more than 1.8 gallons per minute of 60 psi (5.303.3.4.2). Wash fountains shall have a maximum flow rate of not more than 1.8 gallons per minute (5.303.3.4.3). Metering faucets shall not deliver more than 0.20 gallons per cycle (5.303.3.4.4). Metering faucets for wash fountains shall have a maximum flow rate not more than 0.20 gallons per cycle (5.303.3.4.5).
- Outdoor portable water use in landscaped areas. Nonresidential developments shall comply with a local water efficient landscape ordinance or the current California Department of Water Resources' Model Water Efficient Landscape Ordinance (MWELo), whichever is more stringent (5.304.1).
- Water meters. Separate submeters or metering devices shall be installed for new buildings or additions in excess of 50,000 sf or for excess consumption where any tenant within a new building or within an addition that is project to consume more than 1,000 gal/day (5.303.1.1 and 5.303.1.2).

- Outdoor water use in rehabilitated landscape projects equal or greater than 2,500 sf. Rehabilitated landscape projects with an aggregate landscape area equal to or greater than 2,500 sf requiring a building or landscape permit (5.304.3).
- Commissioning. For new buildings 10,000 sf and over, building commissioning shall be included in the design and construction processes of the building project to verify that the building systems and components meet the owner's or owner representative's project requirements (5.410.2).

2.8.3 AIR QUALITY MANAGEMENT PLANNING

Currently, the NAAQS and CAAQS are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMPs to meet the NAAQS and CAAQs (20). AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy. A detailed discussion on the AQMP and Project consistency with the AQMP is provided in Section 3.10.

3 PROJECT AIR QUALITY IMPACT

3.1 INTRODUCTION

The Project has been evaluated to determine if it will violate an air quality standard, contribute to an existing or projected air quality violation, or determine if it will result in a cumulatively considerable net increase of a criteria pollutant for which the SCAB is non-attainment under an applicable NAAQS and CAAQS. Additionally, the Project has been evaluated to determine consistency with the applicable AQMP, exposure of sensitive receptors to substantial pollutant concentrations, and the impacts of odors. The significance of these potential impacts is described in the following section.

3.2 STANDARDS OF SIGNIFICANCE

The criteria used to determine the significance of potential Project-related air quality impacts are taken from the Initial Study Checklist in Appendix G of the State CEQA Guidelines (14 CCR §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to air quality if it would (1):

- Conflict with or obstruct implementation of the applicable air quality plan.
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard.
- Expose sensitive receptors to substantial pollutant concentrations.
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

The SCAQMD has also developed regional significance thresholds for other regulated pollutants, as summarized at Table 3-1 (21). The SCAQMD's CEQA Air Quality Significance Thresholds (April 2019) indicate that any projects in the SCAB with daily emissions that exceed any of the indicated thresholds should be considered as having an individually and cumulatively significant air quality impact.

TABLE 3-1: MAXIMUM DAILY REGIONAL EMISSIONS THRESHOLDS

Pollutant	Construction	Operations
NO _x	100 lbs./day	55 lbs./day
VOC	75 lbs./day	55 lbs./day
PM ₁₀	150 lbs./day	150 lbs./day
PM _{2.5}	55 lbs./day	55 lbs./day
SO _x	150 lbs./day	150 lbs./day
CO	550 lbs./day	550 lbs./day
Pb	3 lbs./day	3 lbs./day

lbs./day = Pounds Per Day

Source: Regional Thresholds presented in this table are based on the SCAQMD Air Quality Significance Thresholds, April 2019

3.3 CALIFORNIA EMISSIONS ESTIMATOR MODEL™ EMPLOYED TO ANALYZE AIR QUALITY

Land uses such as the Project affect air quality through construction-source and operational-source emissions.

In June, 2021 the SCAQMD in conjunction with the California Air Pollution Control Officers Association (CAPCOA) in conjunction with California air districts, released the latest version of the California Emissions Estimator Model (CalEEMod) Version 2020.40.0. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (VOCs, NO_x, SO_x, CO, PM₁₀, and PM_{2.5}) and GHG emissions from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from mitigation (22). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality emissions. CalEEMod output for construction and operational activity are provided in Appendix 3.1.

3.3.1 EMISSION FACTORS MODEL

EMISSION FACTORS MODEL

On August 19, 2019, the EPA approved the 2017 version of the EMISSIONS FACTOR model (EMFAC) web database for use in SIP and transportation conformity analyses. EMFAC2017 is a mathematical model that was developed to calculate emission rates, fuel consumption, VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (23). This AQIA utilizes EMFAC2017 emission factors in order to derive vehicle emissions associated with Project operational activities, which vary by season. Additionally, the EMFAC emission factors used in this analysis include adjustment factors for the SAFE Rule (24) (25).

3.4 CONSTRUCTION EMISSIONS

The proposed 52 multifamily residential units is anticipated to be constructed in a single phase. The Project is anticipated to have an opening year of 2023.

Construction activities associated with the Project will result in emissions of VOCs, NO_x, SO_x, CO, PM₁₀, and PM_{2.5}. Construction related emissions are expected from the following construction activities:

- Demolition
- Site Preparation
- Grading
- Building Construction
- Architectural Coating
- Paving

GRADING/EXCAVATION ACTIVITIES

Dust is typically a major concern during grading and excavation activities. Because such emissions are not amenable to collection and discharge through a controlled source, they are called “fugitive emissions”. Fugitive dust emissions rates vary as a function of many parameters (soil silt, soil moisture, wind speed, area disturbed, number of vehicles, depth of disturbance or excavation, etc.). CalEEMod was utilized to calculate fugitive dust emissions resulting from this phase of activity. This analysis assumes that earthwork activities would import 530 cubic yards during the initial grading phase. All other grading phases are expected to balance on-site and no additional export of soil will be required.

CONSTRUCTION WORKER VEHICLE TRIPS

Construction emissions for construction worker vehicles traveling to and from the Project site, as well as vendor trips (construction materials delivered to the Project site) were estimated based on information included in CalEEMod.

3.4.1 CONSTRUCTION DURATION

Construction is expected to commence in November 2022 and will continue through April 2023. The construction schedule utilized in the analysis, shown in Table 3-2, represents a “worst-case” analysis scenario should construction occur any time after the respective dates since emission factors for construction decrease as time passes and the analysis year increases due to emission regulations becoming more stringent.² The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per CEQA Guidelines. The duration of construction activities was based on Project specific data provided by the Project applicant, where available.

TABLE 3-2: CONSTRUCTION DURATION

Phase Name	Start Date	End Date	Days
Demolition	11/1/2022	11/14/2022	10
Site Preparation	11/15/2022	11/15/2022	1
Grading	11/16/2022	11/17/2022	2
Building Construction	11/18/2022	4/6/2023	100
Paving	3/31/2023	4/6/2023	5
Architectural Coating	3/31/2023	4/6/2023	5

Source: CalEEMod, Appendix 3.1.

3.4.2 CONSTRUCTION EQUIPMENT

Site specific construction fleet may vary due to specific project needs at the time of construction. The associated construction equipment was generally based on CalEEMod standard inputs. A modification to the default equipment list was made to allow the model to more accurately

² As shown in the CalEEMod User’s Guide Version 2020.4.0, Section 4.3 “Offroad Equipment” as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.

calculate fugitive dust from ground disturbance for purposes of the air quality localized significance threshold. As CalEEMod does not calculate ground disturbance for the backhoes/loaders/tractors equipment, these were replaced with crawler tractors with the same horse power and load factors of the backhoes Tractors/Loaders/Backhoes equipment. This is discussed in greater detail in Section 3.6. A detailed summary of construction equipment assumptions by phase is provided at Table 3-3.

TABLE 3-3: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Phase Name	Equipment	Amount	Hours Per Day
Demolition	Concrete/Industrial Saws	1	8
	Rubber Tired Dozers	1	8
	Tractors/Loaders/Backhoes	2	8
Site Preparation	Crawler Tractors (T/L/B)	1	8
	Graders	1	8
Grading	Crawler Tractors (T/L/B)	1	8
	Graders	1	8
	Rubber Tired Dozers	1	8
Building Construction	Cranes	1	8
	Forklifts	2	8
	Tractors/Loaders/Backhoes	2	8
Paving	Cement and Mortar Mixers	4	8
	Pavers	1	8
	Rollers	1	8
	Tractors/Loaders/Backhoes	1	8
Architectural Coating	Air Compressors	1	8

T/L/B = Tractors, Loaders, Backhoes ; E = Excavators

Source: CalEEMod, Appendix 3.1

3.4.1 CONSTRUCTION EMISSIONS SUMMARY

CalEEMod calculates maximum daily emissions for summer and winter periods. The estimated maximum daily construction emissions with compliance with Rules 403 and 1113 are summarized in Table 3-4. Detailed construction model outputs are presented in Appendix 3.1. This AQIA utilizes the “mitigated” emissions estimate in Appendix 3.1 to include the emissions reductions from compliance with SCAQMD rules. With the inclusion of these measures regional emissions would be less-than-significant, as shown at Table 3-4.

TABLE 3-4: OVERALL CONSTRUCTION EMISSIONS SUMMARY

Year	Emissions (lbs/day)					
	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Summer						
2022	1.80	22.45	12.23	0.04	4.53	2.36
2023	67.13	17.40	21.47	0.04	1.57	0.98
Maximum Daily Summer Emissions	67.13	22.45	21.47	0.04	4.53	2.36
SCAQMD Regional Threshold	75	100	550	150	150	55
Threshold Exceeded?	No	No	No	No	No	No
Winter						
2022	1.80	22.68	12.19	0.04	4.53	2.36
2023	67.14	17.42	21.26	0.04	1.57	0.98
Maximum Daily Winter Emissions	67.14	22.68	21.26	0.04	4.53	2.36
SCAQMD Regional Threshold	75	100	550	150	150	55
Threshold Exceeded?	No	No	No	No	No	No

Source: CalEEMod, Appendix 3.1.

3.5 OPERATIONAL EMISSIONS

Operational activities associated with the proposed Project will result in emissions of VOCs, NO_x, SO_x, CO, PM₁₀, and PM_{2.5}. Operational emissions would be expected from the following primary sources:

- Area Source Emissions
- Energy Source Emissions
- Mobile Source Emissions

3.5.1 AREA SOURCE EMISSIONS

ARCHITECTURAL COATINGS

Over a period of time the buildings that are part of this Project will be sources of emissions resulting from the evaporation of solvents contained in paints, varnishes, primers, and other surface coatings as part of Project maintenance. The emissions associated with architectural coatings were calculated using CalEEMod which include reductions from compliance with SCAQMD Rule 1113.

CONSUMER PRODUCTS

Consumer products include, but are not limited to detergents, cleaning compounds, polishes, personal care products, and lawn and garden products. Many of these products contain organic compounds which when released in the atmosphere can react to form ozone and other photochemically reactive pollutants. The emissions associated with use of consumer products were calculated based on defaults provided within CalEEMod.

HEARTHES

Hearths (wood stoves and fireplaces) would generate emissions from wood fuel combustion or natural gas consumption. GHG emissions from the combustion of wood or biomass are calculated and are considered biogenic emissions of CO₂. However, within the SCAQMD, per Rule 445 no wood burning devices can be installed in new construction unless natural gas service is unavailable, or the units are at an elevation of 3,000 feet or greater above mean sea level. Therefore, this analysis assumes all fireplaces would be natural gas fueled. Based on CalEEMod defaults the modeling assumes 10% of the units would not have a hearth.

LANDSCAPE MAINTENANCE EQUIPMENT

Landscape maintenance equipment would generate emissions from fuel combustion and evaporation of unburned fuel. Equipment in this category would include lawnmowers, shredders/grinders, blowers, trimmers, chain saws, and hedge trimmers used to maintain the landscaping of the Project. The emissions associated with landscape maintenance equipment were calculated based on assumptions provided in CalEEMod.

3.5.2 ENERGY SOURCE EMISSIONS**COMBUSTION EMISSIONS ASSOCIATED WITH NATURAL GAS AND ELECTRICITY**

Electricity and natural gas are used by almost every project. Criteria pollutant emissions are emitted through the generation of electricity and consumption of natural gas. However, because electrical generating facilities for the Project area are located either outside the region (state) or offset through the Regional Clean Air Incentives Market (RECLAIM), which provides pollution credits for generation within the SCAB, criteria pollutant emissions from offsite generation of electricity is generally excluded from the evaluation of significance and only natural gas use is considered. The emissions associated with natural gas use were calculated using CalEEMod.

TITLE 24 ENERGY EFFICIENCY STANDARDS

California's Energy Efficiency Standards for Residential and Nonresidential Buildings was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption. The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. Energy efficient buildings require less electricity. The 2019 version of Title 24 was adopted by the CEC and became effective on January 1, 2020 and is included in CalEEMod.

3.5.3 MOBILE SOURCE EMISSIONS

Project mobile source air quality impacts are dependent on both overall daily vehicle trip generation and the effect of the Project on peak hour traffic volumes and traffic operations in the vicinity of the Project. The Project-related operational air quality impacts are derived primarily from the 236 vehicle trips generated by the Project (26).

3.5.5 OPERATIONAL EMISSIONS SUMMARY

Operational activities for summer and winter scenarios are presented in Table 3-5. Detailed operational model outputs are presented in Appendix 3.1. Project operational-source emissions will not exceed the thresholds of significance emissions. Therefore, the Project would result in a less than significant impact to regional air quality.

TABLE 3-5: SUMMARY OPERATIONAL EMISSIONS

Source	Emissions (lbs/day)					
	VOC	NO _x	CO	SO _x	PM ₁₀	PM _{2.5}
Summer						
Area Source	1.34	0.83	4.62	0.01	0.09	0.09
Energy Source	0.02	0.17	0.07	0.00	0.01	0.01
Mobile Source Passenger Cars	0.72	0.79	7.42	0.02	1.71	0.01
Maximum Daily Summer Emissions	2.08	1.79	12.12	0.02	1.81	0.11
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	No	No	No	No	No	No
Winter						
Area Source	1.34	0.83	4.62	0.01	0.09	0.09
Energy Source	0.02	0.17	0.07	0.00	0.01	0.01
Mobile Source Passenger Cars	0.70	0.85	7.14	0.02	1.71	0.01
Maximum Daily Winter Emissions	2.05	1.84	11.84	0.02	1.81	0.11
SCAQMD Regional Threshold	55	55	550	150	150	55
Threshold Exceeded?	No	No	No	No	No	No

Source: CalEEMod, Appendix 3.1

3.6 LOCALIZED EMISSIONS

The analysis makes use of methodology included in the SCAQMD *Final Localized Significance Threshold Methodology* (LST Methodology) (27). The SCAQMD has established that impacts to air quality are significant if there is a potential to contribute or cause localized exceedances of the NAAQS and CAAQS. Collectively, these are referred to as Localized Significance Thresholds (LSTs).

The SCAQMD established LSTs in response to the SCAQMD Governing Board's Environmental Justice Initiative I-4. LSTs represent the maximum emissions from a project that will not cause or contribute to an exceedance of the most stringent applicable federal or state ambient air quality standard at the nearest residence or sensitive receptor. The SCAQMD states that lead agencies can use the LSTs as another indicator of significance in its air quality impact analyses.

LSTs were developed in response to environmental justice and health concerns raised by the public regarding exposure of individuals to criteria pollutants in local communities. To address the issue of localized significance, the SCAQMD adopted LSTs that show whether a project would cause or contribute to localized air quality impacts and thereby cause or contribute to potential

localized adverse health effects. The analysis makes use of methodology included in the *LST Methodology* (28).

APPLICABILITY OF LSTs FOR THE PROJECT

For this Project, the appropriate SRA for the LST analysis is the SCAQMD South San Gabriel Valley (SRA 11). LSTs apply to CO, NO₂, PM₁₀, and PM_{2.5}. The SCAQMD produced look-up tables for projects less than or equal to 5 acres in size.

In order to determine the appropriate methodology for determining localized impacts that could occur as a result of Project-related construction, the following process is undertaken:

- Identify the maximum daily on-site emissions that will occur during construction activity:
 - The maximum daily on-site emissions could be based on information provided by the Project Applicant; or
 - The SCAQMD's *Fact Sheet for Applying CalEEMod to Localized Significance Thresholds* and *CalEEMod User's Guide Appendix A: Calculation Details for CalEEMod* can be used to determine the maximum site acreage that is actively disturbed based on the construction equipment fleet and equipment hours as estimated in CalEEMod (29) (30).
- If the total acreage disturbed is less than or equal to 5 acres per day, then the SCAQMD's screening look-up tables are utilized to determine if a Project has the potential to result in a significant impact. The look-up tables establish a maximum daily emissions threshold in lbs/day that can be compared to CalEEMod outputs.
- If the total acreage disturbed is greater than 5 acres per day, then LST impacts may still be conservatively evaluated using the LST look-up tables for a 5-acre disturbance area. Use of the 5-acre disturbance area thresholds can be used to show that even if the daily emissions from all construction activity were emitted within a 5-acre area, and therefore concentrated over a smaller area which would result in greater site adjacent concentrations, the impacts would still be less than significant if the applicable 5-acre thresholds are utilized.
- The *LST Methodology* presents mass emission rates for each SRA, project sizes of 1, 2, and 5 acres, and nearest receptor distances of 25, 50, 100, 200, and 500 meters. For project sizes between the values given, or with receptors at distances between the given receptors, the methodology uses linear interpolation to determine the thresholds.

EMISSIONS CONSIDERED

SCAQMD's LST Methodology clearly states that "off-site mobile emissions from the Project should not be included in the emissions compared to LSTs (27)." Therefore, for purposes of the construction LST analysis, only emissions included in the CalEEMod "on-site" emissions outputs were considered.

MAXIMUM DAILY DISTURBED-ACREAGE

The "acres disturbed" for analytical purposes are based on specific equipment type for each subcategory of construction activity and the estimated maximum area a given piece of equipment can pass over in an 8-hour workday (as shown on Table 3-7). The equipment-specific grading rates are summarized in the SCAQMD's *Fact Sheet for Applying CalEEMod to Localized Significance Thresholds* and *CalEEMod User's Guide Appendix A: Calculation Details for CalEEMod*

(29) (30). It should be noted that the disturbed area per day is representative of a piece of equipment making multiple passes over the same land area. In other words, one Rubber Tired Dozer can make multiple passes over the same land area totaling 0.5 acres in a given 8-hour day. Appendix A of the CalEEMod User Manual only identifies equipment-specific grading rates for Crawler Tractors, Graders, Rubber Tired Dozers, and Scrapers; therefore, Excavators, Tractors/Loaders/Backhoes equipment that was included in site preparation or grading was replaced with crawler tractors that were adjusted to reflect the horsepower and operating profile of the Excavators, Tractors/Loaders/Backhoes equipment class.

As shown on Table 3-6, the Project's construction activities could disturb a maximum of approximately 2 acres per day for grading activities. However, based on the SCAQMD LST Methodology, construction impacts are assessed against a smaller acreage threshold would represent a more conservative assessment, thus this analysis bases the LST on a 1-acre site.

TABLE 3-6 : MAXIMUM DAILY DISTURBED-ACREAGE

Construction Phase	Equipment Type	Equipment Quantity	Acres graded per 8-hour day	Operating Hours per Day	Acres graded per day
Site Preparation	Crawler Tractors (T/L/B)	1	0.5	8	0.5
	Graders	1	0.5	8	0.5
Total acres disturbed per day during Site Preparation					1
Grading	Crawler Tractors (T/L/B)	1	0.5	8	0.5
	Graders	1	0.5	8	0.5
	Rubber Tired Dozers	1	0.5	8	0.5
Total acres disturbed per day during Grading					1.5
Acres disturbed per day used for LST Assessment					1

T/L/B = Tractors/Loaders/Backhoes; E = Excavators
Source: CalEEMod, User Manual Appendix A.

SENSITIVE RECEPTORS

Some people are especially sensitive to air pollution and are given special consideration when evaluating air quality impacts from projects. These groups of people include children, the elderly, individuals with pre-existing respiratory or cardiovascular illness, and athletes and others who engage in frequent exercise. Structures that house these persons or places where they gather to exercise are defined as "sensitive receptors". These structures typically include residences, hotels, hospitals, etc. as they are also known to be locations where an individual can remain for 24 hours. Consistent with the LST Methodology, the nearest land use where an individual could remain for 24 hours to the Project site (in this case the nearest residential land use) has been used to determine construction and operational air quality impacts for emissions of PM₁₀ and PM_{2.5}, since PM₁₀ and PM_{2.5} thresholds are based on a 24-hour averaging time. The nearest receptor used for evaluation of localized impacts of PM₁₀ and PM_{2.5} is represented by location R-5, which represents an existing single-family residence at 7014 Milton Avenue, approximately 36 feet west of the Project site. As such, the 36-foot distance will be used for evaluation of localized PM₁₀ and PM_{2.5} emission impacts.

Commercial and industrial facilities are not included in the definition of sensitive receptor because employees and patrons do not typically remain onsite for a full 24 hours but are typically onsite for eight hours or less. The LST Methodology explicitly states that “LSTs based on shorter averaging periods, such as the NO₂ and CO LSTs, could also be applied to receptors such as industrial or commercial facilities since it is reasonable to assume that a worker at these sites could be present for periods of one to eight hours (27).” For purposes of analysis, if an industrial/commercial use is located at a closer distance to the Project site than the nearest residential use, the nearest industrial/commercial use will be utilized to determine construction and operational LST air impacts for emissions of NO₂ and CO an individual could be present at these sites for periods of one to eight hours. Since the nearest residential receptor is closer than a non-residential receptor, receptor R-5, at 36-feet, is used for the evaluation of localized impacts of NO_x and CO.

Project-related Sensitive Receptors

Receptors in the Project study area are described below and are shown on Exhibit 3-A.

- R1: R1 represents the existing single-family residence at 6737 Milton Avenue, approximately 361 feet northwest of the Project site and is placed at the outdoor living areas (backyards).
- R2: R2 represents the Grace Brethren Church Whittier at 6704 Milton Avenue, approximately 571 feet north of the Project site and is placed at the nearest building façade.
- R3: R3 represents the Victory Outreach Church at 7021 Greenleaf Ave #1305, approximately 225 feet east of the Project site and is placed at the nearest building façade.
- R4: R4 represents an existing single-family residence at 7048 Milton Avenue, approximately 166 feet southwest of the Project site and is placed at the outdoor living areas (backyards).
- R5: R5 represents an existing single-family residence at 7014 Milton Avenue, approximately 36 feet west of the Project site and is placed at the outdoor living areas (backyards).

EXHIBIT 3-A: SENSITIVE RECEPTOR LOCATIONS



LEGEND:

- Site Boundary
- Receptor Locations
- Distance from receiver to Project site boundary (in feet)

CONSTRUCTION-SOURCE EMISSIONS LST ANALYSIS

Localized Thresholds for Construction Activity

SCAQMD's screening look-up tables are utilized in determining impacts. It should be noted that since the look-up tables identifies thresholds at only 1 acre, 2 acres, and 5 acres. To be conservative and consistent with SCAQMD guidance, the thresholds presented in Table 3-7 were calculated based on the Project's disturbance of 1-acres.

TABLE 3-7: MAXIMUM DAILY LOCALIZED EMISSIONS THRESHOLDS

Pollutant	Construction Localized Thresholds ¹
NO _x	83 Lbs./day
CO	673 Lbs./day
PM ₁₀	5 Lbs./day
PM _{2.5}	4 Lbs./day

¹ Based on 1 acres of disturbance at 25-meter distance for SRA 11.

Source: Localized Thresholds presented in this table are based on the SCAQMD Final LST Methodology, July 2008

Localized Construction-Source Emissions

Table 3-8 identifies the localized impacts at the nearest receptor location in the vicinity of the Project. The emissions report in Table 3-8 represents the maximum daily on-site emissions from any phase of construction (i.e. demolition, site preparation, grading and the combined phases of building construction, paving and architectural coatings). Emissions used in the LST A shown in Table 3-8 local construction emissions would be less than the applicable SCAQMD LSTs.

TABLE 3-8: LOCALIZED SIGNIFICANCE SUMMARY OF CONSTRUCTION

On-Site Site Emissions	Emissions (lbs/day)			
	NO _x	CO	PM ₁₀	PM _{2.5}
Maximum Daily Emissions	17.3	19.2	3.8	2.1
SCAQMD Localized Threshold	83	673	5	4
Threshold Exceeded?	No	No	No	No

Source: CalEEMod, Appendix 3.1.

As stated in Section ES.3, Rule 403 requires the Project to implement feasible dust control measures, including at a minimum applying water to active construction areas 3 times per day, installing track-out devices at access points, and halting operations during high wind events. Based on Project modeling, LST impacts would be less than significant.

OPERATIONAL-SOURCE EMISSIONS LST ANALYSIS

Localized Thresholds for Construction Activity

The proposed project is located on approximately 0.84 acres. As previously stated, the total development is proposed to consist of 52 multiple family residential dwelling units. According to

SCAQMD LST methodology, LSTs would apply to the operational phase of a proposed project, if the project includes stationary sources, or attracts mobile sources that may spend long periods queuing and idling at the site (e.g., transfer facilities and warehouse buildings). The proposed project does not include such uses, and thus, due to the lack of significant stationary source emissions, no LST analysis is needed for operations.

3.7 CO “HOT SPOT” ANALYSIS

As discussed below, the Project would not result in potentially adverse CO concentrations or “hot spots.” Further, detailed modeling of Project-specific CO “hot spots” is not needed to reach this conclusion. An adverse CO concentration, known as a “hot spot”, would occur if an exceedance of the state one-hour standard of 20 ppm or the eight-hour standard of 9 ppm were to occur. At the time of the 1993 Handbook, the SCAB was designated nonattainment under the CAAQS and NAAQS for CO (31).

It has long been recognized that CO hotspots are caused by vehicular emissions, primarily when idling at congested intersections. In response, vehicle emissions standards have become increasingly stringent in the last twenty years. Currently, the allowable CO emissions standard in California is a maximum of 3.4 grams/mile for passenger cars (there are requirements for certain vehicles that are more stringent). With the turnover of older vehicles, introduction of cleaner fuels, and implementation of increasingly sophisticated and efficient emissions control technologies, CO concentration in the SCAB is now designated as attainment-maintenance, as previously noted in Table 2-3.

To establish a more accurate record of baseline CO concentrations affecting the SCAB, a CO “hot spot” analysis was conducted in 2003 for four busy intersections in Los Angeles at the peak morning and afternoon time periods. This “hot spot” analysis did not predict any violation of CO standards, as shown on Table 3-9.

TABLE 3-9: CO MODEL RESULTS

Intersection Location	CO Concentrations (ppm)		
	Morning 1-hour	Afternoon 1-hour	8-hour
Wilshire Boulevard/Veteran Avenue	4.6	3.5	4.2
Sunset Boulevard/Highland Avenue	4	4.5	3.9
La Cienega Boulevard/Century Boulevard	3.7	3.1	5.8
Long Beach Boulevard/Imperial Highway	3	3.1	9.3

Source: 2003 AQMP, Appendix V: Modeling and Attainment Demonstrations

Notes: Federal 1-hour standard is 35 ppm, and the deferral 8-hour standard is 9.0 ppm.

Based on the SCAQMD’s 2003 AQMP and the 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan), peak CO concentrations in the SCAB were a result of unusual meteorological and topographical conditions and not a result of traffic volumes and congestion at a particular intersection. As evidence of this, a 9.3 ppm 8-hour CO concentration was measured at the Long Beach Boulevard and Imperial Highway intersection, which was the highest CO generating

intersection within the “hot spot” analysis. However, the SCAQMD determined that only 0.7 ppm was attributable to the traffic volumes and congestion at this intersection; the remaining 8.6 ppm were due to the ambient air measurements at the time the 2003 AQMP was prepared (32). In contrast, the ambient 8-hour CO concentration within the Project study area is estimated at 1.0 ppm—1.3 ppm (please refer to previous Table 2-3).

The traffic volumes used in the 2003 AQMP “hot spot” analysis are shown on Table 3-10. The busiest intersection evaluated for AM traffic volumes was at Wilshire Boulevard and Veteran Avenue, which had an AM traffic volume of approximately 8,062 vph (33). The 2003 AQMP calculated that the highest 1-hour concentration for the intersection of Wilshire Boulevard and Veteran Avenue was 4.6 ppm. This indicates that, should the hourly traffic volume increase four times to 32,250 vehicles per hour, CO concentrations (4.6 ppm x 4 = 18.4 ppm) would still not likely exceed the most stringent 1-hour CO standard (20.0 ppm).³

TABLE 3-10: TRAFFIC VOLUMES

Intersection Location	Total (AM/PM)				
	Wilshire Boulevard/Veteran Avenue	4,954/2,069	1,830/3,317	721/1,400	560/933
Sunset Boulevard/Highland Avenue	1,417/1,764	1,342/1,540	2,304/1,832	1,551/2,238	6,614/5,374
La Cienega Boulevard/Century Boulevard	2,540/2,243	1,890/2,728	1,384/2,029	821/1,674	6,634/8,674
Long Beach Boulevard/Imperial Highway	1,217/2,020	1,760/1,400	479/944	756/1,150	4,212/5,514

Source: 2003 AQMP

Similar considerations are also employed by other Air Districts when evaluating potential CO concentration impacts. More specifically, the Bay Area Air Quality Management District (BAAQMD) concludes that under existing and future vehicle emission rates, a given project would have to increase traffic volumes at a single intersection by more than 44,000 vehicles per hour (vph) —or 24,000 vph where vertical and/or horizontal air does not mix—in order to generate a significant CO impact (34).

The proposed Project considered herein would generate 236 net trips and would not produce the volume of traffic required to generate a CO “hot spot” either in the context of the 2003 Los Angeles hot spot study or based on representative BAAQMD CO threshold considerations. Therefore, CO “hot spots” are not an environmental impact of concern for the proposed Project. Localized air quality impacts related to mobile-source emissions would therefore be less than significant.

3.8 AIR QUALITY MANAGEMENT PLANNING

The Project site is located within the SCAB, which is characterized by relatively poor air quality. The SCAQMD has jurisdiction over an approximately 10,743 square-mile area consisting of the

³ Based on the ratio of the CO standard (20.0 ppm) and the modeled value (4.6 ppm).

four-county Basin and the Los Angeles County and Riverside County portions of what use to be referred to as the Southeast Desert Air Basin. In these areas, the SCAQMD is principally responsible for air pollution control, and works directly with the SCAG, county transportation commissions, local governments, as well as state and federal agencies to reduce emissions from stationary, mobile, and indirect sources to meet state and federal ambient air quality standards.

Currently, these state and federal air quality standards are exceeded in most parts of the SCAB. In response, the SCAQMD has adopted a series of AQMPs to meet the state and federal ambient air quality standards. AQMPs are updated regularly in order to more effectively reduce emissions, accommodate growth, and to minimize any negative fiscal impacts of air pollution control on the economy.

In March 2017, the AQMD released the Final 2016 AQMP. The 2016 AQMP continues to evaluate current integrated strategies and control measures to meet the NAAQS, as well as explore new and innovative methods to reach its goals. Some of these approaches include utilizing incentive programs, recognizing existing co-benefit programs from other sectors, and developing a strategy with fair-share reductions at the federal, state, and local levels (35). Similar to the 2012 AQMP, the 2016 AQMP incorporates scientific and technological information and planning assumptions, including the 2016 Regional Transportation Plan (RTP)/ Sustainable Communities Strategy (SCS), a planning document that supports the integration of land use and transportation to help the region meet the federal CAA requirements (36). The Project's consistency with the AQMP will be determined using the 2016 AQMP as discussed below.

Criteria for determining consistency with the AQMP are defined in Chapter 12, Section 12.2 and Section 12.3 of the SCAQMD's CEQA Air Quality Handbook (1993) (37). These indicators are discussed below:

Consistency Criterion No. 1: The proposed Project will not result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMP.

The violations that Consistency Criterion No. 1 refers to are the CAAQS and NAAQS. NAAQS and CAAQS violations would occur if regional or localized significance thresholds were exceeded.

Construction Impacts – Consistency Criterion 1

Consistency Criterion No. 1 refers to violations of the CAAQS and NAAQS. CAAQS and NAAQS violations would occur if LSTs or regional significance thresholds were exceeded. Based on the analysis herein, the Project's localized construction-source emissions would not exceed applicable regional significance thresholds or LST. As such, the Project is consistent with the AQMP with regard to regional construction-source air quality.

Operational Impacts – Consistency Criterion 1

As evaluated, the Project's localized operational-source emissions would not exceed applicable regional significance thresholds or LST. As such, the Project would result in a less than significant impact with respect to this criterion.

On the basis of the preceding discussion, and the lack of thresholds exceedances the Project is determined to be consistent with the first criterion.

Consistency Criterion No. 2: The Project will not exceed the assumptions in the AQMP based on the years of Project build-out phase.

The 2016 AQMP demonstrates that the applicable ambient air quality standards can be achieved within the timeframes required under federal law. Growth projections from local general plans adopted by cities in the SCAB are provided to the SCAG, which uses these to develop and the Regional Housing Needs Assessments (RHNA) for each jurisdiction along with regional population and VMT growth forecasts, which are then used to develop future air quality forecasts for the AQMP. Development consistent with these growth projections is considered to be consistent with the AQMP. Consistency can be evaluated using several methods, including, but not limited to, consistency with a local jurisdiction’s land use designations and consistency with SCAG’s jurisdictional growth projections, such as those in the RHNA.

Construction Impacts – Consistency Criterion 2

Peak day emissions generated by construction activities are largely independent of land use assignments, but rather are a function of development scope and maximum area of disturbance. Irrespective of the site’s land use designation, development of the site to its maximum potential would likely occur, with disturbance of the entire site occurring during construction activities.

Operational Impacts – Consistency Criterion 2

The site is located within the Uptown Center of the Uptown Whittier Specific Plan and designates the Project site as “Uptown Center”. The Uptown Center designation allows for mixed-use buildings and courtyard housing that allow for non-residential and residential uses at a lower intensity than other zones. Types of buildings include mixed-use commercial blocks, live-work, and courtyard housing with an urban landscape style. (38). As previously stated, the total development is proposed to consist of 52 multifamily residential units on 0.84 acres. Therefore, the proposed Project would not require a Specific Plan amendment to allow the proposed residential development.

The proposed Project would be consistent with City of Whittier Specific Plan land use and would not be expected to exceed regional growth projections.

On the basis of the preceding discussion, the Project is determined to be consistent with the second criterion.

AQMP Consistency Conclusion

The Project would not result in or cause NAAQS or CAAQS violations, as the Project’s construction and operational emissions would not exceed the applicable threshold of significance. The Project would also be consistent with the City of Whittier land use plans. As such, the Project is therefore considered to be consistent with the AQMP.

3.9 TOXIC AIR CONTAMINANTS

CONSTRUCTION ACTIVITY

During short-term construction activity, the Project will also result in some diesel particulate matter (DPM) which is a listed carcinogen and toxic air contaminant (TAC) in the State of California. The 2015 Office of Environmental Health Hazard Assessment (OEHHA) revised risk assessment guidelines suggest that construction projects as short as 2-6 months may warrant evaluation. Notwithstanding, based on Urban Crossroad's professional opinion and experience in preparing health risk assessments for development projects, given the distance of the Project from surrounding sensitive receptors, the dominant wind patterns blowing to the northwest away from receptors, and the annual PM_{2.5} emissions from equipment during each year of construction, any DPM generated from construction activity would result in less than significant ground level concentrations of DPM and not result in a significant health risks and no further evaluation is required.

Furthermore, many air districts throughout the state, including the SCAQMD, are currently evaluating the applicability of age sensitivity factors and have not established CEQA guidance. More specifically in their response to comments received on SCAQMD New Source Review rule, the SCAQMD explicitly states that:

"The Proposed Amended Rules are separate from the CEQA significance thresholds. The SCAQMD staff is currently evaluating how to implement the Revised OEHHA Guidelines under CEQA. The SCAQMD staff will evaluate a variety of options on how to evaluate health risks under the Revised OEHHA Guidelines under CEQA. The SCAQMD staff will conduct public workshops to gather input before bringing recommendations to the Governing Board. In the interim, staff will continue to use the previous guidelines for CEQA determinations."

OPERATION ACTIVITIES

The project proposes residential land uses, which are not known emitters of substantial TAC concentrations. The project itself does not include any significant source of TACs that would potentially affect sensitive receptors. Land uses in the vicinity of the project include commercial and residential land uses. These land uses are not typically associated with the emission of TACs. Additionally, as stated in the *Air Quality and Land Use Handbook: A Community Health Perspective* the concern for residential land uses is generally limited to siting new development within 500 feet of a freeway or urban road with 100,000 daily vehicles or constructing a new freeway or urban road with 100,000 daily vehicles within 500 feet of existing residences. The Project site is located over 1,500 feet from State Route 72 (Whittier Blvd) which has a volume of less than 50,000 daily vehicles thus exposure of persons on the Project site would be less than significant.

3.10 POTENTIAL IMPACTS TO SENSITIVE RECEPTORS

The potential impact of Project-generated air pollutant emissions at sensitive receptors has been considered under the LST analysis. Sensitive receptors can include uses such as long-term health

care facilities, rehabilitation centers, and retirement homes. Residences, schools, playgrounds, childcare centers, and athletic facilities can also be considered as sensitive receptors.

Results of the LST analysis indicate that with compliance with applicable Rules, the Project will not exceed the SCAQMD localized significance thresholds during construction. Therefore, sensitive receptors would not be exposed to substantial criteria pollutant concentrations during Project construction, and this is considered a less than significant impact.

Results of the LST analysis indicate that the Project will not exceed the SCAQMD localized significance thresholds during operational activity. Further Project traffic would not create or result in a CO “hotspot.” Therefore, sensitive receptors would not be exposed to substantial pollutant concentrations as the result of Project operations.

3.11 ODORS

The potential for the Project to generate objectionable odors has also been considered. Land uses generally associated with odor complaints include:

- Agricultural uses (livestock and farming)
- Wastewater treatment plants
- Food processing plants
- Chemical plants
- Composting operations
- Refineries
- Landfills
- Dairies
- Fiberglass molding facilities

The Project is a residential development and does not contain land uses typically associated with emitting objectionable odors. Potential odor sources associated with the proposed Project may result from construction equipment exhaust and the application of asphalt and architectural coatings during construction activities and the temporary storage of typical solid waste (refuse) associated with the proposed Project’s (long-term operational) uses. Standard construction requirements would minimize odor impacts from construction. The construction odor emissions would be temporary, short-term, and intermittent in nature and would cease upon completion of the respective phase of construction and is thus considered less than significant. It is expected that Project-generated refuse would be stored in covered containers and removed at regular intervals in compliance with the City of Whittier solid waste regulations. The proposed Project would also be required to comply with SCAQMD Rule 402 to prevent occurrences of public nuisances. Therefore, odors associated with the proposed Project construction and operations would be less than significant and no mitigation is required (39).

3.12 CUMULATIVE IMPACTS

As previously shown in Table 2-3, the CAAQS designate the Project site as nonattainment for O₃, PM₁₀, and PM_{2.5} while the NAAQS designates the Project site as nonattainment for O₃ and PM_{2.5}.

The AQMD has published a report on how to address cumulative impacts from air pollution: *White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution (40)*. In this report the AQMD clearly states (Page D-3):

...the AQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or Environmental Impact Report (EIR). The only case where the significance thresholds for project specific and cumulative impacts differ is the Hazard Index (HI) significance threshold for toxic air contaminant (TAC) emissions. The project specific (project increment) significance threshold is HI > 1.0 while the cumulative (facility-wide) is HI > 3.0. It should be noted that the HI is only one of three TAC emission significance thresholds considered (when applicable) in a CEQA analysis. The other two are the maximum individual cancer risk (MICR) and the cancer burden, both of which use the same significance thresholds (MICR of 10 in 1 million and cancer burden of 0.5) for project specific and cumulative impacts.

Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant.

Therefore, this analysis assumes that individual projects that do not generate operational or construction emissions that exceed the SCAQMD's recommended daily thresholds for project-specific impacts would also not cause a cumulatively considerable increase in emissions for those pollutants for which the Basin is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Alternatively, individual project-related construction and operational emissions that exceed SCAQMD thresholds for project-specific impacts would be considered cumulatively considerable.

Construction Impacts

The Project-specific evaluation of emissions presented in the preceding analysis demonstrates that Project construction-source air pollutant emissions would not result in exceedances of applicable thresholds. Therefore, Project construction-source emissions would be considered less than significant on a project-specific and cumulative basis.

Operational Impacts

Project operational-source emissions would not exceed applicable SCAQMD thresholds of significance. Therefore, Project operational-source emissions would be considered less than significant on a project-specific and cumulative basis.

4 REFERENCES

1. **State of California.** 2019 CEQA California Environmental Quality Act. 2019.
2. **South Coast Air Quality Management District.** RULE 403. FUGITIVE DUST. [Online] <https://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-403.pdf?sfvrsn=4>.
3. —. *Rule 445 Wood-Burning Devices.*
4. —. RULE 1113. Architectural Coatings. [Online] <http://www.aqmd.gov/docs/default-source/rule-book/reg-xi/r1113.pdf>.
5. —. Southern California Air Basins. [Online] <https://www.arb.ca.gov/msprog/onroad/porttruck/maps/scabc7map.pdf>.
6. —. *Guidance Document for Addressing Air Quality Issues in General Plans and Local Planning.* 2005.
7. **St. Croix Sensory, Inc.** *The "Gray Line" Between Odor Nuisance and Health Effects.* 2000.
8. **California Air Resources Board.** Ambient Air Quality Standards (AAQS). [Online] 2016. <http://www.arb.ca.gov/research/aaqs/aaqs2.pdf>.
9. **United State Environmental Protection Agency.** Frequent Questions about General Conformity . *EPA.* [Online] <https://www.epa.gov/general-conformity/frequent-questions-about-general-conformity#8>.
10. **South Coast Air Quality Management District.** Annual Air Quality Monitoring Network Plan. [Online] July 2018. <http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-monitoring-network-plan/annual-air-quality-monitoring-network-plan-v2.pdf?sfvrsn=2>.
11. **Air Resources Board.** State and National Ambient Air Quality Standards. [Online] https://www.arb.ca.gov/regact/2019/stateareadesignations/appc.pdf?_ga=2.169398369.1537615702.1554741141-1192937971.1505156621.
12. **District, South Coast Air Quality Management.** Air Quality Data Tables. [Online] <https://www.aqmd.gov/home/air-quality/air-quality-data-studies/historical-data-by-year>.
13. **Environmental Protection Agency.** National Ambient Air Quality Standards (NAAQS). [Online] 1990. <https://www.epa.gov/environmental-topics/air-topics>.
14. —. Air Pollution and the Clean Air Act. [Online] <http://www.epa.gov/air/caa/>.
15. **United States Environmental Protection Agency.** 1990 Clean Air Act Amendment Summary: Title I. [Online] <https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-i>.
16. —. 1990 Clean Air Act Amendment Summary: Title II. [Online] <https://www.epa.gov/clean-air-act-overview/1990-clean-air-act-amendment-summary-title-ii>.
17. **Air Resources Board.** California Ambient Air Quality Standards (CAAQS). [Online] 2009. [Cited: April 16, 2018.] <http://www.arb.ca.gov/research/aaqs/caaqs/caaqs.htm>.
18. **The California Energy Commission.** 2019 Building Energy Efficiency Standards . *California Energy Commission.* [Online] 2018. https://www.energy.ca.gov/title24/2019standards/documents/2018_Title_24_2019_Building_Standards_FAQ.pdf.
19. **Department of General Services.** Building Standards Commission. *CALGreen.* [Online] <https://codes.iccsafe.org/content/chapter/15778/>.

20. **Southern California Association of Governments.** 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy. [Online] April 2016. <http://scagrtpscs.net/Documents/2016/final/f2016RTPSCS.pdf>.
21. **South Coast Air Quality Management District (SCAQMD).** SCAQMD Air Quality Significance Thresholds. [Online] <http://www.aqmd.gov/docs/default-source/ceqa/handbook/scaqmd-air-quality-significance-thresholds.pdf?sfvrsn=2>.
22. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] June 2021. www.caleemod.com.
23. **California Department of Transportation.** EMFAC Software. [Online] <http://www.dot.ca.gov/hq/env/air/pages/emfac.htm>.
24. **California Air Resources Board.** *EMFAC Off-Model Adjustment Factors to Account for the SAFE Vehicle Rule Part One.* 2019.
25. —. *EMFAC Off-Model Adjustment Factors for Carbon Dioxide (CO2) Emissions to Account for the SAFE Vehicles Rule Part One and the Final SAFE Rule.* 2020.
26. **Urban Crossroads, Inc.** *Whittier Residential Trip Generation Assessment.* 2021.
27. **South Coast Air Quality Management District.** *Localized Significance Thresholds Methodology.* s.l. : South Coast Air Quality Management District, 2003.
28. **Lake Environmental.** US EPA Models. *Lake Environmental.* [Online] http://www.weblakes.com/download/us_epa.html.
29. **South Coast Air Quality Management District.** Fact Sheet for Applying CalEEMod to Localized Significance Thresholds. [Online] <http://www.aqmd.gov/docs/default-source/ceqa/handbook/localized-significance-thresholds/caleemod-guidance.pdf>.
30. **California Air Pollution Control Officers Association (CAPCOA).** Appendix A: Calculation Details for CalEEMod. *CalEEMod.* [Online] October 2017. http://www.aqmd.gov/docs/default-source/caleemod/02_appendix-a2016-3-2.pdf?sfvrsn=6.
31. **South Coast Air Quality Management District.** 2003 Air Quality Management Plan. [Online] 2003. <http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2003-air-quality-management-plan/2003-aqmp-appendix-v.pdf>.
32. —. 2003 Air Quality Management Plan. [Online] 2003. <https://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/2003-aqmp>.
33. —. 2003 Air Quality Management Plan. [Online] 2003. <https://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/2003-aqmp>.
34. **Bay Area Air Quality Management District.** [Online] <http://www.baaqmd.gov/>.
35. **South Coast Air Quality Management District.** Final 2016 Air Quality Management Plan (AQMP). [Online] March 2017. <http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf?sfvrsn=11>.
36. **Southern California Association of Governments.** 2016-2040 Regional Transportation Plan/Sustainable Communities Strategy. [Online] April 2016. <http://scagrtpscs.net/Documents/2016/final/f2016RTPSCS.pdf>.
37. **South Coast Air Quality Management District.** *CEQA Air Quality Handbook (1993).* 1993.
38. **City of Whittier.** *Uptown Specific Plan, Land Use Element.* City of Whittier : s.n., 2008.

39. **South Coast Air Quality Management District.** RULE 402 NUISANCE. [Online] <http://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-402.pdf>.
40. **Goss, Tracy A and Kroeger, Amy.** White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution. [Online] South Coast Air Quality Management District, 2003. http://www.aqmd.gov/rules/ciwg/final_white_paper.pdf.
41. **South Coast Association of Governments.** *Regional Housing Needs Assessment, 2021-2029.* 2021.

This page intentionally left blank.

5 CERTIFICATIONS

The contents of this air study report represent an accurate depiction of the environmental impacts associated with the proposed Whittier Residential. The information contained in this air quality impact assessment report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at hqureshi@urbanxroads.com

Haseeb Qureshi
Associate Principal
URBAN CROSSROADS, INC.
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies
California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design
University of California, Irvine • June, 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Planners
AWMA – Air and Waste Management Association
ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Planned Communities and Urban Infill – Urban Land Institute • June 2011
Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008
Principles of Ambient Air Monitoring – CARB • August 2007
AB2588 Regulatory Standards – Trinity Consultants • November 2006
Air Dispersion Modeling – Lakes Environmental • June 2006

This page intentionally left blank.

**APPENDIX 3.1:
CALEEMOD EMISSIONS MODEL OUTPUTS**

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

14480 Whittier Residential

South Coast AQMD Air District, Annual

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Apartments Mid Rise	52.00	Dwelling Unit	0.82	52,000.00	149

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.2	Precipitation Freq (Days)	31
Climate Zone	9			Operational Year	2023
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	390.98	CH4 Intensity (lb/MWhr)	0.033	N2O Intensity (lb/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

- Project Characteristics -
- Land Use - Taken from Project Description
- Construction Phase -
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - T/L/B replaced with Crawler Tractor to accurately calculate disturbance Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - T/L/B replaced with Crawler Tractor to accurately calculate disturbance
- Trips and VMT -
- Demolition - Medical Office Building is 7,172 sf

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading - 689 CY of Cut and 1219 CY of Fill with a Total import of 530 CY

Vehicle Trips - Total trips from TIA report is 236

Vehicle Emission Factors - ex

Vehicle Emission Factors -

Vehicle Emission Factors -

Woodstoves - Per SCAQMD Rule 445 no wood burning devices

Water And Wastewater - Per CalGreen title 24 2013 20% reduction over year 2000 data

Construction Off-road Equipment Mitigation - Per SCAQMD Rule 403 Water 3 x a day, install tractout devices or sweep streets daily. Rule 403 Implementaion handbook = 46% for tractout devices.

Table Name	Column Name	Default Value	New Value
tblFireplaces	NumberGas	44.20	46.80
tblFireplaces	NumberWood	2.60	0.00
tblGrading	MaterialImported	0.00	530.00
tblLandUse	LotAcreage	1.37	0.82
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	4.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	1.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	ST_TR	4.91	4.10
tblVehicleTrips	SU_TR	4.09	3.41
tblVehicleTrips	WD_TR	5.44	4.54
tblWater	IndoorWaterUseRate	3,388,009.33	2,710,407.46
tblWoodstoves	NumberCatalytic	2.60	0.00
tblWoodstoves	NumberNoncatalytic	2.60	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2022	0.0266	0.2602	0.2288	4.7000e-004	0.0201	0.0126	0.0327	6.3300e-003	0.0117	0.0180	0.0000	42.0756	42.0756	9.9000e-003	8.8000e-004	42.5845
2023	0.1992	0.3355	0.3696	7.3000e-004	0.0160	0.0160	0.0320	4.2800e-003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.3000e-004	65.2077
Maximum	0.1992	0.3355	0.3696	7.3000e-004	0.0201	0.0160	0.0327	6.3300e-003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.8000e-004	65.2077

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2022	0.0266	0.2602	0.2288	4.7000e-004	0.0130	0.0126	0.0256	3.8400e-003	0.0117	0.0155	0.0000	42.0756	42.0756	9.9000e-003	8.8000e-004	42.5844
2023	0.1992	0.3355	0.3696	7.3000e-004	0.0160	0.0160	0.0320	4.2800e-003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.3000e-004	65.2076
Maximum	0.1992	0.3355	0.3696	7.3000e-004	0.0160	0.0160	0.0320	4.2800e-003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.8000e-004	65.2076

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	19.78	0.00	11.04	23.47	0.00	6.71	0.00	0.00	0.00	0.00	0.00	0.00

Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
1	11-1-2022	1-31-2023	0.3928	0.3928
2	2-1-2023	4-30-2023	0.4208	0.4208
		Highest	0.4208	0.4208

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	0.2215	0.0159	0.5405	9.0000e-005		3.7500e-003	3.7500e-003		3.7500e-003	3.7500e-003	0.0000	12.1144	12.1144	1.0600e-003	2.1000e-004	12.2022
Energy	3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	71.7573	71.7573	3.6900e-003	1.0300e-003	72.1559
Mobile	0.1186	0.1484	1.2509	2.7800e-003	0.2887	2.0400e-003	0.2907	0.0770	1.9000e-003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254
Waste						0.0000	0.0000		0.0000	0.0000	4.8555	0.0000	4.8555	0.2870	0.0000	12.0294
Water						0.0000	0.0000		0.0000	0.0000	0.8599	10.4673	11.3272	0.0892	2.1900e-003	14.2106
Total	0.3437	0.1956	1.8047	3.0700e-003	0.2887	8.3200e-003	0.2970	0.0770	8.1800e-003	0.0852	5.7154	353.7422	359.4576	0.3974	0.0149	373.8236

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	0.2215	0.0159	0.5405	9.0000e-005		3.7500e-003	3.7500e-003		3.7500e-003	3.7500e-003	0.0000	12.1144	12.1144	1.0600e-003	2.1000e-004	12.2022
Energy	3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	71.7573	71.7573	3.6900e-003	1.0300e-003	72.1559
Mobile	0.1186	0.1484	1.2509	2.7800e-003	0.2887	2.0400e-003	0.2907	0.0770	1.9000e-003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254
Waste						0.0000	0.0000		0.0000	0.0000	4.8555	0.0000	4.8555	0.2870	0.0000	12.0294
Water						0.0000	0.0000		0.0000	0.0000	0.8599	10.4673	11.3272	0.0892	2.1900e-003	14.2106
Total	0.3437	0.1956	1.8047	3.0700e-003	0.2887	8.3200e-003	0.2970	0.0770	8.1800e-003	0.0852	5.7154	353.7422	359.4576	0.3974	0.0149	373.8236

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	11/1/2022	11/14/2022	5	10	
2	Site Preparation	Site Preparation	11/15/2022	11/15/2022	5	1	
3	Grading	Grading	11/16/2022	11/17/2022	5	2	

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4	Building Construction	Building Construction	11/18/2022	4/6/2023	5	100
5	Paving	Paving	3/31/2023	4/6/2023	5	5
6	Architectural Coating	Architectural Coating	3/31/2023	4/6/2023	5	5

Acres of Grading (Site Preparation Phase): 1

Acres of Grading (Grading Phase): 3

Acres of Paving: 0

Residential Indoor: 105,300; Residential Outdoor: 35,100; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Rubber Tired Dozers	1	8.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Site Preparation	Crawler Tractors	1	8.00	97	0.37
Site Preparation	Graders	1	8.00	187	0.41
Grading	Crawler Tractors	1	8.00	97	0.37
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Paving	Cement and Mortar Mixers	4	8.00	9	0.56
Paving	Pavers	1	8.00	130	0.42
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Architectural Coating	Air Compressors	1	8.00	78	0.48

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	4	10.00	0.00	33.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	2	5.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	3	8.00	0.00	66.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	5	37.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	7.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					3.5300e-003	0.0000	3.5300e-003	5.3000e-004	0.0000	5.3000e-004	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	7.6200e-003	0.0747	0.0586	1.1000e-004		3.7400e-003	3.7400e-003		3.5000e-003	3.5000e-003	0.0000	9.1724	9.1724	2.2400e-003	0.0000	9.2285
Total	7.6200e-003	0.0747	0.0586	1.1000e-004	3.5300e-003	3.7400e-003	7.2700e-003	5.3000e-004	3.5000e-003	4.0300e-003	0.0000	9.1724	9.1724	2.2400e-003	0.0000	9.2285

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	7.0000e-005	2.7100e-003	6.2000e-004	1.0000e-005	2.8000e-004	2.0000e-005	3.1000e-004	8.0000e-005	2.0000e-005	1.0000e-004	0.0000	0.9938	0.9938	5.0000e-005	1.6000e-004	1.0422
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.7000e-004	1.4000e-004	1.7700e-003	0.0000	5.5000e-004	0.0000	5.5000e-004	1.5000e-004	0.0000	1.5000e-004	0.0000	0.4464	0.4464	1.0000e-005	1.0000e-005	0.4503
Total	2.4000e-004	2.8500e-003	2.3900e-003	1.0000e-005	8.3000e-004	2.0000e-005	8.6000e-004	2.3000e-004	2.0000e-005	2.5000e-004	0.0000	1.4403	1.4403	6.0000e-005	1.7000e-004	1.4925

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					1.3800e-003	0.0000	1.3800e-003	2.1000e-004	0.0000	2.1000e-004	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	7.6200e-003	0.0747	0.0586	1.1000e-004		3.7400e-003	3.7400e-003		3.5000e-003	3.5000e-003	0.0000	9.1724	9.1724	2.2400e-003	0.0000	9.2285
Total	7.6200e-003	0.0747	0.0586	1.1000e-004	1.3800e-003	3.7400e-003	5.1200e-003	2.1000e-004	3.5000e-003	3.7100e-003	0.0000	9.1724	9.1724	2.2400e-003	0.0000	9.2285

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	7.0000e-005	2.7100e-003	6.2000e-004	1.0000e-005	2.8000e-004	2.0000e-005	3.1000e-004	8.0000e-005	2.0000e-005	1.0000e-004	0.0000	0.9938	0.9938	5.0000e-005	1.6000e-004	1.0422
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.7000e-004	1.4000e-004	1.7700e-003	0.0000	5.5000e-004	0.0000	5.5000e-004	1.5000e-004	0.0000	1.5000e-004	0.0000	0.4464	0.4464	1.0000e-005	1.0000e-005	0.4503
Total	2.4000e-004	2.8500e-003	2.3900e-003	1.0000e-005	8.3000e-004	2.0000e-005	8.6000e-004	2.3000e-004	2.0000e-005	2.5000e-004	0.0000	1.4403	1.4403	6.0000e-005	1.7000e-004	1.4925

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					5.3000e-004	0.0000	5.3000e-004	6.0000e-005	0.0000	6.0000e-005	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	4.0000e-004	4.2400e-003	2.1000e-003	0.0000		2.1000e-004	2.1000e-004		2.0000e-004	2.0000e-004	0.0000	0.4276	0.4276	1.4000e-004	0.0000	0.4310
Total	4.0000e-004	4.2400e-003	2.1000e-003	0.0000	5.3000e-004	2.1000e-004	7.4000e-004	6.0000e-005	2.0000e-004	2.6000e-004	0.0000	0.4276	0.4276	1.4000e-004	0.0000	0.4310

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.0000e-005	1.0000e-005	9.0000e-005	0.0000	3.0000e-005	0.0000	3.0000e-005	1.0000e-005	0.0000	1.0000e-005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225
Total	1.0000e-005	1.0000e-005	9.0000e-005	0.0000	3.0000e-005	0.0000	3.0000e-005	1.0000e-005	0.0000	1.0000e-005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					2.1000e-004	0.0000	2.1000e-004	2.0000e-005	0.0000	2.0000e-005	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	4.0000e-004	4.2400e-003	2.1000e-003	0.0000		2.1000e-004	2.1000e-004		2.0000e-004	2.0000e-004	0.0000	0.4276	0.4276	1.4000e-004	0.0000	0.4310
Total	4.0000e-004	4.2400e-003	2.1000e-003	0.0000	2.1000e-004	2.1000e-004	4.2000e-004	2.0000e-005	2.0000e-004	2.2000e-004	0.0000	0.4276	0.4276	1.4000e-004	0.0000	0.4310

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.0000e-005	1.0000e-005	9.0000e-005	0.0000	3.0000e-005	0.0000	3.0000e-005	1.0000e-005	0.0000	1.0000e-005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225
Total	1.0000e-005	1.0000e-005	9.0000e-005	0.0000	3.0000e-005	0.0000	3.0000e-005	1.0000e-005	0.0000	1.0000e-005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					7.6400e-003	0.0000	7.6400e-003	3.4900e-003	0.0000	3.4900e-003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	1.6300e-003	0.0173	7.7900e-003	2.0000e-005		8.4000e-004	8.4000e-004		7.8000e-004	7.8000e-004	0.0000	1.6054	1.6054	5.2000e-004	0.0000	1.6184
Total	1.6300e-003	0.0173	7.7900e-003	2.0000e-005	7.6400e-003	8.4000e-004	8.4800e-003	3.4900e-003	7.8000e-004	4.2700e-003	0.0000	1.6054	1.6054	5.2000e-004	0.0000	1.6184

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.4000e-004	5.4200e-003	1.2400e-003	2.0000e-005	5.7000e-004	4.0000e-005	6.1000e-004	1.6000e-004	4.0000e-005	2.0000e-004	0.0000	1.9877	1.9877	1.1000e-004	3.2000e-004	2.0844
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.0000e-005	2.0000e-005	2.8000e-004	0.0000	9.0000e-005	0.0000	9.0000e-005	2.0000e-005	0.0000	2.0000e-005	0.0000	0.0714	0.0714	0.0000	0.0000	0.0721
Total	1.7000e-004	5.4400e-003	1.5200e-003	2.0000e-005	6.6000e-004	4.0000e-005	7.0000e-004	1.8000e-004	4.0000e-005	2.2000e-004	0.0000	2.0591	2.0591	1.1000e-004	3.2000e-004	2.1564

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					2.9800e-003	0.0000	2.9800e-003	1.3600e-003	0.0000	1.3600e-003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	1.6300e-003	0.0173	7.7900e-003	2.0000e-005		8.4000e-004	8.4000e-004		7.8000e-004	7.8000e-004	0.0000	1.6054	1.6054	5.2000e-004	0.0000	1.6184
Total	1.6300e-003	0.0173	7.7900e-003	2.0000e-005	2.9800e-003	8.4000e-004	3.8200e-003	1.3600e-003	7.8000e-004	2.1400e-003	0.0000	1.6054	1.6054	5.2000e-004	0.0000	1.6184

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	1.4000e-004	5.4200e-003	1.2400e-003	2.0000e-005	5.7000e-004	4.0000e-005	6.1000e-004	1.6000e-004	4.0000e-005	2.0000e-004	0.0000	1.9877	1.9877	1.1000e-004	3.2000e-004	2.0844
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.0000e-005	2.0000e-005	2.8000e-004	0.0000	9.0000e-005	0.0000	9.0000e-005	2.0000e-005	0.0000	2.0000e-005	0.0000	0.0714	0.0714	0.0000	0.0000	0.0721
Total	1.7000e-004	5.4400e-003	1.5200e-003	2.0000e-005	6.6000e-004	4.0000e-005	7.0000e-004	1.8000e-004	4.0000e-005	2.2000e-004	0.0000	2.0591	2.0591	1.1000e-004	3.2000e-004	2.1564

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0144	0.1495	0.1345	2.3000e-004		7.6500e-003	7.6500e-003		7.0400e-003	7.0400e-003	0.0000	20.4926	20.4926	6.6300e-003	0.0000	20.6583
Total	0.0144	0.1495	0.1345	2.3000e-004		7.6500e-003	7.6500e-003		7.0400e-003	7.0400e-003	0.0000	20.4926	20.4926	6.6300e-003	0.0000	20.6583

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	1.7000e-004	4.5400e-003	1.5100e-003	2.0000e-005	5.9000e-004	5.0000e-005	6.3000e-004	1.7000e-004	4.0000e-005	2.1000e-004	0.0000	1.7356	1.7356	6.0000e-005	2.5000e-004	1.8121
Worker	1.9300e-003	1.5600e-003	0.0204	6.0000e-005	6.2900e-003	4.0000e-005	6.3300e-003	1.6700e-003	4.0000e-005	1.7100e-003	0.0000	5.1204	5.1204	1.4000e-004	1.4000e-004	5.1648
Total	2.1000e-003	6.1000e-003	0.0219	8.0000e-005	6.8800e-003	9.0000e-005	6.9600e-003	1.8400e-003	8.0000e-005	1.9200e-003	0.0000	6.8560	6.8560	2.0000e-004	3.9000e-004	6.9769

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0144	0.1495	0.1345	2.3000e-004		7.6500e-003	7.6500e-003		7.0400e-003	7.0400e-003	0.0000	20.4926	20.4926	6.6300e-003	0.0000	20.6583
Total	0.0144	0.1495	0.1345	2.3000e-004		7.6500e-003	7.6500e-003		7.0400e-003	7.0400e-003	0.0000	20.4926	20.4926	6.6300e-003	0.0000	20.6583

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	1.7000e-004	4.5400e-003	1.5100e-003	2.0000e-005	5.9000e-004	5.0000e-005	6.3000e-004	1.7000e-004	4.0000e-005	2.1000e-004	0.0000	1.7356	1.7356	6.0000e-005	2.5000e-004	1.8121
Worker	1.9300e-003	1.5600e-003	0.0204	6.0000e-005	6.2900e-003	4.0000e-005	6.3300e-003	1.6700e-003	4.0000e-005	1.7100e-003	0.0000	5.1204	5.1204	1.4000e-004	1.4000e-004	5.1648
Total	2.1000e-003	6.1000e-003	0.0219	8.0000e-005	6.8800e-003	9.0000e-005	6.9600e-003	1.8400e-003	8.0000e-005	1.9200e-003	0.0000	6.8560	6.8560	2.0000e-004	3.9000e-004	6.9769

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0296	0.3038	0.2962	5.2000e-004		0.0148	0.0148		0.0136	0.0136	0.0000	45.6334	45.6334	0.0148	0.0000	46.0023
Total	0.0296	0.3038	0.2962	5.2000e-004		0.0148	0.0148		0.0136	0.0136	0.0000	45.6334	45.6334	0.0148	0.0000	46.0023

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	2.2000e-004	7.8900e-003	3.0000e-003	4.0000e-005	1.3100e-003	4.0000e-005	1.3500e-003	3.8000e-004	4.0000e-005	4.2000e-004	0.0000	3.6840	3.6840	1.2000e-004	5.3000e-004	3.8462
Worker	3.9800e-003	3.0600e-003	0.0418	1.2000e-004	0.0140	8.0000e-005	0.0141	3.7200e-003	7.0000e-005	3.7900e-003	0.0000	11.0972	11.0972	2.8000e-004	2.8000e-004	11.1883
Total	4.2000e-003	0.0110	0.0448	1.6000e-004	0.0153	1.2000e-004	0.0154	4.1000e-003	1.1000e-004	4.2100e-003	0.0000	14.7813	14.7813	4.0000e-004	8.1000e-004	15.0345

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0296	0.3038	0.2962	5.2000e-004		0.0148	0.0148		0.0136	0.0136	0.0000	45.6333	45.6333	0.0148	0.0000	46.0023
Total	0.0296	0.3038	0.2962	5.2000e-004		0.0148	0.0148		0.0136	0.0136	0.0000	45.6333	45.6333	0.0148	0.0000	46.0023

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	2.2000e-004	7.8900e-003	3.0000e-003	4.0000e-005	1.3100e-003	4.0000e-005	1.3500e-003	3.8000e-004	4.0000e-005	4.2000e-004	0.0000	3.6840	3.6840	1.2000e-004	5.3000e-004	3.8462
Worker	3.9800e-003	3.0600e-003	0.0418	1.2000e-004	0.0140	8.0000e-005	0.0141	3.7200e-003	7.0000e-005	3.7900e-003	0.0000	11.0972	11.0972	2.8000e-004	2.8000e-004	11.1883
Total	4.2000e-003	0.0110	0.0448	1.6000e-004	0.0153	1.2000e-004	0.0154	4.1000e-003	1.1000e-004	4.2100e-003	0.0000	14.7813	14.7813	4.0000e-004	8.1000e-004	15.0345

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	1.8300e-003	0.0163	0.0205	3.0000e-005		7.8000e-004	7.8000e-004		7.2000e-004	7.2000e-004	0.0000	2.7510	2.7510	7.9000e-004	0.0000	2.7707
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	1.8300e-003	0.0163	0.0205	3.0000e-005		7.8000e-004	7.8000e-004		7.2000e-004	7.2000e-004	0.0000	2.7510	2.7510	7.9000e-004	0.0000	2.7707

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.4000e-004	1.1000e-004	1.4700e-003	0.0000	4.9000e-004	0.0000	5.0000e-004	1.3000e-004	0.0000	1.3000e-004	0.0000	0.3912	0.3912	1.0000e-005	1.0000e-005	0.3944
Total	1.4000e-004	1.1000e-004	1.4700e-003	0.0000	4.9000e-004	0.0000	5.0000e-004	1.3000e-004	0.0000	1.3000e-004	0.0000	0.3912	0.3912	1.0000e-005	1.0000e-005	0.3944

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	1.8300e-003	0.0163	0.0205	3.0000e-005		7.8000e-004	7.8000e-004		7.2000e-004	7.2000e-004	0.0000	2.7510	2.7510	7.9000e-004	0.0000	2.7707
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	1.8300e-003	0.0163	0.0205	3.0000e-005		7.8000e-004	7.8000e-004		7.2000e-004	7.2000e-004	0.0000	2.7510	2.7510	7.9000e-004	0.0000	2.7707

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.4000e-004	1.1000e-004	1.4700e-003	0.0000	4.9000e-004	0.0000	5.0000e-004	1.3000e-004	0.0000	1.3000e-004	0.0000	0.3912	0.3912	1.0000e-005	1.0000e-005	0.3944
Total	1.4000e-004	1.1000e-004	1.4700e-003	0.0000	4.9000e-004	0.0000	5.0000e-004	1.3000e-004	0.0000	1.3000e-004	0.0000	0.3912	0.3912	1.0000e-005	1.0000e-005	0.3944

3.7 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	0.1627					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	6.4000e-004	4.3400e-003	6.0400e-003	1.0000e-005		2.4000e-004	2.4000e-004		2.4000e-004	2.4000e-004	0.0000	0.8511	0.8511	5.0000e-005	0.0000	0.8524
Total	0.1633	4.3400e-003	6.0400e-003	1.0000e-005		2.4000e-004	2.4000e-004		2.4000e-004	2.4000e-004	0.0000	0.8511	0.8511	5.0000e-005	0.0000	0.8524

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.0000e-005	4.0000e-005	5.7000e-004	0.0000	1.9000e-004	0.0000	1.9000e-004	5.0000e-005	0.0000	5.0000e-005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534
Total	5.0000e-005	4.0000e-005	5.7000e-004	0.0000	1.9000e-004	0.0000	1.9000e-004	5.0000e-005	0.0000	5.0000e-005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	0.1627					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	6.4000e-004	4.3400e-003	6.0400e-003	1.0000e-005		2.4000e-004	2.4000e-004		2.4000e-004	2.4000e-004	0.0000	0.8511	0.8511	5.0000e-005	0.0000	0.8524
Total	0.1633	4.3400e-003	6.0400e-003	1.0000e-005		2.4000e-004	2.4000e-004		2.4000e-004	2.4000e-004	0.0000	0.8511	0.8511	5.0000e-005	0.0000	0.8524

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.0000e-005	4.0000e-005	5.7000e-004	0.0000	1.9000e-004	0.0000	1.9000e-004	5.0000e-005	0.0000	5.0000e-005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534
Total	5.0000e-005	4.0000e-005	5.7000e-004	0.0000	1.9000e-004	0.0000	1.9000e-004	5.0000e-005	0.0000	5.0000e-005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	0.1186	0.1484	1.2509	2.7800e-003	0.2887	2.0400e-003	0.2907	0.0770	1.9000e-003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254
Unmitigated	0.1186	0.1484	1.2509	2.7800e-003	0.2887	2.0400e-003	0.2907	0.0770	1.9000e-003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Mid Rise	236.08	213.20	177.32	766,867	766,867
Total	236.08	213.20	177.32	766,867	766,867

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Mid Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	35.4986	35.4986	3.0000e-003	3.6000e-004	35.6817
Electricity Unmitigated						0.0000	0.0000		0.0000	0.0000	0.0000	35.4986	35.4986	3.0000e-003	3.6000e-004	35.6817
NaturalGas Mitigated	3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	36.2587	36.2587	6.9000e-004	6.6000e-004	36.4742
NaturalGas Unmitigated	3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	36.2587	36.2587	6.9000e-004	6.6000e-004	36.4742

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Mid Rise	679463	3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	36.2587	36.2587	6.9000e-004	6.6000e-004	36.4742
Total		3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	36.2587	36.2587	6.9000e-004	6.6000e-004	36.4742

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Mid Rise	679463	3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	36.2587	36.2587	6.9000e-004	6.6000e-004	36.4742
Total		3.6600e-003	0.0313	0.0133	2.0000e-004		2.5300e-003	2.5300e-003		2.5300e-003	2.5300e-003	0.0000	36.2587	36.2587	6.9000e-004	6.6000e-004	36.4742

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity

Unmitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Mid Rise	200166	35.4986	3.0000e-003	3.6000e-004	35.6817
Total		35.4986	3.0000e-003	3.6000e-004	35.6817

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Mid Rise	200166	35.4986	3.0000e-003	3.6000e-004	35.6817
Total		35.4986	3.0000e-003	3.6000e-004	35.6817

6.0 Area Detail

6.1 Mitigation Measures Area

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	0.2215	0.0159	0.5405	9.0000e-005		3.7500e-003	3.7500e-003		3.7500e-003	3.7500e-003	0.0000	12.1144	12.1144	1.0600e-003	2.1000e-004	12.2022
Unmitigated	0.2215	0.0159	0.5405	9.0000e-005		3.7500e-003	3.7500e-003		3.7500e-003	3.7500e-003	0.0000	12.1144	12.1144	1.0600e-003	2.1000e-004	12.2022

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.0163					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.1879					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	1.1400e-003	9.7000e-003	4.1300e-003	6.0000e-005		7.8000e-004	7.8000e-004		7.8000e-004	7.8000e-004	0.0000	11.2384	11.2384	2.2000e-004	2.1000e-004	11.3052
Landscaping	0.0162	6.1800e-003	0.5364	3.0000e-005		2.9700e-003	2.9700e-003		2.9700e-003	2.9700e-003	0.0000	0.8760	0.8760	8.4000e-004	0.0000	0.8970
Total	0.2215	0.0159	0.5405	9.0000e-005		3.7500e-003	3.7500e-003		3.7500e-003	3.7500e-003	0.0000	12.1144	12.1144	1.0600e-003	2.1000e-004	12.2022

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.0163					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.1879					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	1.1400e-003	9.7000e-003	4.1300e-003	6.0000e-005		7.8000e-004	7.8000e-004		7.8000e-004	7.8000e-004	0.0000	11.2384	11.2384	2.2000e-004	2.1000e-004	11.3052
Landscaping	0.0162	6.1800e-003	0.5364	3.0000e-005		2.9700e-003	2.9700e-003		2.9700e-003	2.9700e-003	0.0000	0.8760	0.8760	8.4000e-004	0.0000	0.8970
Total	0.2215	0.0159	0.5405	9.0000e-005		3.7500e-003	3.7500e-003		3.7500e-003	3.7500e-003	0.0000	12.1144	12.1144	1.0600e-003	2.1000e-004	12.2022

7.0 Water Detail

7.1 Mitigation Measures Water

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	Total CO2	CH4	N2O	CO2e
Category	MT/yr			
Mitigated	11.3272	0.0892	2.1900e-003	14.2106
Unmitigated	11.3272	0.0892	2.1900e-003	14.2106

7.2 Water by Land Use

Unmitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Mid Rise	2.71041 / 2.13592	11.3272	0.0892	2.1900e-003	14.2106
Total		11.3272	0.0892	2.1900e-003	14.2106

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

7.2 Water by Land Use

Mitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Mid Rise	2.71041 / 2.13592	11.3272	0.0892	2.1900e-003	14.2106
Total		11.3272	0.0892	2.1900e-003	14.2106

8.0 Waste Detail

8.1 Mitigation Measures Waste

Category/Year

	Total CO2	CH4	N2O	CO2e
	MT/yr			
Mitigated	4.8555	0.2870	0.0000	12.0294
Unmitigated	4.8555	0.2870	0.0000	12.0294

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.2 Waste by Land Use

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Mid Rise	23.92	4.8555	0.2870	0.0000	12.0294
Total		4.8555	0.2870	0.0000	12.0294

Mitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Mid Rise	23.92	4.8555	0.2870	0.0000	12.0294
Total		4.8555	0.2870	0.0000	12.0294

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

14480 Whittier Residential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied**10.0 Stationary Equipment**

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

14480 Whittier Residential
South Coast AQMD Air District, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Apartments Mid Rise	52.00	Dwelling Unit	0.82	52,000.00	149

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.2	Precipitation Freq (Days)	31
Climate Zone	9			Operational Year	2023
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	390.98	CH4 Intensity (lb/MWhr)	0.033	N2O Intensity (lb/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

- Project Characteristics -
- Land Use - Taken from Project Description
- Construction Phase -
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - T/L/B replaced with Crawler Tractor to accurately calculate disturbance Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - T/L/B replaced with Crawler Tractor to accurately calculate disturbance
- Trips and VMT -
- Demolition - Medical Office Building is 7,172 sf

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading - 689 CY of Cut and 1219 CY of Fill with a Total import of 530 CY

Vehicle Trips - Total trips from TIA report is 236

Vehicle Emission Factors - ex

Vehicle Emission Factors -

Vehicle Emission Factors -

Woodstoves - Per SCAQMD Rule 445 no wood burning devices

Water And Wastewater - Per CalGreen title 24 2013 20% reduction over year 2000 data

Construction Off-road Equipment Mitigation - Per SCAQMD Rule 403 Water 3 x a day, install tractout devices or sweep streets daily. Rule 403 Implementaion handbook = 46% for tractout devices.

Table Name	Column Name	Default Value	New Value
tblFireplaces	NumberGas	44.20	46.80
tblFireplaces	NumberWood	2.60	0.00
tblGrading	MaterialImported	0.00	530.00
tblLandUse	LotAcreage	1.37	0.82
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	4.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	1.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	ST_TR	4.91	4.10
tblVehicleTrips	SU_TR	4.09	3.41
tblVehicleTrips	WD_TR	5.44	4.54
tblWater	IndoorWaterUseRate	3,388,009.33	2,710,407.46
tblWoodstoves	NumberCatalytic	2.60	0.00
tblWoodstoves	NumberNoncatalytic	2.60	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	1.7990	22.4482	12.2273	0.0390	8.3095	0.8864	9.1958	3.6685	0.8170	4.4855	0.0000	4,042.638 1	4,042.638 1	0.6921	0.3497	4,164.158 5
2023	67.1269	17.3956	21.4681	0.0395	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,785.122 8	3,785.122 8	0.8608	0.0310	3,815.892 0
Maximum	67.1269	22.4482	21.4681	0.0395	8.3095	0.8864	9.1958	3.6685	0.8170	4.4855	0.0000	4,042.638 1	4,042.638 1	0.8608	0.3497	4,164.158 5

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	1.7990	22.4482	12.2273	0.0390	3.6473	0.8864	4.5337	1.5417	0.8170	2.3587	0.0000	4,042.638 1	4,042.638 1	0.6921	0.3497	4,164.158 5
2023	67.1269	17.3956	21.4681	0.0395	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,785.122 8	3,785.122 8	0.8608	0.0310	3,815.892 0
Maximum	67.1269	22.4482	21.4681	0.0395	3.6473	0.8864	4.5337	1.5417	0.8170	2.3587	0.0000	4,042.638 1	4,042.638 1	0.8608	0.3497	4,164.158 5

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	51.57	0.00	43.30	55.05	0.00	38.92	0.00	0.00	0.00	0.00	0.00	0.00

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586
Energy	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Mobile	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.9519	1,714.9519	0.1028	0.0697	1,738.2794
Total	2.0799	1.7849	12.1159	0.0229	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,932.7403	2,932.7403	0.1335	0.0918	2,963.4444

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586
Energy	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Mobile	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.9519	1,714.9519	0.1028	0.0697	1,738.2794
Total	2.0799	1.7849	12.1159	0.0229	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,932.7403	2,932.7403	0.1335	0.0918	2,963.4444

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	11/1/2022	11/14/2022	5	10	
2	Site Preparation	Site Preparation	11/15/2022	11/15/2022	5	1	
3	Grading	Grading	11/16/2022	11/17/2022	5	2	
4	Building Construction	Building Construction	11/18/2022	4/6/2023	5	100	
5	Paving	Paving	3/31/2023	4/6/2023	5	5	
6	Architectural Coating	Architectural Coating	3/31/2023	4/6/2023	5	5	

Acres of Grading (Site Preparation Phase): 1

Acres of Grading (Grading Phase): 3

Acres of Paving: 0

Residential Indoor: 105,300; Residential Outdoor: 35,100; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Rubber Tired Dozers	1	8.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Site Preparation	Crawler Tractors	1	8.00	97	0.37
Site Preparation	Graders	1	8.00	187	0.41

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Crawler Tractors	1	8.00	97	0.37
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Paving	Cement and Mortar Mixers	4	8.00	9	0.56
Paving	Pavers	1	8.00	130	0.42
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Architectural Coating	Air Compressors	1	8.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	4	10.00	0.00	33.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	2	5.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	3	8.00	0.00	66.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	5	37.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	7.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.7060	0.0000	0.7060	0.1069	0.0000	0.1069			0.0000			0.0000
Off-Road	1.5242	14.9461	11.7226	0.0210		0.7478	0.7478		0.7000	0.7000		2,022.1779	2,022.1779	0.4947		2,034.5445
Total	1.5242	14.9461	11.7226	0.0210	0.7060	0.7478	1.4538	0.1069	0.7000	0.8069		2,022.1779	2,022.1779	0.4947		2,034.5445

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0139	0.5149	0.1231	2.0000e-003	0.0577	4.3000e-003	0.0620	0.0158	4.1200e-003	0.0199		219.0674	219.0674	0.0118	0.0348	229.7250
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0344	0.0242	0.3817	1.0100e-003	0.1118	6.7000e-004	0.1124	0.0296	6.1000e-004	0.0303		102.9147	102.9147	2.6700e-003	2.4500e-003	103.7106
Total	0.0484	0.5391	0.5048	3.0100e-003	0.1695	4.9700e-003	0.1745	0.0455	4.7300e-003	0.0502		321.9822	321.9822	0.0144	0.0372	333.4356

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.2753	0.0000	0.2753	0.0417	0.0000	0.0417			0.0000			0.0000
Off-Road	1.5242	14.9461	11.7226	0.0210		0.7478	0.7478		0.7000	0.7000	0.0000	2,022.1779	2,022.1779	0.4947		2,034.5445
Total	1.5242	14.9461	11.7226	0.0210	0.2753	0.7478	1.0231	0.0417	0.7000	0.7417	0.0000	2,022.1779	2,022.1779	0.4947		2,034.5445

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0139	0.5149	0.1231	2.0000e-003	0.0577	4.3000e-003	0.0620	0.0158	4.1200e-003	0.0199		219.0674	219.0674	0.0118	0.0348	229.7250
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0344	0.0242	0.3817	1.0100e-003	0.1118	6.7000e-004	0.1124	0.0296	6.1000e-004	0.0303		102.9147	102.9147	2.6700e-003	2.4500e-003	103.7106
Total	0.0484	0.5391	0.5048	3.0100e-003	0.1695	4.9700e-003	0.1745	0.0455	4.7300e-003	0.0502		321.9822	321.9822	0.0144	0.0372	333.4356

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					1.0605	0.0000	1.0605	0.1145	0.0000	0.1145			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e-003		0.4254	0.4254		0.3914	0.3914		942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e-003	1.0605	0.4254	1.4859	0.1145	0.3914	0.5059		942.5966	942.5966	0.3049		950.2180

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0172	0.0121	0.1909	5.1000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		51.4574	51.4574	1.3400e-003	1.2200e-003	51.8553
Total	0.0172	0.0121	0.1909	5.1000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		51.4574	51.4574	1.3400e-003	1.2200e-003	51.8553

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.4136	0.0000	0.4136	0.0447	0.0000	0.0447			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e-003		0.4254	0.4254		0.3914	0.3914	0.0000	942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e-003	0.4136	0.4254	0.8390	0.0447	0.3914	0.4360	0.0000	942.5966	942.5966	0.3049		950.2180

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0172	0.0121	0.1909	5.1000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		51.4574	51.4574	1.3400e-003	1.2200e-003	51.8553
Total	0.0172	0.0121	0.1909	5.1000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		51.4574	51.4574	1.3400e-003	1.2200e-003	51.8553

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					7.6428	0.0000	7.6428	3.4865	0.0000	3.4865			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754		1,769.6320	1,769.6320	0.5723		1,783.9403
Total	1.6320	17.2802	7.7882	0.0183	7.6428	0.8428	8.4856	3.4865	0.7754	4.2619		1,769.6320	1,769.6320	0.5723		1,783.9403

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1394	5.1487	1.2305	0.0200	0.5772	0.0431	0.6203	0.1582	0.0412	0.1994		2,190.6744	2,190.6744	0.1177	0.3478	2,297.2498
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0276	0.0194	0.3054	8.1000e-004	0.0894	5.3000e-004	0.0900	0.0237	4.9000e-004	0.0242		82.3318	82.3318	2.1400e-003	1.9600e-003	82.9685
Total	0.1670	5.1681	1.5358	0.0208	0.6667	0.0436	0.7102	0.1819	0.0417	0.2236		2,273.0061	2,273.0061	0.1198	0.3497	2,380.2182

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					2.9807	0.0000	2.9807	1.3598	0.0000	1.3598			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754	0.0000	1,769.6320	1,769.6320	0.5723		1,783.9403
Total	1.6320	17.2802	7.7882	0.0183	2.9807	0.8428	3.8235	1.3598	0.7754	2.1351	0.0000	1,769.6320	1,769.6320	0.5723		1,783.9403

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1394	5.1487	1.2305	0.0200	0.5772	0.0431	0.6203	0.1582	0.0412	0.1994		2,190.6744	2,190.6744	0.1177	0.3478	2,297.2498
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0276	0.0194	0.3054	8.1000e-004	0.0894	5.3000e-004	0.0900	0.0237	4.9000e-004	0.0242		82.3318	82.3318	2.1400e-003	1.9600e-003	82.9685
Total	0.1670	5.1681	1.5358	0.0208	0.6667	0.0436	0.7102	0.1819	0.0417	0.2236		2,273.0061	2,273.0061	0.1198	0.3497	2,380.2182

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.3699	1,457.3699	0.4713		1,469.1535
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.3699	1,457.3699	0.4713		1,469.1535

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0109	0.2792	0.0957	1.1500e-003	0.0384	2.9200e-003	0.0413	0.0111	2.7900e-003	0.0139		123.4016	123.4016	4.1400e-003	0.0179	128.8364
Worker	0.1274	0.0897	1.4123	3.7400e-003	0.4136	2.4700e-003	0.4160	0.1097	2.2800e-003	0.1120		380.7845	380.7845	9.8900e-003	9.0500e-003	383.7291
Total	0.1384	0.3688	1.5080	4.8900e-003	0.4520	5.3900e-003	0.4574	0.1207	5.0700e-003	0.1258		504.1861	504.1861	0.0140	0.0269	512.5655

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542	0.0000	1,457.3699	1,457.3699	0.4713		1,469.1535
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542	0.0000	1,457.3699	1,457.3699	0.4713		1,469.1535

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0109	0.2792	0.0957	1.1500e-003	0.0384	2.9200e-003	0.0413	0.0111	2.7900e-003	0.0139		123.4016	123.4016	4.1400e-003	0.0179	128.8364
Worker	0.1274	0.0897	1.4123	3.7400e-003	0.4136	2.4700e-003	0.4160	0.1097	2.2800e-003	0.1120		380.7845	380.7845	9.8900e-003	9.0500e-003	383.7291
Total	0.1384	0.3688	1.5080	4.8900e-003	0.4520	5.3900e-003	0.4574	0.1207	5.0700e-003	0.1258		504.1861	504.1861	0.0140	0.0269	512.5655

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.0339	1,458.0339	0.4716		1,469.8228
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.0339	1,458.0339	0.4716		1,469.8228

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.6300e-003	0.2178	0.0858	1.0900e-003	0.0384	1.2700e-003	0.0397	0.0111	1.2100e-003	0.0123		117.6186	117.6186	3.9500e-003	0.0170	122.7916
Worker	0.1182	0.0793	1.3014	3.6200e-003	0.4136	2.3300e-003	0.4159	0.1097	2.1400e-003	0.1118		370.7397	370.7397	8.8800e-003	8.3600e-003	373.4537
Total	0.1248	0.2971	1.3872	4.7100e-003	0.4520	3.6000e-003	0.4556	0.1207	3.3500e-003	0.1241		488.3582	488.3582	0.0128	0.0254	496.2453

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952	0.0000	1,458.0339	1,458.0339	0.4716		1,469.8228
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952	0.0000	1,458.0339	1,458.0339	0.4716		1,469.8228

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.6300e-003	0.2178	0.0858	1.0900e-003	0.0384	1.2700e-003	0.0397	0.0111	1.2100e-003	0.0123		117.6186	117.6186	3.9500e-003	0.0170	122.7916
Worker	0.1182	0.0793	1.3014	3.6200e-003	0.4136	2.3300e-003	0.4159	0.1097	2.1400e-003	0.1118		370.7397	370.7397	8.8800e-003	8.3600e-003	373.4537
Total	0.1248	0.2971	1.3872	4.7100e-003	0.4520	3.6000e-003	0.4556	0.1207	3.3500e-003	0.1241		488.3582	488.3582	0.0128	0.0254	496.2453

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.9668	1,212.9668	0.3479		1,221.6649
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.9668	1,212.9668	0.3479		1,221.6649

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0575	0.0386	0.6331	1.7600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		180.3599	180.3599	4.3200e-003	4.0700e-003	181.6802
Total	0.0575	0.0386	0.6331	1.7600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		180.3599	180.3599	4.3200e-003	4.0700e-003	181.6802

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.9668	1,212.9668	0.3479		1,221.6649
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.9668	1,212.9668	0.3479		1,221.6649

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0575	0.0386	0.6331	1.7600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		180.3599	180.3599	4.3200e-003	4.0700e-003	181.6802
Total	0.0575	0.0386	0.6331	1.7600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		180.3599	180.3599	4.3200e-003	4.0700e-003	181.6802

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253
Total	65.3310	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0224	0.0150	0.2462	6.9000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		70.1399	70.1399	1.6800e-003	1.5800e-003	70.6534
Total	0.0224	0.0150	0.2462	6.9000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		70.1399	70.1399	1.6800e-003	1.5800e-003	70.6534

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253
Total	65.3310	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0224	0.0150	0.2462	6.9000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		70.1399	70.1399	1.6800e-003	1.5800e-003	70.6534
Total	0.0224	0.0150	0.2462	6.9000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		70.1399	70.1399	1.6800e-003	1.5800e-003	70.6534

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.9519	1,714.9519	0.1028	0.0697	1,738.2794
Unmitigated	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.9519	1,714.9519	0.1028	0.0697	1,738.2794

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Mid Rise	236.08	213.20	177.32	766,867	766,867
Total	236.08	213.20	177.32	766,867	766,867

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Mid Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
NaturalGas Unmitigated	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Mid Rise	1861.54	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Mid Rise	1.86154	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586
Unmitigated	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.0891					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.0296					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e-003		0.0628	0.0628		0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e-004		0.0238	0.0238		0.0238	0.0238		7.7247	7.7247	7.4300e-003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.0891					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.0296					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e-003		0.0628	0.0628		0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e-004		0.0238	0.0238		0.0238	0.0238		7.7247	7.7247	7.4300e-003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586

7.0 Water Detail

7.1 Mitigation Measures Water

14480 Whittier Residential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

14480 Whittier Residential
South Coast AQMD Air District, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Apartments Mid Rise	52.00	Dwelling Unit	0.82	52,000.00	149

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.2	Precipitation Freq (Days)	31
Climate Zone	9			Operational Year	2023
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	390.98	CH4 Intensity (lb/MWhr)	0.033	N2O Intensity (lb/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

- Project Characteristics -
- Land Use - Taken from Project Description
- Construction Phase -
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - T/L/B replaced with Crawler Tractor to accurately calculate disturbance
Standard 8-hour work day
- Off-road Equipment - Standard 8-hour work day
- Off-road Equipment - T/L/B replaced with Crawler Tractor to accurately calculate disturbance
- Trips and VMT -
- Demolition - Medical Office Building is 7,172 sf

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading - 689 CY of Cut and 1219 CY of Fill with a Total import of 530 CY

Vehicle Trips - Total trips from TIA report is 236

Vehicle Emission Factors - ex

Vehicle Emission Factors -

Vehicle Emission Factors -

Woodstoves - Per SCAQMD Rule 445 no wood burning devices

Water And Wastewater - Per CalGreen title 24 2013 20% reduction over year 2000 data

Construction Off-road Equipment Mitigation - Per SCAQMD Rule 403 Water 3 x a day, install tractout devices or sweep streets daily. Rule 403 Implementaion handbook = 46% for tractout devices.

Table Name	Column Name	Default Value	New Value
tblFireplaces	NumberGas	44.20	46.80
tblFireplaces	NumberWood	2.60	0.00
tblGrading	MaterialImported	0.00	530.00
tblLandUse	LotAcreage	1.37	0.82
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	4.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	1.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	ST_TR	4.91	4.10
tblVehicleTrips	SU_TR	4.09	3.41
tblVehicleTrips	WD_TR	5.44	4.54
tblWater	IndoorWaterUseRate	3,388,009.33	2,710,407.46
tblWoodstoves	NumberCatalytic	2.60	0.00
tblWoodstoves	NumberNoncatalytic	2.60	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	1.7966	22.6763	12.1930	0.0390	8.3095	0.8864	9.1959	3.6685	0.8171	4.4856	0.0000	4,038.657 7	4,038.657 7	0.6920	0.3500	4,160.249 8
2023	67.1376	17.4188	21.2636	0.0391	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,749.282 3	3,749.282 3	0.8609	0.0319	3,780.323 3
Maximum	67.1376	22.6763	21.2636	0.0391	8.3095	0.8864	9.1959	3.6685	0.8171	4.4856	0.0000	4,038.657 7	4,038.657 7	0.8609	0.3500	4,160.249 8

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day										lb/day					
2022	1.7966	22.6763	12.1930	0.0390	3.6473	0.8864	4.5338	1.5417	0.8171	2.3588	0.0000	4,038.657 7	4,038.657 7	0.6920	0.3500	4,160.249 8
2023	67.1376	17.4188	21.2636	0.0391	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,749.282 3	3,749.282 3	0.8609	0.0319	3,780.323 3
Maximum	67.1376	22.6763	21.2636	0.0391	3.6473	0.8864	4.5338	1.5417	0.8171	2.3588	0.0000	4,038.657 7	4,038.657 7	0.8609	0.3500	4,160.249 8

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	51.57	0.00	43.30	55.05	0.00	38.92	0.00	0.00	0.00	0.00	0.00	0.00

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586
Energy	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Mobile	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.9641	1,634.9641	0.1057	0.0724	1,659.1929
Total	2.0543	1.8440	11.8372	0.0222	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,852.7526	2,852.7526	0.1363	0.0946	2,884.3578

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Area	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586
Energy	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Mobile	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.9641	1,634.9641	0.1057	0.0724	1,659.1929
Total	2.0543	1.8440	11.8372	0.0222	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,852.7526	2,852.7526	0.1363	0.0946	2,884.3578

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	11/1/2022	11/14/2022	5	10	
2	Site Preparation	Site Preparation	11/15/2022	11/15/2022	5	1	
3	Grading	Grading	11/16/2022	11/17/2022	5	2	
4	Building Construction	Building Construction	11/18/2022	4/6/2023	5	100	
5	Paving	Paving	3/31/2023	4/6/2023	5	5	
6	Architectural Coating	Architectural Coating	3/31/2023	4/6/2023	5	5	

Acres of Grading (Site Preparation Phase): 1

Acres of Grading (Grading Phase): 3

Acres of Paving: 0

Residential Indoor: 105,300; Residential Outdoor: 35,100; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Rubber Tired Dozers	1	8.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Site Preparation	Crawler Tractors	1	8.00	97	0.37
Site Preparation	Graders	1	8.00	187	0.41

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Crawler Tractors	1	8.00	97	0.37
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Paving	Cement and Mortar Mixers	4	8.00	9	0.56
Paving	Pavers	1	8.00	130	0.42
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Architectural Coating	Air Compressors	1	8.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	4	10.00	0.00	33.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	2	5.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	3	8.00	0.00	66.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	5	37.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	7.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.7060	0.0000	0.7060	0.1069	0.0000	0.1069			0.0000			0.0000
Off-Road	1.5242	14.9461	11.7226	0.0210		0.7478	0.7478		0.7000	0.7000		2,022.1779	2,022.1779	0.4947		2,034.5445
Total	1.5242	14.9461	11.7226	0.0210	0.7060	0.7478	1.4538	0.1069	0.7000	0.8069		2,022.1779	2,022.1779	0.4947		2,034.5445

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0136	0.5375	0.1254	2.0000e-003	0.0577	4.3100e-003	0.0620	0.0158	4.1300e-003	0.0200		219.1481	219.1481	0.0118	0.0348	229.8092
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0362	0.0265	0.3451	9.5000e-004	0.1118	6.7000e-004	0.1124	0.0296	6.1000e-004	0.0303		96.9305	96.9305	2.7000e-003	2.6000e-003	97.7717
Total	0.0498	0.5640	0.4704	2.9500e-003	0.1695	4.9800e-003	0.1745	0.0455	4.7400e-003	0.0502		316.0787	316.0787	0.0145	0.0374	327.5809

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.2753	0.0000	0.2753	0.0417	0.0000	0.0417			0.0000			0.0000
Off-Road	1.5242	14.9461	11.7226	0.0210		0.7478	0.7478		0.7000	0.7000	0.0000	2,022.1779	2,022.1779	0.4947		2,034.5445
Total	1.5242	14.9461	11.7226	0.0210	0.2753	0.7478	1.0231	0.0417	0.7000	0.7417	0.0000	2,022.1779	2,022.1779	0.4947		2,034.5445

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0136	0.5375	0.1254	2.0000e-003	0.0577	4.3100e-003	0.0620	0.0158	4.1300e-003	0.0200		219.1481	219.1481	0.0118	0.0348	229.8092
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0362	0.0265	0.3451	9.5000e-004	0.1118	6.7000e-004	0.1124	0.0296	6.1000e-004	0.0303		96.9305	96.9305	2.7000e-003	2.6000e-003	97.7717
Total	0.0498	0.5640	0.4704	2.9500e-003	0.1695	4.9800e-003	0.1745	0.0455	4.7400e-003	0.0502		316.0787	316.0787	0.0145	0.0374	327.5809

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					1.0605	0.0000	1.0605	0.1145	0.0000	0.1145			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e-003		0.4254	0.4254		0.3914	0.3914		942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e-003	1.0605	0.4254	1.4859	0.1145	0.3914	0.5059		942.5966	942.5966	0.3049		950.2180

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0181	0.0133	0.1725	4.8000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		48.4653	48.4653	1.3500e-003	1.3000e-003	48.8859
Total	0.0181	0.0133	0.1725	4.8000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		48.4653	48.4653	1.3500e-003	1.3000e-003	48.8859

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					0.4136	0.0000	0.4136	0.0447	0.0000	0.0447			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e-003		0.4254	0.4254		0.3914	0.3914	0.0000	942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e-003	0.4136	0.4254	0.8390	0.0447	0.3914	0.4360	0.0000	942.5966	942.5966	0.3049		950.2180

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0181	0.0133	0.1725	4.8000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		48.4653	48.4653	1.3500e-003	1.3000e-003	48.8859
Total	0.0181	0.0133	0.1725	4.8000e-004	0.0559	3.3000e-004	0.0562	0.0148	3.1000e-004	0.0151		48.4653	48.4653	1.3500e-003	1.3000e-003	48.8859

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					7.6428	0.0000	7.6428	3.4865	0.0000	3.4865			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754		1,769.6320	1,769.6320	0.5723		1,783.9403
Total	1.6320	17.2802	7.7882	0.0183	7.6428	0.8428	8.4856	3.4865	0.7754	4.2619		1,769.6320	1,769.6320	0.5723		1,783.9403

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1356	5.3749	1.2536	0.0200	0.5772	0.0431	0.6204	0.1582	0.0413	0.1995		2,191.4813	2,191.4813	0.1175	0.3479	2,298.0920
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0290	0.0212	0.2761	7.6000e-004	0.0894	5.3000e-004	0.0900	0.0237	4.9000e-004	0.0242		77.5444	77.5444	2.1600e-003	2.0800e-003	78.2174
Total	0.1646	5.3961	1.5296	0.0207	0.6667	0.0437	0.7103	0.1819	0.0418	0.2237		2,269.0257	2,269.0257	0.1196	0.3500	2,376.3094

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Fugitive Dust					2.9807	0.0000	2.9807	1.3598	0.0000	1.3598			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754	0.0000	1,769.6320	1,769.6320	0.5723		1,783.9403
Total	1.6320	17.2802	7.7882	0.0183	2.9807	0.8428	3.8235	1.3598	0.7754	2.1351	0.0000	1,769.6320	1,769.6320	0.5723		1,783.9403

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.1356	5.3749	1.2536	0.0200	0.5772	0.0431	0.6204	0.1582	0.0413	0.1995		2,191.4813	2,191.4813	0.1175	0.3479	2,298.0920
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0290	0.0212	0.2761	7.6000e-004	0.0894	5.3000e-004	0.0900	0.0237	4.9000e-004	0.0242		77.5444	77.5444	2.1600e-003	2.0800e-003	78.2174
Total	0.1646	5.3961	1.5296	0.0207	0.6667	0.0437	0.7103	0.1819	0.0418	0.2237		2,269.0257	2,269.0257	0.1196	0.3500	2,376.3094

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.3699	1,457.3699	0.4713		1,469.1535
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.3699	1,457.3699	0.4713		1,469.1535

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0107	0.2914	0.0992	1.1500e-003	0.0384	2.9300e-003	0.0414	0.0111	2.8000e-003	0.0139		123.4634	123.4634	4.1200e-003	0.0179	128.9048
Worker	0.1341	0.0981	1.2767	3.5300e-003	0.4136	2.4700e-003	0.4160	0.1097	2.2800e-003	0.1120		358.6430	358.6430	0.0100	9.6000e-003	361.7554
Total	0.1448	0.3894	1.3759	4.6800e-003	0.4520	5.4000e-003	0.4574	0.1207	5.0800e-003	0.1258		482.1064	482.1064	0.0141	0.0275	490.6602

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542	0.0000	1,457.3699	1,457.3699	0.4713		1,469.1535
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542	0.0000	1,457.3699	1,457.3699	0.4713		1,469.1535

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0107	0.2914	0.0992	1.1500e-003	0.0384	2.9300e-003	0.0414	0.0111	2.8000e-003	0.0139		123.4634	123.4634	4.1200e-003	0.0179	128.9048
Worker	0.1341	0.0981	1.2767	3.5300e-003	0.4136	2.4700e-003	0.4160	0.1097	2.2800e-003	0.1120		358.6430	358.6430	0.0100	9.6000e-003	361.7554
Total	0.1448	0.3894	1.3759	4.6800e-003	0.4520	5.4000e-003	0.4574	0.1207	5.0800e-003	0.1258		482.1064	482.1064	0.0141	0.0275	490.6602

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.0339	1,458.0339	0.4716		1,469.8228
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.0339	1,458.0339	0.4716		1,469.8228

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.3500e-003	0.2286	0.0885	1.0900e-003	0.0384	1.2700e-003	0.0397	0.0111	1.2200e-003	0.0123		117.8312	117.8312	3.9300e-003	0.0171	123.0174
Worker	0.1248	0.0868	1.1777	3.4100e-003	0.4136	2.3300e-003	0.4159	0.1097	2.1400e-003	0.1118		349.2241	349.2241	9.0000e-003	8.8700e-003	352.0925
Total	0.1311	0.3154	1.2663	4.5000e-003	0.4520	3.6000e-003	0.4556	0.1207	3.3600e-003	0.1241		467.0553	467.0553	0.0129	0.0259	475.1099

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952	0.0000	1,458.0339	1,458.0339	0.4716		1,469.8228
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952	0.0000	1,458.0339	1,458.0339	0.4716		1,469.8228

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.3500e-003	0.2286	0.0885	1.0900e-003	0.0384	1.2700e-003	0.0397	0.0111	1.2200e-003	0.0123		117.8312	117.8312	3.9300e-003	0.0171	123.0174
Worker	0.1248	0.0868	1.1777	3.4100e-003	0.4136	2.3300e-003	0.4159	0.1097	2.1400e-003	0.1118		349.2241	349.2241	9.0000e-003	8.8700e-003	352.0925
Total	0.1311	0.3154	1.2663	4.5000e-003	0.4520	3.6000e-003	0.4556	0.1207	3.3600e-003	0.1241		467.0553	467.0553	0.0129	0.0259	475.1099

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.9668	1,212.9668	0.3479		1,221.6649
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.9668	1,212.9668	0.3479		1,221.6649

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0607	0.0422	0.5730	1.6600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		169.8928	169.8928	4.3800e-003	4.3200e-003	171.2882
Total	0.0607	0.0422	0.5730	1.6600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		169.8928	169.8928	4.3800e-003	4.3200e-003	171.2882

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.9668	1,212.9668	0.3479		1,221.6649
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.9668	1,212.9668	0.3479		1,221.6649

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0607	0.0422	0.5730	1.6600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		169.8928	169.8928	4.3800e-003	4.3200e-003	171.2882
Total	0.0607	0.0422	0.5730	1.6600e-003	0.2012	1.1300e-003	0.2023	0.0534	1.0400e-003	0.0544		169.8928	169.8928	4.3800e-003	4.3200e-003	171.2882

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253
Total	65.3310	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0236	0.0164	0.2228	6.5000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		66.0694	66.0694	1.7000e-003	1.6800e-003	66.6121
Total	0.0236	0.0164	0.2228	6.5000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		66.0694	66.0694	1.7000e-003	1.6800e-003	66.6121

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253
Total	65.3310	1.7373	2.4148	3.9600e-003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0236	0.0164	0.2228	6.5000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		66.0694	66.0694	1.7000e-003	1.6800e-003	66.6121
Total	0.0236	0.0164	0.2228	6.5000e-004	0.0782	4.4000e-004	0.0787	0.0208	4.1000e-004	0.0212		66.0694	66.0694	1.7000e-003	1.6800e-003	66.6121

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.964 1	1,634.964 1	0.1057	0.0724	1,659.192 9
Unmitigated	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.964 1	1,634.964 1	0.1057	0.0724	1,659.192 9

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Mid Rise	236.08	213.20	177.32	766,867	766,867
Total	236.08	213.20	177.32	766,867	766,867

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Mid Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
NaturalGas Mitigated	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
NaturalGas Unmitigated	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Mid Rise	1861.54	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - Natural Gas

Mitigated

	Natural Gas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	lb/day										lb/day					
Apartments Mid Rise	1.86154	0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e-003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e-003	4.0200e-003	220.3063

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	lb/day										lb/day					
Mitigated	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586
Unmitigated	1.3389	0.8258	4.6214	5.1800e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.0891					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.0296					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e-003		0.0628	0.0628		0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e-004		0.0238	0.0238		0.0238	0.0238		7.7247	7.7247	7.4300e-003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	lb/day										lb/day					
Architectural Coating	0.0891					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Consumer Products	1.0296					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e-003		0.0628	0.0628		0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e-004		0.0238	0.0238		0.0238	0.0238		7.7247	7.7247	7.4300e-003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e-003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.8586

7.0 Water Detail

7.1 Mitigation Measures Water

14480 Whittier Residential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

This page intentionally left blank