

APPENDIX 6



Murrieta Apartments

ENERGY ANALYSIS

CITY OF MURRIETA

Prepared by:

William Maddux
bmaddux@urbanxroads.com
(619) 778-1971

AUGUST 10, 2021

14027-02 EA Report.docx

TABLE OF CONTENTS

TABLE OF CONTENTS	I
APPENDICES	II
LIST OF EXHIBITS	II
LIST OF TABLES	II
LIST OF ABBREVIATED TERMS	III
EXECUTIVE SUMMARY	2
ES.1 Summary of Findings.....	2
ES.2 Project Requirements	2
1 INTRODUCTION	4
1.1 Site Location.....	4
1.2 Project Description.....	4
2 EXISTING CONDITIONS	8
2.1 Overview	8
2.2 Electricity.....	10
2.3 Natural Gas	11
2.4 Transportation Energy Resources	15
3 REGULATORY BACKGROUND	16
3.1 Federal Regulations.....	16
3.2 California Regulations	16
4 PROJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES	20
4.1 Evaluation Criteria.....	20
4.2 Methodology.....	20
4.3 Construction Energy Demands	21
4.4 Operational Energy Demands	29
4.5 Summary	31
4.6 Energy Findings and Recommendations.....	33
5 REFERENCES	36
6 CERTIFICATIONS	38

APPENDICES

- APPENDIX 4.1: CALEEMOD PROJECT ANNUAL EMISSIONS MODEL OUTPUTS
- APPENDIX 4.2: EMFAC2017

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP 5

EXHIBIT 1-B: SITE PLAN..... 6

LIST OF TABLES

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS 2

TABLE 2-1: TOTAL ELECTRICITY SYSTEM POWER (CALIFORNIA 2020) 8

TABLE 2-2: SCE 2019 POWER CONTENT MIX 11

TABLE 4-1: CONSTRUCTION DURATION 21

TABLE 4-2: CONSTRUCTION POWER COST 22

TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE 22

TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS..... 23

TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES 24

TABLE 4-6: CONSTRUCTION TRIPS AND VMT 25

TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES (LDA)..... 26

TABLE 4-8: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES (LDT1) 26

TABLE 4-9: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES (LDT2) 27

TABLE 4-10: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES (MHDT)..... 27

TABLE 4-11: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES (HHDT)..... 28

TABLE 4-13: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION 30

TABLE 4-14: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY 31

LIST OF ABBREVIATED TERMS

%	Percent
(1)	Reference
AQIA	Murrieta Apartments Air Quality Impact Analysis
BTU	British Thermal Unit
CCR	California Code of Regulations
CEC	California Energy Commission
CEQA	California Environmental Quality Act
CPUC	California Public Utilities Commission
CTA	core transport agents
EIA	Energy Information Administration
EMFAC	EMissions FACtor model
EPA	Environmental Protection Agency
FERC	Federal Energy Regulatory Commission
GHG	greenhouse gas
IEPR	Integrated Energy Policy Report
ISO	Independent Service Operator
ISTEA	Intermodal Surface Transportation Efficiency Act of 1991
LDA	light-duty-auto vehicles
MHDT	medium-heavy duty trucks
MMcfd	million cubic feet per day
MPOs	Metropolitan Planning Organizations
Project	Murrieta Apartments Project
PV	photovoltaic
RPS	California’s Renewable Portfolio Standard
SB	Senate Bill
SCE	Southern California Edison
TEA-21	The Transportation Equity Act for the 21st Century
U.S.	United States
VMT	vehicle miles traveled

This page intentionally left blank.

EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this *Murrieta Apartments Energy Analysis* is summarized below based on the significance criteria in Section 3 of this report consistent with Appendix G of the 2019 California Environmental Quality Act (CEQA) Statute and Guidelines (*CEQA Guidelines*) (1). Table ES-1 shows the findings of significance for potential energy impacts under CEQA.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Analysis	Report Section	Significance Findings	
		Unmitigated	Mitigated
Energy Impact #1: Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?	4.6	<i>Less Than Significant</i>	<i>n/a</i>
Energy Impact #2: Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?	4.6	<i>Less Than Significant</i>	<i>n/a</i>

ES.2 PROJECT REQUIREMENTS

The Project would be required to comply with regulations imposed by the federal and state agencies that regulate energy use and consumption through various means and programs. Those that are directly and indirectly applicable to the Project and that would assist in the reduction of energy usage include:

Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)

The Transportation Equity Act for the 21st Century (TEA-21)

Integrated Energy Policy Report (IEPR)

State of California Energy Plan

California Code Title 24, Part 6, Energy Efficiency Standards – Energy Code

California Code Title 24, Part 11, Green Building Standards - CalGreen

AB 1493 Pavley Regulations and Fuel Efficiency Standards

California’s Renewable Portfolio Standard (RPS)

Clean Energy and Pollution Reduction Act of 2015 (SB 350)

This page intentionally left blank.

1 INTRODUCTION

This report presents the results of the energy analysis prepared by Urban Crossroads, Inc., for the proposed Murrieta Apartments Project (Project). The purpose of this report is to quantify anticipated energy demand associated with construction and operation of the proposed Project, determine if the usage of the energy is inefficient, atypical, or wasteful for the land use type.

1.1 SITE LOCATION

This report presents the results of the traffic analysis (TA) for the proposed Murrieta Apartments (“Project”), which is located at the southeast corner of Whitewood Road and Clinton Keith Road in the City of Murrieta. The Project’s location in relation to the surrounding area is shown on Exhibit 1-A.

The Project site is generally surrounded by residential land uses, educational land uses, and open space, with the nearest residential land use is northwest of the Project site and the Vista Murrieta High School is located the west of the Project site. The Project site is designated Multiple-Family Residential on the City of Murrieta General Plan Land Use Map.

1.2 PROJECT DESCRIPTION

Exhibit 1-B illustrates the preliminary Project site plan. The Project is proposed to consist of 153 condominium dwelling units and 330 apartments dwelling units, 3.5 acres landscaped area, and associated parking. It is anticipated that the Project would be developed in a single phase with an anticipated Opening Year of 2023. The proposed Project is anticipated to generate 2,916 two-way trips per day (2).

EXHIBIT 1-A: LOCATION MAP

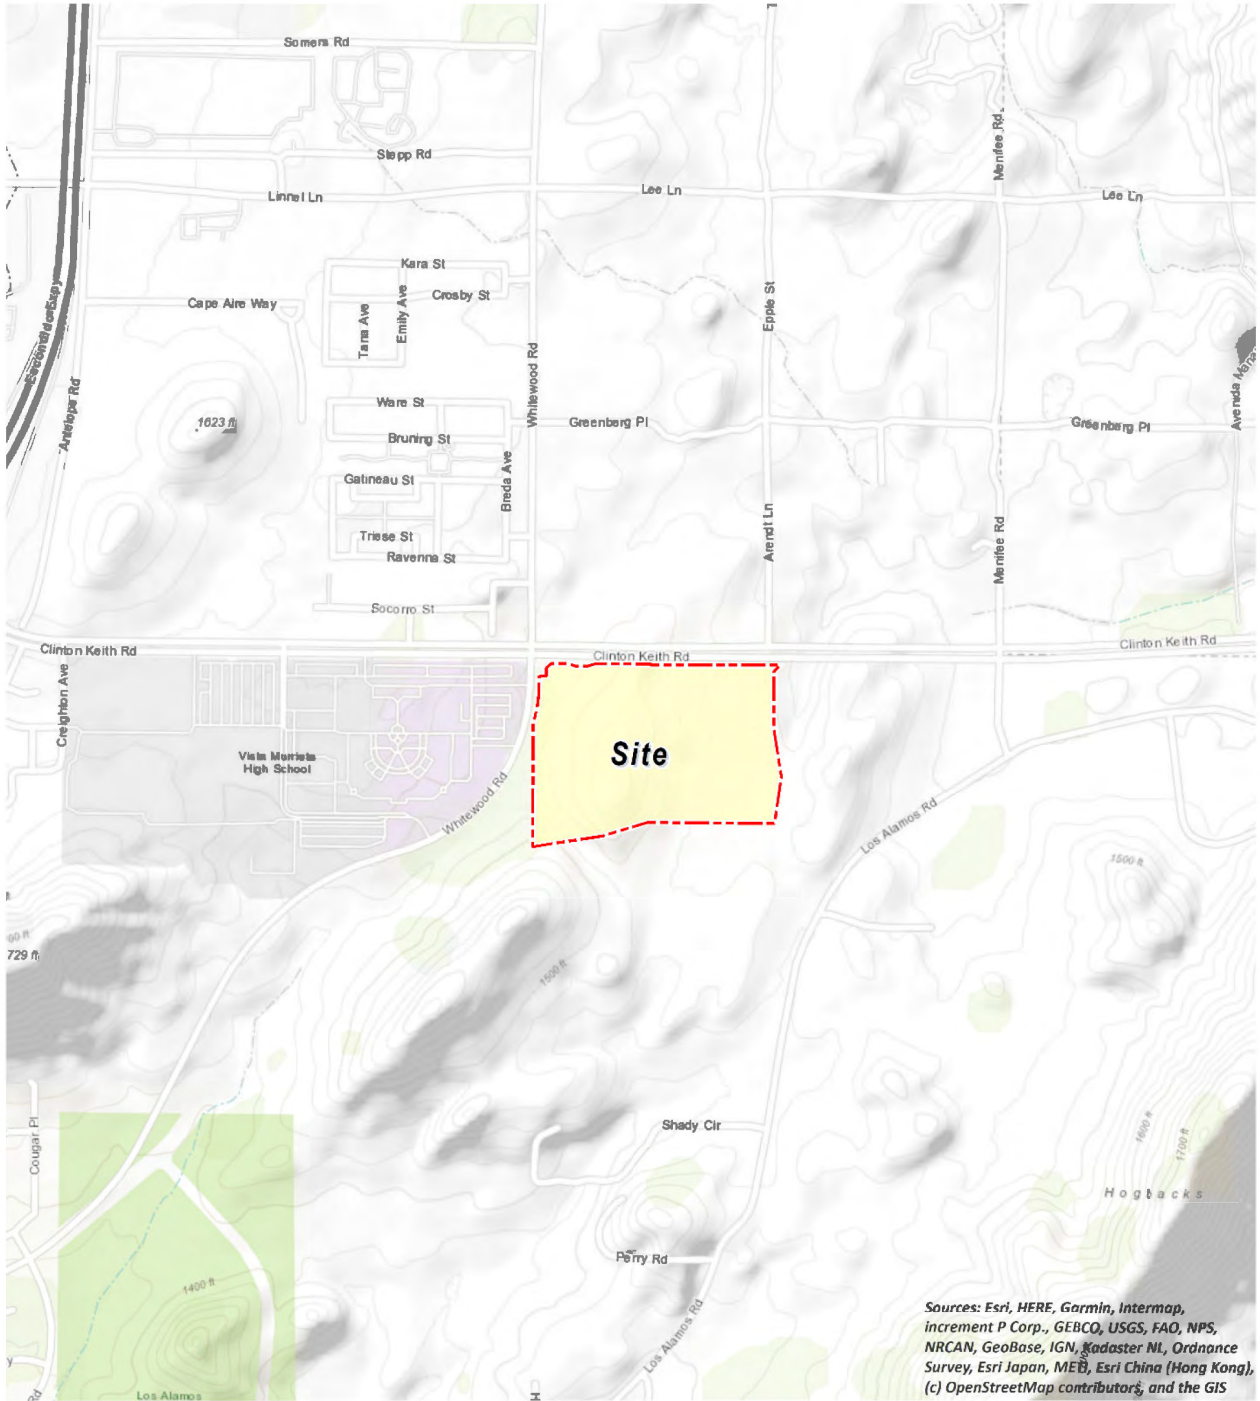


EXHIBIT 1-B: SITE PLAN



This page intentionally left blank.

2 EXISTING CONDITIONS

This section provides an overview of the existing energy conditions in the Project region.

2.1 OVERVIEW

The most recent data for California’s estimated total energy consumption and natural gas consumption is from 2018, released by the United States (U.S.) Energy Information Administration’s (EIA) California State Profile and Energy Estimates in 2020 and included (3):

- Approximately 7,900 trillion British Thermal Unit (BTU) of energy was consumed;
- Approximately 3,444 trillion BTU of petroleum;
- Approximately 2,210 trillion BTU of natural gas;
- Approximately 33.3 trillion BTU coal (3)

The California Energy Commission’s (CEC) Transportation Energy Demand Forecast 2019-2030 was released in order to support the 2020 Integrated Energy Policy Report. The Transportation energy Demand Forecast 2019-2030 lays out graphs and data supporting their projections of California’s future transportation energy demand. The projected inputs consider expected variable changes in fuel prices, income, population, and other variables. Predictions regarding fuel demand included:

Gasoline demand in the transportation sector is expected to decline from approximately 15.5 billion gallons in 2019 to between 12.3 billion and 12.7 billion gallons in 2030 (4)

Diesel demand in the transportation sector is expected to rise, increasing from approximately 3.9 billion diesel gallons in 2019 to approximately 4.3 billion in 2030 (4)

- Data from the Department of Energy states that approximately 4 billion gallons of diesel fuel were consumed in 2019 (5)

The most recent data provided by the EIA for energy use in California by demand sector is from 2019 and is reported as follows:

Approximately 39.4% transportation;

Approximately 23.1% industrial;

Approximately 18.7% residential; and

Approximately 18.8% commercial (6)

In 2020, total system electric generation for California was 277,704 gigawatt hours (GWh). California's massive electricity in-state generation system generated approximately 200,475 GWh which accounted for approximately 72.2% of the electricity it uses; the rest was imported from the Pacific Northwest (8.6%) and the U.S. Southwest (19.2%) (7). Natural gas is the main source for electricity generation at 34.23% of the total in-state electric generation system power as shown in Table 2-1. Renewables account for 31.7% of the total electrical system power.

TABLE 2-1: TOTAL ELECTRICITY SYSTEM POWER (CALIFORNIA 2020)

Fuel Type	California In-State Generation (GWh)	Percent of California In-State Generation	Northwest Imports (GWh)	Southwest Imports (GWh)	Total California Energy Mix (GWh)	Total California Power Mix
Coal	248	0.12%	219	7,765	8,233	2.96%
Natural Gas	86,136	42.97%	62	8,859	95,057	34.23%
Oil	36	0.02%	0	0	36	0.01%
Other	411	0.20%	0	11	422	0.15%
Nuclear	16,163	8.06%	39	8,743	24,945	8.98%
Large Hydro	33,145	16.53%	6,387	1,071	40,603	14.62%
Unspecified	0	0.00%	6,609	13,767	20,376	7.34%
Non-Renewables and Unspecified Totals	136,139	67.91%	13,315	40,218	189,672	68.30%
Biomass	5,851	2.92%	903	33	6,787	2.44%
Geothermal	10,943	5.46%	99	2,218	13,260	4.77%
Small Hydro	5,349	2.67%	292	4	5,646	2.03%
Solar	28,513	14.22%	282	5,295	34,090	12.28%
Wind	13,680	6.82%	9,038	5,531	28,249	10.17%
Renewables Totals	64,336	32.09%	10,615	13,081	88,032	31.70%
Total	200,475	100.00%	23,930	53,299	277,704	100.00%

Source: https://www.energy.ca.gov/almanac/electricity_data/total_system_power.html

An updated summary of, and context for energy consumption and energy demands within the State is presented in “U.S. Energy Information Administration, California State Profile and Energy Estimates, Quick Facts” excerpted below:

- California was the seventh-largest producer of crude oil among the 50 states in 2019, and, as of January 2020, it ranked third in oil refining capacity.
- California is the largest consumer of jet fuel among the 50 states and accounted for 17% of the nation’s jet fuel consumption in 2019 (8).
- California's total energy consumption is second highest in the nation, but, in 2018, the state's per capita energy consumption was the fourth-lowest, due in part to its mild climate and its energy efficiency programs (9).
- In 2019, California ranked first in the nation as a producer of electricity from solar, geothermal, and biomass resources and fourth in the nation in conventional hydroelectric power generation.
- In 2019, California was the fourth-largest electricity producer in the nation, but the state was also the nation’s largest importer of electricity and received about 28% of its electricity supply from generating facilities outside of California, including imports from Mexico (10).

As indicated above, California is one of the nation’s leading energy-producing states, and California’s per capita energy use is among the nation’s most efficient. Given the nature of the

Project, the remainder of this discussion will focus on the three sources of energy that are most relevant to the Project—namely, electricity, natural gas, and transportation fuel for vehicle trips associated with the uses planned for the Project.

2.2 ELECTRICITY

The usage associated with electricity use were calculated using the California Emissions Estimator Model (CalEEMod) Version 2020.4.0. The Southern California region's electricity reliability has been of concern for the past several years due to the planned retirement of aging facilities that depend upon once-through cooling technologies, as well as the June 2013 retirement of the San Onofre Nuclear Generating Station (San Onofre). While the once-through cooling phase-out has been ongoing since the May 2010 adoption of the State Water Resources Control Board's once-through cooling policy, the retirement of San Onofre complicated the situation. California Independent Service Operator (ISO) studies revealed the extent to which the South California Air Basin and the San Diego Air Basin region were vulnerable to low-voltage and post-transient voltage instability concerns. A preliminary plan to address these issues was detailed in the 2013 Integrative Energy Policy Report (IEPR) after a collaborative process with other energy agencies, utilities, and air districts (11). Similarly, the 2020 IEPR's identifies broad strategies that are aimed at maintaining electricity system reliability.

Electricity is currently provided to the Project by Southern California Edison (SCE). SCE provides electric power to more than 15 million persons in 15 counties and in 180 incorporated cities, within a service area encompassing approximately 50,000 square miles. Based on SCE's 2018 Power Content Label Mix, SCE derives electricity from varied energy resources including: fossil fuels, hydroelectric generators, nuclear power plants, geothermal power plants, solar power generation, and wind farms. SCE also purchases from independent power producers and utilities, including out-of-state suppliers (12).

California's electricity industry is an organization of traditional utilities, private generating companies, and state agencies, each with a variety of roles and responsibilities to ensure that electrical power is provided to consumers. The California Independent Service Operator ISO is a nonprofit public benefit corporation and is the impartial operator of the State's wholesale power grid and is charged with maintaining grid reliability, and to direct uninterrupted electrical energy supplies to California's homes and communities. While utilities still own transmission assets, the ISO routes electrical power along these assets, maximizing the use of the transmission system and its power generation resources. The ISO matches buyers and sellers of electricity to ensure that enough power is available to meet demand. To these ends, every five minutes the ISO forecasts electrical demands, accounts for operating reserves, and assigns the lowest cost power plant unit to meet demands while ensuring adequate system transmission capacities and capabilities (13).

Part of the ISO's charge is to plan and coordinate grid enhancements to ensure that electrical power is provided to California consumers. To this end, transmission file annual transmission expansion/modification plans to accommodate the State's growing electrical needs. The ISO reviews and either approves or denies the proposed additions. In addition, and perhaps most importantly, the ISO works with other areas in the western United States electrical grid to ensure

that adequate power supplies are available to the State. In this manner, continuing reliable and affordable electrical power is assured to existing and new consumers throughout the State.

Table 2-2 identifies SCE’s specific proportional shares of electricity sources in 2019. As indicated in Table 2-2, the 2019 SCE Power Mix has renewable energy at 35.1% of the overall energy resources. Geothermal resources are at 5.9%, wind power is at 11.5%, large hydroelectric sources are at 7.9%, solar energy is at 16%, and coal is at 0%. (14).

TABLE 2-2: SCE 2019 POWER CONTENT MIX

Energy Resources	2019 SCE Power Mix
Eligible Renewable	35.1%
Biomass & waste	0.6%
Geothermal	5.9%
Small Hydroelectric	1.0%
Solar	16.0%
Wind	11.5%
Coal	0%
Large Hydroelectric	7.9%
Natural Gas	16.1%
Nuclear	8.2%
Other	0.1%
Unspecified Sources of power*	32.6%
Total	100%

* "Unspecified sources of power" means electricity from transactions that are not traceable to specific generation sources.

2.3 NATURAL GAS

The following summary of natural gas customers & volumes, supplies, delivery of supplies, storage, service options, and operations is excerpted from information provided by the California Public Utilities Commission (CPUC).

“The CPUC regulates natural gas utility service for approximately 10.8 million customers that receive natural gas from Pacific Gas and Electric (PG&E), Southern California Gas (SoCalGas), San Diego Gas & Electric (SDG&E), Southwest Gas, and several smaller natural gas utilities. The CPUC also regulates independent storage operators: Lodi Gas Storage, Wild Goose Storage, Central Valley Storage and Gill Ranch Storage.

California's natural gas utilities provide service to over 11 million gas meters. SoCalGas and PG&E provide service to about 5.9 million and 4.3 million customers, respectively, while SDG&E provides service to over 800, 000 customers. In 2018, California gas utilities

forecasted that they would deliver about 4740 million cubic feet per day (MMcfd) of gas to their customers, on average, under normal weather conditions.

The overwhelming majority of natural gas utility customers in California are residential and small commercial customers, referred to as "core" customers. Larger volume gas customers, like electric generators and industrial customers, are called "noncore" customers. Although very small in number relative to core customers, noncore customers consume about 65% of the natural gas delivered by the state's natural gas utilities, while core customers consume about 35%.

A significant amount of gas (about 19%, or 1131 MMcfd, of the total forecasted California consumption in 2018) is also directly delivered to some California large volume consumers, without being transported over the regulated utility pipeline system. Those customers, referred to as "bypass" customers, take service directly from interstate pipelines or directly from California producers.

SDG&E and Southwest Gas' southern division are wholesale customers of SoCalGas, i.e., they receive deliveries of gas from SoCalGas and in turn deliver that gas to their own customers. (Southwest Gas also provides natural gas distribution service in the Lake Tahoe area.) Similarly, West Coast Gas, a small gas utility, is a wholesale customer of PG&E. Some other wholesale customers are municipalities like the cities of Palo Alto, Long Beach, and Vernon, which are not regulated by the CPUC.

Natural gas from out-of-state production basins is delivered into California via the interstate natural gas pipeline system. The major interstate pipelines that deliver out-of-state natural gas to California gas utilities are Gas Transmission Northwest Pipeline, Kern River Pipeline, Transwestern Pipeline, El Paso Pipeline, Ruby Pipeline, Mojave Pipeline, and Tuscarora. Another pipeline, the North Baja - Baja Norte Pipeline takes gas off the El Paso Pipeline at the California/Arizona border, and delivers that gas through California into Mexico. While the Federal Energy Regulatory Commission (FERC) regulates the transportation of natural gas on the interstate pipelines, and authorizes rates for that service, the California Public Utilities Commission may participate in FERC regulatory proceedings to represent the interests of California natural gas consumers.

The gas transported to California gas utilities via the interstate pipelines, as well as some of the California-produced gas, is delivered into the PG&E and SoCalGas intrastate natural gas transmission pipelines systems (commonly referred to as California's "backbone" pipeline system). Natural gas on the utilities' backbone pipeline systems is then delivered to the local transmission and distribution pipeline systems, or to natural gas storage fields. Some large volume noncore customers take natural gas delivery directly off the high-pressure backbone and local transmission pipeline systems, while core customers and other noncore customers take delivery off the utilities' distribution pipeline systems. The state's natural gas utilities operate over 100,000 miles of transmission and distribution pipelines, and thousands more miles of service lines.

Bypass customers take most of their deliveries directly off the Kern/Mojave pipeline system, but they also take a significant amount of gas from California production.

PG&E and SoCalGas own and operate several natural gas storage fields that are located within their service territories in northern and southern California, respectively. These storage fields, and four independently owned storage utilities - Lodi Gas Storage, Wild Goose Storage, Central Valley Storage, and Gill Ranch Storage - help meet peak seasonal and daily natural gas demand and allow California natural gas customers to secure natural gas supplies more efficiently. PG&E is a 25% owner of the Gill Ranch Storage field. These storage fields provide a significant amount of infrastructure capacity to help meet California's natural gas requirements, and without these storage fields, California would need much more pipeline capacity in order to meet peak gas requirements.

Prior to the late 1980s, California regulated utilities provided virtually all natural gas services to all their customers. Since then, the Commission has gradually restructured the California gas industry in order to give customers more options while assuring regulatory protections for those customers that wish to, or are required to, continue receiving utility-provided services.

The option to purchase natural gas from independent suppliers is one of the results of this restructuring process. Although the regulated utilities procure natural gas supplies for most core customers, core customers have the option to purchase natural gas from independent natural gas marketers, called "core transport agents" (CTA). Contact information for core transport agents can be found on the utilities' web sites. Noncore customers, on the other hand, make natural gas supply arrangements directly with producers or with marketers.

Another option resulting from the restructuring process occurred in 1993, when the Commission removed the utilities' storage service responsibility for noncore customers, along with the cost of this service from noncore customers' transportation rates. The Commission also encouraged the development of independent storage fields, and in subsequent years, all the independent storage fields in California were established. Noncore customers and marketers may now take storage service from the utility or from an independent storage provider (if available), and pay for that service, or may opt to take no storage service at all. For core customers, the Commission assures that the utility has adequate storage capacity set aside to meet core requirements, and core customers pay for that service.

In a 1997 decision, the Commission adopted PG&E's "Gas Accord", which unbundled PG&E's backbone transmission costs from noncore transportation rates. This decision gave customers and marketers the opportunity to obtain pipeline capacity rights on PG&E's backbone transmission pipeline system, if desired, and pay for that service at rates authorized by the Commission. The Gas Accord also required PG&E to set aside a certain amount of backbone transmission capacity in order to deliver gas to its core customers. Subsequent Commission decisions modified and extended the initial terms of the Gas Accord. The "Gas Accord" framework is still in place today for PG&E's backbone

and storage rates and services and is now simply referred to as PG&E Gas Transmission and Storage (GT&S).

In a 2006 decision, the Commission adopted a similar gas transmission framework for Southern California, called the "firm access rights" system. SoCalGas and SDG&E implemented the firm access rights system in 2008, and it is now referred to as the backbone transmission system framework. As under the PG&E backbone transmission system, SoCalGas backbone transmission costs are unbundled from noncore transportation rates. Noncore customers and marketers may obtain, and pay for, firm backbone transmission capacity at various receipt points on the SoCalGas system. A certain amount of backbone transmission capacity is obtained for core customers to assure meeting their requirements.

Many if not most noncore customers now use a marketer to provide for several of the services formerly provided by the utility. That is, a noncore customer may simply arrange for a marketer to procure its supplies, and obtain any needed storage and backbone transmission capacity, in order to assure that it will receive its needed deliveries of natural gas supplies. Core customers still mainly rely on the utilities for procurement service, but they have the option to take procurement service from a CTA. Backbone transmission and storage capacity is either set aside or obtained for core customers in amounts to assure very high levels of service.

In order properly operate their natural gas transmission pipeline and storage systems, PG&E and SoCalGas must balance the amount of gas received into the pipeline system and delivered to customers or to storage fields. Some of these utilities' storage capacity is dedicated to this service, and under most circumstances, customers do not need to precisely match their deliveries with their consumption. However, when too much or too little gas is expected to be delivered into the utilities' systems, relative to the amount being consumed, the utilities require customers to more precisely match up their deliveries with their consumption. And, if customers do not meet certain delivery requirements, they could face financial penalties. The utilities do not profit from these financial penalties - the amounts are then returned to customers as a whole. If the utilities find that they are unable to deliver all the gas that is expected to be consumed, they may even call for a curtailment of some gas deliveries. These curtailments are typically required for just the largest, noncore customers. It has been many years since there has been a significant curtailment of core customers in California." (15)

As indicated in the preceding discussions, natural gas is available from a variety of in-state and out-of-state sources and is provided throughout the state in response to market supply and demand. Complementing available natural gas resources, biogas may soon be available via existing delivery systems, thereby increasing the availability and reliability of resources in total. The CPUC oversees utility purchases and transmission of natural gas to ensure reliable and affordable natural gas deliveries to existing and new consumers throughout the State.

2.4 TRANSPORTATION ENERGY RESOURCES

The Project would generate additional vehicle trips with resulting consumption of energy resources, predominantly gasoline and diesel fuel. In February 2021, the Department of Motor Vehicles identified 35.8 million registered vehicles in California (16), and those vehicles consume an estimated 17.8 billion gallons of fuel each year¹. Gasoline (and other vehicle fuels) are commercially provided commodities and would be available to the Project patrons and employees via commercial outlets.

California's on-road transportation system includes 394,383 land miles, more than 27.5 million passenger vehicles and light trucks, and almost 8.1 million medium- and heavy-duty vehicles (16). While gasoline consumption has been declining since 2008 it is still by far the dominant fuel. Petroleum comprises about 91% of all transportation energy use, excluding fuel consumed for aviation and most marine vessels (17). Nearly 17.8 billion gallons of on-highway fuel are burned each year, including 14.6 billion gallons of gasoline (including ethanol) and 3.2 billion gallons of diesel fuel (including biodiesel and renewable diesel). In 2019, Californians also used 194 million cubic feet of natural gas as a transportation fuel (18), or the equivalent of 183 billion gallons of gasoline.

¹ Fuel consumptions estimated utilizing information from EMFAC2017.

3 REGULATORY BACKGROUND

Federal and state agencies regulate energy use and consumption through various means and programs. On the federal level, the United States (U.S.) Department of Transportation, the United States Department of Energy, and the U.S. Environmental Protection Agency (EPA) are three federal agencies with substantial influence over energy policies and programs. On the state level, the CPUC and the CEC are two agencies with authority over different aspects of energy. Relevant federal and state energy-related laws and plans are summarized below.

3.1 FEDERAL REGULATIONS

3.1.1 INTERMODAL SURFACE TRANSPORTATION EFFICIENCY ACT OF 1991 (ISTEA)

The ISTEA promoted the development of inter-modal transportation systems to maximize mobility as well as address national and local interests in air quality and energy. ISTEA contained factors that Metropolitan Planning Organizations (MPOs) were to address in developing transportation plans and programs, including some energy-related factors. To meet the new ISTEA requirements, MPOs adopted explicit policies defining the social, economic, energy, and environmental values guiding transportation decisions.

3.1.2 THE TRANSPORTATION EQUITY ACT FOR THE 21ST CENTURY (TEA-21)

The TEA-21 was signed into law in 1998 and builds upon the initiatives established in the ISTEA legislation, discussed above. TEA-21 authorizes highway, highway safety, transit, and other efficient surface transportation programs. TEA-21 continues the program structure established for highways and transit under ISTEA, such as flexibility in the use of funds, emphasis on measures to improve the environment, and focus on a strong planning process as the foundation of good transportation decisions. TEA-21 also provides for investment in research and its application to maximize the performance of the transportation system through, for example, deployment of Intelligent Transportation Systems, to help improve operations and management of transportation systems and vehicle safety.

3.2 CALIFORNIA REGULATIONS

3.2.1 INTEGRATED ENERGY POLICY REPORT (IEPR)

Senate Bill 1389 (Bowen, Chapter 568, Statutes of 2002) requires the CEC to prepare a biennial integrated energy policy report that assesses major energy trends and issues facing the state's electricity, natural gas, and transportation fuel sectors and provides policy recommendations to conserve resources; protect the environment; ensure reliable, secure, and diverse energy supplies; enhance the state's economy; and protect public health and safety (Public Resources Code § 25301a). The Energy Commission prepares these assessments and associated policy recommendations every two years, with updates in alternate years, as part of the Integrated Energy Policy Report.

The 2020 IEPR was adopted March 23, 2021, and continues to work towards improving electricity, natural gas, and transportation fuel energy use in California. The 2020 IEPR focuses on a variety of topics such as including the environmental performance of the electricity generation system, landscape-scale planning, the response to the gas leak at the Aliso Canyon natural gas storage facility, transportation fuel supply reliability issues, updates on Southern California electricity reliability, methane leakage, climate adaptation activities for the energy sector, climate and sea level rise scenarios, and the California Energy Demand Forecast (19). The 2021 IEPR is currently in progress but is not anticipated to be adopted until early 2022.

3.2.2 STATE OF CALIFORNIA ENERGY PLAN

The CEC is responsible for preparing the State Energy Plan, which identifies emerging trends related to energy supply, demand, conservation, public health and safety, and the maintenance of a healthy economy. The Plan calls for the state to assist in the transformation of the transportation system to improve air quality, reduce congestion, and increase the efficient use of fuel supplies with the least environmental and energy costs. To further this policy, the plan identifies several strategies, including assistance to public agencies and fleet operators and encouragement of urban designs that reduce vehicle miles traveled (VMT) and accommodate pedestrian and bicycle access.

3.2.3 CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: California's Energy Efficiency Standards for Residential and Nonresidential Buildings (Energy Code), was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption. The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. Energy efficient buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases greenhouse gas (GHG) emissions. The 2019 version of Title 24 was adopted by the CEC and became effective on January 1, 2020. The 2019 Energy Code is applicable to building permit applications submitted on or after January 1, 2020. The 2019 Energy Code requires solar PV systems for new homes, establishes requirements for newly constructed healthcare facilities, encourages demand responsive technologies for residential buildings, and updates indoor and outdoor lighting standards for nonresidential buildings. The CEC anticipates that single-family homes built with the 2019 standards use approximately 7% less energy compared to the residential homes built under the 2016 Energy Code. Nonresidential buildings are approximately 30% less energy due to lighting upgrades compared to the 2016 Energy Code (20).

3.2.4 AB 1493 PAVLEY REGULATIONS AND FUEL EFFICIENCY STANDARDS

California AB 1493, enacted on July 22, 2002, required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. Under this legislation, CARB adopted regulations to reduce GHG emissions from non-commercial passenger vehicles (cars and light-duty trucks). Although aimed at reducing GHG emissions, specifically, a co-benefit of the Pavley standards is an improvement in fuel efficiency and consequently a reduction in fuel consumption.

3.2.5 CALIFORNIA'S RENEWABLE PORTFOLIO STANDARD (RPS)

First established in 2002 under Senate Bill (SB) 1078, California's Renewable Portfolio Standards (RPS) requires retail sellers of electric services to increase procurement from eligible renewable resources to 33% of total retail sales by 2020 (21).

3.2.6 CLEAN ENERGY AND POLLUTION REDUCTION ACT OF 2015 (SB 350)

In October 2015, the legislature approved, and the Governor signed SB 350, which reaffirms California's commitment to reducing its GHG emissions and addressing climate change. Key provisions include an increase in the renewables portfolio standard (RPS), higher energy efficiency requirements for buildings, initial strategies towards a regional electricity grid, and improved infrastructure for electric vehicle charging stations. Specifically, SB 350 requires the following to reduce statewide GHG emissions:

Increase the amount of electricity procured from renewable energy sources from 33% to 50% by 2030, with interim targets of 40% by 2024, and 25% by 2027.

Double the energy efficiency in existing buildings by 2030. This target will be achieved through the California Public Utility Commission (CPUC), the California Energy Commission (CEC), and local publicly owned utilities.

Reorganize the Independent System Operator (ISO) to develop more regional electrify transmission markets and to improve accessibility in these markets, which will facilitate the growth of renewable energy markets in the western United States (California Leginfo 2015).

This page intentionally left blank.

4 PROJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES

4.1 EVALUATION CRITERIA

In compliance with Appendix G of the *State CEQA Guidelines* (1), this report analyzes the Project's anticipated energy use during construction and operations to determine if the Project would:

- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during Project construction or operation; or
- Conflict with or obstruct a state or local plan for renewable energy or energy efficiency

4.2 METHODOLOGY

Appendix F of the *State CEQA Guidelines* (22), provides some guidance for assessing these criteria, which implies that the means of achieving the goal of energy conservation includes decreasing overall per capita energy consumption; decreasing reliance on fossil fuels such as coal, natural gas, and oil; and increasing reliance on renewable energy sources. Additionally, the CEQA Guidelines state “[a] lead agency may consider the extent to which an energy source serving the project has already undergone environmental review that adequately analyzed and mitigated the effects of energy production.”

Information from the CalEEMod Version 2020.4.0 outputs for the *Murrieta Apartments Air Quality Impact Analysis* (Urban Crossroads, Inc.) (AQIA) (23) was utilized in this analysis, detailing Project related construction equipment, transportation energy demands, and facility energy demands.

4.2.1 CAL EEMOD

In June 2021, the SCAQMD, in conjunction with the California Air Pollution Control Officers Association and other California air districts, released the latest version of the CalEEMod Version 2020.4.0. The purpose of this model is to calculate construction-source and operational-source criteria pollutants and GHG emissions from direct and indirect sources as well as energy usage. (24). Accordingly, the latest version of CalEEMod has been used to determine the proposed Project's anticipated transportation and facility energy demands. Output from the annual CalEEMod runs is provided in Appendix 4.1.

4.2.2 EMISSION FACTORS MODEL

On August 19, 2019, the EPA approved the 2017 version of the EMISSIONS FACTOR model (EMFAC) web database for use in State Implementation Plan and transportation conformity analyses. EMFAC2017 is a mathematical model that was developed to calculate emission rates, fuel consumption, VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (25). This energy study utilizes the different fuel types for each vehicle class from the annual EMFAC2017 emission inventory in order to derive the average vehicle fuel economy which is then used to determine the estimated annual fuel consumption associated

with vehicle usage during Project construction and operational activities. For purposes of analysis, the 2022 and 2023 analysis years were utilized to determine the average vehicle fuel economy for construction and operation the Project.

4.3 CONSTRUCTION ENERGY DEMANDS

4.3.1 CONSTRUCTION POWER COST AND ELECTRICITY USAGE

The focus within this section is the energy implications of the construction process, specifically the power cost from on-site electricity consumption during construction of the proposed Project.

CONSTRUCTION DURATION

Construction is expected to commence in February 2022 and will last through September 2023. The construction schedule utilized in the analysis, shown in Table 4-1, represents a “worst-case” analysis scenario. Should construction occur any time after the respective dates, impacts would be reduced since emission factors for construction decrease as time passes due to emission regulations becoming more stringent². The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines* (1). The duration of construction activity was based on an estimated schedule provided by the Project applicant and an opening year of 2023.

TABLE 4-1: CONSTRUCTION DURATION

Phase Name	Start Date	End Date	Days
Site Preparation	2/7/2022	2/18/2022	10
Grading	2/19/2022	4/8/2022	35
Building Construction	4/9/2022	9/8/2023	370
Paving	7/26/2023	9/8/2023	33
Architectural Coating	7/26/2023	9/8/2023	33

Source: CalEEMod, Appendix 4.1.

Based on the *2021 National Construction Estimator*, Richard Pray (2021) (26), the typical power cost per 1,000 sf of construction per month is estimated to be \$2.37. Based on the Project plans, the proposed Project includes the development of approximately 483,000 sf residential land uses, 152,460 square feet of landscaped area/open space, and 454,800 square feet of parking. Based on information provided in the AQIA, construction activities are anticipated to occur over the course of 43 months (23). Based on Table 4-2, the total power cost of the on-site electricity usage during the construction of the Project is estimated to be approximately \$49,094.

² As shown in the CalEEMod User’s Guide, Section 4.3 “OFFROAD Equipment” as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.

TABLE 4-2: CONSTRUCTION POWER COST

Land Use	Power Cost (per 1,000 SF of building per month of construction)	Total Building Size (1,000 SF)	Construction Duration (months)	Total Project Construction Power Cost
Apartments	\$2.37	483.000	19	\$21,749.49
Landscaped/Open Space	\$2.37	152.460	19	\$6,865.27
Parking	\$2.37	454.800	19	\$20,479.64
TOTAL PROJECT CONSTRUCTION COST				\$49,094.41

The SCE's general service rate schedule were used to determine the Project's electrical usage. As of June 1, 2021, SCE's general service rate is \$0.11 per kilowatt hours (kWh) of electricity for residential services (27). As shown on Table 4-3, the total electricity usage from on-site Project construction related activities is estimated to be approximately 446,313 kWh.

TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE

Land Use	Cost per kWh	Total Project Construction Electricity Usage (kWh)
Apartments	\$0.11	197,723
Landscaped/Open Space	\$0.11	62,412
Parking	\$0.11	186,179
TOTAL PROJECT CONSTRUCTION ELECTRICITY USAGE (kWh)		446,313

4.3.2 CONSTRUCTION EQUIPMENT FUEL ESTIMATES

Fuel consumed by construction equipment would be the primary energy resource expended over the course of Project construction.

CONSTRUCTION EQUIPMENT

Consistent with industry standards and typical construction practices, each piece of equipment listed in Table 4-4 will operate up to a total of eight (8) hours per day, or more than two-thirds of the period during which construction activities are allowed pursuant to the code. It should be noted that most pieces of equipment would likely operate for fewer hours per day. A summary of construction equipment assumptions by phase is provided at Table 4-4.

TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Phase Name	Equipment	Amount	Hours Per Day
Site Preparation	Crawler Tractors	4	8
	Rubber Tired Dozers	3	8
Grading	Crawler Tractors	2	8
	Crawler Tractors	2	8
	Graders	1	8
	Rubber Tired Dozers	1	8
	Scrapers	2	8
Building Construction	Cranes	1	8
	Forklifts	3	8
	Generator Sets	1	8
	Tractors/Loaders/Backhoes	3	8
	Welders	1	8
Paving	Pavers	2	8
	Paving Equipment	2	8
	Rollers	2	8
Architectural Coating	Air Compressors	1	8

Source: CalEEMod, Appendix 4.1

Project construction activity timeline estimates, construction equipment schedules, equipment power ratings, load factors, and associated fuel consumption estimates are presented in Table 4-5. Eight-hour daily use of all equipment is assumed. The aggregate fuel consumption rate for all equipment is estimated at 18.5 horsepower hour per gallon (hp-hr-gal.), obtained from CARB 2018 Emissions Factors Tables and cited fuel consumption rate factors presented in Table D-24 of the Moyer guidelines (28).

Calculations assume all construction equipment is diesel-powered consistent with industry standards. Diesel fuel would be supplied by existing commercial fuel providers serving the County. As presented in Table 4-5, Project construction activities would consume an estimated 66,858 gallons of diesel fuel. Project construction would represent a “single-event” diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES

Activity/Duration	Duration (Days)	Equipment	HP Rating	Quantity	Usage Hours	Load Factor	HP-hrs/day	Total Fuel Consumption (gal. diesel fuel)
Site Preparation	10	Crawler Tractors	97	4	8	0.37	1,148	621
		Rubber Tired Dozers	247	3	8	0.40	2,371	1,282
Grading	35	Crawler Tractors	158	2	8	0.38	961	1,817
		Crawler Tractors	97	2	8	0.37	574	1,086
		Graders	187	1	8	0.41	613	1,160
		Rubber Tired Dozers	247	1	8	0.40	790	1,495
		Scrapers	367	2	8	0.48	2,819	5,332
Building Construction	370	Cranes	231	1	8	0.29	536	10,718
		Forklifts	89	3	8	0.20	427	8,544
		Generator Sets	84	1	8	0.74	497	9,946
		Tractors/Loaders/Backhoes	97	3	8	0.37	861	17,227
		Welders	46	1	8	0.45	166	3,312
Paving	33	Pavers	130	2	8	0.42	874	1,558
		Paving Equipment	132	2	8	0.36	760	1,356
		Rollers	80	2	8	0.38	486	868
Architectural Coating	33	Air Compressors	78	1	8	0.48	300	534
CONSTRUCTION FUEL DEMAND (GALLONS DIESEL FUEL)								66,858

4.3.3 CONSTRUCTION TRIPS AND VMT

The worker trips identified in Table 4-6 are based on CalEEMod standard generation factors and demolition and soil hauling information was provided by the Project applicant.

TABLE 4-6: CONSTRUCTION TRIPS AND VMT

Phase Name	Worker Trips / Day	Vendor Trips / Day	Worker Trip Length	Vendor Trip Length	Hauling Trip Length
Site Preparation	18	0	14.7	6.9	20
Grading	20	0	14.7	6.9	20
Building Construction	603	151	14.7	6.9	20
Paving	15	0	14.7	6.9	20
Architectural Coating	121	0	14.7	6.9	20

Source: CalEEMod, Appendix 4.1.

4.3.4 CONSTRUCTION WORKER FUEL ESTIMATES

With respect to estimated VMT for the Project, the construction worker trips would generate an estimated 3,358,627 VMT during the 19 months of construction (23). Based on CalEEMod methodology, emissions from construction worker trips are generated by light-duty-auto vehicles (LDA), light-duty-trucks 1 (LDT1³), and light-duty-trucks 2 (LDT2⁴). Based on EMFAC2017 vehicle population data for Year 2022, 70.9% of these vehicles would be LDA, 7.2% would be LDT1, and 21.9% would be LDT2. Data regarding Project related construction worker trips were based on EMFAC2017 inputs utilized within the AQIA.

Vehicle fuel efficiencies for LDA, LDT1, and LDT2 were estimated using information generated by EMFAC2017. EMFAC2017 is a mathematical model that was developed to calculate emission rates, fuel consumption, and VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (25). EMFAC2017 was run for the LDA, LDT1, and LDT2 vehicle class within the San Bernardino-South Coast sub-area for the 2022 calendar year. Data from EMFAC2017 is shown in Appendix 4.2. Using the static year 2022 is considered conservative for estimating construction worker fuel consumption as it does not account for fuel efficiency improvements each year.

As generated by EMFAC2017, an aggregated fuel economy of LDAs ranging from model year 1981 to model year 2026 are estimated to have a fuel efficiency of 32.77 miles per gallon (mpg). Table 4-7 provides an estimated annual fuel consumption resulting from LDAs related to the

³ Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

⁴ Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.

Project construction worker trips. Based on Table 4-7, it is estimated that 72,652 gallons of fuel will be consumed related to construction worker trips during full construction of the Project.

TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES (LDA)

Construction Activity	Duration (Days)	Worker Trips/Day	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Site Preparation	10	13	14.7	1,876	32.77	57
Grading	35	14	14.7	7,294	32.77	223
Building Construction	370	427	14.7	2,324,810	32.77	70,945
Paving	33	11	14.7	5,158	32.77	157
Architectural Coating	33	86	14.7	41,607	32.77	1,270
TOTAL CONSTRUCTION WORKER (LDA) FUEL CONSUMPTION						72,652

The EMFAC2017 aggregated fuel economy of LDT1s ranging from model year 1981 to model year 2026 are estimated to have a fuel efficiency 27.55 mpg. Table 4-8 provides an estimated annual fuel consumption resulting from LDT1s related to the Project construction worker trips. Based on Table 4-8, it is estimated that 8,743 gallons of fuel will be consumed related to construction worker trips during full construction of the Project.

TABLE 4-8: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES (LDT1)

Construction Activity	Duration (Days)	Worker Trips / Day	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Site Preparation	10	1	14.7	190	27.55	7
Grading	35	1	14.7	738	27.55	27
Building Construction	370	43	14.7	235,236	27.55	8,538
Paving	33	1	14.7	522	27.55	19
Architectural Coating	33	9	14.7	4,210	27.55	153
TOTAL CONSTRUCTION WORKER (LDT2) FUEL CONSUMPTION						8,743

The EMFAC2017 aggregated fuel economy of LDT2s ranging from model year 1981 to model year 2026 are estimated to have a fuel efficiency of 26.03 mpg. Table 4-9 provides an estimated annual fuel consumption resulting from LDT2s related to the Project construction worker trips. Based on Table 4-9, it is estimated that 28,312 gallons of fuel will be consumed related to construction worker trips during full construction of the Project.

TABLE 4-9: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES (LDT2)

Construction Activity	Duration (Days)	Worker Trips / Day	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Site Preparation	10	4	14.7	581	26.03	22
Grading	35	4	14.7	2,258	26.03	87
Building Construction	370	132	14.7	719,671	26.03	27,647
Paving	33	3	14.7	1,597	26.03	61
Architectural Coating	33	27	14.7	12,880	26.03	495
TOTAL CONSTRUCTION WORKER (LDT1) FUEL CONSUMPTION						28,312

It should be noted that construction worker trips would represent a “single-event” gasoline fuel demand and would not require on-going or permanent commitment of fuel resources for this purpose.

4.3.5 CONSTRUCTION VENDOR AND HAULING FUEL ESTIMATES

Construction vendor trips (vehicles that deliver materials to the site during construction) are estimated to generate 158,769 VMT and hauling is anticipated to generate in 122,500 VMT along area roadways for the Project over the duration of construction activity (29). Based on the CalEEMod User Manual, vehicles associated with vendor trips are limited to medium-heavy duty trucks (MHDT) and heavy-heavy duty trucks (HHDT) (30). Similar to LDA, LDT1, and LDT fuel estimates, vehicle fuel efficiencies for MHDTs and HHDTs for vending trips were estimated using information generated within EMFAC2017. For debris and soil hauling all trucks were assumed to be HHDT constituent with CalEEMod standard settings. EMFAC2017 was run for the MHDT and HHDT vehicle classes within the California sub-area for the 2022 calendar year. Data from EMFAC2017 is shown in Appendix 4.2.

As generated by EMFAC2017, an aggregated fuel economy of MHDTs ranging from model year 1981 to model year 2026 are estimated to have a fuel efficiency of 10.77 mpg. Based on Table 4-10, it is estimated that 1,547 gallons of fuel will be consumed related to construction vendor trips (MHDTs) during full construction of the Project.

TABLE 4-10: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES (MHDT)

Construction Activity	Duration (Days)	Vendor Trips / Day	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Grading	35	69	6.9	16,664	10.77	1,547
TOTAL CONSTRUCTION VENDOR (MHDT) FUEL CONSUMPTION						1,547

Tables 4-11 shows the estimated fuel economy of HHDTs accessing the Project site. As generated by EMFAC2017, an aggregated fuel economy of HHDTs ranging from model year 1981 to model

year 2026 are estimated to have a fuel efficiency of 7.44 mpg. Based on Table 4-11, fuel consumption from construction vendor trips (HHDTs) will total approximately 2,696 gallons.

TABLE 4-11: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES (HHDT)

Construction Activity	Duration (Days)	Vendor Trips / Day	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Grading	35	83	6.9	20,045	7.44	2,696
TOTAL CONSTRUCTION VENDOR (HHDT) FUEL CONSUMPTION						2,696

It should be noted that Project construction vendor trips would represent a “single-event” diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

4.3.6 CONSTRUCTION ENERGY EFFICIENCY/CONSERVATION MEASURES

Starting in 2014, CARB adopted the nation's first regulation aimed at cleaning up off-road construction equipment such as bulldozers, graders, and backhoes. These requirements ensure fleets gradually turnover the oldest and dirtiest equipment to newer, cleaner models and prevent fleets from adding older, dirtier equipment. As such, the equipment used for Project construction would conform to CARB regulations and California emissions standards. It should also be noted that there are no unusual Project characteristics or construction processes that would require the use of equipment that would be more energy intensive than is used for comparable activities; or equipment that would not conform to current emissions standards (and related fuel efficiencies). Equipment employed in construction of the Project would therefore not result in inefficient wasteful, or unnecessary consumption of fuel.

Construction contractors would be required to comply with applicable CARB regulation regarding retrofitting, repowering, or replacement of diesel off-road construction equipment. Additionally, CARB has adopted the Airborne Toxic Control Measure to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to diesel particulate matter and other Toxic Air Contaminants. Compliance with anti-idling and emissions regulations would result in a more efficient use of construction-related energy and the minimization or elimination of wasteful or unnecessary consumption of energy. Idling restrictions and the use of newer engines and equipment would result in less fuel combustion and energy consumption.

Additional construction-source energy efficiencies would occur due to required California regulations and best available control measures. For example, CCR Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than five minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. Section 2449(d)(3) requires that “grading plans shall reference the requirement that a sign shall be posted on-site stating that construction workers need to shut off engines at or before five minutes of idling.” In this manner, construction equipment operators are required to be informed that engines are to be turned off at or prior to five minutes of idling.

Enforcement of idling limitations is realized through periodic site inspections conducted by County building officials, and/or in response to citizen complaints.

A full analysis related to the energy needed to form construction materials is not included in this analysis due to a lack of detailed Project-specific information on construction materials. At this time, an analysis of the energy needed to create Project-related construction materials would be extremely speculative and thus has not been prepared.

In general, the construction processes promote conservation and efficient use of energy by reducing raw materials demands, with related reduction in energy demands associated with raw materials extraction, transportation, processing, and refinement. Use of materials in bulk reduces energy demands associated with preparation and transport of construction materials as well as the transport and disposal of construction waste and solid waste in general, with corollary reduced demands on area landfill capacities and energy consumed by waste transport and landfill operations.

4.4 OPERATIONAL ENERGY DEMANDS

Energy consumption in support of or related to Project operations would include transportation energy demands (energy consumed by passenger car and truck vehicles accessing the Project site) and facilities energy demands (energy consumed by building operations and site maintenance activities).

4.4.1 TRANSPORTATION ENERGY DEMANDS

Energy that would be consumed by Project-generated traffic is a function of total VMT and estimated vehicle fuel economies of vehicles accessing the Project site. As shown in Table 4-13, the Project will result in 9,642,246 annual VMT and an estimated annual fuel consumption of 357,358 gallons of fuel.

TABLE 4-13: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION

Vehicle Type	Annual Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Annual Fuel Consumption (gallons)
LDA	5,237,085	33.79	155,007
LDT1	585,757	28.38	20,638
LDT2	1,781,503	27.02	65,931
MDV	1,255,981	21.45	58,541
LHD1	229,775	14.58	15,760
LHD2	61,257	15.26	4,015
MHD	112,988	10.77	10,486
HHD	88,101	7.44	11,848
OBUS	7,830	6.74	1,162
UBUS	4,908	4.97	988
MCY	233,275	37.90	6,156
SBUS	7,232	8.06	898
MH	36,554	6.17	5,926
Total (All Vehicles)	9,642,246	NA	357,358

4.4.2 FACILITY ENERGY DEMANDS

Project building operations activities would result in the consumption of natural gas and electricity. Natural gas would be supplied to the Project by SoCalGas; electricity would be supplied to the Project by SCE. As previously stated, the analysis herein assumes compliance with the 2019 Title 24 Standards. Annual natural gas and electricity demands of the Project are summarized in Table 4-14 and provided in Appendices 4.1.

4.4.3 OPERATIONAL ENERGY EFFICIENCY/CONSERVATION MEASURES

Energy efficiency/energy conservation attributes of the Project would be complemented by increasingly stringent state and federal regulatory actions addressing vehicle fuel economies and vehicle emissions standards; and enhanced building/utilities energy efficiencies mandated under California building codes (e.g., Title24, California Green Building Standards Code).

ENHANCED VEHICLE FUEL EFFICIENCIES

Project annual fuel consumption estimates presented previously in Table 4-13 represent likely potential maximums that would occur for the Project. Under subsequent future conditions, average fuel economies of vehicles accessing the Project site can be expected to improve as older, less fuel-efficient vehicles are removed from circulation, and in response to fuel economy and emissions standards imposed on newer vehicles entering the circulation system.

TABLE 4-14: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY

Natural Gas Demand	kBTU/year
Apartments	7,060,380
Landscaped/Open Space	0
Parking	0
TOTAL PROJECT NATURAL GAS DEMAND	7,060,380

Electricity Demand	kWh/year
Apartments	1,944,802
Landscaped/Open Space	0
Parking	159,180
TOTAL PROJECT ELECTRICITY DEMAND	2,103,982

kBTU – kilo-British Thermal Units
kWh – Kilo Watt Hours

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. Location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands.

4.5 SUMMARY

4.5.1 CONSTRUCTION ENERGY DEMANDS

The estimated power cost of on-site electricity usage during the construction of the Project is assumed to be approximately \$49,049. Additionally, based on the assumed power cost, it is estimated that the total electricity usage during construction, after full Project build-out, is calculated to be approximately 466,313 kWh.

Construction equipment used by the Project would result in single event consumption of approximately 66,858 gallons of diesel fuel. Construction equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed construction process that are unusual or energy-intensive, and Project construction equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

CCR Title 13, Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than 5 minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. BACMs inform construction equipment operators of this requirement. Enforcement of idling limitations is realized through periodic site inspections conducted by County building officials, and/or in response to citizen complaints.

Construction worker trips for full construction of the Project would result in the estimated fuel consumption of 109,707 gallons of fuel. Additionally, fuel consumption from construction vendor and hauling trips (MHDTs and HHDTs) will total approximately 4,242 gallons. Diesel fuel would be supplied by regional commercial vendors. Indirectly, construction energy efficiencies and energy conservation would be achieved using bulk purchases, transport and use of construction materials. The 2020 IEPR released by the CEC has shown that fuel efficiencies are getting better within on and off-road vehicle engines due to more stringent government requirements (19). As supported by the preceding discussions, Project construction energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

4.5.2 OPERATIONAL ENERGY DEMANDS

TRANSPORTATION ENERGY DEMANDS

Annual vehicular trips and related VMT generated by the operation of the Project would result in a fuel demand of 357,358 gallons of fuel.

Fuel would be provided by current and future commercial vendors. Trip generation and VMT generated by the Project are consistent with other mixed residential and commercial uses of similar scale and configuration, as reflected respectively in the Institute of Transportation Engineers Trip Generation Manual (10th Ed., 2017); and CalEEMod. As such, Project operations would not result in excessive and wasteful vehicle trips and VMT, nor excess and wasteful vehicle energy consumption compared to other residential developments of similar size.

In addition, enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT in the future. Location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands. The Project would implement sidewalks, facilitating and encouraging pedestrian access. Facilitating pedestrian and bicycle access would reduce VMT and associated energy consumption. In compliance with the California Green Building Standards Code and City requirements, the Project would promote the use of bicycles as an alternative mean of transportation by providing short-term and/or long-term bicycle parking accommodations. As supported by the preceding discussions, Project transportation energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

FACILITY ENERGY DEMANDS

Project facility operational energy demands are estimated at: 7,060,380 kBTU/year of natural gas; and 2,103,982 kWh/year of electricity. Natural gas would be supplied to the Project by SoCalGas; electricity would be supplied by SCE. The Project proposes conventional residences, retail spaces, and offices that reflect contemporary energy efficient/energy conserving designs and operational programs. The Project does not propose uses that are inherently energy intensive and the energy demands in total would be comparable to other mixed use developments of similar scale and configuration.

Lastly, the Project will comply with the applicable Title 24 standards. Compliance itself with applicable Title 24 standards will ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary.

4.6 ENERGY FINDINGS AND RECOMMENDATIONS

4.6.1 ENERGY IMPACT 1

Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation.

As supported by the preceding analyses, Project construction and operations would not result in the inefficient, wasteful, or unnecessary consumption of energy. The Project would therefore not cause or result in the need for additional energy producing or transmission facilities. The Project would not engage in wasteful or inefficient uses of energy and aims to achieve energy conservations goals within the State of California.

4.6.2 ENERGY IMPACT 2

Conflict with or obstruct a state or local plan for renewable energy or energy efficiency.

The Project's consistency with the applicable state and local plans is discussed below.

CONSISTENCY WITH ISTE A

Transportation and access to the Project site is provided by the local and regional roadway systems. The Project would not interfere with, nor otherwise obstruct intermodal transportation plans or projects that may be realized pursuant to the ISTE A because Southern California Association of Governments is not planning for intermodal facilities on or through the Project site.

CONSISTENCY WITH TEA-21

The Project site is located near major transportation corridors with proximate access to the Interstate freeway system. The site selected for the Project facilitates access acts to reduce vehicle miles traveled, takes advantage of existing infrastructure systems, and promotes land use compatibilities through collocation of similar uses. The Project supports the strong planning processes emphasized under TEA-21. The Project is therefore consistent with, and would not otherwise interfere with, nor obstruct implementation of TEA-21.

CONSISTENCY WITH IEPR

Electricity may be provided to the Project by SCE. SCE's *Clean Power and Electrification Pathway* white paper builds on existing state programs and policies. As such, the Project is consistent with, and would not otherwise interfere with, nor obstruct implementation the goals presented in the 2020 IEPR.

CONSISTENCY WITH STATE OF CALIFORNIA ENERGY PLAN

The Project site is located proximate to transportation corridors with access to the Interstate freeway system. The site selected for the Project is infill and facilitates access and takes advantage of existing infrastructure systems. The Project therefore supports urban design and planning processes identified under the State of California Energy Plan, is consistent with, and would not otherwise interfere with, nor obstruct implementation of the State of California Energy Plan.

CONSISTENCY WITH CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

The 2019 version of Title 24 was adopted by the California Energy Commission (CEC) and became effective on January 1, 2020. It should be noted that the analysis herein assumes compliance with the 2019 Title 24 Energy Efficiency Standards, which are incorporated into CalEEMod.

CONSISTENCY WITH AB 1493

AB 1493 is not applicable to the Project as it is a statewide measure establishing vehicle emissions standards. No feature of the Project would interfere with implementation of the requirements under AB 1493.

CONSISTENCY WITH RPS

California's Renewable Portfolio Standard is not applicable to the Project as it is a statewide measure that establishes a renewable energy mix. No feature of the Project would interfere with implementation of the requirements under RPS.

CONSISTENCY WITH SB 350

The proposed Project would use energy from SCE, which have committed to diversify their portfolio of energy sources by increasing energy from wind and solar sources. No feature of the Project would interfere with implementation of SB 350. Additionally, the Project would be designed and constructed to implement the energy efficiency measures for new residential developments and would include several measures designed to reduce energy consumption.

As shown above, the Project would not conflict with any of the state or local plans. As such, a less than significant impact is expected.

This page intentionally left blank.

5 REFERENCES

1. **State of California.** *2020 CEQA California Environmental Quality Act Statute and Guidelines.* s.l. : California Association of Environmental Professionals, 2020.
2. **Urban Crossroads, Inc.** *Murrieta Housing Transportation Analysis.* 2021.
3. **Administration, U.S. Energy Information.** California State Profile and Energy Estimates. [Online] <https://www.eia.gov/state/data.php?sid=CA#ConsumptionExpenditures>.
4. **California Energy Commission.** *Transportation Energy Demand Forecast 2019-2030.* 2020.
5. **Alternate Fuels Data Center.** *U.S. Department of Energy.* [Online] <https://afdc.energy.gov/states/ca>.
6. **U.S. Energy Information Administration.** California Energy Consumption by End-Use Sector 2019. *California State Profile and Energy Estimates.* [Online] <https://www.eia.gov/state/?sid=CA#tabs-2>.
7. **California Energy Commission.** Total System Electric Generation. *CA.gov.* [Online] https://www.energy.ca.gov/almanac/electricity_data/total_system_power.html.
8. **Jet fuel consumption, price, and expenditure estimates, 2019.** *U.S. Energy Information Administration.* [Online] https://www.eia.gov/state/seds/data.php?incfile=/state/seds/sep_fuel/html/fuel_jf.html.
9. **State Profile Data: California, 2019.** *U.S. Energy and Information Administration.* [Online] <https://www.eia.gov/state/data.php?sid=CA>.
10. **U.S. Energy Information Administration.** State Profile and Energy Estimates 2019. *Independent Statistics and Analysis.* [Online] <http://www.eia.gov/state/?sid=CA#tabs2..>
11. **California Energy Commission.** 2013 Integrated Energy Policy Report. [Online] 2013. <http://www.energy.ca.gov/2013publications/CEC-100-2013-001/CEC-100-2013-001-CMF.pdf>.
12. —. **California Energy Almanac.** *Utility Energy Supply Plans from 2013.* [Online] https://www.energy.ca.gov/almanac/electricity_data/s-2_supply_forms_2013/.
13. **California ISO.** Understanding the ISO. [Online] <http://www.caiso.com/about/Pages/OurBusiness/UnderstandingtheISO/default.aspx>.
14. **Southern California Edison.** 2018 Power Content Label. *Southern California Edison.* [Online] 2018. <https://www.sce.com/sites/default/files/inline-files/2018SCEPCL.pdf>.
15. **California Public Utilities Commission.** Natural Gas and California. [Online] <http://www.cpuc.ca.gov/general.aspx?id=4802>.
16. **Department of Motor Vehicles.** *State of California Department of Motor Vehicles Statistics For Publication January Through December 2020.* 2021.
17. **U.S. Energy Information Administration.** Use of Energy in the United States Explained Energy Use for Transportation. [Online] https://www.eia.gov/energyexplained/?page=us_energy_transportation.
18. —. **Natural Gas Consumption by End Use.** [Online] https://www.eia.gov/dnav/ng/ng_cons_sum_dcu_SCA_a.htm.
19. **California Energy Commission Staff.** 2020 Integrated Energy Policy Report Update. [Online] 2020. [Cited: March 26, 2021.] https://ww2.energy.ca.gov/2020_energypolicy/.
20. **The California Energy Commission.** 2019 Building Energy Efficiency Standards . *California Energy Commission.* [Online] 2018.

https://www.energy.ca.gov/title24/2019standards/documents/2018_Title_24_2019_Building_Standards_FAQ.pdf.

21. California Energy Commission. Renewables Portfolio Standard (RPS). [Online] 2002. <http://www.energy.ca.gov/portfolio/>.
22. State of California. *California Environmental Quality Act Guideline, California Public Resources Code, Title 14, Division 6, Chapter 3,*
23. Urban Crossroads, Inc. *Murrieta Apartments Air Quality Impact Analysis*. 2021.
24. California Air Pollution Control Officers Association (CAPCOA). California Emissions Estimator Model (CalEEMod). [Online] June 1, 2020. [Cited: June 2, 2021.] www.caleemod.com.
25. California Department of Transportation. Emissions Inventory. *EMFAC*. [Online] 2017. <https://arb.ca.gov/emfac/>.
26. Pray, Richard. *2021 National Construction Estimator*. Carlsbad : Craftsman Book Company, 2021.
27. Southern California Edison. Schedule GS-1 General Service. *Regulatory Information - Rates Pricing*. [Online] https://library.sce.com/content/dam/sce-doctrans/public/regulatory/tariff/electric/schedules/general-service-&-industrial-rates/ELECTRIC_SCHEDULES_GS-1.pdf.
28. California Air Resources Board. *Methods to Find the Cost-Effectiveness of Funding Air Quality Projects For Evaluating Motor Vehicle Registration Fee Projects And Congestion Mitigation and Air Quality Improvement (CMAQ) Projects, Emission Factor Tables*. 2018.
29. Urban Crossroads, Inc. *Murrieta Apartments Air Quality Impact Analysis*. 2021.
30. California Air Pollution Control Officers Association. *California Emissions Estimator Model User Manual, version 2020.4.0, Appendix A*. s.l. : California Air Pollution Control Officers Association, 2021.

6 CERTIFICATIONS

The contents of this energy analysis report represent an accurate depiction of the environmental impacts associated with the proposed Murrieta Apartments. The information contained in this energy analysis report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at (619) 778-1971.

William Maddux
Senior Associate
URBAN CROSSROADS, INC.
(619) 788-1971
bmaddux@urbanxroads.com

EDUCATION

Bachelor of Science in Urban and Regional Planning
California Polytechnic State University, Pomona • June 2000

PROFESSIONAL AFFILIATIONS

ASA – Acoustical Society of America
APA – American Planning Association
AWMA – Air and Waste Management Association

PROFESSIONAL CERTIFICATIONS``

HARP Model Training – Bluescape Environmental • 2004
Air Dispersion Modeling – Lakes Environmental • 2008

This page intentionally left blank.

APPENDIX 4.1:

CALEEMOD PROJECT ANNUAL EMISSIONS MODEL OUTPUTS

This page intentionally left blank.

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

**Murrieta Apartments
South Coast AQMD Air District, Annual**

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Parking Lot	1,137.00	Space	12.55	454,800.00	0
City Park	3.50	Acre	3.50	152,460.00	0
Apartments Low Rise	153.00	Dwelling Unit	4.59	153,000.00	438
Apartments Mid Rise	330.00	Dwelling Unit	4.17	330,000.00	944

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.2	Precipitation Freq (Days)	31
Climate Zone	10			Operational Year	2023
Utility Company	Southern California Edison				
CO2 Intensity (lb/MWhr)	390.98	CH4 Intensity (lb/MWhr)	0.033	N2O Intensity (lb/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Based on Site Plan actual building area, open space/landscaped, and parking lot acreage

Construction Phase - Based on Project Applicant Schedule Starting in early 2022 and opening year 2023. Paving and painting extended to provide 1.5 months and then overlapped with building construction.

Off-road Equipment - standard 8-hour day

Off-road Equipment - Standard 8 hour day

Off-road Equipment - tractor/backhoe/loader and excavators replaced with crawler tractors for PM generation crawler tractor LF and HP set same as tractor/backhoe/loader and excavators

Off-road Equipment -

Off-road Equipment - tractor/backhoe/loader replaced with crawler tractor for PM generation crawler tractor LF and HP set same as tractor/backhoe/loader

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading -

Architectural Coating - Based on a total apartments SF of 286,608 square feet

Vehicle Trips - No trip generation for park as it represents landscaping and on-site open space

Woodstoves - No wood burning device per SCAQMD Rule 445. 10% No fire place

Area Coating - Based on a total apartment square footage of 286,608 sf

Water And Wastewater - Outdoor water use for landscaping included in apartment outdoor water use rates, indoor water use reduced 20% to account for CalGreen Code updates in 2013 as water rates are taken from year 2000 survey.

Construction Off-road Equipment Mitigation - Clean Paved roads % taken from SCAQMD Rule 403 workbook

Energy Mitigation - Based on Title 24 solar PV requirements for residential under 4 stories.

Table Name	Column Name	Default Value	New Value
tblArchitecturalCoating	ConstArea_Residential_Exterior	326,025.00	193,461.00
tblArchitecturalCoating	ConstArea_Residential_Interior	978,075.00	580,381.00
tblAreaCoating	Area_Residential_Exterior	326025	193461
tblAreaCoating	Area_Residential_Interior	978075	580381
tblConstDustMitigation	CleanPavedRoadPercentReduction	0	46
tblConstructionPhase	NumDays	20.00	33.00
tblConstructionPhase	NumDays	20.00	33.00
tblFireplaces	NumberGas	130.05	138.00
tblFireplaces	NumberGas	280.50	297.00
tblFireplaces	NumberNoFireplace	15.30	14.00
tblFireplaces	NumberWood	7.65	0.00
tblFireplaces	NumberWood	16.50	0.00
tblLandUse	LotAcreage	10.23	12.55
tblLandUse	LotAcreage	9.56	4.59
tblLandUse	LotAcreage	8.68	4.17
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	HorsePower	212.00	158.00
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	LoadFactor	0.43	0.37

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblOffRoadEquipment	LoadFactor	0.43	0.38
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblVehicleTrips	ST_TR	1.96	0.00
tblVehicleTrips	SU_TR	2.19	0.00
tblVehicleTrips	WD_TR	0.78	0.00
tblWater	IndoorWaterUseRate	9,968,565.92	7,974,852.74
tblWater	IndoorWaterUseRate	21,500,828.46	17,200,662.77
tblWater	OutdoorWaterUseRate	4,170,184.72	0.00
tblWoodstoves	NumberCatalytic	7.65	0.00
tblWoodstoves	NumberCatalytic	16.50	0.00
tblWoodstoves	NumberNoncatalytic	7.65	0.00
tblWoodstoves	NumberNoncatalytic	16.50	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00

2.0 Emissions Summary

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Murrieta Apartments - South Coast AQMD Air District, Annual

2.1 Overall Construction
Unmitigated Construction

Year	tons/yr															MT/yr
ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
2022	0.4906	3.4601	4.5645	0.0123	1.0123	0.1438	0.3119	0.1342	0.4461	0.0000	1,131.126	1,131.126	0.1172	0.0527	1,149.748	
2023	1.3392	2.2395	3.8846	0.0108	0.7057	0.0837	0.1894	0.0786	0.2680	0.0000	995.3900	995.3900	0.0861	0.0475	1,011.705	
Maximum	1.3392	3.4601	4.5645	0.0123	1.0123	0.1438	0.3119	0.1342	0.4461	0.0000	1,131.126	1,131.126	0.1172	0.0527	1,149.748	

Mitigated Construction

Year	tons/yr															MT/yr
ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
2022	0.4906	3.4601	4.5645	0.0123	0.5543	0.1438	0.1709	0.1342	0.3051	0.0000	1,131.126	1,131.126	0.1172	0.0527	1,149.748	
2023	1.3392	2.2395	3.8846	0.0108	0.4306	0.0837	0.5143	0.0786	0.2005	0.0000	995.3897	995.3897	0.0861	0.0475	1,011.704	
Maximum	1.3392	3.4601	4.5645	0.0123	0.5543	0.1438	0.1709	0.1342	0.3051	0.0000	1,131.126	1,131.126	0.1172	0.0527	1,149.748	

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	42.68	0.00	37.68	41.59	0.00	29.20	0.00	0.00	0.00	0.00	0.00	0.00

Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
1	3-7-2022	6-6-2022	1.2222	1.2222
2	6-7-2022	9-6-2022	0.9667	0.9667
3	9-7-2022	12-6-2022	0.9693	0.9693
4	12-7-2022	3-6-2023	0.8821	0.8821
5	3-7-2023	6-6-2023	0.8580	0.8580
6	6-7-2023	9-6-2023	1.9765	1.9765
7	9-7-2023	9-30-2023	0.0708	0.0708
		Highest	1.9765	1.9765

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	2.0341	0.1478	5.0351	8.4000e-004		0.0349	0.0349		0.0349	0.0349	0.0000	112.6244	112.6244	9.9000e-003	1.9200e-003	113.4426
Energy	0.0381	0.3253	0.1384	2.0800e-003		0.0263	0.0263		0.0263	0.0263	0.0000	749.9013	749.9013	0.0387	0.0107	754.0651
Mobile	1.4908	1.8663	15.7277	0.0349	3.6298	0.0257	3.6554	0.9687	0.0239	0.9925	0.0000	3,261.6218	3,261.6218	0.2077	0.1439	3,309.6806
Waste						0.0000	0.0000		0.0000	0.0000	45.1614	0.0000	45.1614	2.6690	0.0000	111.8855
Water						0.0000	0.0000		0.0000	0.0000	7.9870	97.2255	105.2125	0.8286	0.0204	131.9950
Total	3.5630	2.3394	20.9012	0.0378	3.6298	0.0869	3.7166	0.9687	0.0851	1.0537	53.1485	4,221.3729	4,274.5213	3.7538	0.1769	4,421.0688

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	2.0341	0.1478	5.0351	8.4000e-004		0.0349	0.0349		0.0349	0.0349	0.0000	112.6244	112.6244	9.9000e-003	1.9200e-003	113.4426
Energy	0.0381	0.3253	0.1384	2.0800e-003		0.0263	0.0263		0.0263	0.0263	0.0000	538.7090	538.7090	0.0209	8.5600e-003	541.7833
Mobile	1.4908	1.8663	15.7277	0.0349	3.6298	0.0257	3.6554	0.9687	0.0239	0.9925	0.0000	3,261.6218	3,261.6218	0.2077	0.1439	3,309.6806
Waste						0.0000	0.0000		0.0000	0.0000	45.1614	0.0000	45.1614	2.6690	0.0000	111.8855
Water						0.0000	0.0000		0.0000	0.0000	7.9870	97.2255	105.2125	0.8286	0.0204	131.9950
Total	3.5630	2.3394	20.9012	0.0378	3.6298	0.0869	3.7166	0.9687	0.0851	1.0537	53.1485	4,010.1806	4,063.3290	3.7360	0.1747	4,208.7870

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.00	4.94	0.47	1.22	4.80

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	2/7/2022	2/18/2022	5	10	
2	Grading	Grading	2/19/2022	4/8/2022	5	35	
3	Building Construction	Building Construction	4/9/2022	9/8/2023	48	370	

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4	Paving	Paving	7/26/2023	9/8/2023	5	33
5	Architectural Coating	Architectural Coating	7/26/2023	9/8/2023	5	33

Acres of Grading (Site Preparation Phase): 35

Acres of Grading (Grading Phase): 140

Acres of Paving: 12.55

Residential Indoor: 580,381; Residential Outdoor: 193,461; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 27,288 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Site Preparation	Crawler Tractors	4	8.00	97	0.37
Site Preparation	Rubber Tired Dozers	3	8.00	247	0.40
Grading	Crawler Tractors	2	8.00	158	0.38
Grading	Crawler Tractors	2	8.00	97	0.37
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Grading	Scrapers	2	8.00	367	0.48
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	3	8.00	89	0.20
Building Construction	Generator Sets	1	8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	3	8.00	97	0.37
Building Construction	Welders	1	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	8.00	78	0.48

Trips and VMT

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	8	20.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	9	603.00	151.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	6	15.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	121.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area
 Clean Paved Roads

3.2 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1089	0.0000	0.1089	0.0517	0.0000	0.0517	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0202	0.1965	0.1034	1.9000e-004		0.0114	0.0114		0.0105	0.0105	0.0000	16.7211	16.7211	5.4100e-003	0.0000	16.8563
Total	0.0202	0.1965	0.1034	1.9000e-004	0.1089	0.0114	0.1203	0.0517	0.0105	0.0622	0.0000	16.7211	16.7211	5.4100e-003	0.0000	16.8563

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.0000e-004	2.4000e-004	3.1900e-003	1.0000e-005	9.9000e-004	1.0000e-005	9.9000e-004	2.6000e-004	1.0000e-005	2.7000e-004	0.0000	0.8036	0.8036	2.0000e-005	2.0000e-005	0.8105
Total	3.0000e-004	2.4000e-004	3.1900e-003	1.0000e-005	9.9000e-004	1.0000e-005	9.9000e-004	2.6000e-004	1.0000e-005	2.7000e-004	0.0000	0.8036	0.8036	2.0000e-005	2.0000e-005	0.8105

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0425	0.0000	0.0425	0.0202	0.0000	0.0202	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0202	0.1965	0.1034	1.9000e-004		0.0114	0.0114		0.0105	0.0105	0.0000	16.7211	16.7211	5.4100e-003	0.0000	16.8563
Total	0.0202	0.1965	0.1034	1.9000e-004	0.0425	0.0114	0.0539	0.0202	0.0105	0.0307	0.0000	16.7211	16.7211	5.4100e-003	0.0000	16.8563

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.0000e-004	2.4000e-004	3.1900e-003	1.0000e-005	5.9000e-004	1.0000e-005	6.0000e-004	1.7000e-004	1.0000e-005	1.7000e-004	0.0000	0.8036	0.8036	2.0000e-005	2.0000e-005	0.8105
Total	3.0000e-004	2.4000e-004	3.1900e-003	1.0000e-005	5.9000e-004	1.0000e-005	6.0000e-004	1.7000e-004	1.0000e-005	1.7000e-004	0.0000	0.8036	0.8036	2.0000e-005	2.0000e-005	0.8105

3.3 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.1796	0.0000	0.1796	0.0659	0.0000	0.0659	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0783	0.8138	0.5239	1.0900e-003		0.0394	0.0394		0.0363	0.0363	0.0000	95.4171	95.4171	0.0309	0.0000	96.1886
Total	0.0783	0.8138	0.5239	1.0900e-003	0.1796	0.0394	0.2190	0.0659	0.0363	0.1022	0.0000	95.4171	95.4171	0.0309	0.0000	96.1886

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.1800e-003	9.5000e-004	0.0124	3.0000e-005	3.8400e-003	2.0000e-005	3.8600e-003	1.0200e-003	2.0000e-005	1.0400e-003	0.0000	3.1249	3.1249	9.0000e-005	8.0000e-005	3.1520
Total	1.1800e-003	9.5000e-004	0.0124	3.0000e-005	3.8400e-003	2.0000e-005	3.8600e-003	1.0200e-003	2.0000e-005	1.0400e-003	0.0000	3.1249	3.1249	9.0000e-005	8.0000e-005	3.1520

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Fugitive Dust					0.0701	0.0000	0.0701	0.0257	0.0000	0.0257	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0783	0.8138	0.5239	1.0900e-003		0.0394	0.0394		0.0363	0.0363	0.0000	95.4170	95.4170	0.0309	0.0000	96.1884
Total	0.0783	0.8138	0.5239	1.0900e-003	0.0701	0.0394	0.1095	0.0257	0.0363	0.0620	0.0000	95.4170	95.4170	0.0309	0.0000	96.1884

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.1800e-003	9.5000e-004	0.0124	3.0000e-005	2.3100e-003	2.0000e-005	2.3300e-003	6.4000e-004	2.0000e-005	6.7000e-004	0.0000	3.1249	3.1249	9.0000e-005	8.0000e-005	3.1520
Total	1.1800e-003	9.5000e-004	0.0124	3.0000e-005	2.3100e-003	2.0000e-005	2.3300e-003	6.4000e-004	2.0000e-005	6.7000e-004	0.0000	3.1249	3.1249	9.0000e-005	8.0000e-005	3.1520

3.4 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1724	1.5929	1.6567	2.7400e-003		0.0821	0.0821		0.0772	0.0772	0.0000	235.8947	235.8947	0.0578	0.0000	237.3406
Total	0.1724	1.5929	1.6567	2.7400e-003		0.0821	0.0821		0.0772	0.0772	0.0000	235.8947	235.8947	0.0578	0.0000	237.3406

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0259	0.7005	0.2326	2.7400e-003	0.0905	6.9900e-003	0.0975	0.0261	6.6900e-003	0.0328	0.0000	267.7058	267.7058	8.9600e-003	0.0388	279.5056
Worker	0.1924	0.1553	2.0323	5.5400e-003	0.6285	3.8300e-003	0.6323	0.1669	3.5200e-003	0.1704	0.0000	511.4594	511.4594	0.0141	0.0137	515.8951
Total	0.2183	0.8558	2.2649	8.2800e-003	0.7190	0.0108	0.7298	0.1930	0.0102	0.2032	0.0000	779.1652	779.1652	0.0230	0.0526	795.4007

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1724	1.5929	1.6567	2.7400e-003		0.0821	0.0821		0.0772	0.0772	0.0000	235.8945	235.8945	0.0578	0.0000	237.3403
Total	0.1724	1.5929	1.6567	2.7400e-003		0.0821	0.0821		0.0772	0.0772	0.0000	235.8945	235.8945	0.0578	0.0000	237.3403

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0259	0.7005	0.2326	2.7400e-003	0.0610	6.9900e-003	0.0680	0.0189	6.6900e-003	0.0256	0.0000	267.7058	267.7058	8.9600e-003	0.0388	279.5056
Worker	0.1924	0.1553	2.0323	5.5400e-003	0.3779	3.8300e-003	0.3817	0.1054	3.5200e-003	0.1089	0.0000	511.4594	511.4594	0.0141	0.0137	515.8951
Total	0.2183	0.8558	2.2649	8.2800e-003	0.4389	0.0108	0.4497	0.1243	0.0102	0.1345	0.0000	779.1652	779.1652	0.0230	0.0526	795.4007

3.4 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1506	1.3894	1.5579	2.6000e-003		0.0673	0.0673		0.0633	0.0633	0.0000	223.5610	223.5610	0.0545	0.0000	224.9225
Total	0.1506	1.3894	1.5579	2.6000e-003		0.0673	0.0673		0.0633	0.0633	0.0000	223.5610	223.5610	0.0545	0.0000	224.9225

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0147	0.5177	0.1971	2.4800e-003	0.0857	2.8800e-003	0.0886	0.0247	2.7500e-003	0.0275	0.0000	241.8634	241.8634	8.1100e-003	0.0350	252.5093
Worker	0.1693	0.1301	1.7757	5.0800e-003	0.5954	3.4200e-003	0.5988	0.1581	3.1400e-003	0.1613	0.0000	471.7959	471.7959	0.0120	0.0120	475.6680
Total	0.1839	0.6479	1.9728	7.5600e-003	0.6811	6.3000e-003	0.6874	0.1829	5.8900e-003	0.1888	0.0000	713.6593	713.6593	0.0201	0.0470	728.1772

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.1506	1.3894	1.5579	2.6000e-003		0.0673	0.0673		0.0633	0.0633	0.0000	223.5607	223.5607	0.0545	0.0000	224.9222
Total	0.1506	1.3894	1.5579	2.6000e-003		0.0673	0.0673		0.0633	0.0633	0.0000	223.5607	223.5607	0.0545	0.0000	224.9222

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0147	0.5177	0.1971	2.4800e-003	0.0578	2.8800e-003	0.0607	0.0179	2.7500e-003	0.0206	0.0000	241.8634	241.8634	8.1100e-003	0.0350	252.5093
Worker	0.1693	0.1301	1.7757	5.0800e-003	0.3580	3.4200e-003	0.3614	0.0999	3.1400e-003	0.1030	0.0000	471.7959	471.7959	0.0120	0.0120	475.6680
Total	0.1839	0.6479	1.9728	7.5600e-003	0.4158	6.3000e-003	0.4221	0.1177	5.8900e-003	0.1236	0.0000	713.6593	713.6593	0.0201	0.0470	728.1772

3.5 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0170	0.1682	0.2406	3.8000e-004		8.4200e-003	8.4200e-003		7.7400e-003	7.7400e-003	0.0000	33.0443	33.0443	0.0107	0.0000	33.3115
Paving	0.0164					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0335	0.1682	0.2406	3.8000e-004		8.4200e-003	8.4200e-003		7.7400e-003	7.7400e-003	0.0000	33.0443	33.0443	0.0107	0.0000	33.3115

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.7000e-004	5.9000e-004	8.1000e-003	2.0000e-005	2.7200e-003	2.0000e-005	2.7300e-003	7.2000e-004	1.0000e-005	7.4000e-004	0.0000	2.1516	2.1516	5.0000e-005	5.0000e-005	2.1693
Total	7.7000e-004	5.9000e-004	8.1000e-003	2.0000e-005	2.7200e-003	2.0000e-005	2.7300e-003	7.2000e-004	1.0000e-005	7.4000e-004	0.0000	2.1516	2.1516	5.0000e-005	5.0000e-005	2.1693

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0170	0.1682	0.2406	3.8000e-004		8.4200e-003	8.4200e-003		7.7400e-003	7.7400e-003	0.0000	33.0443	33.0443	0.0107	0.0000	33.3115
Paving	0.0164					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0335	0.1682	0.2406	3.8000e-004		8.4200e-003	8.4200e-003		7.7400e-003	7.7400e-003	0.0000	33.0443	33.0443	0.0107	0.0000	33.3115

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	7.7000e-004	5.9000e-004	8.1000e-003	2.0000e-005	1.6300e-003	2.0000e-005	1.6500e-003	4.6000e-004	1.0000e-005	4.7000e-004	0.0000	2.1516	2.1516	5.0000e-005	5.0000e-005	2.1693
Total	7.7000e-004	5.9000e-004	8.1000e-003	2.0000e-005	1.6300e-003	2.0000e-005	1.6500e-003	4.6000e-004	1.0000e-005	4.7000e-004	0.0000	2.1516	2.1516	5.0000e-005	5.0000e-005	2.1693

3.6 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	0.9599					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	4.2200e-003	0.0287	0.0398	7.0000e-005		1.5600e-003	1.5600e-003		1.5600e-003	1.5600e-003	0.0000	5.6172	5.6172	3.4000e-004	0.0000	5.6256
Total	0.9642	0.0287	0.0398	7.0000e-005		1.5600e-003	1.5600e-003		1.5600e-003	1.5600e-003	0.0000	5.6172	5.6172	3.4000e-004	0.0000	5.6256

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	6.2300e-003	4.7900e-003	0.0653	1.9000e-004	0.0219	1.3000e-004	0.0220	5.8200e-003	1.2000e-004	5.9300e-003	0.0000	17.3566	17.3566	4.4000e-004	4.4000e-004	17.4990
Total	6.2300e-003	4.7900e-003	0.0653	1.9000e-004	0.0219	1.3000e-004	0.0220	5.8200e-003	1.2000e-004	5.9300e-003	0.0000	17.3566	17.3566	4.4000e-004	4.4000e-004	17.4990

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Archit. Coating	0.9599					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	4.2200e-003	0.0287	0.0398	7.0000e-005		1.5600e-003	1.5600e-003		1.5600e-003	1.5600e-003	0.0000	5.6172	5.6172	3.4000e-004	0.0000	5.6256
Total	0.9642	0.0287	0.0398	7.0000e-005		1.5600e-003	1.5600e-003		1.5600e-003	1.5600e-003	0.0000	5.6172	5.6172	3.4000e-004	0.0000	5.6256

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
Category	tons/yr										MT/yr						
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	6.2300e-003	4.7900e-003	0.0653	1.9000e-004	0.0132	1.3000e-004	0.0133	3.6700e-003	1.2000e-004	3.7900e-003	0.0000	17.3566	17.3566	4.4000e-004	4.4000e-004	17.4990	
Total	6.2300e-003	4.7900e-003	0.0653	1.9000e-004	0.0132	1.3000e-004	0.0133	3.6700e-003	1.2000e-004	3.7900e-003	0.0000	17.3566	17.3566	4.4000e-004	4.4000e-004	17.4990	

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	1.4908	1.8663	15.7277	0.0349	3.6298	0.0257	3.6554	0.9687	0.0239	0.9925	0.0000	3,261.6218	3,261.6218	0.2077	0.1439	3,309.6806
Unmitigated	1.4908	1.8663	15.7277	0.0349	3.6298	0.0257	3.6554	0.9687	0.0239	0.9925	0.0000	3,261.6218	3,261.6218	0.2077	0.1439	3,309.6806

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Low Rise	1,119.96	1,245.42	960.84	3,810,642	3,810,642
Apartments Mid Rise	1,795.20	1,620.30	1349.70	5,831,614	5,831,614
City Park	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Total	2,915.16	2,865.72	2,310.54	9,642,256	9,642,256

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Low Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3
City Park	16.60	8.40	6.90	33.00	48.00	19.00	66	28	6
Parking Lot	16.60	8.40	6.90	0.00	0.00	0.00	0	0	0

4.4 Fleet Mix

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Low Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791
Apartments Mid Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791
City Park	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791
Parking Lot	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Kilowatt Hours of Renewable Electricity Generated

Category	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	161.9402	161.9402	0.0137	1.6600e-003	162.7756
Electricity Unmitigated						0.0000	0.0000		0.0000	0.0000	0.0000	373.1325	373.1325	0.0315	3.8200e-003	375.0574
NaturalGas Mitigated	0.0381	0.3253	0.1384	2.0800e-003		0.0263	0.0263		0.0263	0.0263	0.0000	376.7688	376.7688	7.2200e-003	6.9100e-003	379.0077
NaturalGas Unmitigated	0.0381	0.3253	0.1384	2.0800e-003		0.0263	0.0263		0.0263	0.0263	0.0000	376.7688	376.7688	7.2200e-003	6.9100e-003	379.0077

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Low Rise	2.31426e+006	0.0125	0.1066	0.0454	6.8000e-004		8.6200e-003	8.6200e-003		8.6200e-003	8.6200e-003	0.0000	123.4980	123.4980	2.3700e-003	2.2600e-003	124.2318
Apartments Mid Rise	4.74612e+006	0.0256	0.2187	0.0931	1.4000e-003		0.0177	0.0177		0.0177	0.0177	0.0000	253.2708	253.2708	4.8500e-003	4.6400e-003	254.7759
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0381	0.3253	0.1384	2.0800e-003		0.0263	0.0263		0.0263	0.0263	0.0000	376.7688	376.7688	7.2200e-003	6.9000e-003	379.0077

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Low Rise	2.31426e+006	0.0125	0.1066	0.0454	6.8000e-004		8.6200e-003	8.6200e-003		8.6200e-003	8.6200e-003	0.0000	123.4980	123.4980	2.3700e-003	2.2600e-003	124.2318
Apartments Mid Rise	4.74612e+006	0.0256	0.2187	0.0931	1.4000e-003		0.0177	0.0177		0.0177	0.0177	0.0000	253.2708	253.2708	4.8500e-003	4.6400e-003	254.7759
City Park	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0381	0.3253	0.1384	2.0800e-003		0.0263	0.0263		0.0263	0.0263	0.0000	376.7688	376.7688	7.2200e-003	6.9000e-003	379.0077

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity

Unmitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Low Rise	638002	113.1469	9.5500e-003	1.1600e-003	113.7306
Apartments Mid Rise	1.3068e+006	231.7557	0.0196	2.3700e-003	232.9513
City Park	0	0.0000	0.0000	0.0000	0.0000
Parking Lot	159180	28.2299	2.3800e-003	2.9000e-004	28.3755
Total		373.1325	0.0315	3.8200e-003	375.0574

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Low Rise	340289	60.3488	5.0900e-003	6.2000e-004	60.6601
Apartments Mid Rise	1.00909e+006	178.9577	0.0151	1.8300e-003	179.8809
City Park	-297713	-52.7981	-0.0045	-0.0005	-53.0705
Parking Lot	-138533	-24.5682	-0.0021	-0.0003	-24.6950
Total		161.9402	0.0137	1.6600e-003	162.7756

6.0 Area Detail

6.1 Mitigation Measures Area

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	2.0341	0.1478	5.0351	8.4000e-004		0.0349	0.0349		0.0349	0.0349	0.0000	112.6244	112.6244	9.9000e-003	1.9200e-003	113.4426
Unmitigated	2.0341	0.1478	5.0351	8.4000e-004		0.0349	0.0349		0.0349	0.0349	0.0000	112.6244	112.6244	9.9000e-003	1.9200e-003	113.4426

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.0960					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	1.7762					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0106	0.0902	0.0384	5.8000e-004		7.2900e-003	7.2900e-003		7.2900e-003	7.2900e-003	0.0000	104.4597	104.4597	2.0000e-003	1.9200e-003	105.0804
Landscaping	0.1514	0.0576	4.9967	2.6000e-004		0.0276	0.0276		0.0276	0.0276	0.0000	8.1647	8.1647	7.9000e-003	0.0000	8.3622
Total	2.0341	0.1478	5.0351	8.4000e-004		0.0349	0.0349		0.0349	0.0349	0.0000	112.6244	112.6244	9.9000e-003	1.9200e-003	113.4426

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.0960					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	1.7762					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0106	0.0902	0.0384	5.8000e-004		7.2900e-003	7.2900e-003		7.2900e-003	7.2900e-003	0.0000	104.4597	104.4597	2.0000e-003	1.9200e-003	105.0804
Landscaping	0.1514	0.0576	4.9967	2.6000e-004		0.0276	0.0276		0.0276	0.0276	0.0000	8.1647	8.1647	7.9000e-003	0.0000	8.3622
Total	2.0341	0.1478	5.0351	8.4000e-004		0.0349	0.0349		0.0349	0.0349	0.0000	112.6244	112.6244	9.9000e-003	1.9200e-003	113.4426

7.0 Water Detail

7.1 Mitigation Measures Water

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	Total CO2	CH4	N2O	CO2e
Category	MT/yr			
Mitigated	105.2125	0.8286	0.0204	131.9950
Unmitigated	105.2125	0.8286	0.0204	131.9950

7.2 Water by Land Use

Unmitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Low Rise	7.97485 / 6.28453	33.3282	0.2625	6.4500e-003	41.8121
Apartments Mid Rise	17.2007 / 13.5549	71.8843	0.5661	0.0139	90.1829
City Park	0 / 0	0.0000	0.0000	0.0000	0.0000
Parking Lot	0 / 0	0.0000	0.0000	0.0000	0.0000
Total		105.2125	0.8286	0.0204	131.9950

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

7.2 Water by Land Use

Mitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Low Rise	7.97485 / 6.28453	33.3282	0.2625	6.4500e-003	41.8121
Apartments Mid Rise	17.2007 / 13.5549	71.8843	0.5661	0.0139	90.1829
City Park	0 / 0	0.0000	0.0000	0.0000	0.0000
Parking Lot	0 / 0	0.0000	0.0000	0.0000	0.0000
Total		105.2125	0.8286	0.0204	131.9950

8.0 Waste Detail

8.1 Mitigation Measures Waste

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Category/Year

	Total CO2	CH4	N2O	CO2e
	MT/yr			
Mitigated	45.1614	2.6690	0.0000	111.8855
Unmitigated	45.1614	2.6690	0.0000	111.8855

8.2 Waste by Land Use

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Low Rise	70.38	14.2865	0.8443	0.0000	35.3942
Apartments Mid Rise	151.8	30.8140	1.8211	0.0000	76.3405
City Park	0.3	0.0609	3.6000e-003	0.0000	0.1509
Parking Lot	0	0.0000	0.0000	0.0000	0.0000
Total		45.1614	2.6690	0.0000	111.8855

Murrieta Apartments - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Equipment Type	Number
----------------	--------

11.0 Vegetation

APPENDIX 4.2:

EMFAC2017

This page intentionally left blank.

Source: EMFAC2017 (v1.0.3) Emissions Inventory

Region Type: Sub-Area

Region: Riverside (SC)

Calendar Year: 2022

Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for VMT, trips/day for Trips, tons/day for Emissions, 1000 gallons/day for Fuel Consumption

Region	Calent	Vehicle Ca	Model Year	Speed	Fuel	Population	VMT	Trips	Fuel Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class	Ratio
Riverside (SC)	2022	HHDT	Aggregate	Aggregate	Gasol	6.576938112	469.290096	131.5914	0.111263246	276720.944	469.290096	1954241.273	7.06	HHDT	54.71%
Riverside (SC)	2022	HHDT	Aggregate	Aggregate	Diese	15714.36952	1943053.846	165079.1	272.0962785		1943053.846				
Riverside (SC)	2022	HHDT	Aggregate	Aggregate	Natur	263.7933161	10718.13672	1028.794	4.513402274		10718.13672				
Riverside (SC)	2022	LDA	Aggregate	Aggregate	Gasol	581991.6725	23700815.4	2755730	737.3963282	741995.8718	23700815.4	24314627.74	32.77	LDA	70.88%
Riverside (SC)	2022	LDA	Aggregate	Aggregate	Diese	5627.648407	239612.1354	26937.89	4.599543626		239612.1354				
Riverside (SC)	2022	LDA	Aggregate	Aggregate	Electr	9519.079074	374200.2044	47839.25	0		374200.2044				
Riverside (SC)	2022	LDT1	Aggregate	Aggregate	Gasol	60037.51621	2261929.707	273557.5	82.62273159	82646.09985	2261929.707	2277084.362	27.55	LDT1	7.17%
Riverside (SC)	2022	LDT1	Aggregate	Aggregate	Diese	27.76404389	601.6680241	91.61243	0.023368267		601.6680241				
Riverside (SC)	2022	LDT1	Aggregate	Aggregate	Electr	356.2042589	14552.98677	1810.859	0		14552.98677				
Riverside (SC)	2022	LDT2	Aggregate	Aggregate	Gasol	182118.8677	7165411.096	853062.8	277.8915039	279116.8158	7165411.096	7265624.392	26.03	LDT2	21.94%
Riverside (SC)	2022	LDT2	Aggregate	Aggregate	Diese	1054.483634	48028.55818	5205.89	1.225311901		48028.55818				
Riverside (SC)	2022	LDT2	Aggregate	Aggregate	Electr	1677.633962	52184.73813	8507.233	0		52184.73813				
Riverside (SC)	2022	LHDT1	Aggregate	Aggregate	Gasol	15417.55767	499086.0807	229698.6	46.20219857	71521.2169	499086.0807	1029280.982	14.39	LHDT1	
Riverside (SC)	2022	LHDT1	Aggregate	Aggregate	Diese	15837.49513	530194.9018	199215.8	25.31901832		530194.9018				
Riverside (SC)	2022	LHDT2	Aggregate	Aggregate	Gasol	2252.42518	73474.64451	33557.78	7.77372894	18506.82986	73474.64451	279062.9473	15.08	LHDT2	
Riverside (SC)	2022	LHDT2	Aggregate	Aggregate	Diese	6123.275766	205588.3028	77023.11	10.73310092		205588.3028				
Riverside (SC)	2022	MCY	Aggregate	Aggregate	Gasol	28171.90267	180969.5918	56343.81	4.77114182	4771.14182	180969.5918	180969.5918	37.93	MCY	
Riverside (SC)	2022	MDV	Aggregate	Aggregate	Gasol	154199.5457	5597389.871	706482.9	273.1677758	277942.5828	5597389.871	5763801.187	20.74	MDV	
Riverside (SC)	2022	MDV	Aggregate	Aggregate	Diese	3261.4865	137165.9419	15860.64	4.774807066		137165.9419				
Riverside (SC)	2022	MDV	Aggregate	Aggregate	Electr	916.717804	29245.37498	4686.481	0		29245.37498				
Riverside (SC)	2022	MH	Aggregate	Aggregate	Gasol	4849.122996	37965.37359	485.1063	7.358586255	8794.495605	37965.37359	53583.34508	6.09	MH	
Riverside (SC)	2022	MH	Aggregate	Aggregate	Diese	1986.085476	15617.97149	198.6085	1.43590935		15617.97149				
Riverside (SC)	2022	MHDT	Aggregate	Aggregate	Gasol	1326.926938	54049.91102	26549.15	10.27353802	76587.82765	54049.91102	794309.7864	10.37	MHDT	45.29%
Riverside (SC)	2022	MHDT	Aggregate	Aggregate	Diese	11907.6705	740259.8754	118276.6	66.31428963		740259.8754				
Riverside (SC)	2022	OBUS	Aggregate	Aggregate	Gasol	438.8357563	15270.69972	8780.226	2.9578564	4724.84948	15270.69972	31059.30019	6.57	OBUS	
Riverside (SC)	2022	OBUS	Aggregate	Aggregate	Diese	222.2197269	15788.60048	2124.34	1.766993079		15788.60048				
Riverside (SC)	2022	SBUS	Aggregate	Aggregate	Gasol	417.9532809	14725.72528	1671.813	1.664498557	5223.410044	14725.72528	41715.56692	7.99	SBUS	
Riverside (SC)	2022	SBUS	Aggregate	Aggregate	Diese	852.548169	26989.84164	9838.288	3.558911487		26989.84164				
Riverside (SC)	2022	UBUS	Aggregate	Aggregate	Gasol	164.4551683	23154.43353	657.8207	3.756059553	10115.00541	23154.43353	50069.98905	4.95	UBUS	
Riverside (SC)	2022	UBUS	Aggregate	Aggregate	Diese	1.105797941	58.57190354	4.423192	0.006566346		58.57190354				
Riverside (SC)	2022	UBUS	Aggregate	Aggregate	Electr	0.058469431	1.251702935	0.233878	0		1.251702935				
Riverside (SC)	2022	UBUS	Aggregate	Aggregate	Natur	204.1188773	26855.73191	816.4755	6.35237951		26855.73191				

Source: EMFAC2017 (v1.0.3) Emissions Inventory

Region Type: Sub-Area

Region: Riverside (SC)

Calendar Year: 2023

Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for VMT, trips/day for Trips, tons/day for Emissions, 1000 gallons/day for Fuel Consumption

Region	Calenc	Vehicle Cat	Model Year	Speed	Fuel	Population	VMT	Fuel Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class	Ratio
Riverside (SC)	2023	HHDT	Aggregate	Aggregate	Gasoli	6.287048944	470.7572646	0.108716829	269084.7531	470.7572646	2000831.243	7.44	HHDT	55.70%
Riverside (SC)	2023	HHDT	Aggregate	Aggregate	Diesel	15994.29576	1988254.022	263.9532757		1988254.022				
Riverside (SC)	2023	HHDT	Aggregate	Aggregate	Natur	297.8339277	12106.46352	5.022760484		12106.46352				
Riverside (SC)	2023	LDA	Aggregate	Aggregate	Gasoli	600073.2625	24106871.96	730.2309972	734950.915	24106871.96	24831107.93	33.79	LDA	71.00%
Riverside (SC)	2023	LDA	Aggregate	Aggregate	Diesel	6022.455725	252078.6078	4.719917791		252078.6078				
Riverside (SC)	2023	LDA	Aggregate	Aggregate	Electr	11812.58063	472157.3583	0		472157.3583				
Riverside (SC)	2023	LDT1	Aggregate	Aggregate	Gasoli	61620.9911	2305410.758	81.95823074	81979.79872	2305410.758	2326765.882	28.38	LDT1	7.14%
Riverside (SC)	2023	LDT1	Aggregate	Aggregate	Diesel	25.82294405	564.5507588	0.02156798		564.5507588				
Riverside (SC)	2023	LDT1	Aggregate	Aggregate	Electr	500.2265064	20790.57268	0		20790.57268				
Riverside (SC)	2023	LDT2	Aggregate	Aggregate	Gasoli	186844.1926	7271356.285	272.2201339	273519.5233	7271356.285	7390732.737	27.02	LDT2	21.86%
Riverside (SC)	2023	LDT2	Aggregate	Aggregate	Diesel	1179.189513	52389.15473	1.299389383		52389.15473				
Riverside (SC)	2023	LDT2	Aggregate	Aggregate	Electr	2202.047417	66987.29664	0		66987.29664				
Riverside (SC)	2023	LHDT1	Aggregate	Aggregate	Gasoli	15202.19219	489408.3926	44.78794149	69458.64379	489408.3926	1012657.526	14.58	LHDT1	
Riverside (SC)	2023	LHDT1	Aggregate	Aggregate	Diesel	15878.17916	523249.1337	24.67070229		523249.1337				
Riverside (SC)	2023	LHDT2	Aggregate	Aggregate	Gasoli	2254.447347	72843.78455	7.620327883	18120.43735	72843.78455	276453.3551	15.26	LHDT2	
Riverside (SC)	2023	LHDT2	Aggregate	Aggregate	Diesel	6182.746468	203609.5705	10.50010946		203609.5705				
Riverside (SC)	2023	MCY	Aggregate	Aggregate	Gasoli	28475.24545	179075.0601	4.725448328	4725.448328	179075.0601	179075.0601	37.90	MCY	
Riverside (SC)	2023	MDV	Aggregate	Aggregate	Gasoli	154204.1049	5532730.192	261.6189822	266481.7348	5532730.192	5717270.278	21.45	MDV	
Riverside (SC)	2023	MDV	Aggregate	Aggregate	Diesel	3492.231312	143624.7637	4.862752584		143624.7637				
Riverside (SC)	2023	MDV	Aggregate	Aggregate	Electr	1314.447545	40915.32239	0		40915.32239				
Riverside (SC)	2023	MH	Aggregate	Aggregate	Gasoli	4646.002839	36045.00319	6.920030798	8307.842208	36045.00319	51245.8412	6.17	MH	
Riverside (SC)	2023	MH	Aggregate	Aggregate	Diesel	1979.944695	15200.83801	1.38781141		15200.83801				
Riverside (SC)	2023	MHDT	Aggregate	Aggregate	Gasoli	1361.919314	55522.81781	10.39979838	74626.43474	55522.81781	804084.1257	10.77	MHDT	44.30%
Riverside (SC)	2023	MHDT	Aggregate	Aggregate	Diesel	11600.10675	748561.3079	64.22663636		748561.3079				
Riverside (SC)	2023	OBUS	Aggregate	Aggregate	Gasoli	437.8068702	14961.4141	2.859206488	4613.197055	14961.4141	31071.97019	6.74	OBUS	
Riverside (SC)	2023	OBUS	Aggregate	Aggregate	Diesel	221.7033657	16110.5561	1.753990567		16110.5561				
Riverside (SC)	2023	SBUS	Aggregate	Aggregate	Gasoli	428.8888994	14909.41731	1.679727113	5282.154427	14909.41731	42556.73324	8.06	SBUS	
Riverside (SC)	2023	SBUS	Aggregate	Aggregate	Diesel	872.8772386	27647.31593	3.602427315		27647.31593				
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Gasoli	165.4254964	23291.05069	3.744875418	10143.9907	23291.05069	50365.41497	4.97	UBUS	
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Diesel	0.141961099	11.67769301	0.001254634		11.67769301				
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Electr	0.058469431	1.251702935	0		1.251702935				
Riverside (SC)	2023	UBUS	Aggregate	Aggregate	Natur	206.2939379	27061.43488	6.397860652		27061.43488				