



# Mission Grove Apartments Project

Draft Environmental Impact Report  
SCH#2022100610

## **Appendix B: Air Quality, Greenhouse Gas, Energy Impact Analysis**

## MEMORANDUM

**DATE:** August 25, 2023

**To:** Vanessa Garza, Anton Mission Grove, LLC

**FROM:** Ronald Brugger, Senior Air Quality Specialist

**SUBJECT:** Air Quality, Greenhouse Gas Emissions, and Energy Impact Analysis Memorandum for the proposed Mission Grove Apartments Project in Riverside, California

### INTRODUCTION

This air quality, greenhouse gas (GHG) emissions, and energy impact analysis for the proposed Mission Grove Apartments project within the Mission Grove Shopping Center in Riverside, California (project) has been prepared using methods and assumptions recommended in the South Coast Air Quality Management District's (SCAQMD) *CEQA Air Quality Handbook* (SCAQMD 1993). This analysis includes a description of existing regulatory framework and an assessment of project construction and operational air pollutant and GHG emissions and energy impacts. Measures to reduce or eliminate significant impacts are identified, where appropriate. All references cited in the memorandum are included in Attachment A.

### Project Location

The 9.92-acre project site is within the Mission Grove Shopping Center at the northwest side of the intersection of Mission Grove Parkway and Mission Village Drive. The project is within the Mission Grove Specific Plan, formerly known as the Alessandro Heights Specific Plan. Figure 1 shows the project location (all figures are in Attachment B).

### Project Description

The proposed project would demolish the existing vacant 104,321-square-foot (sf) building and parking lot to accommodate a new, 347-unit apartment complex with a swimming pool, a 2,580 sf fitness center, and a 5,100 sf clubhouse. The site is currently zoned as CR-SP – Commercial Retail and Specific Plan (Mission Grove) Overlay Zones and is proposed to change to MU-U-SP – Mixed-Use Urban and Specific Plan (Mission Grove) Overlay Zones. Construction of the proposed project is anticipated to start in the spring of 2025 and would complete in 2027. Figure 2 shows the site plan. Project traffic is described in the Transportation Memorandum (LSA 2023).

### Land Uses in the Project Vicinity

Land uses surrounding the proposed project site include single family homes to the south of the project site across Mission Village Drive, as shown in Figure 1. Otherwise, there are commercial uses to the north, east, and west.



## REGIONAL CLIMATE AND AIR QUALITY

The project site is in Riverside, Riverside County, California, which is part of the South Coast Air Basin (Basin) and is under the jurisdiction of SCAQMD. This Basin includes all of Orange County and the non-desert portions of Los Angeles, San Bernardino, and Riverside counties. Both the State of California and the federal government have established health-based ambient air quality standards (AAQS) for seven air pollutants. As detailed in Table A, these pollutants include ozone (O<sub>3</sub>), carbon monoxide (CO), nitrogen dioxide (NO<sub>2</sub>), sulfur dioxide (SO<sub>2</sub>), particulate matter less than 10 microns in size (PM<sub>10</sub>), particulate matter less than 2.5 microns in size (PM<sub>2.5</sub>), and lead. In addition, the State has set standards for sulfates, hydrogen sulfide (H<sub>2</sub>S), vinyl chloride, and visibility-reducing particles. These standards are designed to protect the health and welfare of the populace with a reasonable margin of safety.

Table B summarizes the most common health and environmental effects for each of the air pollutants for which there is a national and/or California AAQS, as well as for toxic air contaminants. Because the concentration standards were set at a level that protects public health with an adequate margin of safety (by the United States Environmental Protection Agency [EPA]), these health effects would not occur unless the standards are exceeded by a large margin or for a prolonged period of time. State AAQS are typically more stringent than federal AAQS. Among the pollutants, O<sub>3</sub> and particulate matter (PM<sub>2.5</sub> and PM<sub>10</sub>) are considered pollutants with regional effects, while the others have more localized effects. (CARB 2017).

The California Clean Air Act (CCAA) provides SCAQMD and other air districts with the authority to manage transportation activities at indirect sources. Indirect sources of pollution include any facility, building, structure, or installation, or combination thereof, that attracts or generates mobile-source emissions of any pollutant. In addition, area-source emissions that are generated when minor sources collectively emit a substantial amount of pollution are also managed by the local air districts. Examples of this would be the motor vehicles at an intersection, at a mall, and on highways. SCAQMD also regulates stationary sources of pollution throughout its jurisdictional area. The California Air Resources Board (CARB) regulates direct emissions from motor vehicles.

### Climate/Meteorology

Air quality in the planning area is affected not only by various emission sources (e.g., mobile and industry) but also by atmospheric conditions (e.g., wind speed, wind direction, temperature, and rainfall). The regional climate within the Basin is considered semi-arid and is characterized by warm summers, mild winters, infrequent seasonal rainfall, moderate daytime onshore breezes, and moderate humidity. The air quality within the Basin is primarily influenced by a wide range of emissions sources—such as dense population centers, heavy vehicular traffic, and industry—and meteorology.

**Table A: Ambient Air Quality Standards**

Pollutant	Averaging Time	California Standards <sup>1</sup>		National Standards <sup>2</sup>		
		Concentration <sup>3</sup>	Method <sup>4</sup>	Primary <sup>3,5</sup>	Secondary <sup>3,6</sup>	Method <sup>7</sup>
<b>O<sub>3</sub></b> <sup>8</sup>	1-Hour	0.09 ppm (180 µg/m <sup>3</sup> )	Ultraviolet Photometry	—	Same as Primary Standard	Ultraviolet Photometry
	8-Hour	0.070 ppm (137 µg/m <sup>3</sup> )		0.070 ppm (137 µg/m <sup>3</sup> )		
<b>Respirable Particulate Matter (PM<sub>10</sub>)</b> <sup>9</sup>	24-Hour	50 µg/m <sup>3</sup>	Gravimetric or Beta Attenuation	150 µg/m <sup>3</sup>	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	20 µg/m <sup>3</sup>		—		
<b>Fine Particulate Matter (PM<sub>2.5</sub>)</b> <sup>9</sup>	24-Hour	—	—	35 µg/m <sup>3</sup>	Same as Primary Standard	Inertial Separation and Gravimetric Analysis
	Annual Arithmetic Mean	12 µg/m <sup>3</sup>	Gravimetric or Beta Attenuation	12.0 µg/m <sup>3</sup>	15 µg/m <sup>3</sup>	
<b>CO</b>	1-Hour	20 ppm (23 mg/m <sup>3</sup> )	Non-Dispersive Infrared Photometry (NDIR)	35 ppm (40 mg/m <sup>3</sup> )	—	Non-Dispersive Infrared Photometry (NDIR)
	8-Hour	9.0 ppm (10 mg/m <sup>3</sup> )		9 ppm (10 mg/m <sup>3</sup> )	—	
	8-Hour (Lake Tahoe)	6 ppm (7 mg/m <sup>3</sup> )		—	—	
<b>NO<sub>2</sub></b> <sup>10</sup>	1-Hour	0.18 ppm (339 µg/m <sup>3</sup> )	Gas Phase Chemiluminescence	100 ppb (188 µg/m <sup>3</sup> )	—	Gas Phase Chemiluminescence
	Annual Arithmetic Mean	0.030 ppm (57 µg/m <sup>3</sup> )		0.053 ppm (100 µg/m <sup>3</sup> )	Same as Primary Standard	
<b>SO<sub>2</sub></b> <sup>11</sup>	1-Hour	0.25 ppm (655 µg/m <sup>3</sup> )	Ultraviolet Fluorescence	75 ppb (196 µg/m <sup>3</sup> )	—	Ultraviolet Fluorescence; Spectrophotometry (Pararosaniline Method)
	3-Hour	—		—	0.5 ppm (1,300 µg/m <sup>3</sup> )	
	24-Hour	0.04 ppm (105 µg/m <sup>3</sup> )		0.14 ppm (for certain areas) <sup>11</sup>	—	
	Annual Arithmetic Mean	—		0.030 ppm (for certain areas) <sup>11</sup>	—	
<b>Lead</b> <sup>12,13</sup>	30-Day Average	1.5 µg/m <sup>3</sup>	Atomic Absorption	—	—	High-Volume Sampler and Atomic Absorption
	Calendar Quarter	—		1.5 µg/m <sup>3</sup> (for certain areas) <sup>13</sup>	Same as Primary Standard	
	Rolling 3-Month Average <sup>11</sup>	—		0.15 µg/m <sup>3</sup>		
<b>Visibility- Reducing Particles</b> <sup>14</sup>	8-Hour	See footnote 14	Beta Attenuation and Transmittance through Filter Tape	No National Standards		
<b>Sulfates</b>	24-Hour	25 µg/m <sup>3</sup>	Ion Chromatography			
<b>Hydrogen Sulfide</b>	1-Hour	0.03 ppm (42 µg/m <sup>3</sup> )	Ultraviolet Fluorescence			
<b>Vinyl Chloride</b> <sup>12</sup>	24-Hour	0.01 ppm (26 µg/m <sup>3</sup> )	Gas Chromatography			

Source: California Air Resources Board (2016).  
Footnotes are provided on the following page.

- <sup>1</sup> California standards for O<sub>3</sub>, CO (except 8-hour Lake Tahoe), SO<sub>2</sub> (1- and 24-hour), NO<sub>2</sub>, and PM (PM<sub>10</sub>, PM<sub>2.5</sub>, and visibility-reducing particles) are values that are not to be exceeded. All others are not to be equaled or exceeded. California AAQS are listed in the Table of Standards in Section 70200 of Title 17 of the California Code of Regulations.
- <sup>2</sup> National standards (other than for O<sub>3</sub> and PM and those based on the annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth-highest 8-hour concentration measured at each site in a year, averaged over 3 years, is equal to or less than the standard. For PM<sub>10</sub>, the 24-hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above 150 µg/m<sup>3</sup> is equal to or less than 1. For PM<sub>2.5</sub>, the 24-hour standard is attained when 98 percent of the daily concentrations, averaged over 3 years, are equal to or less than the standard. Contact the EPA for further clarification and current national policies.
- <sup>3</sup> Concentration expressed first in the units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.
- <sup>4</sup> Any equivalent measurement method that can be shown to the satisfaction of the CARB to give equivalent results at or near the level of the air quality standard may be used.
- <sup>5</sup> National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.
- <sup>6</sup> National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.
- <sup>7</sup> The reference method as described by the EPA. An “equivalent method” of measurement may be used but must have a “consistent relationship to the reference method” and must be approved by the EPA.
- <sup>8</sup> On October 1, 2015, the national 8-hour O<sub>3</sub> primary and secondary standards were lowered from 0.075 to 0.070 ppm.
- <sup>9</sup> On December 14, 2012, the national annual PM<sub>2.5</sub> primary standard was lowered from 15 µg/m<sup>3</sup> to 12.0 µg/m<sup>3</sup>. The existing national 24-hour PM<sub>2.5</sub> standards (primary and secondary) were retained at 35 µg/m<sup>3</sup>, as was the annual secondary standard of 15 µg/m<sup>3</sup>. The existing 24-hour PM<sub>10</sub> standards (primary and secondary) of 150 µg/m<sup>3</sup> also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.
- <sup>10</sup> To attain the 1-hour standard, the 3-year average of the annual 98<sup>th</sup> percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards, the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.
- <sup>11</sup> On June 2, 2010, a new 1-hour SO<sub>2</sub> standard was established, and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99<sup>th</sup> percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO<sub>2</sub> national standards (24-hour and annual) remain in effect until 1 year after an area is designated for the 2010 standard, except that in areas designated as Nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved. Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard, the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.
- <sup>12</sup> CARB has identified lead and vinyl chloride as “toxic air contaminants” with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.
- <sup>13</sup> The national standard for lead was revised on October 15, 2008, to a rolling 3-month average. The 1978 lead standard (1.5 µg/m<sup>3</sup> as a quarterly average) remains in effect until 1 year after an area is designated for the 2008 standard, except that in areas designated as Nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standards are approved.
- <sup>14</sup> In 1989, CARB converted both the general statewide 10 mi visibility standard and the Lake Tahoe 30 mi visibility standard to instrumental equivalents, which are “extinction of 0.23 per kilometer” and “extinction of 0.07 per kilometer” for the statewide and Lake Tahoe Air Basin standards, respectively.

°C = degrees Celsius

µg/m<sup>3</sup> = micrograms per cubic meter

AAQS = ambient air quality standards

CARB = California Air Resources Board

CO = carbon monoxide

EPA = United States Environmental Protection Agency

mg/m<sup>3</sup> = milligrams per cubic meter

mi = mile/miles

NO<sub>2</sub> = nitrogen dioxide

O<sub>3</sub> = ozone

PM = particulate matter

PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size

PM<sub>10</sub> = particulate matter less than 10 microns in size

ppb = parts per billion

ppm = parts per million

SO<sub>2</sub> = sulfur dioxide

**Table B: Summary of Health and Environmental Effects of the Criteria Air Pollutants**

Pollutant	Effects on Health and the Environment
Ozone (O <sub>3</sub> )	<ul style="list-style-type: none"> <li>● Respiratory symptoms</li> <li>● Worsening of lung disease leading to premature death</li> <li>● Damage to lung tissue</li> <li>● Crop, forest and ecosystem damage</li> <li>● Damage to a variety of materials, including rubber, plastics, fabrics, paint and metals</li> </ul>
PM <sub>2.5</sub> (particulate matter less than 2.5 microns in aerodynamic diameter)	<ul style="list-style-type: none"> <li>● Premature death</li> <li>● Hospitalization for worsening of cardiovascular disease</li> <li>● Hospitalization for respiratory disease</li> <li>● Asthma-related emergency room visits</li> <li>● Increased symptoms, increased inhaler usage</li> </ul>
PM <sub>10</sub> (particulate matter less than 10 microns in aerodynamic diameter)	<ul style="list-style-type: none"> <li>● Premature death &amp; hospitalization, primarily for worsening of respiratory disease</li> <li>● Reduced visibility and material soiling</li> </ul>
Nitrogen Oxides (NO <sub>x</sub> )	<ul style="list-style-type: none"> <li>● Lung irritation</li> <li>● Enhanced allergic responses</li> </ul>
Carbon Monoxide (CO)	<ul style="list-style-type: none"> <li>● Chest pain in patients with heart disease</li> <li>● Headache</li> <li>● Light-headedness</li> <li>● Reduced mental alertness</li> </ul>
Sulfur Oxides (SO <sub>x</sub> )	<ul style="list-style-type: none"> <li>● Worsening of asthma: increased symptoms, increased medication usage, and emergency room visits</li> </ul>
Lead	<ul style="list-style-type: none"> <li>● Impaired mental functioning in children</li> <li>● Learning disabilities in children</li> <li>● Brain and kidney damage</li> </ul>
Hydrogen Sulfide (H <sub>2</sub> S)	<ul style="list-style-type: none"> <li>● Nuisance odor (rotten egg smell)</li> <li>● At high concentrations: headache &amp; breathing difficulties</li> </ul>
Sulfate	<ul style="list-style-type: none"> <li>● Same as PM<sub>2.5</sub>, particularly worsening of asthma and other lung diseases</li> <li>● Reduces visibility</li> </ul>
Vinyl Chloride	<ul style="list-style-type: none"> <li>● Central nervous system effects, such as dizziness, drowsiness &amp; headaches</li> <li>● Long-term exposure: liver damage &amp; liver cancer</li> </ul>
Visibility Reducing Particles	<ul style="list-style-type: none"> <li>● Reduced airport safety, scenic enjoyment, road safety, and discourages tourism</li> </ul>
Toxic Air Contaminants About 200 chemicals have been listed as toxic air contaminants	<ul style="list-style-type: none"> <li>● Cancer</li> <li>● Reproductive and developmental effects</li> <li>● Neurological effects</li> </ul>

Source: California Air Resources Board (n.d.-a).  
CARB = California Air Resources Board

The annual average temperature varies little throughout the Basin, ranging from the low to middle 60s, measured in degrees Fahrenheit (°F). With a more pronounced oceanic influence, coastal areas show less variability in annual minimum and maximum temperatures than inland areas. The climatological station closest to the site is the Riverside Fire Station 3 (Western Regional Climate Center 2022). The monthly average maximum temperature recorded at this station ranged from 66.8°F in January to 94.4°F in August, with an annual average maximum of 79.5°F. The monthly average minimum temperature recorded at this station ranged from 39.1°F in January to 59.6°F in August, with an annual average minimum of 48.6°F. January is typically the coldest month, and July and August are typically the warmest months in this area of the Basin.

## Description of Global Climate Change and Its Sources

Earth's natural warming process is known as the "greenhouse effect." This greenhouse effect compares the Earth and the atmosphere surrounding it to a greenhouse with glass panes. The glass allows solar radiation (sunlight) into Earth's atmosphere but prevents radiated heat from escaping, thus warming Earth's atmosphere. GHGs keep the average surface temperature of the Earth to approximately 60°F. However, excessive concentrations of GHGs in the atmosphere can result in increased global mean temperatures, with associated adverse climatic and ecological consequences (Intergovernmental Panel on Climate Change [IPCC] 2022).

Scientists refer to the global warming context of the past century as the "enhanced greenhouse effect" to distinguish it from the natural greenhouse effect (Pew Center 2006). While the increase in temperature is known as "global warming," the resulting change in weather patterns is known as "global climate change." Global climate change (GCC) is evidenced in changes to global temperature rise, warming oceans, shrinking ice sheets, glacial retreat, decreased snow cover, sea level rise, declining Arctic sea ice, extreme weather events, and ocean acidification (IPCC 2022).

Higher temperatures, conducive to air pollution formation, could worsen air quality in California. While climate change may increase the concentration of ground-level ozone, the magnitude of the effect and, therefore, its indirect effects, are uncertain. If higher temperatures are accompanied by drier conditions, the potential for large wildfires could increase, which, in turn, would exacerbate air quality. Additionally, severe heat accompanied by drier conditions and poor air quality could increase the number of heat-related deaths, illnesses, and asthma attacks throughout the State. However, if higher temperatures are accompanied by wetter, rather than drier conditions, the rains would temporarily clear the air of particulate pollution and reduce the incidence of large wildfires, thus reducing the pollution associated with wildfires. GHGs are present in the atmosphere naturally, are released by natural sources, or are formed from secondary reactions taking place in the atmosphere. The gases that are widely seen as the principal contributors to human-induced GCC are the following:<sup>1</sup>

- Carbon dioxide (CO<sub>2</sub>)
- Methane (CH<sub>4</sub>)
- Nitrous oxide (N<sub>2</sub>O)
- Hydrofluorocarbons (HFCs)
- Perfluorocarbons (PFCs)
- Sulfur hexafluoride (SF<sub>6</sub>)

Over the last 200 years, human activities have caused substantial quantities of GHGs to be released into the atmosphere. These extra emissions are increasing GHG concentrations in the atmosphere and enhancing the natural greenhouse effect, which can cause global warming. Although GHGs produced by human activities include naturally occurring GHGs (e.g., CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O), some gases (e.g., HFCs, PFCs, and SF<sub>6</sub>) are completely new to the atmosphere. Water vapor is a GHG but is

---

<sup>1</sup> The greenhouse gases listed are consistent with the definition in Assembly Bill 32 (Government Code 38505), as discussed later in this section.

generally excluded from the list of GHGs because it is short-lived in the atmosphere and its atmospheric concentrations are largely determined by natural processes (e.g., oceanic evaporation). For the purposes of this air quality study, the term “GHGs” will refer collectively to the six gases identified in the bulleted list provided above.

These GHGs vary considerably in terms of global warming potential (GWP), which is a concept developed to compare the ability of each GHG to trap heat in the atmosphere relative to another gas. GWP is based on several factors, including the relative effectiveness of a gas in absorbing infrared radiation and the length of time that the gas remains in the atmosphere (“atmospheric lifetime”). The GWP of each gas is measured relative to CO<sub>2</sub>, the most abundant GHG. The definition of GWP for a particular GHG is the ratio of heat trapped by one unit mass of the GHG to the ratio of heat trapped by one unit mass of CO<sub>2</sub> over a specified time period. GHG emissions are typically measured in terms of metric tons of “CO<sub>2</sub> equivalents” (MT CO<sub>2</sub>e). Table C identifies the GWP for each type of GHG analyzed in this report. The EPA and CARB use GWP values from the 2007 IPCC Fourth Assessment Report. The IPCC has published the 2021 IPCC Sixth Assessment Report with updated GWP values.

**Table C: Global Warming Potential for Selected Greenhouse Gases**

Pollutant	AR4 Values	AR6 Values
Carbon Dioxide (CO <sub>2</sub> )	1 (by definition)	1 (by definition)
Methane (CH <sub>4</sub> )	25	29.8 ± 11
Nitrous Oxide (N <sub>2</sub> O)	298	273 ± 130

Sources: CARB 2017 Climate Change Scoping Plan, and IPCC Sixth Assessment Report

Note: The EPA and CARB use global warming potential values from the IPCC Fourth Assessment Report (AR4) (2007).

AR4 = IPCC Assessment Report 4

AR6 = IPCC Assessment Report 6

CARB = California Air Resources Board

EPA = United States Environmental Protection Agency

IPCC = Intergovernmental Panel on Climate Change

### Air Pollution Constituents and Attainment Status

CARB coordinates and oversees both State and federal air pollution control programs in the State. CARB oversees activities of local air quality management agencies and maintains air quality monitoring stations throughout the State in conjunction with the EPA and local air districts. CARB has divided the State into 15 air basins based on meteorological and topographical factors of air pollution. Data collected at these stations are used by CARB and the EPA to classify air basins as Attainment, Nonattainment, Nonattainment-Transitional, or Unclassified, based on air quality data for the most recent 3 calendar years compared with the AAQS.

Attainment areas may be the following:

- **Attainment/Unclassified** (“Unclassifiable” in some lists). These basins have never violated the air quality standard of interest or do not have enough monitoring data to establish Attainment or Nonattainment status.

- **Attainment-Maintenance** (national ambient air quality standards [NAAQS] only). These basins violated a NAAQS that is currently in use (were Nonattainment) in or after 1990, but now attain the standard and are officially redesignated as Attainment by the EPA with a Maintenance State Implementation Plan.
- **Attainment** (usually only for California ambient air quality standards [CAAQS], but sometimes for NAAQS). These basins have adequate monitoring data to show attainment, have never been Nonattainment, or, for NAAQS, have completed the official Maintenance period.

Nonattainment areas are imposed with additional restrictions as required by the EPA. The air quality data are also used to monitor progress in attaining air quality standards. Table D lists the attainment status for the criteria pollutants in the Basin.

**Table D: Attainment Status of Criteria Pollutants in the South Coast Air Basin**

Pollutant	State	Federal
O <sub>3</sub>	Nonattainment (1-hour) Nonattainment (8-hour)	Extreme Nonattainment (1-hour) Extreme Nonattainment (8-hour)
PM <sub>10</sub>	Nonattainment (24-hour) Nonattainment (Annual)	Attainment-Maintenance (24-hour)
PM <sub>2.5</sub>	Nonattainment (Annual)	Serious Nonattainment (24-hour) Moderate Nonattainment (Annual)
CO	Attainment (1-hour) Attainment (8-hour)	Attainment-Maintenance (1-hour) Attainment-Maintenance (8-hour)
NO <sub>2</sub>	Attainment (1-hour) Attainment (Annual)	Attainment/Unclassified (1-hour) Attainment-Maintenance (Annual)
SO <sub>2</sub>	Attainment (1-hour) Attainment (24-hour)	Attainment/Unclassified (1-hour) Attainment/Unclassified (Annual)
Lead <sup>1</sup>	Attainment (30-day average)	Attainment (3-month rolling)
All Others	Attainment/Unclassified	N/A

Source: South Coast Air Quality Management District (n.d.-b).

<sup>1</sup> Only the Los Angeles County portion of the Basin is in nonattainment for lead.

CO = carbon monoxide

PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size

N/A = not applicable

PM<sub>10</sub> = particulate matter less than 10 microns in size

NO<sub>2</sub> = nitrogen dioxide

SO<sub>2</sub> = sulfur dioxide

O<sub>3</sub> = ozone

## LOCAL AIR QUALITY

SCAQMD, together with CARB, maintains ambient air quality monitoring stations. The air quality monitoring station that monitors air pollutant data closest to the site is the Rubidoux Monitoring Station at 5888 Mission Boulevard, in Riverside, approximately 8 miles northwest of the project site. The air quality trends from this station are used to represent the ambient air quality in the project area. The ambient air quality data in Table E show that NO<sub>2</sub> and CO levels are below the applicable State and federal standards. However, PM<sub>10</sub> and O<sub>3</sub> levels frequently exceed their respective standards and PM<sub>2.5</sub> levels occasionally exceed the federal 24-hour standard.



**Table E: Air Quality Concentrations in the Project Vicinity**

Pollutant	Standard	2019	2020	2021
<b>CO (Measured at the Riverside – Rubidoux Monitoring Station)</b>				
Maximum 1-hour concentration (ppm)		1.5	1.8	2.1
No. of days exceeded	State: 20 ppm	0	0	0
	Federal: 35 ppm	0	0	0
Maximum 8-hour concentration (ppm)		1.2	1.5	1.8
No. of days exceeded	State: 9 ppm	0	0	0
	Federal: 9 ppm	0	0	0
<b>O<sub>3</sub> (Measured at the Riverside – Rubidoux Monitoring Station)</b>				
Maximum 1-hour concentration (ppm)		0.123	0.143	0.117
No. of days exceeded	State: 0.09 ppm	24	46	ND
Max 8-hour concentration (ppm)		0.096	0.115	0.097
No. of days exceeded	State: 0.07 ppm	63	86	ND
	Federal: 0.07 ppm	59	82	ND
<b>PM<sub>10</sub> (Measured at the Riverside – Rubidoux Monitoring Station)</b>				
Maximum 24-hour concentration (µg/m <sup>3</sup> )		57.6	61.9	76.0
No. of days exceeded	State: 50 µg/m <sup>3</sup>	110	115	0
	Federal: 150 µg/m <sup>3</sup>	0	0	0
Annual avg. concentration (µg/m <sup>3</sup> )		40.9	ND	33.2
Exceeds Standard?	State: 20 µg/m <sup>3</sup>	Yes	ND	Yes
<b>PM<sub>2.5</sub> (Measured at the Riverside – Rubidoux Monitoring Station)</b>				
Maximum 24-hour concentration (µg/m <sup>3</sup> )		57.7	59.9	44.4
No. of days exceeded	Federal: 35 µg/m <sup>3</sup>	5	12	0
Annual avg. concentration (µg/m <sup>3</sup> )		11.2	14.1	13.3
Exceeds Standard?	State: 12 µg/m <sup>3</sup>	No	Yes	No
	Federal: 12 µg/m <sup>3</sup>	No	Yes	No
<b>NO<sub>2</sub> (Measured at the Riverside – Rubidoux Monitoring Station)</b>				
Maximum 1-hour concentration (ppb):		56.0	62.0	52
No. of days exceeded	State: 180 ppb	0	0	0
	Federal: 100 ppb	0	0	0
Annual avg. concentration (ppb):		14.0	14.0	14.3
Exceeds standard?	State: 30 ppb	No	No	No
	Federal: 53 ppb	No	No	No

Sources: Air Data: EPA (2022b) and CARB (n.d.-b).

Notes: Data was collected from the closest stations to the project site where each criteria pollutant data was available. The *Riverside - Rubidoux* Air Quality Monitoring Station is at 5888 Mission Boulevard, Rubidoux, California.

µg/m<sup>3</sup> = micrograms per cubic meter

CARB = California Air Resources Board

CO = carbon monoxide

EPA = United States Environmental Protection Agency

ND = No data available

NO<sub>2</sub> = nitrogen dioxide

O<sub>3</sub> = ozone

PM<sub>2.5</sub> = particulate matter smaller than 2.5 microns in size

PM<sub>10</sub> = particulate matter smaller than 10 microns in size

ppb = parts per billion

ppm = parts per million

## REGULATORY FRAMEWORK

Air quality and GHG standards and the regulatory framework are discussed below.

### Federal Regulations

Pursuant to the federal Clean Air Act (CAA) of 1970, the EPA established the NAAQS. The NAAQS were established for six major pollutants, termed “criteria” pollutants. Criteria pollutants are defined as those pollutants for which the federal and State governments have established AAQS, or criteria, for outdoor concentrations to protect public health.

The EPA has designated the Southern California Association of Governments (SCAG) as the Metropolitan Planning Organization responsible for ensuring compliance with the requirements of the CAA for the Basin.

The United States has historically had a voluntary approach to reducing GHG emissions; however, on April 2, 2007, the United States Supreme Court ruled that the EPA has the authority to regulate CO<sub>2</sub> emissions under the CAA. The Supreme Court ruled that GHGs fit within the CAA's definition of a pollutant and that the EPA did not have a valid rationale for not regulating GHGs. In December 2009, the EPA issued an endangerment finding for GHGs under the CAA.

On December 7, 2009, the EPA Administrator signed a final action under the CAA, finding that six GHGs (i.e., CO<sub>2</sub>, CH<sub>4</sub>, N<sub>2</sub>O, HFCs, PFCs, and SF<sub>6</sub>) constitute a threat to public health and welfare and that the combined emissions from motor vehicles cause and contribute to GCC.

On September 15, 2011, the EPA and the United States Department of Transportation (USDOT) issued the final rule for the first national standards to improve the fuel efficiency of medium- and heavy-duty trucks and buses, model years 2014 to 2018. For combination tractors, the agencies proposed engine and vehicle standards that would achieve up to a 20 percent reduction from model year 2014 in fuel consumption by the 2018 model year. For heavy-duty pickup trucks and vans, the agencies proposed separate gasoline and diesel truck standards, which would achieve up to a 10 percent reduction from model year 2014 for gasoline vehicles and a 15 percent reduction for diesel vehicles (12 and 17 percent, respectively, if accounting for air conditioning leakage). Lastly, for vocational vehicles, the engine and vehicle standards would achieve up to a 10 percent reduction from model year 2014 in fuel consumption. On October 25, 2016, the EPA and the USDOT issued Phase 2 of the national standards to improve fuel efficiency standards for medium- and heavy-duty trucks and buses for model years 2021 to 2027 to achieve vehicle fuel savings as high as 25 percent, depending on the vehicle category.

On August 2, 2018, the previous EPA Administration released a notice of proposed rulemaking, The Safer Affordable Fuel-Efficient (SAFE) Vehicles Rule for Model Years 2021–2026 Passenger Cars and Light Trucks (SAFE Vehicles Rule) to amend the Corporate Average Fuel Economy (CAFE) and GHG emission standards established in 2012 for model years 2021 through 2026. The SAFE Vehicle Rule would decrease fuel economy and would withdraw the California Waiver for the California Advanced Clean Car program, Zero Emissions Vehicle mandate, and greenhouse gas emission standards for model years 2021 through 2026.

The current administration withdrew portions of the SAFE Rule, concluding that the SAFE Rule overstepped the agency's legal authority and finalized updated CAFE Standards for model years 2024 through 2026. The final rule establishes standards that would require an industry-wide fleet average of approximately 49 miles per gallon (mpg) for passenger cars and light trucks in model year 2026, by increasing fuel efficiency by 8 percent annually for model years 2024 and 2025, and 10 percent annually for model years 2026. The agency projects the final standards will save consumers nearly \$1,400 in total fuel expenses over the lifetimes of vehicles produced in these model years and avoid the consumption of about 234 billion gallons of gas between model years 2030 to 2050. The National Highway Traffic Safety Administration also projects that the standards will cut GHGs from the atmosphere, reduce air pollution, and reduce the country's dependence on oil.

The Energy Independence and Security Act of 2007 aims to move the United States toward greater energy independence and security; increase the production of clean renewable fuels; protect consumers; increase the efficiency of products, buildings and vehicles; promote GHG research; improve the energy efficiency of the federal government; and improve vehicle fuel economy.

The Energy Policy Act of 2005 seeks to reduce reliance on nonrenewable energy resources and provide incentives to reduce current demand on these resources. For example, under the Energy Policy Act, consumers and businesses can obtain federal tax credits for purchasing fuel-efficient appliances and products (including hybrid vehicles), building energy-efficient buildings, and improving the energy efficiency of commercial buildings. Additionally, tax credits are available for the installation of qualified fuel cells, stationary microturbine power plants, and solar power equipment.

## State Agencies and Regulations

### *California Air Resources Board*

In 1967, the State Legislature passed the Mulford-Carrell Act, which combined two Department of Health bureaus (i.e., the Bureau of Air Sanitation and the Motor Vehicle Pollution Control Board) to establish CARB. Since its formation, CARB has worked with the public, the business sector, and local governments to find solutions to the State's air pollution problems. California adopted the CCAA in 1988. CARB administers the CAAQS for the 10 air pollutants designated in the CCAA. These 10 State air pollutants are the 6 criteria pollutants designated by the federal CAA as well as 4 others: visibility-reducing particulates, H<sub>2</sub>S, sulfates, and vinyl chloride.

The California Global Warming Solutions Act of 2006, widely known as Assembly Bill (AB) 32, requires CARB to develop and enforce regulations for the reporting and verification of statewide GHG emissions. CARB was directed to set a statewide GHG emissions limit and set a timeline for adopting a scoping plan for achieving GHG reductions in a technologically and economically feasible manner.

In 2016, the Legislature passed, and Governor Jerry Brown signed, Senate Bill (SB) 32 and AB 197. SB 32 affirms the importance of addressing climate change by codifying into statute the GHG emissions reductions target of at least 40 percent below 1990 levels by 2030 contained in Governor Brown's April 2015 Executive Order B-30-15. SB 32 builds on AB 32 and keeps California on the path toward achieving the State's 2050 objective of reducing emissions to 80 percent below 1990 levels, consistent with an IPCC analysis of the emissions trajectory that would stabilize atmospheric GHG concentrations at 450 parts per million (ppm) CO<sub>2</sub>e and reduce the likelihood of catastrophic impacts from climate change. The companion bill to SB 32, AB 197, provides additional direction to CARB related to the adoption of strategies to reduce GHG emissions.

In December 2017, CARB adopted "California's 2017 Climate Change Scoping Plan: The Strategy for Achieving California's 2030 Greenhouse Gas Target" (CARB 2017) that describes the actions the State will take to achieve the SB 32 climate goal of reducing GHG emissions at least 40 percent below 1990 levels by 2030. The 2017 Scoping Plan includes input from a range of State agencies and is the result of a 2-year development process, including extensive public and stakeholder outreach, designed to ensure that California's climate and air quality efforts continue to improve public health

and drive development of a more sustainable economy. It outlines an approach that cuts across economic sectors to combine GHG reductions with reductions of smog-causing pollutants, while also safeguarding public health and economic goals. The 2017 Scoping Plan reflects the direction from the Legislature on the Cap-and-Trade Program, as described in AB 398, the need to extend key existing emissions reductions programs, and acknowledges the parallel actions required under AB 617 to strengthen monitoring and reduce air pollution at the community level.

The actions identified in the 2017 Scoping Plan can reduce overall GHG emissions in California and deliver strong policy signals that will continue to drive investment and certainty in a low-carbon economy. The 2017 Scoping Plan builds upon the successful framework established by the original Scoping Plan and the 2014 Scoping Plan, while also identifying new, technologically feasibility and cost-effective strategies to ensure that California meets its GHG reduction targets in a way that promotes and rewards innovation, continues to foster economic growth, and delivers improvements to the environment and public health, including in disadvantaged communities.

Although the 2017 Scoping Plan does not impose any specific mandates or policies that specifically apply to individual development projects such as the proposed project, the Scoping Plan encourages local municipalities to update building codes and establish sustainable development practices for accommodating future growth. Key policies that involve the residential and commercial building sectors that are indirectly applicable to the proposed project include the implementation of SB 275 (promoting infill development and high-density housing in high quality transit areas), implementing green building practices (i.e., the California Green Building Standards Code), energy efficiency and water conservation policies, and waste diversion efforts.

CARB adopted the 2022 Scoping Plan Update on December 15, 2022. The 2022 Scoping Plan Update assesses progress toward the statutory 2030 target, while laying out a path to achieving carbon neutrality no later than 2045. The 2022 Scoping Plan Update focuses on outcomes needed to achieve carbon neutrality by assessing paths for clean technology, energy deployment, natural and working lands, and others and is designed to meet the State's long-term climate objectives and support a range of economic, environmental, energy security, environmental justice, and public health priorities.

#### *Senate Bill 97 and State CEQA Guidelines*

In August 2007, the Legislature adopted SB 97, requiring the Office of Planning and Research (OPR) to prepare and transmit new California Environmental Quality Act (CEQA) guidelines for the mitigation of GHG emissions or the effects of GHG emissions to the California Natural Resources Agency. OPR submitted its proposed guidelines to the Secretary for Natural Resources on April 13, 2009, and the *State CEQA Guidelines* amendments were adopted on December 30, 2009 and became effective on March 18, 2010.

The *State CEQA Guidelines* amendments do not specify a threshold of significance for GHG emissions or prescribe assessment methodologies or specific mitigation measures. Instead, the amendments encourage lead agencies to consider many factors in performing a CEQA analysis but rely on the lead agencies in making their own significance determinations based upon substantial evidence. The

*State CEQA Guidelines* amendments also encourage public agencies to make use of programmatic mitigation plans and programs from which to tier when they perform individual project analyses.

The *State CEQA Guidelines* amendments require a lead agency to make a good-faith effort based on the extent possible on scientific and factual data to describe, calculate or estimate the amount of GHG emissions resulting from a project. The *State CEQA Guidelines* amendments give discretion to the lead agency whether to (1) use a model or methodology to quantify GHG emissions resulting from a project and which model or methodology to use and/or (2) rely on a qualitative analysis or performance-based standards. The California Natural Resources Agency is required to periodically update the guidelines to incorporate new information or criteria established by CARB pursuant to AB 32.

### *California Green Building Standards*

The California Green Building Standards Code, which is Part 11 of the California Code of Regulations, is commonly referred to as the CALGreen Code. The State updates this code every 3 years. The first edition of the CALGreen Code was released in 2008 and contained only voluntary standards. The 2019 CALGreen Code was updated in 2019, became effective on January 1, 2020, and applies to non-residential and residential developments. The 2022 CALGreen Code went into effect on January 1, 2023. The CALGreen Code contains requirements for construction site selection, stormwater control during construction, construction waste reduction, indoor water use reduction, material selection, natural resource conservation, site irrigation conservation, and more. The CALGreen Code provides for design options allowing the designer to determine how best to achieve compliance for a given site or building condition. The CALGreen Code also requires building commissioning, which is a process for the verification that all building systems, such as heating and cooling equipment and lighting systems, function at their maximum efficiency.

The California Energy Commission (CEC) is the State's primary energy policy and planning agency, and it plays a critical role creating a clean and modern energy system. SB 1389 (Chapter 568, Statutes of 2002) requires the CEC to prepare an Integrated Energy Policy Report biennially at a minimum. The report should include a description of the international energy market prospects and an evaluation of its export promotion activities.

AB 2076 (passed in 2000, Shelley, Chapter 936, Statutes of 2000) directs CARB and the CEC to develop and adopt recommendations for the Governor and the Legislature on a strategy to reduce California's dependence on petroleum.

In 2002, the Legislature passed SB 1389, which required the CEC to develop an integrated energy plan every 2 years for electricity, natural gas, and transportation fuels for the California Energy Policy Report. The plan calls for the State to assist in the transformation of the transportation system to improve air quality, reduce congestion, and increase the efficient use of fuel supplies with the least environmental and energy costs. To further this policy, the plan identifies a number of strategies, including assistance to public agencies and fleet operators in implementing incentive programs for zero-emission vehicles and their infrastructure needs, and encouragement of urban designs that reduce vehicle miles traveled (VMT) and accommodate pedestrian and bicycle access.

The CEC adopted the 2021 Integrated Energy Policy Report on February 16, 2022. The 2021 Integrated Energy Policy Report addresses the following four major topics and includes an analysis of the benefits of transitioning to a clean transportation system:

- (1) energy reliability over the next 5 years;
- (2) natural gas outlook and assessments;
- (3) building decarbonization and energy efficiency; and
- (4) energy demand.

To this end, the 2021 Integrated Energy Policy Report has four volumes and an appendix consisting of: (1) a report on actions needed to reduce the GHGs related to buildings in which Californians live and work, with an emphasis on energy efficiency, and reducing GHGs from the industrial and agricultural sectors; (2) a report on actions needed to increase the reliability and resiliency of California's energy system; (3) an assessment of the evolving role of gas in California's energy system, both the importance in near-term reliability and the need for the system to evolve as California works to achieve carbon neutrality by 2045; (4) an assessment of California's energy demand outlook, including a forecast to 2035 and long-term energy demand scenarios to 2050; and (5) an evaluation of the benefits of California's Clean Transportation Program. (CEC 2022).

### Regional Regulatory Framework

SCAG is a council of governments for Imperial, Los Angeles, Orange, Riverside, San Bernardino, and Ventura counties. SCAG is a regional planning agency and a forum for regional issues relating to transportation, the economy and community development, and the environment. Although SCAG is not an air quality management agency, it is responsible for developing transportation, land use, and energy conservation measures that affect air quality.

On September 3, 2020, the Regional Council of SCAG adopted *Connect SoCal*, also known as the *2020–2045 Regional Transportation Plan/Sustainable Communities Strategy: A Plan for Mobility, Accessibility, Sustainability, and High Quality of Life* (a.k.a., 2020–2045 RTP/SCS). The 2020–2045 RTP/SCS is a long-range visioning plan that balances future mobility and housing needs with economic, environmental, and public health goals. Connect SoCal embodies a collective vision for the region's future and is developed with input from local governments, county transportation commissions, tribal governments, non-profit organizations, businesses, and local stakeholders within the counties of Imperial, Los Angeles, Orange, Riverside, San Bernardino, and Ventura.

### South Coast Air Quality Management District

The SCAQMD is the agency principally responsible for comprehensive air pollution control in the Basin. To that end, the SCAQMD, a regional agency, works directly with SCAG, county transportation commissions and local governments, and cooperates actively with State and federal government agencies. The SCAQMD develops air quality-related rules and regulations, establishes permitting requirements, inspects emissions sources, and provides regulatory enforcement through such measures as educational programs or fines, when necessary.



### *Regional Air Quality Management Plan*

SCAQMD and SCAG are responsible for formulating and implementing the Air Quality Management Plan (AQMP) for the Basin. The main purpose of an AQMP is to bring the area into compliance with federal and State air quality standards. SCAQMD prepares a new AQMP every 3 years, updating the previous plan and a 20-year horizon.

The latest plan is the 2022 AQMP (SCAQMD 2022), adopted December 2, 2022. On October 1, 2015, the EPA strengthened the NAAQS for ground-level ozone, lowering the primary and secondary ozone standard levels to 70 parts per billion (ppb). The Basin is classified as an “extreme” nonattainment area, and the Coachella Valley is classified as a “severe-15” nonattainment area for the 2015 Ozone NAAQS. The 2022 AQMP was developed to address the requirements for meeting this standard.

The 2022 AQMP builds upon measures already in place from previous AQMPs. It also includes a variety of additional strategies such as regulation, accelerated deployment of available cleaner technologies (e.g., zero emissions technologies, when cost-effective and feasible, and low NOX technologies in other applications), best management practices, co-benefits from existing programs (e.g., climate and energy efficiency), incentives, and other CAA measures to achieve the 2015 8-hour ozone standard. SCAQMD adopts rules and regulations to implement portions of the AQMP. Several of these rules may apply to project construction or operation. For example, SCAQMD Rule 403 requires the implementation of the best-available fugitive dust control measure during active construction periods capable of generating fugitive dust emissions from on-site earth-moving activities, construction/demolition activities, and construction equipment travel on paved and unpaved roads.

Although SCAQMD is responsible for regional air quality planning efforts, it does not have the authority to directly regulate the air quality issues associated with new development projects within the Basin, such as the proposed project. Instead, SCAQMD published the *CEQA Air Quality Handbook* (SCAQMD 1993) to assist lead agencies, as well as consultants, project proponents, and other interested parties in evaluating potential air quality impacts of projects proposed in the Basin. The *CEQA Air Quality Handbook* provides standards, methodologies, and procedures for conducting air quality analyses in Environmental Impact Reports and was used extensively in the preparation of this analysis. SCAQMD is currently in the process of replacing the *CEQA Air Quality Handbook* (1993) with the *Air Quality Analysis Guidance Handbook* (SCAQMD n.d.-a).

To assist the CEQA practitioner in conducting an air quality analysis in the interim while the replacement *Air Quality Analysis Guidance Handbook* is being prepared, supplemental guidance/information is provided on the SCAQMD website and includes (1) on-road vehicle emission factors, (2) background CO concentrations, (3) localized significance thresholds (LST), (4) mitigation measures and control efficiencies, (5) mobile-source toxics analysis, (6) off-road mobile-source emission factors, (7) PM<sub>2.5</sub> significance thresholds and calculation methodology, and (8) updated SCAQMD Air Quality Significance Thresholds. SCAQMD also recommends using approved models to calculate emissions from land use projects, such as the California Emissions Estimator Model (CalEEMod). These recommendations were followed in the preparation of this analysis.



The following SCAQMD rules and regulations would apply to the proposed project:

- SCAQMD Rule 403 (SCAQMD 2005) requires projects to incorporate fugitive dust control measures.
- SCAQMD Rule 1113 (SCAQMD 2016) limits the volatile organic compound (VOC) content of architectural coatings.

## Local Regulations

### *City of Riverside General Plan 2025*

The *City of Riverside General Plan 2025* (General Plan) was adopted in November 2007 to preserve the vision and values of Riverside looking ahead to future improvements, increasing industry, and population growth. The Air Quality Element of the implemented policies intended to limit air pollution and reduce the potential sensitive receptor exposure (City of Riverside 2007). The following policies from the Air Quality Element of the General Plan are applicable to the project:

**Objective AQ-1:** Adopt land use policies that site polluting facilities away from sensitive receptors and vice versa, improve the jobs–housing balance, reduce vehicle miles traveled and the length of work trips, and improve the flow of traffic.

**Policy AQ-1.2:** Consider potential environmental justice issues in reviewing impacts (including cumulative impacts for each project proposed).

**Policy AQ-1.3:** Separate, buffer, and protect sensitive receptors from significant sources of pollution to the greatest extent possible.

**Policy AQ-1.4:** Facilitate communication between residents and businesses on nuisance issues related to air quality.

**Policy AQ-1.16:** Design safe and efficient vehicular access to commercial land uses from arterial streets to ensure efficient vehicular ingress and egress.

**Policy AQ-2.4:** Monitor and strive to achieve performance goals and/or VMT reduction which are consistent with SCAG’s goals.

**Policy AQ-3.4:** Require projects to mitigate, to the extent feasible, anticipated emissions that exceed the AQMP Guidelines.

**Policy AQ-3.6:** Support “green” building codes that require air conditioning/filtration installation, upgrades or improvements for all buildings, but particularly for those associated with sensitive receptors.

**Policy AQ-3.7:** Require use of pollution control measures for stationary and area sources through the use of best available control activities, fuel/material substitution, cleaner fuel alternatives, product reformulation, change in work practices and of control measures identified in the latest AQMP.

**Policy AQ-4.5:** Require the suspension of all grading operations when wind speeds (as instantaneous gusts) exceed 25 mph.

*City of Riverside Restorative Growthprint Plan*

The *Riverside Restorative Growthprint* (RRG) combines two plans: the *Economic Prosperity Action Plan* (RRG-EPAP) and the *Climate Action Plan* (RRG-CAP), which work in conjunction to spur entrepreneurship and smart growth while advancing the City of Riverside’s (City) GHG emission reduction goals. The RRG includes actions to reduce GHG emissions that align with the City’s planning priorities and its vision of a future “green” economy based on sustainable businesses. The RRG-EPAP identifies the measures and strategies in the RRG-CAP with the greatest potential to drive local economic prosperity through clean-tech investment, entrepreneurship, and expansion of local green businesses.

In 2014, Riverside was one of 12 cities that collaborated with the Western Riverside Council of Governments on a *Subregional Climate Action Plan* (Subregional CAP) that included 36 measures to guide Riverside’s GHG reduction efforts through 2020. The RRG-CAP expands upon the Subregional CAP and provides a path for the City to achieve deep reductions in GHG emissions through 2035, while the RRG-EPAP provides a framework for smart growth and low-carbon economic development. The RRG-CAP provides a roadmap for the City to achieve deep GHG emissions reductions through 2035. The RRG-CAP prioritizes the implementation of policies that enable the City to fulfill the requirements of AB 32 and SB 375. The following measures from the RRG-CAP are applicable to the project.

**Measure SR-2:** *2013 California Building Energy Efficiency Standards (Title 24, Part 6)* Mandatory energy efficiency standards for buildings.

**Measure SR-12:** *Electric Vehicle Plan and Infrastructure Facilitate* electric vehicle use by providing necessary infrastructure.

**Measure SR-13:** *Construction & Demolition Waste Diversion* Meet mandatory requirement to divert 90% of C&D waste from landfills by 2035.

**Measure E-2:** *Shade Trees* Strategically plant trees at new residential developments to reduce the urban heat island effect.

**Measure T-2:** *Bicycle Parking* Provide additional options for bicycle parking.

**Measure T-6:** *Density* Improve jobs-housing balance and reduce vehicle miles traveled by increasing household and employment densities.

**Measure T-19:** *Alternative Fuel & Vehicle Technology and Infrastructure* Promote the use of alternative fueled vehicles such as those powered by electric, natural gas, biodiesel, and fuel cells by Riverside residents and workers.

**Measure W-1: Water Conservation and Efficiency** Reduce per capita water use by 20% by 2020. While the goal date has passed, the goal to minimize water use by implementing conservation measures and higher efficiency is still applicable.

**THRESHOLDS OF SIGNIFICANCE**

Certain air districts (e.g., SCAQMD) have created guidelines and requirements to conduct air quality analyses. SCAQMD’s current guidelines, the *CEQA Air Quality Handbook* (SCAQMD 1993) with associated updates, were followed in this assessment of air quality and climate impacts for the proposed project.

Based on the *State CEQA Guidelines*, Appendix G (Public Resources Code Sections 15000–15387), a project would normally be considered to have a significant effect on air quality if the project would violate any CAAQS, contribute substantially to an existing air quality violation, expose sensitive receptors to substantial pollutants concentrations, or conflict with adopted environmental plans and goals of the community in which it is located.

**Pollutants with Regional Effects**

SCAQMD has established daily emissions thresholds for construction and operation of a proposed project in the Basin. The emissions thresholds were established based on the attainment status of the Basin with regard to air quality standards for specific criteria pollutants. Because the concentration standards were set at a level that protects public health with an adequate margin of safety (SCAQMD 2017), these emissions thresholds are regarded as conservative and would overstate an individual project’s contribution to health risks. Table F lists the CEQA significance thresholds for construction and operational emissions established for the Basin.

**Table F: Regional Thresholds for Construction and Operational Emissions**

Emissions Source	Pollutant Emissions Thresholds (lbs/day)					
	VOCs	NO <sub>x</sub>	CO	PM <sub>10</sub>	PM <sub>2.5</sub>	SO <sub>x</sub>
Construction	75	100	550	150	55	150
Operations	55	55	550	150	55	150

Source: SCAQMD (2019).

CO = carbon monoxide

lbs/day = pounds per day

NO<sub>x</sub> = nitrogen oxides

PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size

PM<sub>10</sub> = particulate matter less than 10 microns in size

SCAQMD = South Coast Air Quality Management District

SO<sub>x</sub> = sulfur oxides

VOC = volatile organic compound

Projects in the Basin with construction- or operation-related emissions that exceed any of their respective emission thresholds would be considered significant under SCAQMD guidelines. These thresholds, which SCAQMD developed and that apply throughout the Basin, apply as both project and cumulative thresholds. If a project exceeds these standards, it is considered to have a project-specific and cumulative impact.

**Local Microscale Concentration Standards**

The significance of localized project impacts under CEQA depends on whether ambient CO levels in the vicinity of the project are above or below State and federal CO standards. Because ambient CO levels are below the standards throughout the Basin, a project would be considered to have a significant CO impact if project emissions result in an exceedance of one or more of the 1-hour or 8-hour standards. The following are applicable local emission concentration standards for CO:

- California State 1-hour CO standard of 20 ppm
- California State 8-hour CO standard of 9 ppm

**Localized Impacts Analysis**

SCAQMD published its *Final Localized Significance Threshold Methodology* in June 2003 and updated it in July 2008 (SCAQMD 2008), recommending that all air quality analyses include an assessment of both construction and operational impacts on the air quality of nearby sensitive receptors. LSTs represent the maximum emissions from a project site that are not expected to result in an exceedance of the NAAQS or the CAAQS for CO, NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub>, as shown in Table G. LSTs are based on the ambient concentrations of that pollutant within the project’s Source Receptor Area (SRA) and the distance to the nearest sensitive receptor. The project site is in the Metropolitan Riverside County area (SRA 23).

**Table G: SCAQMD Localized Significance Thresholds**

Emissions Source Category	Pollutant Emissions (lbs/day)			
	NO <sub>x</sub>	CO	PM <sub>10</sub>	PM <sub>2.5</sub>
Construction (4.ac, 115 ft distance)	249	1,556	20	7
Operations (4 ac, 115 ft distance)	249	1,556	5	2

Source: SCAQMD (2008).

Note: The local Source Receptor Area is 23—Metropolitan Riverside County.

ac = acre  
 CO = carbon monoxide  
 ft = foot  
 lbs/day = pounds per day  
 NO<sub>x</sub> = nitrogen oxides  
 PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size  
 PM<sub>10</sub> = particulate matter less than 10 microns in size  
 SCAQMD = South Coast Air Quality Management District

Sensitive receptors include residences, schools, hospitals, and similar uses that are sensitive to adverse air quality. The nearest sensitive receptors to the project site are single-family residential units that are at least 115 feet to the south of the project site boundary across Mission Village Drive.

The SCAQMD provides LST screening tables for 25, 50, 100, 200, and 500-meter source-receptor distances. As identified, the nearest sensitive receptors are located approximately 115 feet (35-meters) from the project site boundary. The proposed project site is 9.92 acres; however, the construction activities would only take place on portions of the project site on any 1 day. The SCAQMD recommends assuming that 4 acres would be disturbed in any 1 day; therefore, LSTs for the 4 acre/35-meter combination were derived by interpolation.

Table G shows the emission thresholds that would apply based on the project size and distance to nearby receptors during project construction and operation, respectively.

## Global Climate Change

*State CEQA Guidelines* Section 15064(b) provides that the “determination of whether a project may have a significant effect on the environment calls for careful judgment on the part of the public agency involved, based to the extent possible on scientific and factual data”, and further states that an “ironclad definition of significant effect is not always possible because the significance of an activity may vary with the setting.”

Appendix G of the *State CEQA Guidelines* includes significance thresholds for GHG emissions. A project would normally have a significant effect on the environment if it would do either of the following:

- Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment
- Conflict with an applicable plan, policy, or regulation adopted for the purpose of reducing the emissions of GHGs

Currently, there is no Statewide GHG emissions threshold that has been used to determine the potential GHG emissions impacts of a project. Threshold methodology and thresholds are still being developed and revised by air districts in California.

To provide guidance to local lead agencies on determining significance for GHG emissions in their CEQA documents, SCAQMD convened a GHG CEQA Significance Threshold Working Group (Working Group) in 2008. This Working Group proposed a tiered approach for evaluating GHG emissions for development projects where SCAQMD is not the lead agency. The applicable tier for this project is Tier 3, which states that if GHG emissions are less than 3,000 MT CO<sub>2</sub>e per year, project-level and cumulative GHG emissions would be less than significant.

## Energy

Although no quantitative thresholds related to energy are included in the *State CEQA Guidelines*, the *State CEQA Guidelines* indicate that a project would normally have a significant adverse energy impact if the project would do either of the following:

- Result in a potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources during project construction or operation; or
- Conflict with or obstruct a State or local plan for renewable energy or energy efficiency.

For the purposes of this analysis, impacts to energy resources will be considered significant if the project would result in the wasteful, inefficient, or unnecessary consumption of fuel or energy; and/or conversely, if the project would not incorporate renewable energy or energy efficiency measures into building design, equipment use, transportation, or other project features.

## IMPACTS AND MITIGATION MEASURES

Impacts associated with the project would include emissions of criteria air pollutants and GHG emissions. Additionally, energy resources would be consumed during the construction and operation of the project. The sections below describe the proposed project's consistency with applicable air quality plans, estimated project emissions and energy use, and the significance of impacts.

### Construction Air Quality Impacts

#### *Criteria Pollutant Analysis*

The Basin is designated as non-attainment for O<sub>3</sub> and PM<sub>2.5</sub> for federal standards and non-attainment for O<sub>3</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub> for State standards. The SCAQMD's nonattainment status is attributed to the region's development history. Past, present, and future development projects contribute to the region's adverse air quality impacts on a cumulative basis. By its very nature, air pollution is largely a cumulative impact. No single project is sufficient in size to, by itself, result in nonattainment of ambient air quality standards. Instead, a project's individual emissions contribute to existing cumulatively significant adverse air quality impacts. If a project's contribution to the cumulative impact is considerable, then the project's impact on air quality would be considered significant.

In developing thresholds of significance for air pollutants, the SCAQMD considered the emission levels for which a project's individual emissions would be cumulatively considerable. If a project exceeds the identified significance thresholds, its emissions would be cumulatively considerable, resulting in significant adverse air quality impacts to the region's existing air quality conditions.

**Construction Emissions.** Construction activities produce combustion emissions from various sources (utility engines, tenant improvements, and motor vehicles transporting the construction crew). Exhaust emissions from construction activities envisioned on site would vary daily as construction activity levels change.

The construction analysis includes estimating the construction equipment that would be used during each construction activity, the hours of use for that construction equipment, the quantities of earth and debris to be moved, and the on-road vehicle trips (e.g., worker, soil-hauling, and vendor trips). The proposed earthwork for the project includes 5,118 cubic yards (cy) of cut and 5,950 cy of fill. It was assumed that the cut would be reused as fill, leaving 832 cy of fill import required. CalEEMod defaults are assumed for the construction activities, off-road equipment, and on-road construction fleet mix and trip lengths. It is expected that construction would start in spring of 2025 and finish in 2027. Table H lists the tentative project construction schedule.

**Table H: Tentative Project Construction Schedule**

Phase Name	Phase Start Date	Phase End Date	Number of Days
Demolition	4/1/2025	8/4/2025	90
Site Preparation	8/5/2025	8/18/2025	10
Grading	8/19/2025	9/15/2025	20
Building Construction	9/16/2025	7/15/2027	478
Paving	7/16/2027	8/12/2027	20
Architectural Coating	9/14/2026	8/26/2027	249

Source: Estimated by LSA from the project information provided (August 2023).

The most recent version of CalEEMod (Version 2022.1) was used to develop the construction equipment inventory and calculate the construction emissions. Table I lists the estimated construction equipment that would be used during project construction as estimated by CalEEMod default values. The CalEEMod output is included as Attachment C.

**Table I: Diesel Construction Equipment Used by Construction Phase**

Construction Phase	Off-Road Equipment Type	Off-Road Equipment Unit Amount	Hours Used per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	1	8	33	0.73
	Excavators	3	8	36	0.38
	Rubber Tired Dozers	2	8	367	0.4
Site Preparation	Rubber Tired Dozers	3	8	367	0.4
	Tractors/Loaders/Backhoes	4	8	84	0.37
Grading	Excavators	1	8	36	0.38
	Graders	1	8	148	0.41
	Rubber Tired Dozers	1	8	367	0.4
	Tractors/Loaders/Backhoes	3	8	84	0.37
Building Construction	Cranes	1	7	367	0.29
	Forklifts	3	8	82	0.2
	Generator Sets	1	8	14	0.74
	Tractors/Loaders/Backhoes	3	7	84	0.37
	Welders	1	8	46	0.45
Architectural Coating	Air Compressors	1	6	37	0.48
Paving	Pavers	2	8	81	0.42
	Paving Equipment	2	8	89	0.36
	Rollers	2	8	36	0.38

Source: Compiled by LSA using CalEEMod defaults (August 2023).  
CalEEMod = California Emissions Estimator Model

The emissions rates shown in Table J are from the CalEEMod output tables. Emission rates from the CalEEMod output show the combination of the on- and off-site emissions and the greater of summer and winter emissions. No exceedances of any criteria pollutants are expected. Standard measures are documented in the CalEEMod output in Attachment C.



**Table J: Short-Term Regional Construction Emissions**

Construction Phase	Total Regional Pollutant Emissions (lbs/day)							
	VOCs	NO <sub>x</sub>	CO	SO <sub>x</sub>	Fugitive PM <sub>10</sub>	Exhaust PM <sub>10</sub>	Fugitive PM <sub>2.5</sub>	Exhaust PM <sub>2.5</sub>
Demolition	1	28	20	<1	4	1	1	1
Site Preparation	1	40	30	<1	8	1	4	1
Grading	1	24	19	<1	3	1	1	1
Building Construction	2	21	34	<1	4	1	1	1
Architectural Coating	9	1	4	<1	1	<1	<1	<1
Paving	1	13	12	<1	<1	1	<1	1
<b>Peak Daily</b>	<b>11</b>	<b>40</b>	<b>38</b>	<b>&lt;1</b>	<b>10</b>		<b>5</b>	
<b>SCAQMD Threshold</b>	<b>75</b>	<b>100</b>	<b>550</b>	<b>150</b>	<b>150</b>		<b>55</b>	
<b>Exceeds Threshold?</b>	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>		<b>No</b>	

Source: Compiled by LSA (August 2023)

PM<sub>10</sub> and PM<sub>2.5</sub> fugitive emissions are from the Mitigated results; the only “mitigation” measures applied in this modeling are required dust control measures per SCAQMD Rule 403. It was assumed that the architectural coatings would be applied during the building construction phase.

CO = carbon monoxide

lbs/day = pounds per day

NO<sub>x</sub> = nitrogen oxides

PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size

PM<sub>10</sub> = particulate matter less than 10 microns in size

SCAQMD = South Coast Air Quality Management District

SO<sub>x</sub> = sulfur oxides

VOCs = volatile organic compounds

**Fugitive Dust.** Fugitive dust emissions are generally associated with land clearing and exposure of soils to the air and wind, as well as cut-and-fill grading operations. Dust generated during construction varies substantially on a project-by-project basis, depending on the level of activity, the specific operations, and weather conditions at the time of construction. The construction calculations prepared for this project assumed that dust control measures (watering a minimum of two times daily consistent with SCAQMD Rule 403) would be employed to reduce emissions of fugitive dust during site grading. Furthermore, all construction would need to comply with SCAQMD Rule 403 regarding the emission of fugitive dust. Table J lists total construction emissions (i.e., fugitive dust emissions and construction equipment exhausts) that have incorporated the following Rule 403 measures that would be implemented to significantly reduce PM<sub>10</sub> emissions from construction:

- Water active sites at least twice daily (locations where grading is to occur shall be thoroughly watered prior to earthmoving).
- Cover all trucks hauling dirt, sand, soil, or other loose materials, or maintain at least 2 feet (0.6 meter) of freeboard (vertical space between the top of the load and the top of the trailer) in accordance with the requirements of California Vehicle Code Section 23114.
- Reduce traffic speeds on all unpaved roads to 15 miles per hour or less.

These Rule 403 measures were incorporated in the CalEEMod analysis.

**Architectural Coatings.** Architectural coatings contain VOCs that are part of the O<sub>3</sub> precursors. Based on the proposed project, it is estimated that application of the architectural coatings for

the proposed peak construction day would result in a peak of 11 pounds per day (lbs/day) of VOCs. Therefore, VOC emissions from architectural-coating application would not exceed the SCAQMD VOC threshold of 75 lbs/day.

**Localized Impacts Analysis.** Table K shows the portion of the construction emissions that would be produced on the project sites compared to the LSTs. Table K shows that the localized construction emissions would not result in a locally significant air quality impact.

**Table K: Construction Localized Impacts Analysis**

Emissions Sources	Pollutant Emissions (lbs/day)			
	NO <sub>x</sub>	CO	PM <sub>10</sub>	PM <sub>2.5</sub>
On-Site Emissions	40	28	9	5
<b>LST</b>	<b>249</b>	<b>1,556</b>	<b>20</b>	<b>7</b>
<b>Exceeds Threshold?</b>	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>

Source: Compiled by LSA (August 2023)

Note: SRA 23- Metropolitan Riverside County, 4-ac construction area, 115 feet to the nearest sensitive receptors.

ac = acre

CO = carbon monoxide

lbs/day = pounds per day

NO<sub>x</sub> = nitrogen oxides

LST = localized significance threshold

PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size

PM<sub>10</sub> = particulate matter less than 10 microns in size

SRA = Source Receptor Area

**Odors from Construction Activities.** Heavy-duty equipment in the project area during construction would emit odors, primarily from the equipment exhaust. However, the construction-produced odors would cease after individual construction is completed. No other sources of objectionable odors have been identified for the proposed project.

SCAQMD Rule 402 regarding nuisances states:

A person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.

The proposed construction would comply with Rule 402, thus is not anticipated to emit any objectionable odors. Therefore, objectionable odors posing a health risk to potential on-site and existing off-site uses would not occur during construction as a result of the proposed project, and no mitigation measures are required.

*Construction Emissions Conclusions*

Tables J and K show that daily regional construction emissions and localized emissions would not exceed the established thresholds of any criteria pollutant emission thresholds established by SCAQMD; thus, during construction, there would be no construction air quality impacts.

## Operational Air Quality Impacts

Long-term air pollutant emission impacts are those associated with mobile sources (e.g., vehicle trips), energy sources (e.g., electricity and natural gas) and area sources (e.g., architectural coatings and the use of landscape maintenance equipment) related to the proposed project.

PM<sub>10</sub> emissions result from running exhaust, tire and brake wear, and the entrainment of dust into the atmosphere from vehicles traveling on paved roadways. Entrainment of PM<sub>10</sub> occurs when vehicle tires pulverize small rocks and pavement, and the vehicle wakes generate airborne dust. The contribution of tire and brake wear is small compared to the other PM emission processes. Gasoline-powered engines have small rates of particulate matter emissions compared with diesel-powered vehicles. Based on the project *Vehicle Miles Traveled Analysis* (LSA 2023) prepared for the project, the proposed project would generate a total of 1,464 vehicle trips on a peak day (weekday), which was accounted for in the CalEEMod analysis.

Energy source emissions result from activities in buildings that use electricity and natural gas. The quantity of emissions is the product of usage intensity (i.e., the amount of electricity or natural gas) and the emission factor of the fuel source. Major sources of energy demand include building mechanical systems, such as heating and air conditioning, lighting, and plug-in electronics, such as computers. Greater building or appliance efficiency reduces the amount of energy for a given activity and thus lowers the resultant emissions. The emission factor is determined by the fuel source, with cleaner energy sources, like renewable energy, producing fewer emissions than conventional sources. The project would include solar panels with the capacity to generate approximately 1,275,500 kWh per year.

Typically, area source emissions consist of direct sources of air emissions at the project site, including architectural coatings and the use of landscape maintenance equipment. Area source emissions associated with the project would include emissions from the use of landscaping equipment and the use of consumer products.

Emission estimates for operation of the project were calculated using CalEEMod and are shown in Table L, below. The peak daily emissions associated with project operations are identified in Table L for VOC, NO<sub>x</sub>, CO, SO<sub>x</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>.

**Table L: Project Operational Emissions (lbs/day)**

	VOCs	NO <sub>x</sub>	CO	SO <sub>x</sub>	PM <sub>10</sub>	PM <sub>2.5</sub>
Area Source Emissions	9	<1	20	<1	<1	<1
Energy Source Emissions	<1	1	<1	<1	<1	<1
Mobile Source Emissions	6	5	46	<1	10	3
<b>Total Project Emissions</b>	<b>15</b>	<b>6</b>	<b>66</b>	<b>&lt;1</b>	<b>10</b>	<b>3</b>
<b>SCAQMD Significance Threshold</b>	<b>55</b>	<b>55</b>	<b>550</b>	<b>150</b>	<b>150</b>	<b>55</b>
<b>Exceed Threshold?</b>	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>

Source: Compiled by LSA (August 2023).

CO = carbon monoxide

lbs/day = pounds per day

NO<sub>x</sub> = nitrogen oxides

PM<sub>10</sub> = particulate matter less than 10 microns in size

PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size

SCAQMD = South Coast Air Quality Management District

SO<sub>x</sub> = oxides of sulfur

VOCs = volatile organic compounds

The results shown in Table L indicate the project would not exceed the significance criteria for any pollutant emissions; therefore, operation of the proposed project would not result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in nonattainment under an applicable federal or State AAQS.

Emission calculations sheets are included in Attachment C.

*Localized Impacts Analysis*

By design, the localized impacts analysis only includes on-site sources; however, the CalEEMod outputs do not separate on-site and off-site emissions for operations. It was assumed that all of the area source emissions would occur on-site, none of the energy source emissions would occur on-site, and a portion of the mobile source emissions would occur onsite. As the default average trip length is between 5.9 and 14.7 miles and the on-site distance would average less than 1,000 feet, it was assumed that 5 percent of the mobile source emissions would occur on-site. Table M shows that the proposed operational emission rates would not exceed the LSTs for sensitive receptors in the project area. Therefore, the proposed operational activity would NOT result in a locally significant air quality impact. The proposed project’s impact would be less than significant.

**Table M: Long-Term Operational Localized Impacts Analysis**

Emissions Sources	Pollutant Emissions (lbs/day)			
	NO <sub>x</sub>	CO	PM <sub>10</sub>	PM <sub>2.5</sub>
On-Site Emissions	1	22	<1	<1
<b>LST</b>	<b>249</b>	<b>1,556</b>	<b>5</b>	<b>2</b>
<b>Exceeds Threshold?</b>	<b>No</b>	<b>No</b>	<b>No</b>	<b>No</b>

Source: Compiled by LSA (August 2023)

Note: SRA 23 – Metropolitan Riverside, 4-acre operating area, receptors at 115 feet (35 meters)

CO = carbon monoxide

lbs/day = pounds per day

LST = local significance threshold

NO<sub>x</sub> = nitrogen oxides

PM<sub>2.5</sub> = particulate matter less than 2.5 microns in size

PM<sub>10</sub> = particulate matter less than 10 microns in size

SRA = Source Receptor Area

### *Objectionable Odors*

SCAQMD addresses odor criteria within the CEQA Handbook. The district has not established a rule or standard regarding odor emissions, rather, the district has a nuisance rule: “Any project with the potential to frequently expose members of the public to objectionable odors should be deemed to have a significant impact.” Land uses and industrial operations that are associated with odor complaints include agricultural uses, wastewater treatment plants, food-processing plants, chemical plants, composting, refineries, landfills, dairies, and fiberglass molding. The proposed project would not fall under any of these categories.

City regulations require trash storage areas to be in an enclosed area to limit air circulation, and through adherence to City regulations, odors from the trash storage areas would be minimal. The project’s trash enclosures are planned with the following features:

- All trash/recycling enclosures will be located within vestibules in the residential buildings (there will not be any trash enclosures in exterior areas of the property);
- There will be one set of trash and recycling chutes per building (5 sets of trash/recycling chutes total for the property); and
- Each set of trash chutes will have ventilation to move the indoor air up to the roof.

With these measures, no sources of objectionable odors have been identified or are expected for the proposed project. Therefore, the proposed project would not result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

### **Greenhouse Gas Impacts**

This section discusses the project’s impacts related to the release of GHG emissions for the construction and operational phases of the project.

#### *Emissions Background*

Estimation of GHG emissions in the future does not account for all changes in technology that may reduce such emissions; therefore, the estimates are based on past performance and represent a scenario that is worse than that which is likely to be encountered (after energy-efficient technologies have been implemented). While information is presented below to assist the public and decision-makers in understanding the project’s potential contribution to GCC impacts, the information available is not sufficiently detailed to allow a direct comparison between particular project characteristics and particular climate change impacts or between any particular proposed mitigation measure and any reduction in climate change impacts.

Construction and operation of the proposed project would generate GHG emissions, with the majority of energy consumption (and associated generation of GHG emissions) occurring during the project’s operation.

Overall, the following activities associated with the proposed project could directly or indirectly contribute to the generation of GHG emissions.

*Construction Activities*

Construction activities associated with the proposed project would produce combustion emissions from various sources. During construction, GHGs would be emitted through the operation of construction equipment and from worker and builder supply vendor vehicles, each of which typically use fossil-based fuels to operate. The combustion of fossil-based fuels creates GHGs such as CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O. Furthermore, CH<sub>4</sub> is emitted during the fueling of heavy equipment. Exhaust emissions from on-site construction activities would vary daily as construction activity levels change.

The SCAQMD does not provide a separate GHG significance threshold for construction emissions, rather their guidance specifies that construction emissions should be amortized over 30 years (a typical project lifetime), added to the project operational emissions, and that total compared to the GHG significance threshold.

*Operational Greenhouse Gas Emissions*

Long-term GHG emissions are typically generated from mobile sources (e.g., cars, trucks and buses), area sources (e.g., maintenance activities and landscaping), indirect emissions from sources associated with energy consumption, waste sources (land filling and waste disposal), and water sources (water supply and conveyance, treatment, and distribution). Mobile-source GHG emissions would include project-generated vehicle and truck trips to and from the project. Area-source emissions would be associated with activities such as landscaping and maintenance on the project site. Waste source emissions generated by the proposed project include energy generated by land filling and other methods of disposal related to transporting and managing project generated waste. The project would include solar panels with the capacity to generate approximately 1,275,500 kWh per year.

As described above, this analysis evaluates existing and proposed operational emissions associated with the project. Construction and Operational GHG emissions were estimated using CalEEMod and the results are presented in Tables N and O.

**Table N: Construction Greenhouse Gas Emissions**

Construction Phase	Total Emissions per Phase (MT)			Total Emissions per Phase (MT CO <sub>2</sub> e)
	CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	
Demolition	263	<1	<1	269
Site Preparation	25	<1	<1	25
Grading	32	<1	<1	32
Building Construction (2025, 2026, 2027)	1,453	<1	<1	1,475
Architectural Coating (2026, 2027)	86	<1	<1	88
Paving	15	<1	<1	15
<b>Total Emissions for the Entire Construction Process</b>				<b>1,904</b>
<b>Total Construction Emissions Amortized over 30 Years</b>				<b>63</b>

Source: Compiled by LSA (August 2023).

CH<sub>4</sub> = methane

CO<sub>2</sub> = carbon dioxide

MT CO<sub>2</sub>e = metric tons of carbon dioxide equivalent

MT = metric tons

N<sub>2</sub>O = nitrous oxide

**Table O: Long-Term Operational Greenhouse Gas Emissions**

Source	Pollutant Emissions (MT/yr)					
	Bio-CO <sub>2</sub>	NBio-CO <sub>2</sub>	Total CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	CO <sub>2</sub> e
<b>Proposed Operational Emissions</b>						
Mobile	<1	1,780	1,780	<1	<1	1,811
Area	0	6	6	<1	<1	6
Energy	<1	510	510	<1	<1	511
Water	4	38	42	<1	<1	57
Waste	23	0	23	3	0	80
<b>Total Proposed Project Emissions</b>	<b>27</b>	<b>2,334</b>	<b>2,362</b>	<b>3</b>	<b>&lt;1</b>	<b>2,465</b>
<b>Construction Emissions Amortized over 30 Years</b>						<b>63</b>
<b>Total Project-Related GHG Emissions</b>						<b>2,528</b>
<b>SCAQMD Threshold</b>						<b>3,000</b>
<b>GHG Emissions Exceed Threshold?</b>						<b>No</b>

Source: Compiled by LSA (August 2023).

Note: CalEEMod only allows including the photovoltaic system as mitigation, even though the project is required to include it. Thus, the results reported in this table are from the “Mitigated” results from CalEEMod.

Bio-CO<sub>2</sub> = biologically generated CO<sub>2</sub>

GHG = greenhouse gas

CalEEMod = California Emission Estimator Model

MT/yr = metric tons per year

CH<sub>4</sub> = methane

N<sub>2</sub>O = nitrous oxide

CO<sub>2</sub> = carbon dioxide

NBio-CO<sub>2</sub> = non-biologically generated CO<sub>2</sub>

CO<sub>2</sub>e = carbon dioxide equivalent

SCAQMD = South Coast Air Quality Management District

As shown in Table O, the project would result in approximately 2,528 MT CO<sub>2</sub>e per year. This is less than SCAQMD’s threshold of 3,000 MT CO<sub>2</sub>e per year.

### Energy

The proposed project would increase the demand for electricity, natural gas, and gasoline compared to the existing condition of the site. The discussion and analysis provided below is based on the data included in the CalEEMod output, which is included as Attachment C. For purposes of evaluating energy impacts under the California Environmental Quality Act, this analysis will determine if the project would result in a potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources during project construction or operation.

#### Construction-Period Energy Use

The anticipated construction schedule assumes that the proposed project would be built over approximately 28 months. The proposed project would require demolition, site preparation, grading, building construction, architectural coating, and paving during construction.

Construction of the proposed project would require energy for the manufacture and transportation of building materials and for preparation of the site for grading activities and building construction. Petroleum fuels (e.g., diesel and gasoline) would be the primary sources of energy for these activities. Table P shows the diesel fuel usage based on the CalEEMod modeling assumptions described above.



**Table P: Construction Fuel Usage**

Phase Name	Fuel Used (gal)
Demolition	4,091
Site Preparation	1,950
Grading	3,978
Building Construction & Architectural Coatings	2,993
Paving	1,894
<b>Total Construction Fuel Used</b>	<b>14,906</b>

Sources: Compiled by LSA. CalEEMod modeling and EMFAC2021 (August 2023)

In 2019, vehicles in California consumed approximately 3.8 billion gallons of diesel fuel (CEC n.d.-c). Therefore, diesel demand generated by construction of the proposed project would be a minimal fraction of diesel fuel consumption in California and, by extension, in Riverside County.

Construction activities are not anticipated to result in an inefficient use of energy because gasoline and diesel fuel would be supplied by construction contractors who would conserve the use of their supplies to minimize their costs on the proposed project.

Energy usage on the project site during construction would be temporary in nature and would be relatively small in comparison to the State's available energy sources. Therefore, construction energy impacts would be less than significant, and no mitigation would be required.

#### *Operational Energy Use*

Energy use includes both direct and indirect sources of emissions. Direct sources of emissions include on-site natural gas usage for heating and cooking, while indirect sources include electricity generated by off-site power plants. Natural gas use in CalEEMod is measured in units of a thousand British thermal units (kBtu) per year; however, this analysis converts the results to natural gas in units of therms to be consistent with State natural gas usage data. Electricity use in CalEEMod is measured in kilowatt hours (kWh) per year, the same as State electricity usage data.

CalEEMod divides building electricity and natural gas use into uses that are subject to Title 24 standards and those that are not. For electricity, Title 24 uses include the major building envelope systems covered by Part 6 (California Energy Code) of Title 24 (e.g., space heating, space cooling, water heating, and ventilation). Non-Title 24 uses include all other end uses (e.g., appliances, electronics, and other miscellaneous plug-in uses). Because some lighting is not considered as part of the building envelope energy budget, CalEEMod considers lighting as a separate electricity use category.

For natural gas, uses are likewise categorized as Title 24 or non-Title 24. Title 24 uses include building heating and hot water end uses. Non-Title 24 natural gas uses include appliances.

Table P shows the estimated potential increased electricity, natural gas, gasoline, and diesel demand associated with the proposed project. The electricity and natural gas rates are from the CalEEMod analysis, while the gasoline and diesel rates are based on the traffic analysis in conjunction with USDOT fuel efficiency data (see Attachment D).

**Table P: Estimated Annual Energy Use of the Proposed Project**

Land Use	Electricity Use (kWh/yr)	Natural Gas Use (kBtu/yr)	Gasoline (gal/yr)	Diesel (gal/yr)
Residential	688,228	4,473,806	176,738	126,865

Source: Compiled by LSA (August 2023).

gal/yr = gallons per year

kBTU/yr = thousand British thermal units per year

kWh/yr = kilowatt-hours per year

As shown in Table P, the estimated potential increased electricity demand associated with the proposed project is 688,228 kWh per year (with the photovoltaic system providing the rest of the electrical demand). In 2021, California consumed approximately 277,764 gigawatt hours (GWh) or 277,764,000,000 kWh. Of this total, Riverside County consumed 16,767.2 GWh or 16,767,235,877 kWh (CEC n.d.-a). Therefore, electricity demand associated with the proposed project would be approximately less than 0.01 percent of Riverside County’s total electricity demand.

Also shown in Table P, the estimated potential increased natural gas demand associated with the proposed project is 4,473,806 kBtu per year or 44,738 therms (CEC n.d.-b). In 2021, California consumed approximately 1,192,270,564 therms, while Riverside County consumed 430.8 million therms (430,843,598 therms). Therefore, operation of the proposed project would negligibly increase the annual natural gas consumption in Riverside County by approximately 0.01 percent.

Furthermore, the proposed project would result in energy usage associated with gasoline and diesel to fuel project-related trips. The average fuel economy for light-duty vehicles (automobiles, pickups, vans, and sport utility vehicles) in the United States has steadily increased, from about 14.9 mpg in 1980 to 22.9 mpg in 2020 (USDOT 2017). The average fuel economy for heavy-duty trucks in the United States has also steadily increased, from 5.7 mpg in 2013 to a projected 8.0 mpg in 2022 (CEC 2015).

Using the EPA gasoline fuel economy estimates for 2020, the California diesel fuel economy estimates for 2021, and the traffic data from the project traffic analyses, the proposed project would result in the annual consumption of 176,738 gallons of gasoline and 126,865 gallons of diesel fuel. In 2019, vehicles in California consumed approximately 15.6 billion gallons of gasoline and 3.8 billion gallons of diesel fuel (CEC n.d.-c). Therefore, gasoline and diesel demand generated by vehicle trips associated with the proposed project would be a minimal fraction of gasoline and diesel fuel consumption in California and, by extension, in Riverside County.

In addition, vehicles associated with trips to and from the project site would be subject to fuel economy and efficiency standards, which are applicable throughout the State. These statistics do not include the increasing use of electric vehicles. As such, the fuel efficiency of vehicles associated with project operations would increase throughout the life of the proposed project. Therefore,

implementation of the proposed project would not result in a substantial increase in transportation-related energy uses.

#### *Energy Use Summary.*

As described above, the proposed project would not result in the wasteful, inefficient, or unnecessary consumption of fuel or energy and would incorporate renewable energy or energy efficiency measures into building design, equipment uses, and transportation. Impacts would be less than significant, and no mitigation measures would be necessary.

**Consistency with State and Local Plans for Renewable Energy and Energy Efficiency.** As indicated above, energy usage on the project site during construction would be temporary in nature. In addition, energy usage associated with operation of the proposed project would be relatively small in comparison to the State's available energy sources and energy impacts would be negligible at the regional level. Because California's energy conservation planning actions are conducted at a regional level and because the project's total impacts to regional energy supplies would be minor, the proposed project would not conflict with California's energy conservation plans as described in the CEC's 2021 Integrated Energy Policy Report. In addition, the proposed project would comply with Title 24 and CALGreen standards. Thus, as shown above, the proposed project would not conflict with or obstruct a State or local plan for renewable energy or energy efficiency. Therefore, energy impacts from the proposed project would be less than significant, and no mitigation measures would be necessary.

## CONCLUSION

Based on the analysis presented above, the construction and operational emissions associated with the proposed project would not exceed SCAQMD established significance thresholds. The proposed project is not expected to produce significant localized emissions that would affect nearby sensitive receptors. The proposed project would also not result in objectionable odors affecting a substantial number of people. The GHG emissions associated with the construction and operation of the proposed project are estimated to be lower than the significance threshold and, thus, would not be cumulatively considerable. The proposed project would also not result in the wasteful, inefficient, or unnecessary consumption of energy resources. No mitigation measures are required.

Attachments: A: References  
B: Figures 1 and 2  
C: CalEEMod Output  
D: Fuel Consumption Worksheet

## ATTACHMENT A

### REFERENCES

- California Air Resources Board (CARB). 2009. Health: Air Pollution Health Effects. Website: [www.arb.ca.gov/our-work/topics/health](http://www.arb.ca.gov/our-work/topics/health) (accessed August 2023).
- \_\_\_\_\_. 2016. Ambient Air Quality Standards. May 4. Website: [www.arb.ca.gov/research/aaqs/aaqs2.pdf](http://www.arb.ca.gov/research/aaqs/aaqs2.pdf) (accessed August 2023).
- \_\_\_\_\_. 2017. California's 2017 Climate Change Scoping Plan. November. Website: [www.arb.ca.gov/cc/scopingplan/scoping\\_plan\\_2017.pdf](http://www.arb.ca.gov/cc/scopingplan/scoping_plan_2017.pdf) (accessed August 2023).
- \_\_\_\_\_. 2020. GHG Current California Emission Inventory Data. Website: <https://ww2.arb.ca.gov/ghg-inventory-data> (accessed August 2023).
- \_\_\_\_\_. n.d.-a. Common Air Pollutants. Website: [www.arb.ca.gov/resources/common-air-pollutants](http://www.arb.ca.gov/resources/common-air-pollutants) (accessed August 2023).
- \_\_\_\_\_. n.d.-b. iADAM: Air Quality Data Statistics. Website: [www.arb.ca.gov/adam](http://www.arb.ca.gov/adam) (accessed August 2023).
- California Energy Commission (CEC). 2015. Medium and Heavy-Duty Truck Prices and Fuel Economy 2013–2026. Website: [efiling.energy.ca.gov/getdocument.aspx?tn=206180](http://efiling.energy.ca.gov/getdocument.aspx?tn=206180) (accessed August 2023).
- \_\_\_\_\_. 2022. *2021 Integrated Energy Policy Report*. February 16. Website: [www.energy.ca.gov/data-reports/reports/integrated-energy-policy-report/2021-integrated-energy-policy-report](http://www.energy.ca.gov/data-reports/reports/integrated-energy-policy-report/2021-integrated-energy-policy-report) (accessed August 2023).
- \_\_\_\_\_. n.d.-a. Electricity Consumption by County. Website: [www.ecdms.energy.ca.gov/elecbycounty.aspx](http://www.ecdms.energy.ca.gov/elecbycounty.aspx) (accessed August 2023).
- \_\_\_\_\_. n.d.-b. Gas Consumption by County. Website: [ecdms.energy.ca.gov/gasbycounty.aspx](http://ecdms.energy.ca.gov/gasbycounty.aspx) (accessed August 2023).
- \_\_\_\_\_. n.d.-c. California Gasoline Data, Facts, and Statistics. Website: [www.energy.ca.gov/data-reports/energy-almanac/transportation-energy/california-gasoline-data-facts-and-statistics](http://www.energy.ca.gov/data-reports/energy-almanac/transportation-energy/california-gasoline-data-facts-and-statistics) (accessed August 2023).
- City of Riverside 2007. General Plan. Website: [riversideca.gov/cedd/planning/city-plans/general-plan-0](http://riversideca.gov/cedd/planning/city-plans/general-plan-0) (accessed August 2023).
- Intergovernmental Panel on Climate Change (IPCC). 2022. Sixth Assessment Report. Website: [www.ipcc.ch/assessment-report/ar6/](http://www.ipcc.ch/assessment-report/ar6/) (accessed August 2023).

- \_\_\_\_\_. 2022. Climate Change 2022: AR6 Synthesis Report (SYR) Website [www.ipcc.ch/report/sixth-assessment-report-cycle/](http://www.ipcc.ch/report/sixth-assessment-report-cycle/) (accessed August 2023)
- \_\_\_\_\_. Mitigation of Climate Change. Website: [www.ipcc.ch/report/sixth-assessment-report-working-group-3/#:~:text=the%20report%20AUTHORS-,Report,56th%20Session%20of%20the%20IPCC](http://www.ipcc.ch/report/sixth-assessment-report-working-group-3/#:~:text=the%20report%20AUTHORS-,Report,56th%20Session%20of%20the%20IPCC) (accessed August 2023)
- LSA Associates, Inc. (LSA). 2023. *Vehicle Miles Traveled Analysis*. January.
- Pew Center. 2006. *Pew Center on Global Climate Change and the Pew Center on the States, Climate Change 101: Understanding and Responding to Global Climate Change*. October.
- South Coast Air Quality Management District (SCAQMD). 1993. *CEQA Air Quality Handbook*. April. Website: [www.aqmd.gov/home/rules-compliance/ceqa/air-quality-analysis-handbook/ceqa-air-quality-handbook-\(1993\)](http://www.aqmd.gov/home/rules-compliance/ceqa/air-quality-analysis-handbook/ceqa-air-quality-handbook-(1993)) (accessed August 2023).
- \_\_\_\_\_. 2005. Rule 403. Fugitive Dust. Website: [www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-403.pdf](http://www.aqmd.gov/docs/default-source/rule-book/rule-iv/rule-403.pdf) (accessed August 2023).
- \_\_\_\_\_. 2008. *Final Localized Significance Threshold Methodology*. June. Website: [www.aqmd.gov/docs/default-source/ceqa/handbook/localized-significance-thresholds/final-1st-methodology-document.pdf](http://www.aqmd.gov/docs/default-source/ceqa/handbook/localized-significance-thresholds/final-1st-methodology-document.pdf) (accessed August 2023).
- \_\_\_\_\_. 2015. *Multiple Air Toxics Exposure Study in the South Coast Air Basin (MATES-IV)*. May. Website: [www.aqmd.gov/home/air-quality/air-quality-studies/health-studies/mates-iv](http://www.aqmd.gov/home/air-quality/air-quality-studies/health-studies/mates-iv) (accessed August 2023).
- \_\_\_\_\_. 2016. SCAQMD Rule 1113.
- \_\_\_\_\_. 2017. Final 2016 Air Quality Management Plan. March. Website: [www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf?sfvrsn=15](http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2016-air-quality-management-plan/final-2016-aqmp/final2016aqmp.pdf?sfvrsn=15) (accessed August 2023).
- \_\_\_\_\_. 2019. South Coast AQMD Air Quality Significance Thresholds. Website: [www.aqmd.gov/docs/default-source/ceqa/handbook/scaqmd-air-quality-significance-thresholds.pdf](http://www.aqmd.gov/docs/default-source/ceqa/handbook/scaqmd-air-quality-significance-thresholds.pdf) (accessed August 2023).
- \_\_\_\_\_. 2022. Final 2022 Air Quality Management Plan. February. Website: [www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan](http://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan) (accessed August 2023).
- \_\_\_\_\_. n.d.-a. Air Quality Analysis Handbook. Website: [www.aqmd.gov/home/rules-compliance/ceqa/air-quality-analysis-handbook](http://www.aqmd.gov/home/rules-compliance/ceqa/air-quality-analysis-handbook) (accessed August 2023)
- \_\_\_\_\_. n.d.-b. National Ambient Air Quality Standards (NAAQS) and California Ambient Air Quality Standards (CAAQS) Attainment Status for South Coast Air Basin. Website: [www.aqmd.gov/](http://www.aqmd.gov/)

- docs/default-source/clean-air-plans/air-quality-management-plans/naaqs-caaqs-feb2016.pdf (accessed August 2023).
- \_\_\_\_\_. n.d.-b. Greenhouse Gases (GHG) CEQA Significance Thresholds. Website: [www.aqmd.gov/home/regulations/ceqa/air-quality-analysis-handbook/ghg-significance-thresholds/](http://www.aqmd.gov/home/regulations/ceqa/air-quality-analysis-handbook/ghg-significance-thresholds/) (accessed August 2023).
- United States Department of Transportation National Highway Traffic Safety Administration (NHTSA). 2022. Vehicle Fuel Economy Standards for Model Year 2024-2026. April. Website: <https://www.nhtsa.gov/press-releases/usdot-announces-new-vehicle-fuel-economy-standards-model-year-2024-2026> (accessed August 2023).
- United States Environmental Protection Agency (EPA). 2010. Methane and Nitrous Oxide Emissions from Natural Sources. Website: [nepis.epa.gov/Exe/ZyPDF.cgi/P100717T.PDF?Dockey=P100717T.PDF](http://nepis.epa.gov/Exe/ZyPDF.cgi/P100717T.PDF?Dockey=P100717T.PDF) (accessed August 2023).
- \_\_\_\_\_. 2022a. Final Rule to Revise Existing National GHG Emissions Standards for Passenger Cars and Light Trucks Through Model Year 2026. Website: [www.epa.gov/regulations-emissions-vehicles-and-engines/final-rule-revise-existing-national-ghg-emissions](http://www.epa.gov/regulations-emissions-vehicles-and-engines/final-rule-revise-existing-national-ghg-emissions) (accessed August 2023).
- \_\_\_\_\_. 2022b. Inventory of U.S. Greenhouse Gas Emissions and Sinks. Website: [www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks](http://www.epa.gov/ghgemissions/inventory-us-greenhouse-gas-emissions-and-sinks) (accessed August 2023).
- \_\_\_\_\_. 2022c. Air Data: Air Quality Data Collected at Outdoor Monitors across the US. Website: [www.epa.gov/outdoor-air-quality-data](http://www.epa.gov/outdoor-air-quality-data) (accessed August 2023).
- \_\_\_\_\_. 2022d. Nonattainment Areas for Criteria Pollutants (Green Book). Website: [www.epa.gov/green-book](http://www.epa.gov/green-book) (accessed August 2023).
- \_\_\_\_\_. 2022e. Clean Air Act Requirements and History. Website: [www.epa.gov/clean-air-act-overview/clean-air-act-requirements-and-history](http://www.epa.gov/clean-air-act-overview/clean-air-act-requirements-and-history) (accessed August 2023).
- Western Regional Climate Center (WRCC). 2022. Western Regional Climate Center. Website: [www.wrcc.dri.edu](http://www.wrcc.dri.edu) (accessed August 2023).

**ATTACHMENT B**

**FIGURES 1 AND 2**






FIGURE 1

LSA


LEGEND  
 Project Site



SOURCE: Google Earth 2021

Mission Grove Apartments  
 Project Location and Vicinity



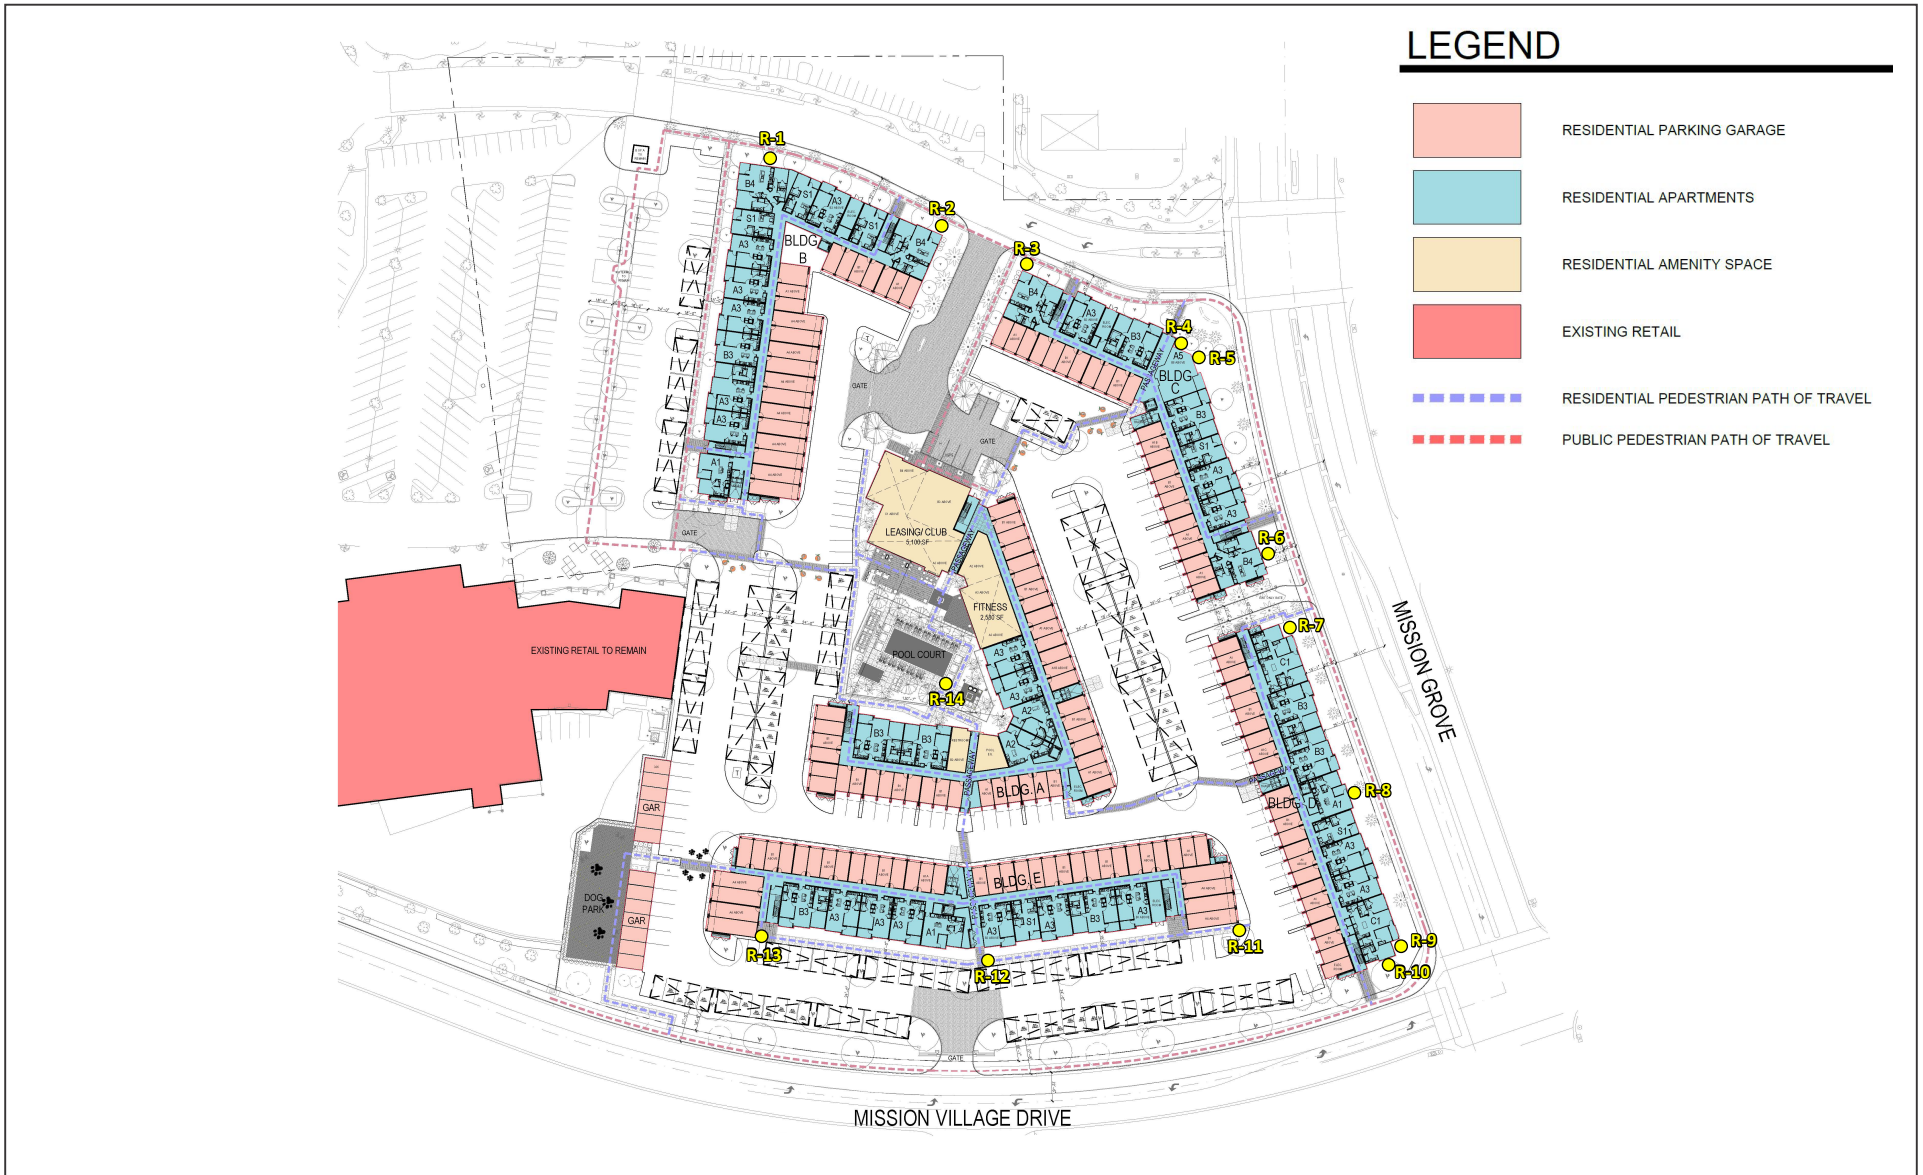

### LEGEND

- RESIDENTIAL PARKING GARAGE
- RESIDENTIAL APARTMENTS
- RESIDENTIAL AMENITY SPACE
- EXISTING RETAIL
- RESIDENTIAL PEDESTRIAN PATH OF TRAVEL
- PUBLIC PEDESTRIAN PATH OF TRAVEL

LSA

LEGEND  
 R-# Receptor Locations

FIGURE 4

↑  
N

0 20 40  
FEET

**ATTACHMENT C**

**CALEEMOD OUTPUT**

# Mission Grove Apartments Project Custom Report

## Table of Contents

1. Basic Project Information
  - 1.1. Basic Project Information
  - 1.2. Land Use Types
  - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
2. Emissions Summary
  - 2.1. Construction Emissions Compared Against Thresholds
  - 2.2. Construction Emissions by Year, Unmitigated
  - 2.3. Construction Emissions by Year, Mitigated
  - 2.4. Operations Emissions Compared Against Thresholds
  - 2.5. Operations Emissions by Sector, Unmitigated
  - 2.6. Operations Emissions by Sector, Mitigated
3. Construction Emissions Details
  - 3.1. Demolition (2025) - Unmitigated
  - 3.2. Demolition (2025) - Mitigated

3.3. Site Preparation (2025) - Unmitigated

3.4. Site Preparation (2025) - Mitigated

3.5. Grading (2025) - Unmitigated

3.6. Grading (2025) - Mitigated

3.7. Building Construction (2025) - Unmitigated

3.8. Building Construction (2025) - Mitigated

3.9. Building Construction (2026) - Unmitigated

3.10. Building Construction (2026) - Mitigated

3.11. Building Construction (2027) - Unmitigated

3.12. Building Construction (2027) - Mitigated

3.13. Paving (2027) - Unmitigated

3.14. Paving (2027) - Mitigated

3.15. Architectural Coating (2026) - Unmitigated

3.16. Architectural Coating (2026) - Mitigated

3.17. Architectural Coating (2027) - Unmitigated

3.18. Architectural Coating (2027) - Mitigated

#### 4. Operations Emissions Details

#### 4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.1.2. Mitigated

#### 4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.2. Electricity Emissions By Land Use - Mitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.2.4. Natural Gas Emissions By Land Use - Mitigated

#### 4.3. Area Emissions by Source

4.3.1. Unmitigated

4.3.2. Mitigated

#### 4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.4.2. Mitigated

#### 4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.5.2. Mitigated

#### 4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.6.2. Mitigated

#### 4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.7.2. Mitigated

#### 4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.8.2. Mitigated

#### 4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.9.2. Mitigated

#### 4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated



4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

## 5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.2.2. Mitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.3.2. Mitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

## 5.8. Construction Electricity Consumption and Emissions Factors

## 5.9. Operational Mobile Sources

### 5.9.1. Unmitigated

### 5.9.2. Mitigated

## 5.10. Operational Area Sources

### 5.10.1. Hearths

#### 5.10.1.1. Unmitigated

#### 5.10.1.2. Mitigated

### 5.10.2. Architectural Coatings

### 5.10.3. Landscape Equipment

### 5.10.4. Landscape Equipment - Mitigated

## 5.11. Operational Energy Consumption

### 5.11.1. Unmitigated

### 5.11.2. Mitigated

## 5.12. Operational Water and Wastewater Consumption

### 5.12.1. Unmitigated

### 5.12.2. Mitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.13.2. Mitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.14.2. Mitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.15.2. Mitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

5.18.2.2. Mitigated

8. User Changes to Default Data

# 1. Basic Project Information

## 1.1. Basic Project Information

Data Field	Value
Project Name	Mission Grove Apartments Project
Construction Start Date	4/1/2025
Operational Year	2027
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.50
Precipitation (days)	10.0
Location	33.91371470655713, -117.32525705377213
County	Riverside-South Coast
City	Riverside
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5477
EDFZ	11
Electric Utility	City of Riverside
Gas Utility	Southern California Gas
App Version	2022.1.1.17

## 1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
------------------	------	------	-------------	-----------------------	------------------------	--------------------------------	------------	-------------

Apartments Mid Rise	347	Dwelling Unit	9.92	333,120	0.00	0.00	1,121	—
---------------------	-----	---------------	------	---------	------	------	-------	---

### 1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Energy	E-10-B	Establish Onsite Renewable Energy Systems: Solar Power

## 2. Emissions Summary

### 2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	2.13	10.3	39.9	37.2	0.05	1.12	7.89	9.01	1.02	3.99	5.01	—	7,782	7,782	0.30	0.48	17.1	7,907
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	2.07	10.3	22.5	32.0	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,450	7,450	0.27	0.34	0.44	7,557
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.33	4.65	15.5	21.5	0.02	0.52	2.68	3.20	0.48	0.64	1.12	—	4,967	4,967	0.13	0.23	4.75	5,044
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.24	0.85	2.83	3.92	< 0.005	0.09	0.49	0.58	0.09	0.12	0.20	—	822	822	0.02	0.04	0.79	835

### 2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	2.02	1.76	39.9	34.0	0.05	1.12	7.89	9.01	1.02	3.99	5.01	—	7,054	7,054	0.27	0.48	16.2	7,171
2026	2.13	10.3	22.3	37.2	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,782	7,782	0.30	0.34	17.1	7,907
2027	2.07	10.3	22.1	35.5	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,685	7,685	0.17	0.33	15.4	7,802
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	1.85	1.70	21.4	29.3	0.03	0.70	3.58	4.29	0.66	0.85	1.51	—	6,770	6,770	0.27	0.32	0.42	6,872
2026	2.07	10.3	22.5	32.0	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,450	7,450	0.19	0.34	0.44	7,557
2027	2.01	10.2	22.3	30.7	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,360	7,360	0.18	0.33	0.40	7,462
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.68	0.63	13.9	13.0	0.02	0.43	2.23	2.66	0.39	0.56	0.95	—	3,358	3,358	0.12	0.19	2.23	3,420
2026	1.33	3.01	15.5	21.5	0.02	0.52	2.68	3.20	0.48	0.64	1.12	—	4,967	4,967	0.13	0.23	4.75	5,044
2027	0.82	4.65	9.45	13.0	0.01	0.33	1.68	2.01	0.31	0.40	0.71	—	2,997	2,997	0.07	0.13	2.64	3,040
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.12	0.12	2.53	2.38	< 0.005	0.08	0.41	0.48	0.07	0.10	0.17	—	556	556	0.02	0.03	0.37	566
2026	0.24	0.55	2.83	3.92	< 0.005	0.09	0.49	0.58	0.09	0.12	0.20	—	822	822	0.02	0.04	0.79	835
2027	0.15	0.85	1.73	2.37	< 0.005	0.06	0.31	0.37	0.06	0.07	0.13	—	496	496	0.01	0.02	0.44	503

### 2.3. Construction Emissions by Year, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	2.02	1.76	39.9	34.0	0.05	1.12	7.89	9.01	1.02	3.99	5.01	—	7,054	7,054	0.27	0.48	16.2	7,171



2026	2.13	10.3	22.3	37.2	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,782	7,782	0.30	0.34	17.1	7,907
2027	2.07	10.3	22.1	35.5	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,685	7,685	0.17	0.33	15.4	7,802
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	1.85	1.70	21.4	29.3	0.03	0.70	3.58	4.29	0.66	0.85	1.51	—	6,770	6,770	0.27	0.32	0.42	6,872
2026	2.07	10.3	22.5	32.0	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,450	7,450	0.19	0.34	0.44	7,557
2027	2.01	10.2	22.3	30.7	0.03	0.77	4.24	5.01	0.72	1.01	1.73	—	7,360	7,360	0.18	0.33	0.40	7,462
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.68	0.63	13.9	13.0	0.02	0.43	2.23	2.66	0.39	0.56	0.95	—	3,358	3,358	0.12	0.19	2.23	3,420
2026	1.33	3.01	15.5	21.5	0.02	0.52	2.68	3.20	0.48	0.64	1.12	—	4,967	4,967	0.13	0.23	4.75	5,044
2027	0.82	4.65	9.45	13.0	0.01	0.33	1.68	2.01	0.31	0.40	0.71	—	2,997	2,997	0.07	0.13	2.64	3,040
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2025	0.12	0.12	2.53	2.38	< 0.005	0.08	0.41	0.48	0.07	0.10	0.17	—	556	556	0.02	0.03	0.37	566
2026	0.24	0.55	2.83	3.92	< 0.005	0.09	0.49	0.58	0.09	0.12	0.20	—	822	822	0.02	0.04	0.79	835
2027	0.15	0.85	1.73	2.37	< 0.005	0.06	0.31	0.37	0.06	0.07	0.13	—	496	496	0.01	0.02	0.44	503

## 2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	8.06	15.1	6.21	65.9	0.12	0.18	10.3	10.5	0.18	2.62	2.80	165	18,342	18,507	17.4	0.62	40.0	19,166
Mit.	8.06	15.1	6.21	65.9	0.12	0.18	10.3	10.5	0.18	2.62	2.80	165	15,290	15,456	17.3	0.60	40.0	16,107
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	17%	16%	1%	2%	—	16%

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	5.88	13.0	6.37	39.1	0.12	0.17	10.3	10.5	0.17	2.62	2.79	165	17,568	17,734	17.4	0.64	3.36	18,361
Mit.	5.88	13.0	6.37	39.1	0.12	0.17	10.3	10.5	0.17	2.62	2.79	165	14,517	14,682	17.3	0.62	3.36	15,303
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	17%	17%	1%	2%	—	17%
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	6.81	13.9	6.33	52.0	0.11	0.18	9.76	9.94	0.17	2.48	2.65	165	17,151	17,316	17.4	0.61	17.8	17,951
Mit.	6.81	13.9	6.33	52.0	0.11	0.18	9.76	9.94	0.17	2.48	2.65	165	14,100	14,265	17.3	0.60	17.8	14,893
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	18%	18%	1%	2%	—	17%
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.24	2.54	1.15	9.50	0.02	0.03	1.78	1.81	0.03	0.45	0.48	27.4	2,840	2,867	2.88	0.10	2.95	2,972
Mit.	1.24	2.54	1.15	9.50	0.02	0.03	1.78	1.81	0.03	0.45	0.48	27.4	2,334	2,362	2.86	0.10	2.95	2,466
% Reduced	—	—	—	—	—	—	—	—	—	—	—	—	18%	18%	1%	2%	—	17%

## 2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	6.11	5.63	4.89	45.7	0.12	0.08	10.3	10.4	0.08	2.62	2.70	—	11,927	11,927	0.47	0.53	37.6	12,134
Area	1.82	9.43	0.19	19.7	< 0.005	0.01	—	0.01	0.01	—	0.01	0.00	52.6	52.6	< 0.005	< 0.005	—	52.8
Energy	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	6,132	6,132	0.30	0.02	—	6,146
Water	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346

Waste	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	8.06	15.1	6.21	65.9	0.12	0.18	10.3	10.5	0.18	2.62	2.80	165	18,342	18,507	17.4	0.62	40.0	19,166
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	5.75	5.27	5.24	38.7	0.11	0.08	10.3	10.4	0.08	2.62	2.70	—	11,207	11,207	0.49	0.54	0.98	11,382
Area	0.00	7.70	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Energy	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	6,132	6,132	0.30	0.02	—	6,146
Water	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Waste	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	5.88	13.0	6.37	39.1	0.12	0.17	10.3	10.5	0.17	2.62	2.79	165	17,568	17,734	17.4	0.64	3.36	18,361
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	5.43	4.97	5.07	38.1	0.11	0.08	9.76	9.84	0.07	2.48	2.55	—	10,753	10,753	0.46	0.52	15.4	10,936
Area	1.25	8.88	0.13	13.5	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	0.00	36.1	36.1	< 0.005	< 0.005	—	36.2
Energy	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	6,132	6,132	0.30	0.02	—	6,146
Water	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Waste	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	6.81	13.9	6.33	52.0	0.11	0.18	9.76	9.94	0.17	2.48	2.65	165	17,151	17,316	17.4	0.61	17.8	17,951
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.99	0.91	0.92	6.95	0.02	0.01	1.78	1.80	0.01	0.45	0.47	—	1,780	1,780	0.08	0.09	2.56	1,811
Area	0.23	1.62	0.02	2.46	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	5.97	5.97	< 0.005	< 0.005	—	5.99
Energy	0.02	0.01	0.21	0.09	< 0.005	0.02	—	0.02	0.02	—	0.02	—	1,015	1,015	0.05	< 0.005	—	1,018
Water	—	—	—	—	—	—	—	—	—	—	—	4.48	38.1	42.5	0.46	0.01	—	57.3
Waste	—	—	—	—	—	—	—	—	—	—	—	22.9	0.00	22.9	2.29	0.00	—	80.1
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.39	0.39

Total	1.24	2.54	1.15	9.50	0.02	0.03	1.78	1.81	0.03	0.45	0.48	27.4	2,840	2,867	2.88	0.10	2.95	2,972
-------	------	------	------	------	------	------	------	------	------	------	------	------	-------	-------	------	------	------	-------

## 2.6. Operations Emissions by Sector, Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	6.11	5.63	4.89	45.7	0.12	0.08	10.3	10.4	0.08	2.62	2.70	—	11,927	11,927	0.47	0.53	37.6	12,134
Area	1.82	9.43	0.19	19.7	< 0.005	0.01	—	0.01	0.01	—	0.01	0.00	52.6	52.6	< 0.005	< 0.005	—	52.8
Energy	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	3,080	3,080	0.19	0.01	—	3,088
Water	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Waste	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	8.06	15.1	6.21	65.9	0.12	0.18	10.3	10.5	0.18	2.62	2.80	165	15,290	15,456	17.3	0.60	40.0	16,107
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	5.75	5.27	5.24	38.7	0.11	0.08	10.3	10.4	0.08	2.62	2.70	—	11,207	11,207	0.49	0.54	0.98	11,382
Area	0.00	7.70	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Energy	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	3,080	3,080	0.19	0.01	—	3,088
Water	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Waste	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	5.88	13.0	6.37	39.1	0.12	0.17	10.3	10.5	0.17	2.62	2.79	165	14,517	14,682	17.3	0.62	3.36	15,303
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	5.43	4.97	5.07	38.1	0.11	0.08	9.76	9.84	0.07	2.48	2.55	—	10,753	10,753	0.46	0.52	15.4	10,936
Area	1.25	8.88	0.13	13.5	< 0.005	0.01	—	0.01	< 0.005	—	< 0.005	0.00	36.1	36.1	< 0.005	< 0.005	—	36.2

Energy	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	3,080	3,080	0.19	0.01	—	3,088
Water	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Waste	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	6.81	13.9	6.33	52.0	0.11	0.18	9.76	9.94	0.17	2.48	2.65	165	14,100	14,265	17.3	0.60	17.8	14,893
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.99	0.91	0.92	6.95	0.02	0.01	1.78	1.80	0.01	0.45	0.47	—	1,780	1,780	0.08	0.09	2.56	1,811
Area	0.23	1.62	0.02	2.46	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	5.97	5.97	< 0.005	< 0.005	—	5.99
Energy	0.02	0.01	0.21	0.09	< 0.005	0.02	—	0.02	0.02	—	0.02	—	510	510	0.03	< 0.005	—	511
Water	—	—	—	—	—	—	—	—	—	—	—	4.48	38.1	42.5	0.46	0.01	—	57.3
Waste	—	—	—	—	—	—	—	—	—	—	—	22.9	0.00	22.9	2.29	0.00	—	80.1
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.39	0.39
Total	1.24	2.54	1.15	9.50	0.02	0.03	1.78	1.81	0.03	0.45	0.48	27.4	2,334	2,362	2.86	0.10	2.95	2,466

### 3. Construction Emissions Details

#### 3.1. Demolition (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.72	0.72	24.9	18.2	0.03	0.79	—	0.79	0.71	—	0.71	—	3,425	3,425	0.14	0.03	—	3,437
Demolition	—	—	—	—	—	—	3.53	3.53	—	0.53	0.53	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.18	0.18	6.15	4.48	0.01	0.19	—	0.19	0.18	—	0.18	—	845	845	0.03	0.01	—	847
Demolition	—	—	—	—	—	—	0.87	0.87	—	0.13	0.13	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	1.12	0.82	< 0.005	0.04	—	0.04	0.03	—	0.03	—	140	140	0.01	< 0.005	—	140
Demolition	—	—	—	—	—	—	0.16	0.16	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.07	1.16	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	211	211	0.01	0.01	0.78	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.12	0.05	3.13	0.76	0.02	0.05	0.74	0.79	0.05	0.21	0.26	—	2,819	2,819	0.05	0.44	6.01	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.23	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	48.5	48.5	< 0.005	< 0.005	0.08	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.03	0.01	0.81	0.19	< 0.005	0.01	0.18	0.19	0.01	0.05	0.06	—	695	695	0.01	0.11	0.64	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	8.03	8.03	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.01	< 0.005	0.15	0.03	< 0.005	< 0.005	0.03	0.04	< 0.005	0.01	0.01	—	115	115	< 0.005	0.02	0.11	—

### 3.2. Demolition (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.72	0.72	24.9	18.2	0.03	0.79	—	0.79	0.71	—	0.71	—	3,425	3,425	0.14	0.03	—	3,437
Demolition	—	—	—	—	—	—	3.53	3.53	—	0.53	0.53	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.18	0.18	6.15	4.48	0.01	0.19	—	0.19	0.18	—	0.18	—	845	845	0.03	0.01	—	847
Demolition	—	—	—	—	—	—	0.87	0.87	—	0.13	0.13	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	1.12	0.82	< 0.005	0.04	—	0.04	0.03	—	0.03	—	140	140	0.01	< 0.005	—	140



Demolition	—	—	—	—	—	—	0.16	0.16	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.07	1.16	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	211	211	0.01	0.01	0.78	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.12	0.05	3.13	0.76	0.02	0.05	0.74	0.79	0.05	0.21	0.26	—	2,819	2,819	0.05	0.44	6.01	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.23	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	48.5	48.5	< 0.005	< 0.005	0.08	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.03	0.01	0.81	0.19	< 0.005	0.01	0.18	0.19	0.01	0.05	0.06	—	695	695	0.01	0.11	0.64	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	8.03	8.03	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.01	< 0.005	0.15	0.03	< 0.005	< 0.005	0.03	0.04	< 0.005	0.01	0.01	—	115	115	< 0.005	0.02	0.11	—

### 3.3. Site Preparation (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	1.07	1.07	39.9	28.3	0.05	1.12	—	1.12	1.02	—	1.02	—	5,295	5,295	0.21	0.04	—	5,314
Dust From Material Movement:	—	—	—	—	—	—	7.67	7.67	—	3.94	3.94	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	1.09	0.78	< 0.005	0.03	—	0.03	0.03	—	0.03	—	145	145	0.01	< 0.005	—	146
Dust From Material Movement:	—	—	—	—	—	—	0.21	0.21	—	0.11	0.11	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.20	0.14	< 0.005	0.01	—	0.01	0.01	—	0.01	—	24.0	24.0	< 0.005	< 0.005	—	24.1
Dust From Material Movement:	—	—	—	—	—	—	0.04	0.04	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.08	0.08	1.35	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	247	247	0.01	0.01	0.91	—

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.29	6.29	< 0.005	< 0.005	0.01	—	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.04	1.04	< 0.005	< 0.005	< 0.005	—	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—

### 3.4. Site Preparation (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.07	1.07	39.9	28.3	0.05	1.12	—	1.12	1.02	—	1.02	—	5,295	5,295	0.21	0.04	—	5,314
Dust From Material Movement	—	—	—	—	—	—	7.67	7.67	—	3.94	3.94	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	1.09	0.78	< 0.005	0.03	—	0.03	0.03	—	0.03	—	145	145	0.01	< 0.005	—	146
Dust From Material Movement	—	—	—	—	—	—	0.21	0.21	—	0.11	0.11	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.20	0.14	< 0.005	0.01	—	0.01	0.01	—	0.01	—	24.0	24.0	< 0.005	< 0.005	—	24.1
Dust From Material Movement	—	—	—	—	—	—	0.04	0.04	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.08	0.08	1.35	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	247	247	0.01	0.01	0.91	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	6.29	6.29	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.04	1.04	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.5. Grading (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.73	0.73	23.2	17.8	0.03	0.75	—	0.75	0.69	—	0.69	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	1.27	0.97	< 0.005	0.04	—	0.04	0.04	—	0.04	—	162	162	0.01	< 0.005	—	163

Dust From Material Movement:	—	—	—	—	—	—	0.15	0.15	—	0.07	0.07	—	—	—	—	—	—	
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Off-Road Equipment	0.01	0.01	0.23	0.18	< 0.005	0.01	—	0.01	0.01	—	0.01	—	26.8	26.8	< 0.005	< 0.005	—	26.9
Dust From Material Movement:	—	—	—	—	—	—	0.03	0.03	—	0.01	0.01	—	—	—	—	—	—	
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Worker	0.08	0.07	0.07	1.16	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	211	211	0.01	0.01	0.78	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	
Hauling	0.02	0.01	0.40	0.10	< 0.005	0.01	0.09	0.10	0.01	0.03	0.03	—	358	358	0.01	0.06	0.76	
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	10.8	10.8	< 0.005	< 0.005	0.02	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	
Hauling	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	19.6	19.6	< 0.005	< 0.005	0.02	
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.79	1.79	< 0.005	< 0.005	< 0.005	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	

Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.25	3.25	< 0.005	< 0.005	< 0.005	—
---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---	------	------	---------	---------	---------	---

### 3.6. Grading (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.73	0.73	23.2	17.8	0.03	0.75	—	0.75	0.69	—	0.69	—	2,959	2,959	0.12	0.02	—	2,970
Dust From Material Movement	—	—	—	—	—	—	2.76	2.76	—	1.34	1.34	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	1.27	0.97	< 0.005	0.04	—	0.04	0.04	—	0.04	—	162	162	0.01	< 0.005	—	163
Dust From Material Movement	—	—	—	—	—	—	0.15	0.15	—	0.07	0.07	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.23	0.18	< 0.005	0.01	—	0.01	0.01	—	0.01	—	26.8	26.8	< 0.005	< 0.005	—	26.9

Dust From Material Movement:	—	—	—	—	—	—	0.03	0.03	—	0.01	0.01	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.07	1.16	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	211	211	0.01	0.01	0.78	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.02	0.01	0.40	0.10	< 0.005	0.01	0.09	0.10	0.01	0.03	0.03	—	358	358	0.01	0.06	0.76	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	10.8	10.8	< 0.005	< 0.005	0.02	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	19.6	19.6	< 0.005	< 0.005	0.02	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.79	1.79	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.25	3.25	< 0.005	< 0.005	< 0.005	—

### 3.7. Building Construction (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—



Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,398	2,398	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,398	2,398	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.13	0.13	3.95	2.99	< 0.005	0.14	—	0.14	0.13	—	0.13	—	502	502	0.02	< 0.005	—	504
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.72	0.55	< 0.005	0.03	—	0.03	0.02	—	0.02	—	83.1	83.1	< 0.005	< 0.005	—	83.4
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.34	1.12	1.09	19.3	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,521	3,521	0.15	0.12	12.9	—
Vendor	0.05	0.02	1.25	0.39	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,135	1,135	0.02	0.17	3.22	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.18	1.05	1.21	14.6	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,237	3,237	0.15	0.12	0.34	—
Vendor	0.05	0.02	1.30	0.40	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,136	1,136	0.02	0.17	0.08	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.25	0.22	0.27	3.23	0.00	0.00	0.68	0.68	0.00	0.16	0.16	—	686	686	0.03	0.03	1.17	—
Vendor	0.01	0.01	0.27	0.08	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	238	238	0.01	0.04	0.29	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.05	0.59	0.00	0.00	0.12	0.12	0.00	0.03	0.03	—	114	114	0.01	< 0.005	0.19	—
Vendor	< 0.005	< 0.005	0.05	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	39.4	39.4	< 0.005	0.01	0.05	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.8. Building Construction (2025) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,398	2,398	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,398	2,398	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.13	0.13	3.95	2.99	< 0.005	0.14	—	0.14	0.13	—	0.13	—	502	502	0.02	< 0.005	—	504
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.72	0.55	< 0.005	0.03	—	0.03	0.02	—	0.02	—	83.1	83.1	< 0.005	< 0.005	—	83.4
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.34	1.12	1.09	19.3	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,521	3,521	0.15	0.12	12.9	—
Vendor	0.05	0.02	1.25	0.39	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,135	1,135	0.02	0.17	3.22	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.18	1.05	1.21	14.6	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,237	3,237	0.15	0.12	0.34	—
Vendor	0.05	0.02	1.30	0.40	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,136	1,136	0.02	0.17	0.08	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.25	0.22	0.27	3.23	0.00	0.00	0.68	0.68	0.00	0.16	0.16	—	686	686	0.03	0.03	1.17	—
Vendor	0.01	0.01	0.27	0.08	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	—	238	238	0.01	0.04	0.29	—

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.04	0.04	0.05	0.59	0.00	0.00	0.12	0.12	0.00	0.03	0.03	—	114	114	0.01	< 0.005	0.19	—
Vendor	< 0.005	< 0.005	0.05	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	39.4	39.4	< 0.005	0.01	0.05	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.9. Building Construction (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.44	0.44	13.5	10.2	0.02	0.49	—	0.49	0.46	—	0.46	—	1,712	1,712	0.07	0.01	—	1,718
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.08	0.08	2.46	1.86	< 0.005	0.09	—	0.09	0.08	—	0.08	—	283	283	0.01	< 0.005	—	284
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.18	1.06	0.98	17.9	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,446	3,446	0.15	0.12	11.7	—
Vendor	0.05	0.02	1.19	0.37	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,117	1,117	0.02	0.17	3.05	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.12	1.00	1.09	13.6	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,168	3,168	0.05	0.12	0.30	—
Vendor	0.05	0.02	1.24	0.38	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,117	1,117	0.02	0.17	0.08	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.80	0.71	0.85	10.2	0.00	0.00	2.32	2.32	0.00	0.54	0.54	—	2,292	2,292	0.04	0.09	3.60	—
Vendor	0.04	0.02	0.89	0.27	0.01	0.01	0.23	0.24	0.01	0.06	0.07	—	798	798	0.02	0.12	0.94	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.15	0.13	0.16	1.86	0.00	0.00	0.42	0.42	0.00	0.10	0.10	—	379	379	0.01	0.01	0.60	—
Vendor	0.01	< 0.005	0.16	0.05	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	132	132	< 0.005	0.02	0.16	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.10. Building Construction (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
----------	-----	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.44	0.44	13.5	10.2	0.02	0.49	—	0.49	0.46	—	0.46	—	1,712	1,712	0.07	0.01	—	1,718
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.08	2.46	1.86	< 0.005	0.09	—	0.09	0.08	—	0.08	—	283	283	0.01	< 0.005	—	284
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.18	1.06	0.98	17.9	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,446	3,446	0.15	0.12	11.7	—
Vendor	0.05	0.02	1.19	0.37	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,117	1,117	0.02	0.17	3.05	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.12	1.00	1.09	13.6	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,168	3,168	0.05	0.12	0.30	—
Vendor	0.05	0.02	1.24	0.38	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,117	1,117	0.02	0.17	0.08	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.80	0.71	0.85	10.2	0.00	0.00	2.32	2.32	0.00	0.54	0.54	—	2,292	2,292	0.04	0.09	3.60	—
Vendor	0.04	0.02	0.89	0.27	0.01	0.01	0.23	0.24	0.01	0.06	0.07	—	798	798	0.02	0.12	0.94	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.15	0.13	0.16	1.86	0.00	0.00	0.42	0.42	0.00	0.10	0.10	—	379	379	0.01	0.01	0.60	—
Vendor	0.01	< 0.005	0.16	0.05	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	—	132	132	< 0.005	0.02	0.16	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.11. Building Construction (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.24	0.24	7.24	5.49	0.01	0.26	—	0.26	0.25	—	0.25	—	919	919	0.04	0.01	—	923
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.04	0.04	1.32	1.00	< 0.005	0.05	—	0.05	0.04	—	0.04	—	152	152	0.01	< 0.005	—	153
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.13	1.00	0.87	16.6	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,382	3,382	0.04	0.12	10.5	—
Vendor	0.05	0.02	1.15	0.36	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,096	1,096	0.03	0.16	2.79	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.07	0.95	0.98	12.5	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,110	3,110	0.04	0.12	0.27	—
Vendor	0.05	0.02	1.20	0.37	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,097	1,097	0.02	0.16	0.07	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.41	0.36	0.42	5.05	0.00	0.00	1.24	1.24	0.00	0.29	0.29	—	1,208	1,208	0.02	0.05	1.74	—
Vendor	0.02	0.01	0.46	0.14	< 0.005	0.01	0.12	0.13	0.01	0.03	0.04	—	421	421	0.01	0.06	0.46	—



Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.07	0.08	0.92	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	200	200	< 0.005	0.01	0.29	—
Vendor	< 0.005	< 0.005	0.08	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	69.6	69.6	< 0.005	0.01	0.08	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.12. Building Construction (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.62	0.62	18.9	14.3	0.02	0.69	—	0.69	0.64	—	0.64	—	2,397	2,397	0.10	0.02	—	2,405
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.24	0.24	7.24	5.49	0.01	0.26	—	0.26	0.25	—	0.25	—	919	919	0.04	0.01	—	923
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.04	0.04	1.32	1.00	< 0.005	0.05	—	0.05	0.04	—	0.04	—	152	152	0.01	< 0.005	—	153
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.13	1.00	0.87	16.6	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,382	3,382	0.04	0.12	10.5	—
Vendor	0.05	0.02	1.15	0.36	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,096	1,096	0.03	0.16	2.79	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	1.07	0.95	0.98	12.5	0.00	0.00	3.27	3.27	0.00	0.77	0.77	—	3,110	3,110	0.04	0.12	0.27	—
Vendor	0.05	0.02	1.20	0.37	0.01	0.02	0.32	0.33	0.02	0.09	0.10	—	1,097	1,097	0.02	0.16	0.07	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.41	0.36	0.42	5.05	0.00	0.00	1.24	1.24	0.00	0.29	0.29	—	1,208	1,208	0.02	0.05	1.74	—
Vendor	0.02	0.01	0.46	0.14	< 0.005	0.01	0.12	0.13	0.01	0.03	0.04	—	421	421	0.01	0.06	0.46	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.07	0.08	0.92	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	200	200	< 0.005	0.01	0.29	—
Vendor	< 0.005	< 0.005	0.08	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	69.6	69.6	< 0.005	0.01	0.08	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.13. Paving (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
----------	-----	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.50	0.50	13.3	10.6	0.01	0.58	—	0.58	0.54	—	0.54	—	1,511	1,511	0.06	0.01	—	1,516
Paving	—	0.00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	0.73	0.58	< 0.005	0.03	—	0.03	0.03	—	0.03	—	82.8	82.8	< 0.005	< 0.005	—	83.1
Paving	—	0.00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.13	0.11	< 0.005	0.01	—	0.01	0.01	—	0.01	—	13.7	13.7	< 0.005	< 0.005	—	13.8
Paving	—	0.00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.05	1.00	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	203	203	< 0.005	0.01	0.63	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	10.4	10.4	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.72	1.72	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.14. Paving (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.50	0.50	13.3	10.6	0.01	0.58	—	0.58	0.54	—	0.54	—	1,511	1,511	0.06	0.01	—	1,516
Paving	—	0.00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Off-Road Equipment	0.03	0.03	0.73	0.58	< 0.005	0.03	—	0.03	0.03	—	0.03	—	82.8	82.8	< 0.005	< 0.005	—	83.1
Paving	—	0.00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.13	0.11	< 0.005	0.01	—	0.01	0.01	—	0.01	—	13.7	13.7	< 0.005	< 0.005	—	13.8
Paving	—	0.00	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.07	0.06	0.05	1.00	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	203	203	< 0.005	0.01	0.63	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	10.4	10.4	< 0.005	< 0.005	0.01	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.72	1.72	< 0.005	< 0.005	< 0.005	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.15. Architectural Coating (2026) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.23	0.21	< 0.005	0.01	—	0.01	0.01	—	0.01	—	28.5	28.5	< 0.005	< 0.005	—	28.6
Architectural Coatings	—	1.79	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.04	0.04	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.71	4.71	< 0.005	< 0.005	—	4.73
Architectural Coatings	—	0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.24	0.21	0.20	3.59	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	689	689	0.03	0.02	2.33	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.22	0.20	0.22	2.72	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	634	634	0.01	0.02	0.06	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.05	0.61	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	137	137	< 0.005	0.01	0.22	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.11	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	22.7	22.7	< 0.005	< 0.005	0.04	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.16. Architectural Coating (2026) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.23	0.21	< 0.005	0.01	—	0.01	0.01	—	0.01	—	28.5	28.5	< 0.005	< 0.005	—	28.6
Architectural Coatings	—	1.79	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—



Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.04	0.04	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	4.71	4.71	< 0.005	< 0.005	—	4.73
Architectural Coatings	—	0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.24	0.21	0.20	3.59	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	689	689	0.03	0.02	2.33	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.22	0.20	0.22	2.72	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	634	634	0.01	0.02	0.06	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.05	0.04	0.05	0.61	0.00	0.00	0.14	0.14	0.00	0.03	0.03	—	137	137	< 0.005	0.01	0.22	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.11	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	22.7	22.7	< 0.005	< 0.005	0.04	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.17. Architectural Coating (2027) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architect ural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architect ural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.51	0.45	< 0.005	0.03	—	0.03	0.03	—	0.03	—	62.2	62.2	< 0.005	< 0.005	—	62.4
Architect ural Coatings	—	3.90	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.09	0.08	< 0.005	0.01	—	0.01	0.01	—	0.01	—	10.3	10.3	< 0.005	< 0.005	—	10.3
Architectural Coatings	—	0.71	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.23	0.20	0.17	3.32	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	676	676	0.01	0.02	2.10	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.19	0.20	2.51	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	622	622	0.01	0.02	0.05	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.10	1.23	0.00	0.00	0.30	0.30	0.00	0.07	0.07	—	293	293	< 0.005	0.01	0.42	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.22	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	48.6	48.6	< 0.005	< 0.005	0.07	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

### 3.18. Architectural Coating (2027) - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	1.09	0.96	< 0.005	0.07	—	0.07	0.06	—	0.06	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	8.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.02	0.02	0.51	0.45	< 0.005	0.03	—	0.03	0.03	—	0.03	—	62.2	62.2	< 0.005	< 0.005	—	62.4
Architectural Coatings	—	3.90	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.09	0.08	< 0.005	0.01	—	0.01	0.01	—	0.01	—	10.3	10.3	< 0.005	< 0.005	—	10.3
Architectural Coatings	—	0.71	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.23	0.20	0.17	3.32	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	676	676	0.01	0.02	2.10	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.21	0.19	0.20	2.51	0.00	0.00	0.65	0.65	0.00	0.15	0.15	—	622	622	0.01	0.02	0.05	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.10	1.23	0.00	0.00	0.30	0.30	0.00	0.07	0.07	—	293	293	< 0.005	0.01	0.42	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.22	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	48.6	48.6	< 0.005	< 0.005	0.07	—
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	—

## 4. Operations Emissions Details

### 4.1. Mobile Emissions by Land Use

#### 4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	6.11	5.63	4.89	45.7	0.12	0.08	10.3	10.4	0.08	2.62	2.70	—	11,927	11,927	0.47	0.53	37.6	12,134
Total	6.11	5.63	4.89	45.7	0.12	0.08	10.3	10.4	0.08	2.62	2.70	—	11,927	11,927	0.47	0.53	37.6	12,134
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	5.75	5.27	5.24	38.7	0.11	0.08	10.3	10.4	0.08	2.62	2.70	—	11,207	11,207	0.49	0.54	0.98	11,382
Total	5.75	5.27	5.24	38.7	0.11	0.08	10.3	10.4	0.08	2.62	2.70	—	11,207	11,207	0.49	0.54	0.98	11,382
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.99	0.91	0.92	6.95	0.02	0.01	1.78	1.80	0.01	0.45	0.47	—	1,780	1,780	0.08	0.09	2.56	1,811
Total	0.99	0.91	0.92	6.95	0.02	0.01	1.78	1.80	0.01	0.45	0.47	—	1,780	1,780	0.08	0.09	2.56	1,811

#### 4.1.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	6.11	5.63	4.89	45.7	0.12	0.08	10.3	10.4	0.08	2.62	2.70	—	11,927	11,927	0.47	0.53	37.6	12,134
Total	6.11	5.63	4.89	45.7	0.12	0.08	10.3	10.4	0.08	2.62	2.70	—	11,927	11,927	0.47	0.53	37.6	12,134
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	5.75	5.27	5.24	38.7	0.11	0.08	10.3	10.4	0.08	2.62	2.70	—	11,207	11,207	0.49	0.54	0.98	11,382
Total	5.75	5.27	5.24	38.7	0.11	0.08	10.3	10.4	0.08	2.62	2.70	—	11,207	11,207	0.49	0.54	0.98	11,382
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.99	0.91	0.92	6.95	0.02	0.01	1.78	1.80	0.01	0.45	0.47	—	1,780	1,780	0.08	0.09	2.56	1,811
Total	0.99	0.91	0.92	6.95	0.02	0.01	1.78	1.80	0.01	0.45	0.47	—	1,780	1,780	0.08	0.09	2.56	1,811

## 4.2. Energy

### 4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	4,698	4,698	0.18	0.02	—	4,709
Total	—	—	—	—	—	—	—	—	—	—	—	—	4,698	4,698	0.18	0.02	—	4,709
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	4,698	4,698	0.18	0.02	—	4,709
Total	—	—	—	—	—	—	—	—	—	—	—	—	4,698	4,698	0.18	0.02	—	4,709
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	778	778	0.03	< 0.005	—	780
Total	—	—	—	—	—	—	—	—	—	—	—	—	778	778	0.03	< 0.005	—	780

#### 4.2.2. Electricity Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	1,646	1,646	0.06	0.01	—	1,650
Total	—	—	—	—	—	—	—	—	—	—	—	—	1,646	1,646	0.06	0.01	—	1,650
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	1,646	1,646	0.06	0.01	—	1,650



Total	—	—	—	—	—	—	—	—	—	—	—	—	1,646	1,646	0.06	0.01	—	1,650
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	273	273	0.01	< 0.005	—	273
Total	—	—	—	—	—	—	—	—	—	—	—	—	273	273	0.01	< 0.005	—	273

#### 4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Total	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Total	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.02	0.01	0.21	0.09	< 0.005	0.02	—	0.02	0.02	—	0.02	—	237	237	0.02	< 0.005	—	238
Total	0.02	0.01	0.21	0.09	< 0.005	0.02	—	0.02	0.02	—	0.02	—	237	237	0.02	< 0.005	—	238

#### 4.2.4. Natural Gas Emissions By Land Use - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Total	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Total	0.13	0.07	1.13	0.48	0.01	0.09	—	0.09	0.09	—	0.09	—	1,434	1,434	0.13	< 0.005	—	1,438
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	0.02	0.01	0.21	0.09	< 0.005	0.02	—	0.02	0.02	—	0.02	—	237	237	0.02	< 0.005	—	238
Total	0.02	0.01	0.21	0.09	< 0.005	0.02	—	0.02	0.02	—	0.02	—	237	237	0.02	< 0.005	—	238

### 4.3. Area Emissions by Source

#### 4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00

Consum Products	—	7.13	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architect ural Coatings	—	0.57	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipme nt	1.82	1.73	0.19	19.7	< 0.005	0.01	—	0.01	0.01	—	0.01	—	52.6	52.6	< 0.005	< 0.005	—	52.8
Total	1.82	9.43	0.19	19.7	< 0.005	0.01	—	0.01	0.01	—	0.01	0.00	52.6	52.6	< 0.005	< 0.005	—	52.8
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consum er Products	—	7.13	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architect ural Coatings	—	0.57	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.00	7.70	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consum er Products	—	1.30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architect ural Coatings	—	0.10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipme nt	0.23	0.22	0.02	2.46	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	5.97	5.97	< 0.005	< 0.005	—	5.99
Total	0.23	1.62	0.02	2.46	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	5.97	5.97	< 0.005	< 0.005	—	5.99

4.3.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consumer Products	—	7.13	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.57	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	1.82	1.73	0.19	19.7	< 0.005	0.01	—	0.01	0.01	—	0.01	—	52.6	52.6	< 0.005	< 0.005	—	52.8
Total	1.82	9.43	0.19	19.7	< 0.005	0.01	—	0.01	0.01	—	0.01	0.00	52.6	52.6	< 0.005	< 0.005	—	52.8
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Consumer Products	—	7.13	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.57	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	0.00	7.70	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Hearths	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00

Consumer Products	—	1.30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.23	0.22	0.02	2.46	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	5.97	5.97	< 0.005	< 0.005	—	5.99
Total	0.23	1.62	0.02	2.46	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	0.00	5.97	5.97	< 0.005	< 0.005	—	5.99

#### 4.4. Water Emissions by Land Use

##### 4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Total	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Total	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Apartment Mid Rise	—	—	—	—	—	—	—	—	—	—	—	4.48	38.1	42.5	0.46	0.01	—	57.3
Total	—	—	—	—	—	—	—	—	—	—	—	4.48	38.1	42.5	0.46	0.01	—	57.3

#### 4.4.2. Mitigated

##### Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartment Mid Rise	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Total	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartment Mid Rise	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Total	—	—	—	—	—	—	—	—	—	—	—	27.0	230	257	2.78	0.07	—	346
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartment Mid Rise	—	—	—	—	—	—	—	—	—	—	—	4.48	38.1	42.5	0.46	0.01	—	57.3
Total	—	—	—	—	—	—	—	—	—	—	—	4.48	38.1	42.5	0.46	0.01	—	57.3

#### 4.5. Waste Emissions by Land Use

##### 4.5.1. Unmitigated

##### Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Total	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Total	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	22.9	0.00	22.9	2.29	0.00	—	80.1
Total	—	—	—	—	—	—	—	—	—	—	—	22.9	0.00	22.9	2.29	0.00	—	80.1

#### 4.5.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Total	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Total	—	—	—	—	—	—	—	—	—	—	—	138	0.00	138	13.8	0.00	—	484
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	22.9	0.00	22.9	2.29	0.00	—	80.1
Total	—	—	—	—	—	—	—	—	—	—	—	22.9	0.00	22.9	2.29	0.00	—	80.1

#### 4.6. Refrigerant Emissions by Land Use

##### 4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39



Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.39	0.39
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.39	0.39

#### 4.6.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	2.39	2.39
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Apartments Mid Rise	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.39	0.39
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	0.39	0.39

#### 4.7. Offroad Emissions By Equipment Type

#### 4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

#### 4.7.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

## 4.8. Stationary Emissions By Equipment Type

### 4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

### 4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

### 4.9. User Defined Emissions By Equipment Type

#### 4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

#### 4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

#### 4.10. Soil Carbon Accumulation By Vegetation Type

##### 4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

##### 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Remove	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—



Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

## 5. Activity Data

### 5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Demolition	Demolition	4/1/2025	8/4/2025	5.00	90.0	—
Site Preparation	Site Preparation	8/5/2025	8/18/2025	5.00	10.0	—

Grading	Grading	8/19/2025	9/15/2025	5.00	20.0	—
Building Construction	Building Construction	9/16/2025	7/15/2027	5.00	478	—
Paving	Paving	7/16/2027	8/12/2027	5.00	20.0	—
Architectural Coating	Architectural Coating	9/14/2026	8/26/2027	5.00	249	—

## 5.2. Off-Road Equipment

### 5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Tier 2	1.00	8.00	33.0	0.73
Demolition	Excavators	Diesel	Tier 2	3.00	8.00	36.0	0.38
Demolition	Rubber Tired Dozers	Diesel	Tier 2	2.00	8.00	367	0.40
Site Preparation	Rubber Tired Dozers	Diesel	Tier 2	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Tier 2	4.00	8.00	84.0	0.37
Grading	Excavators	Diesel	Tier 2	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 2	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 2	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Tier 2	3.00	8.00	84.0	0.37
Building Construction	Cranes	Diesel	Tier 2	1.00	7.00	367	0.29
Building Construction	Forklifts	Diesel	Tier 2	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Tier 2	1.00	8.00	14.0	0.74
Building Construction	Tractors/Loaders/Backhoes	Diesel	Tier 2	3.00	7.00	84.0	0.37
Building Construction	Welders	Diesel	Tier 2	1.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Tier 2	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Tier 2	2.00	8.00	89.0	0.36

Paving	Rollers	Diesel	Tier 2	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Tier 2	1.00	6.00	37.0	0.48

### 5.2.2. Mitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Demolition	Concrete/Industrial Saws	Diesel	Tier 2	1.00	8.00	33.0	0.73
Demolition	Excavators	Diesel	Tier 2	3.00	8.00	36.0	0.38
Demolition	Rubber Tired Dozers	Diesel	Tier 2	2.00	8.00	367	0.40
Site Preparation	Rubber Tired Dozers	Diesel	Tier 2	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Tier 2	4.00	8.00	84.0	0.37
Grading	Excavators	Diesel	Tier 2	1.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 2	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 2	1.00	8.00	367	0.40
Grading	Tractors/Loaders/Backhoes	Diesel	Tier 2	3.00	8.00	84.0	0.37
Building Construction	Cranes	Diesel	Tier 2	1.00	7.00	367	0.29
Building Construction	Forklifts	Diesel	Tier 2	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Tier 2	1.00	8.00	14.0	0.74
Building Construction	Tractors/Loaders/Backhoes	Diesel	Tier 2	3.00	7.00	84.0	0.37
Building Construction	Welders	Diesel	Tier 2	1.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Tier 2	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Tier 2	2.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Tier 2	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Tier 2	1.00	6.00	37.0	0.48

## 5.3. Construction Vehicles

### 5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	15.0	18.5	LDA,LDT1,LDT2
Demolition	Vendor	—	10.2	HHDT,MHDT
Demolition	Hauling	40.9	20.0	HHDT
Demolition	Onsite truck	—	—	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	17.5	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	—	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	15.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	—	10.2	HHDT,MHDT
Grading	Hauling	5.20	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	250	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	37.1	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT

Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	50.0	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

### 5.3.2. Mitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Demolition	—	—	—	—
Demolition	Worker	15.0	18.5	LDA,LDT1,LDT2
Demolition	Vendor	—	10.2	HHDT,MHDT
Demolition	Hauling	40.9	20.0	HHDT
Demolition	Onsite truck	—	—	HHDT
Site Preparation	—	—	—	—
Site Preparation	Worker	17.5	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	—	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	15.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	—	10.2	HHDT,MHDT
Grading	Hauling	5.20	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	250	18.5	LDA,LDT1,LDT2

Building Construction	Vendor	37.1	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	50.0	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

## 5.4. Vehicles

### 5.4.1. Construction Vehicle Control Strategies

Control Strategies Applied	PM10 Reduction	PM2.5 Reduction
Water unpaved roads twice daily	55%	55%
Limit vehicle speeds on unpaved roads to 25 mph	44%	44%
Sweep paved roads once per month	9%	9%

## 5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	674,568	224,856	0.00	0.00	—

## 5.6. Dust Mitigation

### 5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (Ton of Debris)	Acres Paved (acres)
Demolition	0.00	0.00	0.00	14,723	—
Site Preparation	0.00	0.00	15.0	0.00	—
Grading	832	0.00	20.0	0.00	—
Paving	0.00	0.00	0.00	0.00	—

### 5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	2	61%	61%

## 5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Apartments Mid Rise	—	0%

## 5.8. Construction Electricity Consumption and Emissions Factors

### kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2025	0.00	873	0.03	< 0.005
2026	0.00	873	0.03	< 0.005
2027	0.00	873	0.03	< 0.005

## 5.9. Operational Mobile Sources

## 5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Apartments Mid Rise	1,468	1,326	1,103	509,334	14,589	13,175	10,967	5,062,366

## 5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Apartments Mid Rise	1,468	1,326	1,103	509,334	14,589	13,175	10,967	5,062,366

## 5.10. Operational Area Sources

## 5.10.1. Hearths

## 5.10.1.1. Unmitigated

Hearth Type	Unmitigated (number)
Apartments Mid Rise	—
Wood Fireplaces	0
Gas Fireplaces	0
Propane Fireplaces	0
Electric Fireplaces	0
No Fireplaces	0
Conventional Wood Stoves	0
Catalytic Wood Stoves	0
Non-Catalytic Wood Stoves	0
Pellet Wood Stoves	0

## 5.10.1.2. Mitigated



Hearth Type	Unmitigated (number)
Apartments Mid Rise	—
Wood Fireplaces	0
Gas Fireplaces	0
Propane Fireplaces	0
Electric Fireplaces	0
No Fireplaces	0
Conventional Wood Stoves	0
Catalytic Wood Stoves	0
Non-Catalytic Wood Stoves	0
Pellet Wood Stoves	0

### 5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
674568	224,856	0.00	0.00	—

### 5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

### 5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

## 5.11. Operational Energy Consumption

### 5.11.1. Unmitigated

#### Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Apartments Mid Rise	1,963,728	873	0.0330	0.0040	4,473,806

### 5.11.2. Mitigated

#### Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Apartments Mid Rise	688,228	873	0.0330	0.0040	4,473,806

## 5.12. Operational Water and Wastewater Consumption

### 5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Apartments Mid Rise	14,113,800	0.00

### 5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Apartments Mid Rise	14,113,800	0.00

## 5.13. Operational Waste Generation

### 5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
----------	------------------	-------------------------

Apartments Mid Rise	257	—
---------------------	-----	---

### 5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Apartments Mid Rise	257	—

## 5.14. Operational Refrigeration and Air Conditioning Equipment

### 5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Apartments Mid Rise	Average room A/C & Other residential A/C and heat pumps	R-410A	2,088	< 0.005	2.50	2.50	10.0
Apartments Mid Rise	Household refrigerators and/or freezers	R-134a	1,430	0.12	0.60	0.00	1.00

### 5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Apartments Mid Rise	Average room A/C & Other residential A/C and heat pumps	R-410A	2,088	< 0.005	2.50	2.50	10.0
Apartments Mid Rise	Household refrigerators and/or freezers	R-134a	1,430	0.12	0.60	0.00	1.00

## 5.15. Operational Off-Road Equipment

### 5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
----------------	-----------	-------------	----------------	---------------	------------	-------------

### 5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
----------------	-----------	-------------	----------------	---------------	------------	-------------

### 5.16. Stationary Sources

#### 5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
----------------	-----------	----------------	---------------	----------------	------------	-------------

#### 5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
----------------	-----------	--------	--------------------------	------------------------------	------------------------------

### 5.17. User Defined

Equipment Type	Fuel Type
----------------	-----------

### 5.18. Vegetation

#### 5.18.1. Land Use Change

##### 5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
--------------------------	----------------------	---------------	-------------

##### 5.18.1.2. Mitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
--------------------------	----------------------	---------------	-------------

##### 5.18.1. Biomass Cover Type

### 5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres
--------------------	---------------	-------------

### 5.18.1.2. Mitigated

Biomass Cover Type	Initial Acres	Final Acres
--------------------	---------------	-------------

### 5.18.2. Sequestration

#### 5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
-----------	--------	------------------------------	------------------------------

#### 5.18.2.2. Mitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
-----------	--------	------------------------------	------------------------------

## 8. User Changes to Default Data

Screen	Justification
Land Use	Total project site is 9.92 acres
Construction: Construction Phases	Construction would begin in April 2025 and end in August 2027. Overlap between building construction and architectural coating activities.
Construction: Off-Road Equipment	Default construction equipment with tier 2 engine
Operations: Vehicle Data	Weekday trip rate from project traffic study, proportioned to CalEEMod default rates to match
Operations: Hearths	Proposed project would not include fireplaces or woodstoves

**ATTACHMENT D**  
**ENERGY WORKSHEET**

### Fuel Consumption Worksheet

Annual VMT from CalEEMod modeling	Gasoline-Fueled Percentage	Diesel-Fueled Percentage	Gasoline mpg	Gasoline Consumption (gallons/yr)	Diesel mpg	Diesel Consumption (gallons/yr)
5,062,366	79.9%	20.0%	22.9	176,738	8	126,865

#### Fleet Mix from CalEEMod modeling

Land Use	ADT	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Residential	1,468	49.57%	3.70%	20.85%	15.70%	3.09%	0.88%	1.49%	1.64%	0.06%	0.04%	2.28%	0.13%	0.57%

#### Vehicle Percentages by fuel type

Gasoline-powered:	98%	95%	75%	50%	50%	10%	5%	5%	0%	0%	100%	10%	50%
Diesel-powered:	2%	5%	25%	50%	50%	90%	95%	95%	100%	100%	0%	90%	50%

truck % = 43.65%

2020	kWh/yr	kBTU/yr	therms/yr
Riverside County total	16,857,930,966		436,941,555
Project	688,228	4,473,806	44,738
Project % of County	0.0041%		0.0102%

1 therm = 100,000 BTUs

County Electricity: [www.ecdms.energy.ca.gov/elecbycounty.aspx](http://www.ecdms.energy.ca.gov/elecbycounty.aspx)  
County Natural Gas: [www.ecdms.energy.ca.gov/gasbycounty.aspx](http://www.ecdms.energy.ca.gov/gasbycounty.aspx)