

2655 THE ALAMENDA RESIDENTIAL DEVELOPMENT CONSTRUCTION COMMUNITY RISK ASSESSMENT

Santa Clara, California

September 21, 2022

Prepared for:

**Patrick Kallas
Project Manager
David J. Powers & Associates, Inc.
1871 The Alameda, Suite 200
San José, CA 95126**

Prepared by:

**Casey Divine
James Reyff**

ILLINGWORTH & RODKIN, INC.
/// Acoustics • Air Quality ///

**429 East Cotati Avenue
Cotati, CA 94931
(707) 794-0400**

I&R Project#: 22-122

Introduction

The purpose of this report is to address the potential community risk impacts associated with the construction of a proposed residential development located at 2655 The Alameda in Santa Clara, California. The air quality impacts from this project would be associated with demolition of the existing land uses and construction of the residential building. Air pollutant emissions associated with construction of the project were predicted using appropriate computer models. In addition, the potential health risk impacts from existing toxic air contaminant (TAC) sources affecting the nearby and proposed sensitive receptors were evaluated. The analysis was conducted following guidance provided by the Bay Area Air Quality Management District (BAAQMD).¹

Project Description

The project site lies where The Alameda and Park Avenue meet Bellomy Street in Santa Clara, CA. The proposed project would develop the vacant 0.4-acre project site with a four-story mixed-use development including 39 residential units and 1,540 square feet (sf) of retail space. The site would be provided in one, subgrade parking level with 23 spaces and surface parking with 10 spaces, for a total of 33 parking spaces.

Setting

The project is located in Santa Clara County, which is in the San Francisco Bay Area Air Basin. Ambient air quality standards have been established at both the State and federal level. The Bay Area meets all ambient air quality standards with the exception of ground-level ozone, respirable particulate matter (PM₁₀), and fine particulate matter (PM_{2.5}).

Air Pollutants of Concern

High ozone levels are caused by the cumulative emissions of reactive organic gases (ROG) and nitrogen oxides (NO_x). These precursor pollutants react under certain meteorological conditions to form high ozone levels. Controlling the emissions of these precursor pollutants is the focus of the Bay Area's attempts to reduce ozone levels. The highest ozone levels in the Bay Area occur in the eastern and southern inland valleys that are downwind of air pollutant sources. High ozone levels aggravate respiratory and cardiovascular diseases, reduced lung function, and increase coughing and chest discomfort.

Particulate matter is another problematic air pollutant of the Bay Area. Particulate matter is assessed and measured in terms of respirable particulate matter or particles that have a diameter of 10 micrometers or less (PM₁₀) and fine particulate matter where particles have a diameter of 2.5 micrometers or less (PM_{2.5}). Elevated concentrations of PM₁₀ and PM_{2.5} are the result of both region-wide (or cumulative) emissions and localized emissions. High particulate matter levels aggravate respiratory and cardiovascular diseases, reduce lung function, increase mortality (e.g., lung cancer), and result in reduced lung function growth in children.

¹ Bay Area Air Quality Management District, *CEQA Air Quality Guidelines*, May 2017.

Toxic Air Contaminants

Toxic air contaminants (TAC) are a broad class of compounds known to cause morbidity or mortality, often because they cause cancer. TACs are found in ambient air, especially in urban areas, and are caused by industry, agriculture, fuel combustion, and commercial operations (e.g., dry cleaners). TACs are typically found in low concentrations, even near their source (e.g., diesel particulate matter [DPM] near a freeway). Because chronic exposure can result in adverse health effects, TACs are regulated at the regional, State, and federal level.

Diesel exhaust is the predominant TAC in urban air and is estimated to represent about three-quarters of the cancer risk from TACs (based on the Bay Area average). According to the California Air Resources Board (CARB), diesel exhaust is a complex mixture of gases, vapors, and fine particles. This complexity makes the evaluation of health effects of diesel exhaust a complex scientific issue. Some of the chemicals in diesel exhaust, such as benzene and formaldehyde, have been previously identified as TACs by the CARB, and are listed as carcinogens either under the State's Proposition 65 or under the Federal Hazardous Air Pollutants programs. Health risks from TACs are estimated using the Office of Environmental Health Hazard Assessment (OEHHA) risk assessment guidelines, which were published in February of 2015.² See *Attachment 1* for a detailed description of the community risk modeling methodology used in this assessment.

Sensitive Receptors

There are groups of people more affected by air pollution than others. CARB has identified the following persons who are most likely to be affected by air pollution: children under 16, the elderly over 65, athletes, and people with cardiovascular and chronic respiratory diseases. These groups are classified as sensitive receptors. Locations that may contain a high concentration of these sensitive population groups include residential areas, hospitals, daycare facilities, elder care facilities, and elementary schools. For cancer risk assessments, children are the most sensitive receptors, since they are more susceptible to cancer causing TACs. Residential locations are assumed to include infants and small children. The closest sensitive receptors to the project site are the residents in the single-family homes to the west, the multi-family housing for Santa Clara University to the east, and the Kids On Campus Preschool to the north of the project site. Additional sensitive receptors are located at further distances surrounding the site. This project would introduce new sensitive receptors (i.e., residents) to the area.

Regulatory Setting

Federal Regulations

The United States Environmental Protection Agency (EPA) sets nationwide emission standards for mobile sources, which include on-road (highway) motor vehicles such trucks, buses, and automobiles, and non-road (off-road) vehicles and equipment used in construction, agricultural,

² OEHHA, 2015. *Air Toxics Hot Spots Program Risk Assessment Guidelines, The Air Toxics Hot Spots Program Guidance Manual for Preparation of Health Risk Assessments*. Office of Environmental Health Hazard Assessment. February.

industrial, and mining activities (such as bulldozers and loaders). The EPA also sets nationwide fuel standards. California also has the ability to set motor vehicle emission standards and standards for fuel used in California, as long as they are the same or more stringent than the federal standards.

In the past decade, the EPA has established a number of emission standards for on- and non-road heavy-duty diesel engines used in trucks and other equipment. This was done in part because diesel engines are a significant source of NO_x and particulate matter (PM_{2.5}) and because the EPA has identified DPM as a probable carcinogen. Implementation of the heavy-duty diesel on-road vehicle standards and the non-road diesel engine standards are estimated to reduce particulate matter and NO_x emissions from diesel engines up to 95 percent in 2030 when the heavy-duty vehicle fleet is completely replaced with newer heavy-duty vehicles that comply with these emission standards.³

In concert with the diesel engine emission standards, the EPA has also substantially reduced the amount of sulfur allowed in diesel fuels. The sulfur contained in diesel fuel is a significant contributor to the formation of particulate matter in diesel-fueled engine exhaust. The new standards reduced the amount of sulfur allowed by 97 percent for highway diesel fuel (from 500 parts per million by weight [ppmw] to 15 ppmw), and by 99 percent for off-highway diesel fuel (from about 3,000 ppmw to 15 ppmw). The low sulfur highway fuel (15 ppmw sulfur), also called ultra-low sulfur diesel (ULSD), is currently required for use by all vehicles in the U.S.

All of the above federal diesel engine and diesel fuel requirements have been adopted by California, in some cases with modifications making the requirements more stringent or the implementation dates sooner.

State Regulations

To address the issue of diesel emissions in the state, CARB developed the *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles*.⁴ In addition to requiring more stringent emission standards for new on-road and off-road mobile sources and stationary diesel-fueled engines to reduce particulate matter emissions by 90 percent, a significant component of the plan involves application of emission control strategies to existing diesel vehicles and equipment. Many Plan measures have been approved and adopted, including the federal on-road and non-road diesel engine emission standards for new engines, and adoption of regulations for low sulfur fuel in California.

CARB has adopted and implemented a number of additional regulations for stationary and mobile sources to reduce emissions of DPM. Several of these regulatory programs affect medium and heavy-duty diesel trucks that represent the bulk of DPM emissions from California highways. CARB regulations require on-road diesel trucks to be retrofitted with particulate matter controls or replaced to meet 2010 or later engine standards that have much lower DPM

³ USEPA, 2000. *Regulatory Announcement, Heavy-Duty Engine and Vehicle Standards and Highway Diesel Fuel Sulfur Control Requirements*. EPA420-F-00-057. December.

⁴ California Air Resources Board, 2000. *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles*. October.

and PM_{2.5} emissions. This regulation will substantially reduce these emissions between 2013 and 2023. While new trucks and buses will meet strict federal standards, CARB's program is intended to accelerate the rate at which the fleet either turns over so there are more cleaner vehicles on the road or is retrofitted to meet similar standards. With this regulation, older, more polluting trucks would be removed from the roads sooner.

CARB has also adopted and implemented regulations to reduce DPM and NO_x emissions from in-use (existing) and new off-road heavy-duty diesel vehicles (e.g., loaders, tractors, bulldozers, backhoes, off-highway trucks, etc.). The regulations apply to diesel-powered off-road vehicles with engines 25 horsepower (hp) or greater. The regulations are intended to reduce particulate matter and NO_x exhaust emissions by requiring owners to turn over their fleet (replace older equipment with newer equipment) or retrofit existing equipment in order to achieve specified fleet-averaged emission rates. Implementation of this regulation, in conjunction with stringent federal off-road equipment engine emission limits for new vehicles, will significantly reduce emissions of DPM and NO_x.

Bay Area Air Quality Management District (BAAQMD)

BAAQMD has jurisdiction over an approximately 5,600-square mile area, commonly referred to as the San Francisco Bay Area (Bay Area). The District's boundary encompasses the nine San Francisco Bay Area counties, including Alameda County, Contra Costa County, Marin County, San Francisco County, San Mateo County, Santa Clara County, Napa County, southwestern Solano County, and southern Sonoma County.

BAAQMD is the lead agency in developing plans to address attainment and maintenance of the National Ambient Air Quality Standards (NAAQS) and California Ambient Air Quality Standards (CAAQS). The District also has permit authority over most types of stationary equipment utilized for the proposed project. The BAAQMD is responsible for permitting and inspection of stationary sources; enforcement of regulations, including setting fees, levying fines, and enforcement actions; and ensuring that public nuisances are minimized.

BAAQMD's Community Air Risk Evaluation (CARE) program was initiated in 2004 to evaluate and reduce health risks associated with exposures to outdoor TACs in the Bay Area.⁵ The program examines TAC emissions from point sources, area sources, and on-road and off-road mobile sources with an emphasis on diesel exhaust, which is a major contributor to airborne health risk in California. The CARE program is an on-going program that encourages community involvement and input. The technical analysis portion of the CARE program is being implemented in three phases that includes an assessment of the sources of TAC emissions, modeling and measurement programs to estimate concentrations of TAC, and an assessment of exposures and health risks. Throughout the program, information derived from the technical analyses will be used to focus emission reduction measures in areas with high TAC exposures and high density of sensitive populations. Risk reduction activities associated with the CARE program are focused on the most at-risk communities in the Bay Area. The BAAQMD defines overburdened communities as areas located (i) within a census tract identified by the California

⁵ See BAAQMD: <https://www.baaqmd.gov/community-health/community-health-protection-program/community-air-risk-evaluation-care-program>, accessed 2/18/2021.

Communities Environmental Health Screening Tool (CalEnviroScreen), Version 4.0 implemented by OEHHA, as having an overall CalEnviroScreen score at or above the 70th percentile, or (ii) within 1,000 feet of any such census tract.⁶ The BAAQMD has identified six communities as impacted: Concord, Richmond/San Pablo, Western Alameda County, San José, Redwood City/East Palo Alto, and Eastern San Francisco. The project site is within the San José CARE area but not within a BAAQMD overburdened area as identified by CalEnviroScreen as the Project site is scored at the 46th percentile.⁷

The BAAQMD California Environmental Quality Act (CEQA) Air Quality Guidelines⁸ were prepared to assist in the evaluation of air quality impacts of projects and plans proposed within the Bay Area. The guidelines provide recommended procedures for evaluating potential air impacts during the environmental review process consistent with California Environmental Quality Act (CEQA) requirements including thresholds of significance, mitigation measures, and background air quality information. They also include assessment methodologies for TACs, odors, and greenhouse gas (GHG) emissions. *Attachment 1* includes detailed community risk modeling methodology.

City of Santa Clara 2010 – 2035 General Plan.

On November 16, 2010, the City of Santa Clara adopted the *City of Santa Clara 2010 – 2035 General Plan*.⁹ The general plan includes goals, policies, and actions to reduce air pollutants and exposure to toxic air contaminants. The following goals, policies, and actions are applicable to the proposed project and this assessment:

5.10.2 Air Quality Goals

- 5.10.2-G1 Improved air quality in Santa Clara and the region.
- 5.10.2-G2 Reduced greenhouse gas emissions that meet the State and regional goals and requirements to combat climate change.

5.10.2 Air Quality Policies

- 5.10.2-P3 Encourage implementation of technological advances that minimize public health hazards and reduce the generation of air pollutants.
- 5.10.2-P4 Encourage measures to reduce greenhouse gas emissions to reach 30 percent below 1990 levels by 2020.
- 5.10.2-P6 Require “Best Management Practices” for construction dust abatement.

Significance Thresholds

⁶ See BAAQMD: https://www.baaqmd.gov/~/_media/dotgov/files/rules/reg-2-permits/2021-amendments/documents/20210722_01_appendixd_mapsofverburdenedcommunities-pdf.pdf?la=en, accessed 10/1/2021.

⁷ OEHHA, CalEnviroScreen 4.0 Maps <https://oehha.ca.gov/calenviroscreen/report/calenviroscreen-40>

⁸ Bay Area Air Quality Management District, 2017. *CEQA Air Quality Guidelines*. May.

⁹ City of Santa Clara, 2010. *City of Santa Clara 2010 – 2035 General Plan*. November. Web: <https://www.santaclaraca.gov/home/showdocument?id=56139>

In June 2010, BAAQMD adopted thresholds of significance to assist in the review of projects under CEQA and these significance thresholds were contained in the District’s 2011 CEQA Air Quality Guidelines. These thresholds were designed to establish the level at which BAAQMD believed air pollution emissions would cause significant environmental impacts under CEQA. The thresholds were challenged through a series of court challenges and were mostly upheld. BAAQMD updated the CEQA Air Quality Guidelines in 2017 to include the latest significance thresholds, which were used in this analysis and are summarized in Table 1. Impacts above these thresholds are considered potentially significant.

Table 1. BAAQMD CEQA Significance Thresholds

Criteria Air Pollutant	Construction Thresholds	
	Single Sources Within 1,000-foot Zone of Influence	Combined Sources (Cumulative from all sources within 1000-foot zone of influence)
Excess Cancer Risk	10 per one million	100 per one million
Hazard Index	1.0	10.0
Incremental annual PM _{2.5}	0.3 µg/m ³	0.8 µg/m ³
Note: PM ₁₀ = coarse particulate matter or particulates with an aerodynamic diameter of 10 micrometers (µm) or less, PM _{2.5} = fine particulate matter or particulates with an aerodynamic diameter of 2.5µm or less.		

Construction Impacts and Mitigation Measures

Project impacts related to increased community risk can occur either by generating emissions of TACs and air pollutants and by introducing a new sensitive receptor in proximity to an existing source of TACs. Temporary project construction activity would generate emissions of DPM from equipment and trucks and also generate dust on a temporary basis that could affect nearby sensitive receptors.

A community health risk assessment was prepared to address project construction impacts on the surrounding off-site sensitive receptors. Additionally, the project could introduce new residents that are sensitive receptors, who would be exposed to existing sources of TACs and localized air pollutants in the vicinity of the project. Therefore, the impact of the existing sources of TAC upon the existing sensitive receptors and new incoming sensitive receptors was assessed.

Community risk impacts are addressed by predicting increased lifetime cancer risk, the increase in annual PM_{2.5} concentrations, and computing the Hazard Index (HI) for non-cancer health risks. Construction equipment and associated heavy-duty truck traffic generates diesel exhaust, which is a known TAC. These exhaust emissions pose health risks for sensitive receptors such as surrounding residents. The primary community risk impact issues associated with construction emissions are cancer risk and exposure to PM_{2.5}. A health risk assessment of the project construction activities was conducted that evaluated potential health effects to nearby sensitive receptors from construction emissions of DPM and PM_{2.5}.¹⁰ This assessment included dispersion

¹⁰ DPM is identified by California as a toxic air contaminant due to the potential to cause cancer.

modeling to predict the offsite and onsite concentrations resulting from project construction, so that lifetime cancer risks and non-cancer health effects could be evaluated. The methodology for computing community risks impacts is contained in *Attachment 1*.

Construction Period Emissions

The California Emissions Estimator Model (CalEEMod) Version 2020.4.0 was used to estimate emissions from on-site construction activity, construction vehicle trips, and evaporative emissions. The project land use types and size, and anticipated construction schedule were input to CalEEMod. The CARB Emission FACTors 2021 (EMFAC2021) model was used to predict emissions from construction traffic, which includes worker travel, vendor trucks, and haul trucks.¹¹ The CalEEMod model output along with construction inputs are included in *Attachment 2* and EMFAC2021 vehicle emissions modeling outputs are included in *Attachment 3*.

CalEEMod Modeling

Land Use Inputs

The proposed project land uses were entered into CalEEMod as described in Table 2.

Table 2. Summary of Project Land Use Inputs

Project Land Uses	Size	Units	Square Feet (sf)	Acreage
Apartments Mid Rise	28	Dwelling Unit	27,860	0.40
Strip Mall	1.54	1,000-sf	1,540	
Enclosed Parking with Elevator	23	Parking Space	14,200	
Parking Lot	10	Parking Space	5,400	

Construction Inputs

CalEEMod computes annual emissions for construction that are based on the project type, size, and acreage. The model provides emission estimates for both on-site and off-site construction activities. On-site activities are primarily made up of construction equipment emissions, while off-site activity includes worker, hauling, and vendor traffic. The construction build-out scenario, including equipment list and schedule, were based on project-specific construction information provided by the project applicant.

The project construction equipment worksheet provided by the applicant included the schedule for each phase (included in *Attachment 2*). Within each phase, the quantity of equipment to be used along with the average hours per day and total number of workdays were based on provided information. Since different equipment would have different estimates of the working days per phase, the hours per day for each phase was computed by dividing the total number of hours that the equipment would be used by the total number of days in that phase. The construction schedule assumed that the earliest possible start date would be September 2023 and would be primarily built out over a period of approximately 17 months, or 375 construction workdays.

¹¹ See CARB’s EMFAC2021 Emissions Inventory at <https://arb.ca.gov/emfac/emissions-inventory>.

Construction Truck Traffic Emissions

Construction would produce traffic in the form of worker trips and truck traffic. The traffic-related emissions are based on worker and vendor trip estimates produced by CalEEMod and haul trips that were computed based on the soil material imported and/or exported to the site and the estimate of concrete and asphalt truck trips. CalEEMod provides daily estimates of worker and vendor trips for each applicable phase. The total trips for those were computed by multiplying the daily trip rate by the number of days in that phase. Haul trips for grading were estimated from provided grading volumes by assuming each truck could carry 10 tons per load. The number of concrete and asphalt total round haul trips were estimated for the project and converted to total one-way trips, assuming two trips per delivery.

The latest version of the CalEEMod model is based on the older version of the CARB EMFAC2017 motor vehicle emission factor model. This model has been superseded by the EMFAC2021 model; however, CalEEMod has not been updated to include EMFAC2021. Therefore, the construction traffic information was combined with EMFAC2021 motor vehicle emissions factors. EMFAC2021 provides aggregate emission rates in grams per mile for each vehicle type. The vehicle mix for this study was based on CalEEMod default assumptions, where worker trips are assumed to be comprised of light-duty autos (EMFAC category LDA) and light duty trucks (EMFAC category LDT1 and LDT2). Vendor trips are comprised of delivery and large trucks (EMFAC category MHDT and HHDT) and haul trips, including concrete trucks, are comprised of large trucks (EMFAC category HHDT). Travel distances are based on CalEEMod default lengths, which are 10.8 miles for worker travel, 7.3 miles for vendor trips and 20 miles for hauling (soil import/export). Since CalEEMod does not address concrete trucks, these were treated as vendor travel distances. Each trip was assumed to include an idle time of 5 minutes. Emissions associated with vehicle starts were also included. On road emissions in Santa Clara County for the year 2023 - 2025 were used in these calculations. Table 3 provides the traffic inputs that were combined with the EMFAC2021 emission database to compute vehicle emissions.

Table 3. Construction Traffic Data Used for EMFAC2021 Model Runs

CalEEMod Run/Land Uses and Construction Phase	Trips by Trip Type			Notes
	Total Worker ¹	Total Vendor ¹	Total Haul ²	
Vehicle mix ¹	50% LDA 25% LDT1 25% LDT2	50% MHDT 50% HHDT	100% HHDT	
Trip Length (miles)	10.8	7.3	20.0 (Demo/Soil) 7.3 (Concrete/Asphalt)	CalEEMod default distance with 5-min truck idle time.
Site Preparation	3	-	-	CalEEMod default worker trips.
Grading	352	-	925	7,400-cy soil export. CalEEMod default worker trips.
Trenching	992	-	430	215 concrete-truck round trips. CalEEMod default worker trips.
Building Construction	6,031	1,304	112	56 concrete-truck round trips. CalEEMod default worker and vendor trips.
Architectural Coating	966	-	-	CalEEMod default worker trips.
Paving	420	-	8	35-cy asphalt hauling CalEEMod default worker trips.
Notes: ¹ Based on 2023 – 2025 EMFAC2021 light-duty vehicle fleet mix for Santa Clara County. ² Includes grading trips estimated by CalEEMod based on amount of material to be removed. Concrete and asphalt trips estimated based on data provided by the applicant.				

Community Health Risk from Project Construction

Construction Emissions

The CalEEMod model and EMFAC2021 emissions provided total annual PM₁₀ exhaust emissions (assumed to be DPM) for the off-road construction equipment and for exhaust emissions from on-road vehicles, with total emissions from all construction stages as 0.02 tons (49 pounds). The on-road emissions are a result of haul truck travel during grading activities, worker travel, and vendor deliveries during construction. A trip length of half a mile was used to represent vehicle travel while at or near the construction site. It was assumed that these emissions from on-road vehicles traveling at or near the site would occur at the construction site. Fugitive PM_{2.5} dust emissions were calculated by CalEEMod as less than 0.01 tons (1 pounds) for the overall construction period.

Dispersion Modeling

The U.S. EPA AERMOD dispersion model was used to predict DPM and PM_{2.5} concentrations at sensitive receptors (i.e., residences, preschool) in the vicinity of the project construction area. The AERMOD dispersion model is a BAAQMD-recommended model for use in modeling

analysis of these types of emission activities for CEQA projects.^{12,13} Emission sources for the construction site were grouped into two categories: exhaust emissions of DPM and fugitive PM_{2.5} dust emissions.

Construction Sources

To represent the construction equipment exhaust emissions, an area source emission release height of 20 feet (6 meters) was used for the area sources.¹⁴ The release height incorporates both the physical release height from the construction equipment (i.e., the height of the exhaust pipe) and plume rise after it leaves the exhaust pipe. Plume rise is due to both the high temperature of the exhaust and the high velocity of the exhaust gas. It should be noted that when modeling an area source, plume rise is not calculated by the AERMOD dispersion model as it would be for a point source (exhaust stack). Therefore, the release height from an area source used to represent emissions from sources with plume rise, such as construction equipment, should be based on the height the exhaust plume is expected to achieve, not just the height of the top of the exhaust pipe. Emissions from vehicle travel on- and off-site were distributed among the exhaust emission area sources throughout the site.

For modeling fugitive PM_{2.5} emissions, a near-ground level release height of 7 feet (2 meters) was used for the area source. Fugitive dust emissions at construction sites come from a variety of sources, including truck and equipment travel, grading activities, truck loading (with loaders) and unloading (rear or bottom dumping), loaders and excavators moving and transferring soil and other materials, etc. All of these activities result in fugitive dust emissions at various heights at the point(s) of generation. Once generated, the dust plume will tend to rise as it moves downwind across the site and exit the site at a higher elevation than when it was generated. For all these reasons, a 7-foot release height was used as the average release height across the construction site. Emissions from the construction equipment and on-road vehicle travel were distributed throughout the modeled area sources. Figure 1 shows the project construction site and receptors.

AERMOD Inputs and Meteorological Data

The modeling used a five-year data set (2013 – 2017) of hourly meteorological data from San José Airport prepared for use with the AERMOD model by BAAQMD. Construction emissions were modeled as occurring daily between 6:00 a.m. to 6:00 p.m., when the majority of construction activity is expected to occur. Annual DPM and PM_{2.5} concentrations from construction activities during the 2023 – 2025 period were calculated using the model. DPM and PM_{2.5} concentrations were calculated at nearby sensitive receptors. Receptor heights of 5 feet (1.5 meters) and 15 feet (4.5 meters) were used to represent the breathing height on the first and

¹² BAAQMD, 2012, *Recommended Methods for Screening and Modeling Local Risks and Hazards, Version 3.0*. May. Web: <https://www.baaqmd.gov/~media/files/planning-and-research/ceqa/risk-modeling-approach-may-2012.pdf?la=en>

¹³ BAAQMD, 2020, *BAAQMD Health Risk Assessment Modeling Protocol*. December. Web: https://www.baaqmd.gov/~media/files/ab617-community-health/facility-risk-reduction/documents/baaqmd_hra_modeling_protocol.pdf?la=en

¹⁴ California Air Resource Board, 2007. *Proposed Regulation for In-Use Off-Road Diesel Vehicles, Appendix D: Health Risk Methodology*. April. Web: <https://ww3.arb.ca.gov/regact/2007/ordiesl07/ordiesl07.htm>

second floors of nearby residences.¹⁵ A receptor height of 3 feet (1 meter) was used to represent the breathing height of infants and children at the Kids on Campus Preschool.

Summary of Construction Community Risk Impacts

The maximum increased cancer risks were calculated using the modeled TAC concentrations combined with the Office of Environmental Health Hazard Assessment (OEHHA) guidance for age sensitivity factors and exposure parameters as recommended by BAAQMD (see *Attachment 1*). Non-cancer health hazards and maximum PM_{2.5} concentrations were also calculated and identified. Age-sensitivity factors reflect the greater sensitivity of infants and children to cancer causing TACs. Third-trimester, infant, child, and adult exposures were assumed to occur at all residences during the entire construction period, while infant and child exposures were assumed to occur at the preschool.

The maximum modeled annual PM_{2.5} concentration was calculated based on combined exhaust and fugitive concentrations. The maximum computed HI value was based on the ratio of the maximum DPM concentration modeled and the chronic inhalation reference exposure level of 5 µg/m³.

The maximum-modeled annual DPM and PM_{2.5} concentrations were identified at nearby sensitive receptors (as shown in Figure 1) to find the maximally exposed individuals (MEI). Results of this assessment indicated that the construction MEI was located on the first floor (3 feet above ground) in the southeast corner of the Kids on Campus Preschool to the north of the project site. Modeling results also identified the residential receptor with the maximum construction impacts, which were less than that of the preschool MEI. Table 4 summarizes the maximum cancer risks, PM_{2.5} concentrations, and health hazard indexes for project related construction activities affecting the construction MEI. *Attachment 4* to this report includes the emission calculations used for the construction area source modeling and the cancer risk calculations.

Summary of Project-Related Community Risks at the Off-Site Sensitive Receptors

As shown in Table 4, the unmitigated maximum cancer risks from construction activities at the preschool MEI location would exceed the BAAQMD single-source significance threshold. However, with the incorporation of the *Mitigation Measure AQ-1 and AQ-2*, the mitigated risk values would reduce emissions such that the cancer risk caused by construction would no longer exceed the BAAQMD single-source significance threshold. The unmitigated annual PM_{2.5} concentration and HI at the preschool MEI, and all risk and hazard impacts at the residential maximum receptor, do not exceed their respective BAAQMD single-source significance thresholds.

¹⁵ Bay Area Air Quality Management District, 2012, Recommended Methods for Screening and Modeling Local Risks and Hazards, Version 3.0. May. Web: <https://www.baaqmd.gov/~media/files/planning-and-research/ceqa/risk-modeling-approach-may-2012.pdf?la=en>

Table 4. Construction Risk Impacts at the Off-Site Sensitive Receptors

Source		Cancer Risk (per million)	Annual PM _{2.5} (µg/m ³)	Hazard Index
Project Impact – Kids on Campus MEI				
Project Construction	Unmitigated	23.09 (infant)	0.06	0.01
	Mitigated*	1.83 (infant)	0.01	<0.01
BAAQMD Single-Source Threshold		10	0.3	1.0
Exceed Threshold?	Unmitigated	Yes	No	No
	Mitigated*	No	No	No
Most Affected Residential Receptor – First Floor (1.5 meter) Receptor				
Project Construction	Unmitigated	5.44 (infant)	0.03	0.01
	Mitigated*	0.43 (infant)	<0.01	<0.01
BAAQMD Single-Source Threshold		10	0.3	1.0
Exceed Threshold?	Unmitigated	No	Yes	No
	Mitigated*	No	No	No

* Construction equipment with Tier 4 engines and BMPs as Mitigation.

Figure 1. Locations of Project Construction Site, Off-Site Sensitive Receptors, and Maximum TAC Impacts (MEI)




Cumulative Community Risks of all TAC Sources at the Off-Site Project MEI

Community health risk assessments typically look at all substantial sources of TACs that can affect sensitive receptors that are located within 1,000 feet of a project site (i.e., influence area). These sources include rail lines, highways, busy surface streets, and stationary sources identified by BAAQMD.

A review of the project area and based on provided traffic information indicated that one roadway within the influence area, El Camino Real, would have traffic exceeding 10,000 vehicles per day. Other nearby streets would have less than 10,000 vehicles per day. A review of BAAQMD's stationary source geographic information systems (GIS) map tool identified 10 stationary sources with the potential to affect the project site and MEI. Figure 2 shows the project area included within the influence area and the location of the MEI. Community risk impacts from these sources upon the MEIs reported in Table 5. Details of the modeling and community risk calculations are included in *Attachment 5*.

Figure 2. Project Site, Project MEI, and Nearby TAC and PM_{2.5} Sources

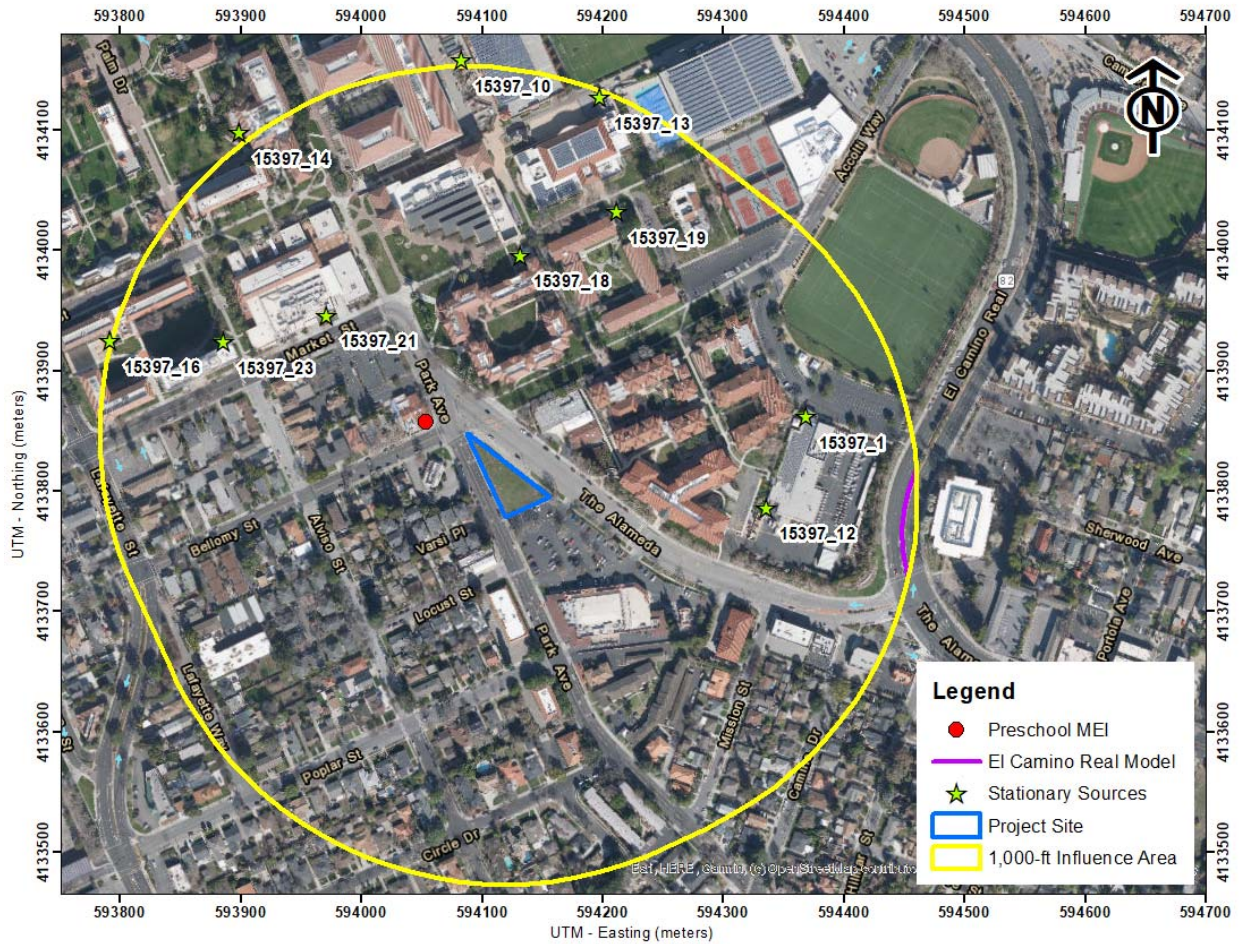

Local Roadways – El Camino Real

A refined analysis of potential health impacts from vehicle traffic on El Camino Real was conducted. This analysis involved predicting emissions for the traffic volume and mix of vehicle types on the roadway near the project site and using an atmospheric dispersion model to predict exposure to TACs. The associated cancer risks were then computed based on the modeled exposures. *Attachment 1* includes a description of how community risk impacts, including cancer risk are computed.

Emission Rates

This analysis involved the development of DPM, organic TACs, and PM_{2.5} emissions for traffic on El Camino Real using the Caltrans version of the CARB EMFAC2017 emissions model, known as CT-EMFAC2017. CT-EMFAC2017 provides emission factors for mobile source criteria pollutants and TACs, including DPM.¹⁶ Emission processes modeled include running exhaust for DPM, PM_{2.5} and total organic compounds (TOG), running evaporative losses for TOG, and tire and brake wear and fugitive road dust for PM_{2.5}. PM_{2.5} emissions from all vehicles were used, rather than just the PM_{2.5} fraction from diesel powered vehicles, because all vehicle types (i.e., gasoline and diesel powered) produce PM_{2.5}. Additionally, PM_{2.5} emissions from vehicle tire and brake wear and from re-entrained roadway dust were included in the emissions estimate. DPM emissions are projected to decrease in the future as reflected in the CT-EMFAC2017 emissions data. Inputs to the model include region (Santa Clara County), type of road (major/collector), truck percentage for non-state highways in Santa Clara County (3.51 percent),¹⁷ traffic mix assigned by CT-EMFAC2017 for the county, year of analysis (2023 – construction start year), and season (annual).

To estimate TAC and PM_{2.5} emissions over the 30-year exposure period used for calculating the increased cancer risks for sensitive receptors at the MEI, the CT-EMFAC2017 model was used to develop vehicle emission factors for the year 2023 (project construction year). Emissions associated with vehicle travel depend on the year of analysis because emission control technology requirements are phased-in over time. Therefore, the earlier the year analyzed in the model, the higher the emission rates utilized by CT-EMFAC2017. Year 2023 emissions were conservatively assumed as being representative of future conditions over the time period that cancer risks are evaluated since, as discussed above, overall vehicle emissions, and in particular diesel truck emissions, will decrease in the future.

Average hourly traffic distributions for Santa Clara County roadways were developed using the EMFAC model,¹⁸ which were then applied to the average daily traffic (ADT) volumes to obtain estimated hourly traffic volumes and emissions for the roadway. The ADT for El Camino Real

¹⁶ The CT-EMFAC2017 version was used in the analysis because Caltrans has not yet release a CT-EMFAC version with the updated EMFAC2021 emissions that would provide TAC emission rates.

¹⁷ Bay Area Air Quality Management District, 2012, *Recommended Methods for Screening and Modeling Local Risks and Hazards, Version 3.0*. May. Web: <https://www.baaqmd.gov/~media/files/planning-and-research/ceqa/risk-modeling-approach-may-2012.pdf?la=en>

¹⁸ The Burden output from EMFAC2007, a previous version of CARB's EMFAC model, was used for this since the current web-based version of EMFAC2021 does not include Burden type output with hour by hour traffic volume information.

was calculated based on traffic data obtained from the traffic consultant.¹⁹ The calculated ADT for El Camino Real would be 23,286 vehicles. An average travel speed of 35 miles per hour (mph) on El Camion Real was used for all hours of the day based on posted speed limit signs.

Dispersion Modeling

Dispersion modeling of TAC and PM_{2.5} emissions was conducted using the EPA AERMOD air quality dispersion model, which is recommended by the BAAQMD for this type of analysis.²⁰ TAC and PM_{2.5} emissions from traffic on El Camino Real within 1,000 feet of the project site were evaluated. Vehicle traffic on the roadways was modeled using volume sources along a line (line volume sources); with line segments used for travel on the roadway. The same meteorological data and off-site sensitive receptors used in the previous dispersion modeling were used in the roadway modeling. Other inputs to the model included road geometry, hourly traffic emissions, and receptor locations. Annual TAC and PM_{2.5} concentrations for 2023 from traffic on the roadway was calculated using the model. Concentrations were calculated at the preschool MEI with receptor heights of 3 feet (1 meter) to represent the breathing heights on the first floor of the preschool.

Computed Cancer and Non-Cancer Health Impacts

The cancer risk, PM_{2.5} concentration, and HI impacts from El Camino Real on the project childcare MEI are shown in Table 5. Figure 2 shows the roadway links used for the modeling and receptor locations where concentrations were calculated. Details of the emission calculations, dispersion modeling, and cancer risk calculations for the receptors with the maximum cancer risk from El Camino Real traffic are provided in *Attachment 5*.

BAAQMD Permitted Stationary Sources

Permitted stationary sources of air pollution near the project site were identified using BAAQMD's *Permitted Stationary Sources 2020* geographic information system (GIS) map website.²¹ This mapping tool identifies the location of nearby stationary sources and their estimated risk and hazard impacts. 10 sources were identified using this tool, with all the sources being diesel generator. The BAAQMD GIS website provided screening risks and hazards for these sources; therefore, a stationary source information request was not required to be submitted to BAAQMD.

The screening level risks and hazards provided by BAAQMD for the stationary sources were adjusted for distance using BAAQMD's *Distance Adjustment Multiplier Tool for Diesel Internal Combustion Engines*. Community risk impacts from the stationary sources upon the preschool MEI are reported in Table 5. Note that the risks are reported for continuous exposure over 30 years with adjustments for infant and child exposure. Risks at the preschool would be less

¹⁹ Email correspondence with Patrick Kallas, Project Manager, David J. Powers & Associates, Inc., August 17, 2022..

²⁰ BAAQMD. *Recommended Methods for Screening and Modeling Local Risks and Hazards*. May 2012

²¹ BAAQMD, *Stationary Source Screening Map*, 2022. Web:

<https://baaqmd.maps.arcgis.com/apps/webappviewer/index.html?id=845658c19eae4594b9f4b805fb9d89a3>

because the exposure time of infants and children attending the preschool is much less than the BAAQMD cancer risk assumptions used to develop the screening levels.

Summary of Cumulative Health Risk Impact at Preschool MEI

Table 5 reports both the project and cumulative community risk impacts at the sensitive receptors most affected by construction (i.e., the MEI). The project would have an exceedance with respect to community risk caused by project construction since the unmitigated maximum cancer risk exceeds the BAAQMD single-source threshold. With the implementation of *Mitigation Measure AQ-1 and AQ-2*, the project’s cancer risk would be lowered to a level below the single-source. The annual PM_{2.5} concentration and HI, unmitigated and mitigated, do not exceed the single-source or cumulative-source thresholds.

Table 5. Impacts from Combined Sources at Preschool MEI

Source	Cancer Risk (per million)	Annual PM _{2.5} (µg/m ³)	Hazard Index
Project Impacts			
Project Construction	Unmitigated	23.09 (infant)	0.06
	Mitigated	1.83 (infant)	0.01
BAAQMD Single-Source Threshold		10	0.3
Exceed Threshold?	Unmitigated	Yes	<i>No</i>
	Mitigated	<i>No</i>	<i>No</i>
Cumulative Sources			
El Camino Real, ADT 23,286	0.03	<0.01	<0.01
Santa Clara University (Facility ID #15397_1, Generator), MEI at 1,000 feet	0.07	<0.01	<0.01
Santa Clara University (Facility ID #15397_10, Generator), MEI at 970 feet	0.17	<0.01	<0.01
Santa Clara University (Facility ID #15397_12, Generator), MEI at 950 feet	0.47	<0.01	<0.01
Santa Clara University (Facility ID #15397_13, Generator), MEI at 980 feet	0.29	<0.01	<0.01
Santa Clara University (Facility ID #15397_14, Generator), MEI at 910 feet	0.10	<0.01	<0.01
Santa Clara University (Facility ID #15397_16, Generator), MEI at 970 feet	0.32	<0.01	<0.01
Santa Clara University (Facility ID #15397_18, Generator), MEI at 510 feet	0.22	<0.01	<0.01
Santa Clara University (Facility ID #15397_19, Generator), MEI at 760 feet	0.09	<0.01	<0.01
Santa Clara University (Facility ID #15397_21, Generator), MEI at 370 feet	0.31	<0.01	<0.01
Santa Clara University (Facility ID #15397_23, Generator), MEI at 575 feet	0.14	<0.01	<0.01
<i>Combined Sources</i>	Unmitigated	25.30	<0.16
	Mitigated	4.04	<0.11
BAAQMD Cumulative Source Threshold		100	0.8
Exceed Threshold?	Unmitigated	<i>No</i>	<i>No</i>
	Mitigated	<i>No</i>	<i>No</i>

Mitigation Measure AQ-1: Include measures to control dust and exhaust during construction.

During any construction period ground disturbance, the applicant shall ensure that the project contractor implement measures to control dust and exhaust. Implementation of the measures recommended by BAAQMD and listed below would reduce the air quality impacts associated with grading and new construction to a less-than-significant level. Additional measures are identified to reduce construction equipment exhaust emissions. The contractor shall implement the following best management practices that are required of all projects:

1. All exposed surfaces (e.g., parking areas, staging areas, soil piles, graded areas, and unpaved access roads) shall be watered two times per day.
2. All haul trucks transporting soil, sand, or other loose material off-site shall be covered.
3. All visible mud or dirt track-out onto adjacent public roads shall be removed using wet power vacuum street sweepers at least once per day. The use of dry power sweeping is prohibited.
4. All vehicle speeds on unpaved roads shall be limited to 15 miles per hour (mph).
5. All roadways, driveways, and sidewalks to be paved shall be completed as soon as possible. Building pads shall be laid as soon as possible after grading unless seeding or soil binders are used.
6. Idling times shall be minimized either by shutting equipment off when not in use or reducing the maximum idling time to 5 minutes (as required by the California airborne toxics control measure Title 13, Section 2485 of California Code of Regulations [CCR]). Clear signage shall be provided for construction workers at all access points.
7. All construction equipment shall be maintained and properly tuned in accordance with manufacturer's specifications. All equipment shall be checked by a certified mechanic and determined to be running in proper condition prior to operation.
8. Post a publicly visible sign with the telephone number and person to contact at the Lead Agency regarding dust complaints. This person shall respond and take corrective action within 48 hours. The Air District's phone number shall also be visible to ensure compliance with applicable regulations.

Effectiveness of Mitigation Measure AQ-1

The measures above are consistent with BAAQMD-recommended basic control measures for reducing fugitive particulate matter that are contained in the BAAQMD CEQA Air Quality Guidelines. These measures would also further reduce TAC emissions associated with construction activity.

Mitigation Measure AQ-2: Use construction equipment that has low diesel particulate matter exhaust emissions.

Implement a feasible plan to reduce DPM emissions by 60 percent such that increased cancer risk and annual PM_{2.5} concentrations from construction would be reduced below TAC significance levels as follows:

1. All construction equipment larger than 25 horsepower used at the site for more than two continuous days or 20 hours total shall meet U.S. EPA Tier 4 emission standards for PM (PM₁₀ and PM_{2.5}), if feasible, otherwise,
 - a. If use of Tier 4 equipment is not available, alternatively use equipment that meets U.S. EPA emission standards for Tier 3 engines and include particulate matter emissions control equivalent to CARB Level 3 verifiable diesel emission control devices that altogether achieve a 60 percent reduction in particulate matter exhaust in comparison to uncontrolled equipment; alternatively (or in combination).
2. Alternatively, the applicant may develop another construction operations plan demonstrating that the construction equipment used on-site would achieve a reduction in construction diesel particulate matter emissions by 60 percent or greater. Elements of the plan could include a combination of some of the following measures:
 - Implementation of No. 1 above to use Tier 4 engines or alternatively fueled equipment,
 - Installation of electric power lines during early construction phases to avoid use of diesel generators and compressors,
 - Use of electrically-powered equipment,
 - Forklifts and aerial lifts used for exterior and interior building construction shall be electric or propane/natural gas powered,
 - Change in construction build-out plans to lengthen phases, and
 - Implementation of different building techniques that result in less diesel equipment usage.

Such a construction operations plan would be subject to review by an air quality expert and approved by the City prior to construction.

Effectiveness of Mitigation Measure AQ-1 and AQ-2

CalEEMod was used to compute emissions associated with this mitigation measure assuming that all equipment met U.S. EPA Tier 4 Interim engine standards and BAAQMD best management practices for construction were included. With these implemented, the project's construction cancer risk levels (assuming infant exposure) would be reduced by 92 percent to 1.83 chances per million. Note that use of equipment that does not meet Tier 4 standards but includes CARB Level 3 verifiable diesel emission control devices would achieve about an 85-

percent reduction and meet the requirements of this mitigation measure. As a result, the project's construction risks would be reduced below the BAAQMD single-source threshold.

Non-CEQA: On-site Community Risk Assessment for TAC Sources - New Project Residences

In addition to evaluating health impact from project construction, a health risk assessment was completed to assess the impact that the existing TAC sources would have on the new proposed sensitive receptors (residents) that the project would introduce. The same TAC sources identified above were used in this health risk assessment.²² Figure 3 shows the on-site sensitive receptors in relation to the nearby TAC sources. All on-site community task results are listed in Table 6. *Attachment 5* includes the dispersion modeling and risk calculations for TAC source impacts upon the proposed on-site sensitive receptors.

Local Roadways – El Camino Real

The roadway analysis for the project residents was conducted in the same manner as described above for the off-site MEI. However, year 2025 (operational year) was conservatively assumed as being representative of future conditions, instead of 2023 (construction year). An analysis based on 2025 resulted in an increased ADT on El Camino Real of 23,733 vehicles. On-site receptors were placed throughout the project site with a spacing of 7 meters (23 feet). Roadway impacts were modeled at receptor heights of 5 feet (1.5 meters) and 21 feet (6.4 meters) representing sensitive receptors on the first and second floors of the proposed building. The portion of the roadway included in the modeling are shown in Figure 3 along with the project site and receptor locations where impacts were modeled.

Maximum increased cancer risks were calculated for the residents at the project site using the maximum modeled TAC concentrations. A 30-year exposure period was used in calculating cancer risks assuming the residents would include third trimester pregnancy and infants/children and were assumed to be in the new homes for 24 hours per day for 350 days per year. The highest impacts from El Camino Real occurred at a receptor on the first floor in the southeast corner of the project site. Cancer risks associated with the roadway are greatest closest to the roadway and decrease with distance from the road. The roadway community risk impacts at the project site are shown in Table 6. Details of the emission calculations, dispersion modeling, and cancer risk calculations are contained in *Attachment 5*.

²² We note that to the extent this analysis considers *existing* air quality issues in relation to the impact on *future residents* of the Project, it does so for informational purposes only pursuant to the judicial decisions in *CBIA v. BAAQMD* (2015) 62 Cal.4th 369, 386 and *Ballona Wetlands Land Trust v. City of Los Angeles* (2011) 201 Cal.App.4th 455, 473, which confirm that the impacts of the environment on a project are excluded from CEQA unless the project itself “exacerbates” such impacts.

Stationary Sources

The stationary source screening analysis for the new project sensitive receptors was conducted in the same manner as described above for the construction MEI. Table 6 includes the health risk assessment results from the stationary sources.


Summary of Cumulative Community Risks at the Project Site

Community risk impacts from the existing and TAC sources upon the project site are reported in Table 6. The risks from the singular TAC sources are compared against the BAAQMD single-source threshold. The risks from all the sources are then combined and compared against the BAAQMD cumulative-source threshold. As shown, none of the sources exceed the single-source or cumulative-source thresholds.

Table 6. Impacts from Combined Sources to Project Site Receptors

Source	Cancer Risk (per million)	Annual PM _{2.5} (µg/m ³)	Hazard Index
El Camino Real, ADT 23,733	0.04	<0.01	<0.01
Santa Clara University (Facility ID #15397_1, Generator), MEI at 1,000 feet	0.13	<0.01	<0.01
Santa Clara University (Facility ID #15397_10, Generator), MEI at 970 feet	0.17	<0.01	<0.01
Santa Clara University (Facility ID #15397_12, Generator), MEI at 950 feet	1.05	<0.01	<0.01
Santa Clara University (Facility ID #15397_13, Generator), MEI at 980 feet	0.29	<0.01	<0.01
Santa Clara University (Facility ID #15397_14, Generator), MEI at 910 feet	0.10	<0.01	<0.01
Santa Clara University (Facility ID #15397_16, Generator), MEI at 970 feet	0.26	<0.01	<0.01
Santa Clara University (Facility ID #15397_18, Generator), MEI at 510 feet	0.26	<0.01	<0.01
Santa Clara University (Facility ID #15397_19, Generator), MEI at 760 feet	0.11	<0.01	<0.01
Santa Clara University (Facility ID #15397_21, Generator), MEI at 370 feet	0.21	<0.01	<0.01
Santa Clara University (Facility ID #15397_23, Generator), MEI at 575 feet	0.13	<0.01	<0.01
<i>BAAQMD Single-Source Threshold</i>	10	0.3	1.0
<i>Exceed Threshold?</i>	<i>No</i>	<i>No</i>	<i>No</i>
Cumulative Total	2.75	<0.11	<0.11
<i>BAAQMD Cumulative Source Threshold</i>	100	0.8	10.0
<i>Exceed Threshold?</i>	<i>No</i>	<i>No</i>	<i>No</i>

Figure 3. Locations of Project Site, On-Site Residential Receptors, Roadway Models, Stationary Sources, and Maximum TAC Impacts

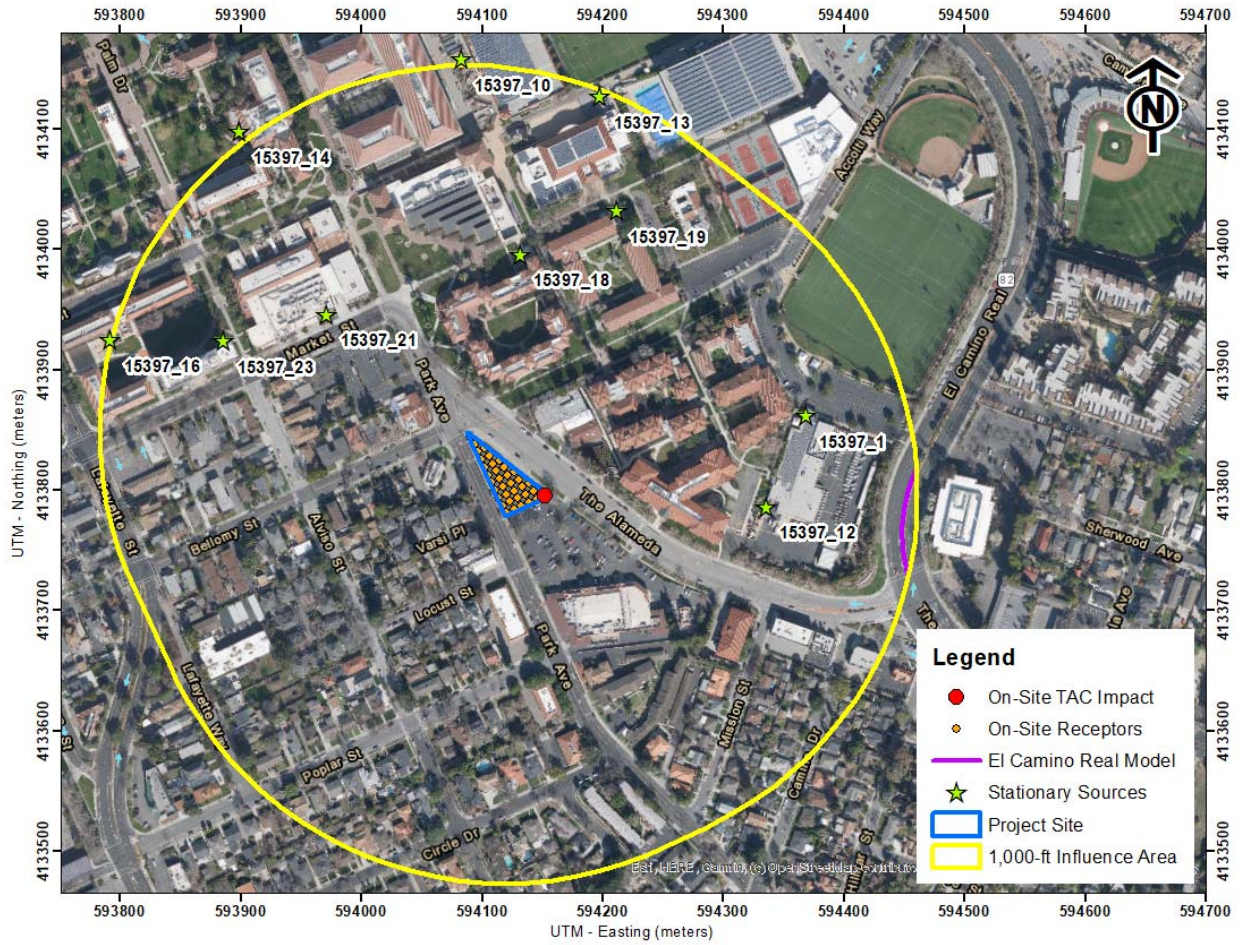

Supporting Documentation

Attachment 1 is the methodology used to compute community risk impacts, including the methods to compute lifetime cancer risk from exposure to project emissions.

Attachment 2 includes the CalEEMod output for project construction emissions. Also included are any modeling assumptions.

Attachment 3 includes the EMFAC2021 emissions modeling. The input files for these calculations are voluminous and are available upon request in digital format.

Attachment 4 is the construction health risk assessment. This includes the summary of the dispersion modeling and the cancer risk calculations for construction. AERMOD dispersion modeling files for this assessment, which are quite voluminous, are available upon request and would be provided in digital format

Attachment 5 includes the cumulative community risk calculations, modeling results, and health risk calculations from sources affecting the construction MEI and project site receptors.

Attachment 1: Health Risk Calculation Methodology

A health risk assessment (HRA) for exposure to Toxic Air Contaminates (TACs) requires the application of a risk characterization model to the results from the air dispersion model to estimate potential health risk at each sensitive receptor location. The State of California Office of Environmental Health Hazard Assessment (OEHHA) and California Air Resources Board (CARB) develop recommended methods for conducting health risk assessments. The most recent OEHHA risk assessment guidelines were published in February of 2015.²³ These guidelines incorporate substantial changes designed to provide for enhanced protection of children, as required by State law, compared to previous published risk assessment guidelines. CARB has provided additional guidance on implementing OEHHA's recommended methods.²⁴ This HRA used the 2015 OEHHA risk assessment guidelines and CARB guidance. The BAAQMD has adopted recommended procedures for applying the newest OEHHA guidelines as part of Regulation 2, Rule 5: New Source Review of Toxic Air Contaminants.²⁵ Exposure parameters from the OEHHA guidelines and the recent BAAQMD HRA Guidelines were used in this evaluation.

Cancer Risk

Potential increased cancer risk from inhalation of TACs is calculated based on the TAC concentration over the period of exposure, inhalation dose, the TAC cancer potency factor, and an age sensitivity factor to reflect the greater sensitivity of infants and children to cancer causing TACs. The inhalation dose depends on a person's breathing rate, exposure time and frequency and duration of exposure. These parameters vary depending on the age, or age range, of the persons being exposed and whether the exposure is considered to occur at a residential location or other sensitive receptor location.

The current OEHHA guidance recommends that cancer risk be calculated by age groups to account for different breathing rates and sensitivity to TACs. Specifically, they recommend evaluating risks for the third trimester of pregnancy to age zero, ages zero to less than two (infant exposure), ages two to less than 16 (child exposure), and ages 16 to 70 (adult exposure). Age sensitivity factors (ASFs) associated with the different types of exposure are an ASF of 10 for the third trimester and infant exposures, an ASF of 3 for a child exposure, and an ASF of 1 for an adult exposure. Also associated with each exposure type are different breathing rates, expressed as liters per kilogram of body weight per day (L/kg-day) or liters per kilogram of body weight per 8-hour period for the case of worker or school child exposures. As recommended by the BAAQMD for residential exposures, 95th percentile breathing rates are used for the third trimester and infant exposures, and 80th percentile breathing rates for child and adult exposures. For children at schools and daycare facilities, BAAQMD recommends using the 95th percentile 8-hour breathing rates. Additionally, CARB and the BAAQMD recommend the use of a

²³ OEHHA, 2015. *Air Toxics Hot Spots Program Risk Assessment Guidelines, The Air Toxics Hot Spots Program Guidance Manual for Preparation of Health Risk Assessments*. Office of Environmental Health Hazard Assessment. February.

²⁴ CARB, 2015. *Risk Management Guidance for Stationary Sources of Air Toxics*. July 23.

²⁵ BAAQMD, 2016. *BAAQMD Air Toxics NSR Program Health Risk Assessment (HRA) Guidelines*. December 2016.

residential exposure duration of 30 years for sources with long-term emissions (e.g., roadways). For workers, assumed to be adults, a 25-year exposure period is recommended by the BAAQMD. For school children a 9-year exposure period is recommended by the BAAQMD.

Under previous OEHHA and BAAQMD HRA guidance, residential receptors are assumed to be at their home 24 hours a day, or 100 percent of the time. In the 2015 Risk Assessment Guidance, OEHHA includes adjustments to exposure duration to account for the fraction of time at home (FAH), which can be less than 100 percent of the time, based on updated population and activity statistics. The FAH factors are age-specific and are: 0.85 for third trimester of pregnancy to less than 2 years old, 0.72 for ages 2 to less than 16 years, and 0.73 for ages 16 to 70 years. Use of the FAH factors is allowed by the BAAQMD if there are no schools in the project vicinity have a cancer risk of one in a million or greater assuming 100 percent exposure (FAH = 1.0).

Functionally, cancer risk is calculated using the following parameters and formulas:

$$\text{Cancer Risk (per million)} = CPF \times \text{Inhalation Dose} \times ASF \times ED/AT \times FAH \times 10^6$$

Where:

- CPF = Cancer potency factor (mg/kg-day)⁻¹
- ASF = Age sensitivity factor for specified age group
- ED = Exposure duration (years)
- AT = Averaging time for lifetime cancer risk (years)
- FAH = Fraction of time spent at home (unitless)

$$\text{Inhalation Dose} = C_{\text{air}} \times DBR^* \times A \times (EF/365) \times 10^{-6}$$

Where:

- C_{air} = concentration in air (µg/m³)
- DBR = daily breathing rate (L/kg body weight-day)
- 8HrBR = 8-hour breathing rate (L/kg body weight-8 hours)
- A = Inhalation absorption factor
- EF = Exposure frequency (days/year)
- 10⁻⁶ = Conversion factor

The health risk parameters used in this evaluation are summarized as follows:

Parameter	Exposure Type →	Infant		Child	Adult
	Age Range →	3 rd Trimester	0<2	2 < 16	16 - 30
DPM Cancer Potency Factor (mg/kg-day) ⁻¹		1.10E+00	1.10E+00	1.10E+00	1.10E+00
Daily Breathing Rate (L/kg-day) 80 th Percentile Rate		273	758	572	261
Daily Breathing Rate (L/kg-day) 95 th Percentile Rate		361	1,090	745	335
8-hour Breathing Rate (L/kg-8 hours) 95 th Percentile Rate		-	1,200	520	240
Inhalation Absorption Factor		1	1	1	1
Averaging Time (years)		70	70	70	70
Exposure Duration (years)		0.25	2	14	14*
Exposure Frequency (days/year)		350	350	350	350*
Age Sensitivity Factor		10	10	3	1
Fraction of Time at Home (FAH)		0.85-1.0	0.85-1.0	0.72-1.0	0.73*

* An 8-hour breathing rate (8HrBR) is used for worker and school child exposures.

Non-Cancer Hazards

Non-cancer health risk is usually determined by comparing the predicted level of exposure to a chemical to the level of exposure that is not expected to cause any adverse effects (reference exposure level), even to the most susceptible people. Potential non-cancer health hazards from TAC exposure are expressed in terms of a hazard index (HI), which is the ratio of the TAC concentration to a reference exposure level (REL). OEHHA has defined acceptable concentration levels for contaminants that pose non-cancer health hazards. TAC concentrations below the REL are not expected to cause adverse health impacts, even for sensitive individuals. The total HI is calculated as the sum of the HIs for each TAC evaluated and the total HI is compared to the BAAQMD significance thresholds to determine whether a significant non-cancer health impact from a project would occur.

Typically, for residential projects located near roadways with substantial TAC emissions, the primary TAC of concern with non-cancer health effects is diesel particulate matter (DPM). For DPM, the chronic inhalation REL is 5 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$).

Annual PM_{2.5} Concentrations

While not a TAC, fine particulate matter (PM_{2.5}) has been identified by the BAAQMD as a pollutant with potential non-cancer health effects that should be included when evaluating potential community health impacts under the California Environmental Quality Act (CEQA). The thresholds of significance for PM_{2.5} (project level and cumulative) are in terms of an increase in the annual average concentration. When considering PM_{2.5} impacts, the contribution from all sources of PM_{2.5} emissions should be included. For projects with potential impacts from nearby local roadways, the PM_{2.5} impacts should include those from vehicle exhaust emissions, PM_{2.5} generated from vehicle tire and brake wear, and fugitive emissions from re-suspended dust on the roads.

Attachment 2: CalEEMod Modeling Inputs and Outputs

Air Quality/Noise Construction Information Data Request

Project Name:	2655 The Alameda - Construction Activities (does not include Environmental Remediation Activities)	Complete ALL Portions in Yellow
See Equipment Type TAB for type, horsepower and load factor		
Project Size	39 Dwelling Units 0.4 total project acres disturbed	Pile Driving? Y/N? N Project include on-site GENERATOR OR FIRE PUMP during project OPERATION (not construction)? Y/N? _N_ IF YES (if BOTH separate values) --> Kilowatts/Horsepower: _____ Fuel Type: _____ Location in project (Plans Desired if Available): _____
	26235 s.f. residential	
	1540 s.f. retail	
	0 s.f. office/commercial	
	1,625 s.f. other, specify: Level 1 Entry, Common Rm	
	14200 s.f. parking garage 23 spaces	
	5400 s.f. parking lot 10 spaces	
Construction Days	9/1/2023 to 2/1/2025	
Construction Hours	6:00 am to 6:00 pm	
DO NOT MULTIPLY EQUIPMENT HOURS/DAY BY THE QUANTITY OF EQUIPMENT		

Quantity	Description	HP	Load Factor	Hours/day	Total Work Days	Avg. Hours per day	HP Annual Hours	Comments
Demolition - not required		Start Date:		Total phase:				Overall Import/Export Volumes
		End Date:						Demolition Volume - not required
	Concrete/Industrial Saws	81	0.73			#DIV/0!	0	Square footage of buildings to be demolished
	Excavators	158	0.38			#DIV/0!	0	(or total tons to be hauled)
	Rubber-Tired Dozers	247	0.4			#DIV/0!	0	? square feet or
	Tractors/Loaders/Backhoes	97	0.37			#DIV/0!	0	? Hauling volume (tons)
	Other Equipment?							Any pavement demolished and hauled? _?_ tons
Site Preparation		Start Date:	9/6/2023	Total phase:	1			
		End Date:	9/7/2023					
	Graders	187	0.41	0		0	0	
	Rubber Tired Dozers	247	0.4	0		0	0	
1	Tractors/Loaders/Backhoes	97	0.37	8	1	8	287	remove existing hardscape and grubb
	Other Equipment?							
Grading / Excavation		Start Date:	9/8/2023	Total phase:	44			
		End Date:	11/8/2023					Soil Hauling Volume
1	Excavators	158	0.38	8	15	2.72727273	7205	Export volume = 7400 cubic yards?
	Graders	187	0.41			0	0	Import volume = none cubic yards?
	Rubber Tired Dozers	247	0.4			0	0	
	Concrete/Industrial Saws	81	0.73			0	0	
1	Tractors/Loaders/Backhoes	97	0.37	8	22	4	6317	
1	Other Equipment?	221	0.5	8	5		4420	Shoring Drill Rig
Trenching/Foundation/Basement		Start Date:	11/9/2023	Total phase:	124			
		End Date:	5/9/2024					Basement Construction to Level 1
	Tractor/Loader/Backhoe	97	0.37			0	0	Cement Trucks 215 Total Round-Trips
	Excavators	158	0.38			0	0	
2	Other Equipment? Fork-lifts	89	0.2	8	80	5.16129032	22784	
1	Cranes	231	0.29	8	20	1.29032258	10718	
Building - Exterior		Start Date:	5/10/2024	Total phase:	163			Cement Trucks 56 Total Round-Trips
		End Date:	12/3/2024					
1	Cranes	231	0.29	8	40	1.96319018	21437	Electric? (Y/N) N Otherwise assumed diesel
1	Forklifts	89	0.2	6	145	5.33742331	15486	Liquid Propane (LPG)? (Y/N) N Otherwise Assumed diesel
	Generator Sets	84	0.74			0	0	Or temporary line power? (Y/N) _N_
	Tractors/Loaders/Backhoes	97	0.37			0	0	
1	Welders	46	0.45	8	4	0.19631902	662	
	Other Equipment? Manlift			0	0	0	0	assuming no manlifts required
Building - Interior/Architectural Coating		Start Date:	8/1/2024	Total phase:	138			
		End Date:	2/1/2025					
4	Air Compressors	78	0.48	8	65	3.76811594	77875	
	Aerial Lift	62	0.31	0	0	0	0	
	Other Equipment?							
Paving		Start Date:	11/1/2024	Total phase:	28			
		End Date:	12/15/2024					Asphalt? yes_35_cubic yards or no_ round trips?
	Cement and Mortar Mixers	9	0.56	0		0	0	
1	Pavers	130	0.42	8	2	0.57142857	874	
1	Paving Equipment	132	0.36	8	2	0.57142857	760	
1	Rollers	80	0.38	8	2	0.57142857	486	
2	Tractors/Loaders/Backhoes	97	0.37	8	3	0.85714286	1723	
	Other Equipment? - Concrete/Industrial Saws	81	0.73	4	5	0.71428571	1182.6	
Additional Phases		Start Date:		Total phase:				
		Start Date:						
						#DIV/0!	0	
						#DIV/0!	0	
						#DIV/0!	0	
						#DIV/0!	0	
						#DIV/0!	0	

Equipment types listed in "Equipment Types" worksheet tab.

Equipment listed in this sheet is to provide an example of inputs
 It is assumed that water trucks would be used during grading
Add or subtract phases and equipment, as appropriate
Modify horsepower or load factor, as appropriate

Complete one sheet for each project component

Traffic Consultant Trip Gen					CalEEMod Default		
Land Use	Size	Daily Trips	New Trips	Weekday Trip Gen	Weekday	Sat	Sun
Apartments Mid Rise	DU	39	177	164	4.21	5.44	4.09
<i>Residential/Retail Internal Capture</i>			-13			Rev 3.80	3.16
Strip Mall	KSF	1.54	84	50	32.47	44.32	20.43
<i>Residential/Retail Internal Capture</i>			-13			Rev 30.80	14.97
<i>Pass-By Reduction</i>			-21				

Land Use	Size	Daily		AM Peak Hour			PM Peak Hour				
		Trip Rate	Trips	Pk-Hr Rate	Trips			Pk-Hr Rate	Trips		
					In	Out	Total		In	Out	Total
Proposed Residential ¹	39 du	4.54	177	0.37	3	11	14	0.39	9	6	15
- Residential/Retail Internal Capture (15%) ³			-13		0	-1	-1		-1	-1	-2
<i>Sub-Total Residential</i>			164		3	10	13		8	5	13
Retail ²	1,540 s.f.	54.45	84	2.36	2	2	4	6.59	5	5	10
- Residential/Retail Internal Capture (15%) ³			-13		-1	0	-1		-1	-1	-2
- Pass-By Reduction (30%) ⁴			-21		0	-1	-1		-1	-1	-2
<i>Sun-Total Retail</i>			50		1	1	2		3	3	6
Net Project Trips			214		4	11	15		11	8	19

Source: ITE *Trip Generation Manual, 11th Edition*. VTA *Transportation Impact Analysis Guidelines*, October 2014

Notes:

1. Mid-Rise Multifamily Housing (ITE Land Use 221): average trip rates in trips per dwelling unit were used.
2. Strip Retail Plaza (Land Use 822): average trip rates in trips per 1,000 s.f. were used.
3. Residential/retail internal trip reductions were applied to the project per the VTA's *TIA Guidelines*.
4. An average 30% pass-by trip reduction was applied based the maximum allowable pass-by trip reduction rate in the VTA *TIA Guidelines*.

Construction Criteria Air Pollutants						
Unmitigated	ROG	NOX	PM10 Exhaust	PM2.5 Exhaust	CO2e	
Year	Tons				MT	
Construction Equipment						
2023	0.01	0.07	0.004	0.003	13.43	
2024-2025	0.26	0.42	0.02	0.02	76.66	
EMFAC						
2023	0.003	0.02	0.002	0.001	21.47	
2024-2025	0.01	0.08	0.01	0.002	73.32	
Total Construction Emissions by Year						
2023	0.01	0.09	0.01	0.00	34.90	
2024-2025	0.27	0.50	0.03	0.02	149.98	
Total Construction Emissions						
Tons	0.29	0.67	0.04	0.03	258.20	
Pounds/Workdays	Average Daily Emissions				Workdays	
2023	0.25	2.21	0.12	0.09		84
2024-2025	1.87	3.43	0.18	0.15		291
Threshold - lbs/day	54.0	54.0	82.0	54.0		
Total Construction Emissions						
Pounds	2.12	5.65	0.31	0.25	0.00	
Average	1.56	3.59	0.20	0.15	0.00	375.00
Threshold - lbs/day	54.0	54.0	82.0	54.0		

Operational Criteria Air Pollutants						
Unmitigated	ROG	NOX	Total PM10	Total PM2.5		
Year 2025	Tons					
Total	0.26	0.08	0.15	0.04		
Existing Use Emissions						
Net Annual Operational Emissions						
Tons/year	0.26	0.08	0.15	0.04		
Threshold - Tons/year	10.0	10.0	15.0	10.0		
Average Daily Emissions						
Pounds Per Day	1.44	0.45	0.81	0.21		
Threshold - lbs/day	54.0	54.0	82.0	54.0		

Category	CO2e			
	Project	Existing	Project 2030	Existing
Area	0.49			
Energy	48.20			
Mobile	146.31			
Waste	9.84			
Water	4.47			
TOTAL	209.30	0.00	0.00	0.00
Net GHG Emissions		209.30		0.00
Service Population	101.79			
Per Capita Emissions		2.06		0.00
CA DOF 2021 =	39 units 2.61 pphh			

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

**2655 The Alameda, Santa Clara
Santa Clara County, Annual**

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Enclosed Parking with Elevator	23.00	Space	0.00	14,200.00	0
Parking Lot	10.00	Space	0.00	5,400.00	0
Apartments Mid Rise	39.00	Dwelling Unit	0.40	27,860.00	112
Strip Mall	1.54	1000sqft	0.00	1,540.00	0

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.2	Precipitation Freq (Days)	58
Climate Zone	4			Operational Year	2025
Utility Company	Silicon Valley Power				
CO2 Intensity (lb/MW hr)	307.98	CH4 Intensity (lb/MW hr)	0.033	N2O Intensity (lb/MW hr)	0.004

1.3 User Entered Comments & Non-Default Data

- Project Characteristics -
- Land Use - Provided construction data - total project acres and square footages.
- Construction Phase - Provided schedule - construction worksheet.
- Off-road Equipment - Provided in construction and equipment list.
- Off-road Equipment - Provided in construction and equipment list.
- Off-road Equipment - Provided in construction and equipment list.0
- Off-road Equipment - Provided in construction and equipment list.
- Off-road Equipment - Provided in construction and equipment list.
- Off-road Equipment - Provided in construction and equipment list.

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstEquipMitigation	Tier	No Change	Tier 4 Interim
tblConstructionPhase	NumDays	2.00	44.00
tblConstructionPhase	NumDays	100.00	163.00
tblConstructionPhase	NumDays	5.00	138.00
tblConstructionPhase	NumDays	5.00	28.00
tblEnergyUse	NT24E	3,054.10	3,978.74
tblEnergyUse	NT24NG	3,155.00	0.00
tblEnergyUse	T24E	70.89	1,602.68
tblEnergyUse	T24E	2.46	3.15
tblEnergyUse	T24NG	5,226.68	0.00
tblEnergyUse	T24NG	2.34	0.00
tblFireplaces	FireplaceDayYear	11.14	0.00
tblFireplaces	FireplaceHourDay	3.50	0.00
tblFireplaces	FireplaceWoodMass	228.80	0.00
tblFireplaces	NumberGas	5.85	0.00
tblFireplaces	NumberNoFireplace	1.56	0.00
tblFireplaces	NumberWood	6.63	0.00
tblFleetMix	HHD	6.3770e-003	7.4400e-003
tblFleetMix	HHD	6.3770e-003	7.4400e-003
tblFleetMix	HHD	6.3770e-003	7.4400e-003
tblFleetMix	HHD	6.3770e-003	7.4400e-003
tblFleetMix	LDA	0.57	0.53

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblFleetMix	LDA	0.57	0.53
tblFleetMix	LDA	0.57	0.53
tblFleetMix	LDA	0.57	0.53
tblFleetMix	LDT1	0.06	0.04
tblFleetMix	LDT1	0.06	0.04
tblFleetMix	LDT1	0.06	0.04
tblFleetMix	LDT1	0.06	0.04
tblFleetMix	LDT2	0.19	0.23
tblFleetMix	LDT2	0.19	0.23
tblFleetMix	LDT2	0.19	0.23
tblFleetMix	LDT2	0.19	0.23
tblFleetMix	LHD1	0.02	0.02
tblFleetMix	LHD1	0.02	0.02
tblFleetMix	LHD1	0.02	0.02
tblFleetMix	LHD1	0.02	0.02
tblFleetMix	LHD2	5.1580e-003	5.7400e-003
tblFleetMix	LHD2	5.1580e-003	5.7400e-003
tblFleetMix	LHD2	5.1580e-003	5.7400e-003
tblFleetMix	LHD2	5.1580e-003	5.7400e-003
tblFleetMix	MCY	0.02	0.02
tblFleetMix	MCY	0.02	0.02
tblFleetMix	MCY	0.02	0.02
tblFleetMix	MCY	0.02	0.02
tblFleetMix	MDV	0.12	0.13
tblFleetMix	MDV	0.12	0.13
tblFleetMix	MDV	0.12	0.13
tblFleetMix	MDV	0.12	0.13
tblFleetMix	MH	2.7200e-003	2.5850e-003
tblFleetMix	MH	2.7200e-003	2.5850e-003

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblFleetMix	MH	2.7200e-003	2.5850e-003
tblFleetMix	MH	2.7200e-003	2.5850e-003
tblFleetMix	MHD	8.0300e-003	9.4250e-003
tblFleetMix	MHD	8.0300e-003	9.4250e-003
tblFleetMix	MHD	8.0300e-003	9.4250e-003
tblFleetMix	MHD	8.0300e-003	9.4250e-003
tblFleetMix	OBUS	8.9300e-004	1.0570e-003
tblFleetMix	OBUS	8.9300e-004	1.0570e-003
tblFleetMix	OBUS	8.9300e-004	1.0570e-003
tblFleetMix	OBUS	8.9300e-004	1.0570e-003
tblFleetMix	SBUS	9.0000e-004	6.8400e-004
tblFleetMix	SBUS	9.0000e-004	6.8400e-004
tblFleetMix	SBUS	9.0000e-004	6.8400e-004
tblFleetMix	SBUS	9.0000e-004	6.8400e-004
tblFleetMix	UBUS	3.7200e-004	4.1300e-004
tblFleetMix	UBUS	3.7200e-004	4.1300e-004
tblFleetMix	UBUS	3.7200e-004	4.1300e-004
tblFleetMix	UBUS	3.7200e-004	4.1300e-004
tblGrading	MaterialExported	0.00	7,400.00
tblLandUse	LandUseSquareFeet	9,200.00	14,200.00
tblLandUse	LandUseSquareFeet	4,000.00	5,400.00
tblLandUse	LandUseSquareFeet	39,000.00	27,860.00
tblLandUse	LotAcreage	0.21	0.00
tblLandUse	LotAcreage	0.09	0.00
tblLandUse	LotAcreage	1.03	0.40
tblLandUse	LotAcreage	0.04	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	4.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	4.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	1.00

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	2.00	0.00
tblOffRoadEquipment	OffRoadEquipmentUnitAmount	1.00	2.00
tblOffRoadEquipment	UsageHours	6.00	3.80
tblOffRoadEquipment	UsageHours	6.00	0.00
tblOffRoadEquipment	UsageHours	4.00	2.00
tblOffRoadEquipment	UsageHours	6.00	5.30
tblOffRoadEquipment	UsageHours	6.00	0.00
tblOffRoadEquipment	UsageHours	8.00	0.00
tblOffRoadEquipment	UsageHours	7.00	0.60
tblOffRoadEquipment	UsageHours	7.00	0.60
tblOffRoadEquipment	UsageHours	6.00	0.00
tblOffRoadEquipment	UsageHours	8.00	0.00
tblOffRoadEquipment	UsageHours	7.00	4.00
tblOffRoadEquipment	UsageHours	7.00	0.90
tblTripsAndVMT	HaulingTripNumber	925.00	0.00
tblTripsAndVMT	VendorTripNumber	8.00	0.00
tblTripsAndVMT	WorkerTripNumber	3.00	0.00
tblTripsAndVMT	WorkerTripNumber	8.00	0.00
tblTripsAndVMT	WorkerTripNumber	8.00	0.00
tblTripsAndVMT	WorkerTripNumber	37.00	0.00
tblTripsAndVMT	WorkerTripNumber	7.00	0.00
tblTripsAndVMT	WorkerTripNumber	15.00	0.00
tblVehicleEF	HHD	0.02	0.23
tblVehicleEF	HHD	0.05	0.12
tblVehicleEF	HHD	6.32	5.18
tblVehicleEF	HHD	0.41	0.76

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	HHD	5.9250e-003	6.8500e-004
tblVehicleEF	HHD	1,030.26	813.97
tblVehicleEF	HHD	1,386.58	1,586.83
tblVehicleEF	HHD	0.05	0.02
tblVehicleEF	HHD	0.16	0.13
tblVehicleEF	HHD	0.22	0.25
tblVehicleEF	HHD	6.0000e-006	1.4000e-005
tblVehicleEF	HHD	5.35	3.97
tblVehicleEF	HHD	2.67	1.77
tblVehicleEF	HHD	2.32	2.75
tblVehicleEF	HHD	2.5050e-003	2.0970e-003
tblVehicleEF	HHD	0.06	0.08
tblVehicleEF	HHD	0.04	0.04
tblVehicleEF	HHD	0.02	0.03
tblVehicleEF	HHD	2.3970e-003	2.0000e-003
tblVehicleEF	HHD	0.03	0.03
tblVehicleEF	HHD	8.8870e-003	8.7820e-003
tblVehicleEF	HHD	0.02	0.02
tblVehicleEF	HHD	1.0000e-006	0.00
tblVehicleEF	HHD	2.0000e-006	1.6100e-004
tblVehicleEF	HHD	8.6000e-005	4.8000e-005
tblVehicleEF	HHD	0.43	0.33
tblVehicleEF	HHD	1.0000e-006	0.00
tblVehicleEF	HHD	0.03	0.02
tblVehicleEF	HHD	3.8000e-005	4.3200e-004
tblVehicleEF	HHD	2.0000e-006	0.00
tblVehicleEF	HHD	9.5860e-003	7.0990e-003
tblVehicleEF	HHD	0.01	0.01
tblVehicleEF	HHD	2.0000e-006	1.6100e-004

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	HHD	8.6000e-005	4.8000e-005
tblVehicleEF	HHD	0.49	0.59
tblVehicleEF	HHD	1.0000e-006	0.00
tblVehicleEF	HHD	0.08	0.14
tblVehicleEF	HHD	3.8000e-005	4.3200e-004
tblVehicleEF	HHD	3.0000e-006	0.00
tblVehicleEF	LDA	1.5230e-003	1.8410e-003
tblVehicleEF	LDA	0.04	0.06
tblVehicleEF	LDA	0.49	0.61
tblVehicleEF	LDA	2.00	2.71
tblVehicleEF	LDA	226.89	237.67
tblVehicleEF	LDA	48.21	61.73
tblVehicleEF	LDA	3.7350e-003	3.8850e-003
tblVehicleEF	LDA	0.02	0.03
tblVehicleEF	LDA	0.03	0.03
tblVehicleEF	LDA	0.15	0.22
tblVehicleEF	LDA	0.04	7.1370e-003
tblVehicleEF	LDA	1.2360e-003	1.1200e-003
tblVehicleEF	LDA	1.6250e-003	1.8490e-003
tblVehicleEF	LDA	0.02	2.4980e-003
tblVehicleEF	LDA	1.1380e-003	1.0310e-003
tblVehicleEF	LDA	1.4940e-003	1.7000e-003
tblVehicleEF	LDA	0.03	0.26
tblVehicleEF	LDA	0.08	0.08
tblVehicleEF	LDA	0.03	0.00
tblVehicleEF	LDA	5.5720e-003	6.9420e-003
tblVehicleEF	LDA	0.03	0.20
tblVehicleEF	LDA	0.18	0.27
tblVehicleEF	LDA	2.2440e-003	2.3490e-003

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	LDA	4.7700e-004	6.1000e-004
tblVehicleEF	LDA	0.03	0.26
tblVehicleEF	LDA	0.08	0.08
tblVehicleEF	LDA	0.03	0.00
tblVehicleEF	LDA	8.1000e-003	0.01
tblVehicleEF	LDA	0.03	0.20
tblVehicleEF	LDA	0.19	0.30
tblVehicleEF	LDT1	3.1240e-003	5.5770e-003
tblVehicleEF	LDT1	0.05	0.10
tblVehicleEF	LDT1	0.77	1.31
tblVehicleEF	LDT1	2.16	4.86
tblVehicleEF	LDT1	272.37	319.18
tblVehicleEF	LDT1	58.50	84.00
tblVehicleEF	LDT1	5.2980e-003	8.6270e-003
tblVehicleEF	LDT1	0.02	0.04
tblVehicleEF	LDT1	0.06	0.11
tblVehicleEF	LDT1	0.20	0.36
tblVehicleEF	LDT1	0.04	9.2190e-003
tblVehicleEF	LDT1	1.5310e-003	1.8130e-003
tblVehicleEF	LDT1	1.9900e-003	2.7500e-003
tblVehicleEF	LDT1	0.02	3.2270e-003
tblVehicleEF	LDT1	1.4090e-003	1.6690e-003
tblVehicleEF	LDT1	1.8300e-003	2.5290e-003
tblVehicleEF	LDT1	0.07	0.56
tblVehicleEF	LDT1	0.13	0.16
tblVehicleEF	LDT1	0.06	0.00
tblVehicleEF	LDT1	0.01	0.02
tblVehicleEF	LDT1	0.07	0.44
tblVehicleEF	LDT1	0.25	0.50

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	LDT1	2.6950e-003	3.1550e-003
tblVehicleEF	LDT1	5.7900e-004	8.3000e-004
tblVehicleEF	LDT1	0.07	0.56
tblVehicleEF	LDT1	0.13	0.16
tblVehicleEF	LDT1	0.06	0.00
tblVehicleEF	LDT1	0.02	0.04
tblVehicleEF	LDT1	0.07	0.44
tblVehicleEF	LDT1	0.27	0.54
tblVehicleEF	LDT2	2.6570e-003	2.5920e-003
tblVehicleEF	LDT2	0.06	0.08
tblVehicleEF	LDT2	0.69	0.78
tblVehicleEF	LDT2	2.60	3.42
tblVehicleEF	LDT2	290.83	327.62
tblVehicleEF	LDT2	63.01	84.01
tblVehicleEF	LDT2	5.2770e-003	5.6470e-003
tblVehicleEF	LDT2	0.03	0.04
tblVehicleEF	LDT2	0.05	0.06
tblVehicleEF	LDT2	0.23	0.31
tblVehicleEF	LDT2	0.04	8.8600e-003
tblVehicleEF	LDT2	1.3020e-003	1.2920e-003
tblVehicleEF	LDT2	1.6610e-003	2.0610e-003
tblVehicleEF	LDT2	0.02	3.1010e-003
tblVehicleEF	LDT2	1.1980e-003	1.1890e-003
tblVehicleEF	LDT2	1.5270e-003	1.8950e-003
tblVehicleEF	LDT2	0.06	0.28
tblVehicleEF	LDT2	0.11	0.08
tblVehicleEF	LDT2	0.06	0.00
tblVehicleEF	LDT2	0.01	0.01
tblVehicleEF	LDT2	0.06	0.21

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	LDT2	0.26	0.35
tblVehicleEF	LDT2	2.8770e-003	3.2380e-003
tblVehicleEF	LDT2	6.2400e-004	8.3000e-004
tblVehicleEF	LDT2	0.06	0.28
tblVehicleEF	LDT2	0.11	0.08
tblVehicleEF	LDT2	0.06	0.00
tblVehicleEF	LDT2	0.02	0.01
tblVehicleEF	LDT2	0.06	0.21
tblVehicleEF	LDT2	0.29	0.39
tblVehicleEF	LHD1	4.8220e-003	5.1940e-003
tblVehicleEF	LHD1	7.2910e-003	7.2220e-003
tblVehicleEF	LHD1	0.01	0.02
tblVehicleEF	LHD1	0.18	0.20
tblVehicleEF	LHD1	0.66	0.82
tblVehicleEF	LHD1	1.01	2.16
tblVehicleEF	LHD1	8.77	8.60
tblVehicleEF	LHD1	764.47	764.97
tblVehicleEF	LHD1	11.28	17.60
tblVehicleEF	LHD1	7.4300e-004	6.3700e-004
tblVehicleEF	LHD1	0.04	0.04
tblVehicleEF	LHD1	0.02	0.03
tblVehicleEF	LHD1	0.05	0.05
tblVehicleEF	LHD1	0.57	0.59
tblVehicleEF	LHD1	0.29	0.42
tblVehicleEF	LHD1	8.5700e-004	6.8500e-004
tblVehicleEF	LHD1	0.08	0.08
tblVehicleEF	LHD1	9.8070e-003	9.4200e-003
tblVehicleEF	LHD1	9.0910e-003	0.01
tblVehicleEF	LHD1	2.3900e-004	2.0600e-004

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	LHD1	8.2000e-004	6.5600e-004
tblVehicleEF	LHD1	0.03	0.03
tblVehicleEF	LHD1	2.4520e-003	2.3550e-003
tblVehicleEF	LHD1	8.6510e-003	0.01
tblVehicleEF	LHD1	2.2000e-004	1.8900e-004
tblVehicleEF	LHD1	1.8120e-003	0.12
tblVehicleEF	LHD1	0.07	0.03
tblVehicleEF	LHD1	0.02	0.02
tblVehicleEF	LHD1	9.4400e-004	0.00
tblVehicleEF	LHD1	0.09	0.08
tblVehicleEF	LHD1	0.19	0.17
tblVehicleEF	LHD1	0.06	0.11
tblVehicleEF	LHD1	8.5000e-005	8.4000e-005
tblVehicleEF	LHD1	7.4620e-003	7.4710e-003
tblVehicleEF	LHD1	1.1200e-004	1.7400e-004
tblVehicleEF	LHD1	1.8120e-003	0.12
tblVehicleEF	LHD1	0.07	0.03
tblVehicleEF	LHD1	0.03	0.03
tblVehicleEF	LHD1	9.4400e-004	0.00
tblVehicleEF	LHD1	0.10	0.10
tblVehicleEF	LHD1	0.19	0.17
tblVehicleEF	LHD1	0.07	0.12
tblVehicleEF	LHD2	2.9270e-003	3.0230e-003
tblVehicleEF	LHD2	6.3420e-003	6.4550e-003
tblVehicleEF	LHD2	7.0910e-003	0.01
tblVehicleEF	LHD2	0.14	0.14
tblVehicleEF	LHD2	0.56	0.53
tblVehicleEF	LHD2	0.57	1.20
tblVehicleEF	LHD2	13.74	13.69

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	LHD2	740.94	811.00
tblVehicleEF	LHD2	7.36	9.64
tblVehicleEF	LHD2	1.7280e-003	1.6800e-003
tblVehicleEF	LHD2	0.07	0.08
tblVehicleEF	LHD2	0.01	0.02
tblVehicleEF	LHD2	0.09	0.09
tblVehicleEF	LHD2	0.68	0.81
tblVehicleEF	LHD2	0.16	0.23
tblVehicleEF	LHD2	1.4520e-003	1.3890e-003
tblVehicleEF	LHD2	0.09	0.09
tblVehicleEF	LHD2	0.01	0.01
tblVehicleEF	LHD2	0.01	0.02
tblVehicleEF	LHD2	1.2200e-004	9.1000e-005
tblVehicleEF	LHD2	1.3890e-003	1.3290e-003
tblVehicleEF	LHD2	0.04	0.03
tblVehicleEF	LHD2	2.6970e-003	2.6660e-003
tblVehicleEF	LHD2	0.01	0.02
tblVehicleEF	LHD2	1.1200e-004	8.4000e-005
tblVehicleEF	LHD2	9.1300e-004	0.06
tblVehicleEF	LHD2	0.04	0.02
tblVehicleEF	LHD2	0.02	0.02
tblVehicleEF	LHD2	4.8500e-004	0.00
tblVehicleEF	LHD2	0.11	0.11
tblVehicleEF	LHD2	0.09	0.09
tblVehicleEF	LHD2	0.04	0.06
tblVehicleEF	LHD2	7.1520e-003	7.8120e-003
tblVehicleEF	LHD2	7.3000e-005	9.5000e-005
tblVehicleEF	LHD2	9.1300e-004	0.06
tblVehicleEF	LHD2	0.04	0.02

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	LHD2	0.02	0.02
tblVehicleEF	LHD2	4.8500e-004	0.00
tblVehicleEF	LHD2	0.12	0.13
tblVehicleEF	LHD2	0.09	0.09
tblVehicleEF	LHD2	0.04	0.06
tblVehicleEF	MCY	0.32	0.16
tblVehicleEF	MCY	0.25	0.18
tblVehicleEF	MCY	18.37	12.31
tblVehicleEF	MCY	9.09	7.97
tblVehicleEF	MCY	210.00	187.27
tblVehicleEF	MCY	60.43	47.31
tblVehicleEF	MCY	0.07	0.04
tblVehicleEF	MCY	0.02	7.6910e-003
tblVehicleEF	MCY	1.14	0.56
tblVehicleEF	MCY	0.27	0.13
tblVehicleEF	MCY	0.01	0.01
tblVehicleEF	MCY	2.0310e-003	1.9250e-003
tblVehicleEF	MCY	2.9300e-003	3.4640e-003
tblVehicleEF	MCY	5.0400e-003	4.2000e-003
tblVehicleEF	MCY	1.8970e-003	1.7990e-003
tblVehicleEF	MCY	2.7510e-003	3.2530e-003
tblVehicleEF	MCY	0.90	3.86
tblVehicleEF	MCY	0.67	3.56
tblVehicleEF	MCY	0.48	0.00
tblVehicleEF	MCY	2.18	1.02
tblVehicleEF	MCY	0.52	3.76
tblVehicleEF	MCY	1.92	1.31
tblVehicleEF	MCY	2.0780e-003	1.8510e-003
tblVehicleEF	MCY	5.9800e-004	4.6800e-004

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	MCY	0.90	0.09
tblVehicleEF	MCY	0.67	3.56
tblVehicleEF	MCY	0.48	0.00
tblVehicleEF	MCY	2.71	1.24
tblVehicleEF	MCY	0.52	3.76
tblVehicleEF	MCY	2.09	1.42
tblVehicleEF	MDV	2.9890e-003	3.3070e-003
tblVehicleEF	MDV	0.06	0.09
tblVehicleEF	MDV	0.72	0.87
tblVehicleEF	MDV	2.79	3.62
tblVehicleEF	MDV	351.34	394.23
tblVehicleEF	MDV	74.92	100.26
tblVehicleEF	MDV	6.9960e-003	7.5830e-003
tblVehicleEF	MDV	0.03	0.04
tblVehicleEF	MDV	0.06	0.09
tblVehicleEF	MDV	0.26	0.38
tblVehicleEF	MDV	0.04	8.9720e-003
tblVehicleEF	MDV	1.3680e-003	1.3100e-003
tblVehicleEF	MDV	1.7330e-003	2.0690e-003
tblVehicleEF	MDV	0.02	3.1400e-003
tblVehicleEF	MDV	1.2620e-003	1.2070e-003
tblVehicleEF	MDV	1.5940e-003	1.9020e-003
tblVehicleEF	MDV	0.07	0.34
tblVehicleEF	MDV	0.12	0.09
tblVehicleEF	MDV	0.06	0.00
tblVehicleEF	MDV	0.01	0.01
tblVehicleEF	MDV	0.06	0.26
tblVehicleEF	MDV	0.31	0.45
tblVehicleEF	MDV	3.4720e-003	3.8950e-003

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	MDV	7.4100e-004	9.9100e-004
tblVehicleEF	MDV	0.07	0.34
tblVehicleEF	MDV	0.12	0.09
tblVehicleEF	MDV	0.06	0.00
tblVehicleEF	MDV	0.02	0.02
tblVehicleEF	MDV	0.06	0.26
tblVehicleEF	MDV	0.34	0.49
tblVehicleEF	MH	8.5740e-003	0.01
tblVehicleEF	MH	0.02	0.03
tblVehicleEF	MH	0.80	1.11
tblVehicleEF	MH	1.94	2.37
tblVehicleEF	MH	1,472.19	1,680.13
tblVehicleEF	MH	17.63	22.07
tblVehicleEF	MH	0.06	0.07
tblVehicleEF	MH	0.03	0.03
tblVehicleEF	MH	1.26	1.49
tblVehicleEF	MH	0.24	0.30
tblVehicleEF	MH	0.13	0.04
tblVehicleEF	MH	0.01	0.01
tblVehicleEF	MH	0.02	0.03
tblVehicleEF	MH	2.5000e-004	2.9600e-004
tblVehicleEF	MH	0.06	0.02
tblVehicleEF	MH	3.2830e-003	3.3090e-003
tblVehicleEF	MH	0.02	0.03
tblVehicleEF	MH	2.3000e-004	2.7200e-004
tblVehicleEF	MH	0.58	30.56
tblVehicleEF	MH	0.05	7.99
tblVehicleEF	MH	0.21	0.00
tblVehicleEF	MH	0.06	0.08

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	MH	0.01	0.19
tblVehicleEF	MH	0.09	0.11
tblVehicleEF	MH	0.01	0.02
tblVehicleEF	MH	1.7400e-004	2.1800e-004
tblVehicleEF	MH	0.58	30.56
tblVehicleEF	MH	0.05	7.99
tblVehicleEF	MH	0.21	0.00
tblVehicleEF	MH	0.08	0.10
tblVehicleEF	MH	0.01	0.19
tblVehicleEF	MH	0.10	0.12
tblVehicleEF	MHD	3.6170e-003	0.01
tblVehicleEF	MHD	1.5120e-003	9.5360e-003
tblVehicleEF	MHD	8.8700e-003	8.3140e-003
tblVehicleEF	MHD	0.39	0.67
tblVehicleEF	MHD	0.21	0.30
tblVehicleEF	MHD	1.02	1.00
tblVehicleEF	MHD	70.85	158.59
tblVehicleEF	MHD	1,065.91	1,213.65
tblVehicleEF	MHD	8.98	8.21
tblVehicleEF	MHD	0.01	0.02
tblVehicleEF	MHD	0.14	0.16
tblVehicleEF	MHD	7.2880e-003	5.8580e-003
tblVehicleEF	MHD	0.40	0.85
tblVehicleEF	MHD	1.45	1.01
tblVehicleEF	MHD	1.70	1.40
tblVehicleEF	MHD	3.2300e-004	1.7620e-003
tblVehicleEF	MHD	0.13	0.05
tblVehicleEF	MHD	7.0640e-003	0.01
tblVehicleEF	MHD	1.1300e-004	1.0100e-004

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	MHD	3.0900e-004	1.6850e-003
tblVehicleEF	MHD	0.06	0.02
tblVehicleEF	MHD	6.7520e-003	0.01
tblVehicleEF	MHD	1.0400e-004	9.3000e-005
tblVehicleEF	MHD	3.5500e-004	0.02
tblVehicleEF	MHD	0.02	5.6030e-003
tblVehicleEF	MHD	0.02	0.03
tblVehicleEF	MHD	1.8800e-004	0.00
tblVehicleEF	MHD	0.01	0.03
tblVehicleEF	MHD	0.02	0.05
tblVehicleEF	MHD	0.05	0.05
tblVehicleEF	MHD	6.7200e-004	1.4720e-003
tblVehicleEF	MHD	0.01	0.01
tblVehicleEF	MHD	8.9000e-005	8.1000e-005
tblVehicleEF	MHD	3.5500e-004	0.02
tblVehicleEF	MHD	0.02	5.6030e-003
tblVehicleEF	MHD	0.02	0.04
tblVehicleEF	MHD	1.8800e-004	0.00
tblVehicleEF	MHD	0.02	0.05
tblVehicleEF	MHD	0.02	0.05
tblVehicleEF	MHD	0.05	0.05
tblVehicleEF	OBUS	7.0670e-003	7.5140e-003
tblVehicleEF	OBUS	3.3170e-003	9.5930e-003
tblVehicleEF	OBUS	0.02	0.02
tblVehicleEF	OBUS	0.60	0.52
tblVehicleEF	OBUS	0.39	0.44
tblVehicleEF	OBUS	1.79	1.87
tblVehicleEF	OBUS	94.25	87.04
tblVehicleEF	OBUS	1,303.83	1,366.10

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	OBUS	14.82	14.86
tblVehicleEF	OBUS	0.01	0.01
tblVehicleEF	OBUS	0.13	0.16
tblVehicleEF	OBUS	0.02	0.01
tblVehicleEF	OBUS	0.39	0.36
tblVehicleEF	OBUS	1.46	0.97
tblVehicleEF	OBUS	1.10	0.99
tblVehicleEF	OBUS	1.2700e-004	4.0400e-004
tblVehicleEF	OBUS	0.13	0.05
tblVehicleEF	OBUS	7.4740e-003	0.02
tblVehicleEF	OBUS	1.4700e-004	1.3100e-004
tblVehicleEF	OBUS	1.2200e-004	3.8700e-004
tblVehicleEF	OBUS	0.06	0.02
tblVehicleEF	OBUS	7.1370e-003	0.01
tblVehicleEF	OBUS	1.3500e-004	1.2100e-004
tblVehicleEF	OBUS	1.0870e-003	0.07
tblVehicleEF	OBUS	0.02	0.02
tblVehicleEF	OBUS	0.05	0.04
tblVehicleEF	OBUS	4.8600e-004	0.00
tblVehicleEF	OBUS	0.02	0.04
tblVehicleEF	OBUS	0.04	0.08
tblVehicleEF	OBUS	0.09	0.09
tblVehicleEF	OBUS	8.9500e-004	8.2300e-004
tblVehicleEF	OBUS	0.01	0.01
tblVehicleEF	OBUS	1.0870e-003	0.07
tblVehicleEF	OBUS	0.02	0.02
tblVehicleEF	OBUS	0.06	0.05
tblVehicleEF	OBUS	4.8600e-004	0.00
tblVehicleEF	OBUS	0.03	0.06

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	OBUS	0.04	0.08
tblVehicleEF	OBUS	0.09	0.10
tblVehicleEF	SBUS	0.06	0.08
tblVehicleEF	SBUS	5.7290e-003	0.09
tblVehicleEF	SBUS	5.1560e-003	4.8980e-003
tblVehicleEF	SBUS	2.37	1.69
tblVehicleEF	SBUS	0.47	0.86
tblVehicleEF	SBUS	0.74	0.67
tblVehicleEF	SBUS	345.98	189.05
tblVehicleEF	SBUS	1,037.30	1,017.84
tblVehicleEF	SBUS	4.26	3.78
tblVehicleEF	SBUS	0.05	0.02
tblVehicleEF	SBUS	0.13	0.13
tblVehicleEF	SBUS	5.0100e-003	4.3540e-003
tblVehicleEF	SBUS	3.34	1.34
tblVehicleEF	SBUS	4.41	2.41
tblVehicleEF	SBUS	0.90	0.49
tblVehicleEF	SBUS	3.3290e-003	1.2090e-003
tblVehicleEF	SBUS	0.74	0.04
tblVehicleEF	SBUS	0.01	0.01
tblVehicleEF	SBUS	0.03	0.01
tblVehicleEF	SBUS	5.1000e-005	4.1000e-005
tblVehicleEF	SBUS	3.1850e-003	1.1550e-003
tblVehicleEF	SBUS	0.32	0.02
tblVehicleEF	SBUS	2.7110e-003	2.6430e-003
tblVehicleEF	SBUS	0.03	0.01
tblVehicleEF	SBUS	4.7000e-005	3.8000e-005
tblVehicleEF	SBUS	5.9800e-004	0.03
tblVehicleEF	SBUS	5.7950e-003	7.7750e-003

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	SBUS	0.26	0.19
tblVehicleEF	SBUS	2.6700e-004	0.00
tblVehicleEF	SBUS	0.08	0.05
tblVehicleEF	SBUS	0.01	0.02
tblVehicleEF	SBUS	0.03	0.03
tblVehicleEF	SBUS	3.2940e-003	1.7180e-003
tblVehicleEF	SBUS	9.9090e-003	9.4580e-003
tblVehicleEF	SBUS	4.2000e-005	3.7000e-005
tblVehicleEF	SBUS	5.9800e-004	0.03
tblVehicleEF	SBUS	5.7950e-003	7.7750e-003
tblVehicleEF	SBUS	0.38	0.30
tblVehicleEF	SBUS	2.6700e-004	0.00
tblVehicleEF	SBUS	0.09	0.15
tblVehicleEF	SBUS	0.01	0.02
tblVehicleEF	SBUS	0.03	0.03
tblVehicleEF	UBUS	1.66	0.50
tblVehicleEF	UBUS	1.6700e-003	3.7330e-003
tblVehicleEF	UBUS	12.57	5.88
tblVehicleEF	UBUS	0.14	0.52
tblVehicleEF	UBUS	1,657.49	1,082.15
tblVehicleEF	UBUS	1.39	3.18
tblVehicleEF	UBUS	0.28	0.17
tblVehicleEF	UBUS	1.1100e-003	6.1420e-003
tblVehicleEF	UBUS	0.71	0.30
tblVehicleEF	UBUS	0.01	0.04
tblVehicleEF	UBUS	0.07	0.12
tblVehicleEF	UBUS	0.03	0.04
tblVehicleEF	UBUS	5.2020e-003	5.6850e-003
tblVehicleEF	UBUS	1.5000e-005	1.2000e-005

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblVehicleEF	UBUS	0.03	0.04
tblVehicleEF	UBUS	8.3320e-003	0.01
tblVehicleEF	UBUS	4.9760e-003	5.4350e-003
tblVehicleEF	UBUS	1.4000e-005	1.1000e-005
tblVehicleEF	UBUS	2.4000e-005	0.01
tblVehicleEF	UBUS	2.0100e-004	3.7860e-003
tblVehicleEF	UBUS	1.1000e-005	0.00
tblVehicleEF	UBUS	0.02	0.06
tblVehicleEF	UBUS	4.0000e-005	7.9870e-003
tblVehicleEF	UBUS	6.9810e-003	0.01
tblVehicleEF	UBUS	0.01	8.8540e-003
tblVehicleEF	UBUS	1.4000e-005	3.1000e-005
tblVehicleEF	UBUS	2.4000e-005	0.01
tblVehicleEF	UBUS	2.0100e-004	3.7860e-003
tblVehicleEF	UBUS	1.1000e-005	0.00
tblVehicleEF	UBUS	1.70	0.57
tblVehicleEF	UBUS	4.0000e-005	7.9870e-003
tblVehicleEF	UBUS	7.6430e-003	0.01
tblVehicleTrips	ST_TR	4.91	3.80
tblVehicleTrips	ST_TR	42.04	30.80
tblVehicleTrips	SU_TR	4.09	3.16
tblVehicleTrips	SU_TR	20.43	14.97
tblVehicleTrips	WD_TR	5.44	4.21
tblVehicleTrips	WD_TR	44.32	32.47
tblWater	AerobicPercent	87.46	100.00
tblWater	AerobicPercent	87.46	100.00
tblWater	AerobicPercent	87.46	100.00
tblWater	AerobicPercent	87.46	100.00
tblWater	AnaerobicandFacultativeLagoonsPercent	2.21	0.00

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

tblWater	AnaerobicandFacultativeLagoonsPercent	2.21	0.00
tblWater	AnaerobicandFacultativeLagoonsPercent	2.21	0.00
tblWater	AnaerobicandFacultativeLagoonsPercent	2.21	0.00
tblWater	SepticTankPercent	10.33	0.00
tblWater	SepticTankPercent	10.33	0.00
tblWater	SepticTankPercent	10.33	0.00
tblWater	SepticTankPercent	10.33	0.00
tblWoodstoves	NumberCatalytic	0.78	0.00
tblWoodstoves	NumberNoncatalytic	0.78	0.00
tblWoodstoves	WoodstoveDayYear	14.12	0.00
tblWoodstoves	WoodstoveWoodMass	582.40	0.00

2.0 Emissions Summary

2.1 Overall Construction

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2023	7.2000e-003	0.0688	0.0879	1.5000e-004	4.2000e-004	3.5000e-003	3.9200e-003	6.0000e-005	3.2200e-003	3.2900e-003	0.0000	13.3239	13.3239	4.3100e-003	0.0000	13.4317
2024	0.2108	0.3775	0.4472	7.7000e-004	0.0000	0.0187	0.0187	0.0000	0.0179	0.0179	0.0000	66.9652	66.9652	0.0120	0.0000	67.2646
2025	0.0500	0.0421	0.0665	1.1000e-004	0.0000	1.8900e-003	1.8900e-003	0.0000	1.8900e-003	1.8900e-003	0.0000	9.3790	9.3790	5.1000e-004	0.0000	9.3917
Maximum	0.2108	0.3775	0.4472	7.7000e-004	4.2000e-004	0.0187	0.0187	6.0000e-005	0.0179	0.0179	0.0000	66.9652	66.9652	0.0120	0.0000	67.2646

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	tons/yr										MT/yr					
2023	2.7700e-003	0.0594	0.1057	1.5000e-004	1.9000e-004	2.5000e-004	4.4000e-004	3.0000e-005	2.5000e-004	2.8000e-004	0.0000	13.3239	13.3239	4.3100e-003	0.0000	13.4317
2024	0.1790	0.2781	0.4899	7.7000e-004	0.0000	1.2300e-003	1.2300e-003	0.0000	1.2300e-003	1.2300e-003	0.0000	66.9651	66.9651	0.0120	0.0000	67.2645
2025	0.0458	0.0389	0.0673	1.1000e-004	0.0000	1.5000e-004	1.5000e-004	0.0000	1.5000e-004	1.5000e-004	0.0000	9.3789	9.3789	5.1000e-004	0.0000	9.3917
Maximum	0.1790	0.2781	0.4899	7.7000e-004	1.9000e-004	1.2300e-003	1.2300e-003	3.0000e-005	1.2300e-003	1.2300e-003	0.0000	66.9651	66.9651	0.0120	0.0000	67.2645

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Percent Reduction	15.10	22.90	-10.22	0.00	54.76	93.24	92.59	50.00	92.93	92.82	0.00	0.00	0.00	0.00	0.00	0.00

Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
1	9-6-2023	12-5-2023	0.0577	0.0518
2	12-6-2023	3-5-2024	0.0631	0.0384
3	3-6-2024	6-5-2024	0.0538	0.0325
4	6-6-2024	9-5-2024	0.1385	0.1052
5	9-6-2024	12-5-2024	0.2792	0.2310
6	12-6-2024	3-5-2025	0.1669	0.1476
		Highest	0.2792	0.2310

2.2 Overall Operational

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Unmitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	0.1456	3.3400e-003	0.2896	2.0000e-005		1.6100e-003	1.6100e-003		1.6100e-003	1.6100e-003	0.0000	0.4736	0.4736	4.5000e-004	0.0000	0.4850
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	47.8873	47.8873	5.1300e-003	6.2000e-004	48.2009
Mobile	0.1175	0.0784	0.7194	1.5600e-003	0.1460	1.1100e-003	0.1471	0.0364	1.0300e-003	0.0375	0.0000	144.0089	144.0089	8.3900e-003	7.0200e-003	146.3101
Waste						0.0000	0.0000		0.0000	0.0000	3.9705	0.0000	3.9705	0.2347	0.0000	9.8368
Water						0.0000	0.0000		0.0000	0.0000	0.9394	2.8244	3.7638	3.5400e-003	2.0800e-003	4.4719
Total	0.2631	0.0817	1.0090	1.5800e-003	0.1460	2.7200e-003	0.1487	0.0364	2.6400e-003	0.0391	4.9099	195.1942	200.1041	0.2522	9.7200e-003	209.3046

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Area	0.1456	3.3400e-003	0.2896	2.0000e-005		1.6100e-003	1.6100e-003		1.6100e-003	1.6100e-003	0.0000	0.4736	0.4736	4.5000e-004	0.0000	0.4850
Energy	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	47.8873	47.8873	5.1300e-003	6.2000e-004	48.2009
Mobile	0.1175	0.0784	0.7194	1.5600e-003	0.1460	1.1100e-003	0.1471	0.0364	1.0300e-003	0.0375	0.0000	144.0089	144.0089	8.3900e-003	7.0200e-003	146.3101
Waste						0.0000	0.0000		0.0000	0.0000	3.9705	0.0000	3.9705	0.2347	0.0000	9.8368

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Water						0.0000	0.0000		0.0000	0.0000	0.9394	2.8244	3.7638	3.5400e-003	2.0800e-003	4.4719
Total	0.2631	0.0817	1.0090	1.5800e-003	0.1460	2.7200e-003	0.1487	0.0364	2.6400e-003	0.0391	4.9099	195.1942	200.1041	0.2522	9.7200e-003	209.3046

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Site Preparation	Site Preparation	9/6/2023	9/6/2023	5	1	
2	Grading	Grading	9/8/2023	11/8/2023	5	44	
3	Trenching	Trenching	11/9/2023	4/30/2024	5	124	
4	Building Construction	Building Construction	5/10/2024	12/24/2024	5	163	
5	Architectural Coating	Architectural Coating	8/1/2024	2/10/2025	5	138	
6	Paving	Paving	11/1/2024	12/10/2024	5	28	

Acres of Grading (Site Preparation Phase): 0

Acres of Grading (Grading Phase): 0

Acres of Paving: 0

Residential Indoor: 56,417; Residential Outdoor: 18,806; Non-Residential Indoor: 2,310; Non-Residential Outdoor: 770; Striped Parking Area: 1,176

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Site Preparation	Graders	0	0.00	187	0.41
Site Preparation	Tractors/Loaders/Backhoes	1	8.00	97	0.37

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Grading	Bore/Drill Rigs	1	0.90	221	0.50
Grading	Excavators	1	2.70	158	0.38
Grading	Graders	0	0.00	187	0.41
Grading	Rubber Tired Dozers	0	0.00	247	0.40
Grading	Tractors/Loaders/Backhoes	1	4.00	97	0.37
Trenching	Cranes	1	1.30	231	0.29
Trenching	Forklifts	2	5.20	89	0.20
Building Construction	Cranes	1	2.00	231	0.29
Building Construction	Forklifts	1	5.30	89	0.20
Building Construction	Tractors/Loaders/Backhoes	0	0.00	97	0.37
Building Construction	Welders	1	0.20	46	0.45
Architectural Coating	Air Compressors	4	3.80	78	0.48
Paving	Cement and Mortar Mixers	0	0.00	9	0.56
Paving	Concrete/Industrial Saws	1	0.70	81	0.73
Paving	Pavers	1	0.60	130	0.42
Paving	Paving Equipment	1	0.60	132	0.36
Paving	Rollers	1	0.60	80	0.38
Paving	Tractors/Loaders/Backhoes	2	0.90	97	0.37

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Site Preparation		1	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Grading		3	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Trenching		3	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction		3	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating		4	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT
Paving		6	0.00	0.00	10.80	7.30	20.00	LD_Mix	HDT_Mix	HHDT

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	2.6200e-003	0.0488	0.0874	1.3000e-004		2.1000e-004	2.1000e-004		2.1000e-004	2.1000e-004	0.0000	11.1776	11.1776	3.6200e-003	0.0000	11.2680
Total	2.6200e-003	0.0488	0.0874	1.3000e-004		2.1000e-004	2.1000e-004		2.1000e-004	2.1000e-004	0.0000	11.1776	11.1776	3.6200e-003	0.0000	11.2680

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

3.5 Building Construction - 2024

Unmitigated Construction On-Site

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	0.0123	0.1219	0.1011	2.1000e-004		5.8200e-003	5.8200e-003		5.3600e-003	5.3600e-003	0.0000	17.9633	17.9633	5.7200e-003	0.0000	18.1064
Total	0.0123	0.1219	0.1011	2.1000e-004		5.8200e-003	5.8200e-003		5.3600e-003	5.3600e-003	0.0000	17.9633	17.9633	5.7200e-003	0.0000	18.1064

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction On-Site

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Off-Road	3.8800e-003	0.0707	0.1284	2.1000e-004		4.2000e-004	4.2000e-004		4.2000e-004	4.2000e-004	0.0000	17.9633	17.9633	5.7200e-003	0.0000	18.1064
Total	3.8800e-003	0.0707	0.1284	2.1000e-004		4.2000e-004	4.2000e-004		4.2000e-004	4.2000e-004	0.0000	17.9633	17.9633	5.7200e-003	0.0000	18.1064

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

3.6 Architectural Coating - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
--	-----	-----	----	-----	---------------	--------------	------------	----------------	---------------	-------------	----------	-----------	-----------	-----	-----	------

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Category	tons/yr										MT/yr					
	Archit. Coating	0.1645					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	0.0250	0.1683	0.2499	4.1000e-004		8.4100e-003	8.4100e-003		8.4100e-003	8.4100e-003	0.0000	35.2519	35.2519	1.9800e-003	0.0000	35.3016
Total	0.1894	0.1683	0.2499	4.1000e-004		8.4100e-003	8.4100e-003		8.4100e-003	8.4100e-003	0.0000	35.2519	35.2519	1.9800e-003	0.0000	35.3016

Unmitigated Construction Off-Site

Category	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction On-Site

ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
-----	-----	----	-----	---------------	--------------	------------	----------------	---------------	-------------	----------	-----------	-----------	-----	-----	------

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Category	tons/yr								MT/yr							
	Archit. Coating	0.1645					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	7.5200e-003	0.1463	0.2530	4.1000e-004		5.5000e-004	5.5000e-004		5.5000e-004	5.5000e-004	0.0000	35.2519	35.2519	1.9800e-003	0.0000	35.3015
Total	0.1720	0.1463	0.2530	4.1000e-004		5.5000e-004	5.5000e-004		5.5000e-004	5.5000e-004	0.0000	35.2519	35.2519	1.9800e-003	0.0000	35.3015

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

3.6 Architectural Coating - 2025

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
--	-----	-----	----	-----	---------------	--------------	------------	----------------	---------------	-------------	----------	-----------	-----------	-----	-----	------

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Category	tons/yr								MT/yr							
	Archit. Coating	0.0438					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	6.2800e-003	0.0421	0.0665	1.1000e-004		1.8900e-003	1.8900e-003		1.8900e-003	1.8900e-003	0.0000	9.3790	9.3790	5.1000e-004	0.0000	9.3917
Total	0.0500	0.0421	0.0665	1.1000e-004		1.8900e-003	1.8900e-003		1.8900e-003	1.8900e-003	0.0000	9.3790	9.3790	5.1000e-004	0.0000	9.3917

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
--	-----	-----	----	-----	---------------	--------------	------------	----------------	---------------	-------------	----------	-----------	-----------	-----	-----	------

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Category	tons/yr								MT/yr							
	Archit. Coating	0.0438					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	2.0000e-003	0.0389	0.0673	1.1000e-004		1.5000e-004	1.5000e-004		1.5000e-004	1.5000e-004	0.0000	9.3789	9.3789	5.1000e-004	0.0000	9.3917
Total	0.0458	0.0389	0.0673	1.1000e-004		1.5000e-004	1.5000e-004		1.5000e-004	1.5000e-004	0.0000	9.3789	9.3789	5.1000e-004	0.0000	9.3917

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

3.7 Paving - 2024

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
--	-----	-----	----	-----	---------------	--------------	------------	----------------	---------------	-------------	----------	-----------	-----------	-----	-----	------

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Category	tons/yr										MT/yr					
	Off-Road	1.3600e-003	0.0125	0.0192	3.0000e-005		5.9000e-004	5.9000e-004		5.5000e-004	5.5000e-004	0.0000	2.5724	2.5724	6.5000e-004	0.0000
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	1.3600e-003	0.0125	0.0192	3.0000e-005		5.9000e-004	5.9000e-004		5.5000e-004	5.5000e-004	0.0000	2.5724	2.5724	6.5000e-004	0.0000	2.5886

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
--	-----	-----	----	-----	---------------	--------------	------------	----------------	---------------	-------------	----------	-----------	-----------	-----	-----	------

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Category	tons/yr									MT/yr						
	Off-Road	5.4000e-004	0.0123	0.0212	3.0000e-005		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005	0.0000	2.5724	2.5724	6.5000e-004	0.0000
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	5.4000e-004	0.0123	0.0212	3.0000e-005		5.0000e-005	5.0000e-005		5.0000e-005	5.0000e-005	0.0000	2.5724	2.5724	6.5000e-004	0.0000	2.5886

Mitigated Construction Off-Site

Category	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
	tons/yr										MT/yr					
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Mitigated	0.1175	0.0784	0.7194	1.5600e-003	0.1460	1.1100e-003	0.1471	0.0364	1.0300e-003	0.0375	0.0000	144.0089	144.0089	8.3900e-003	7.0200e-003	146.3101
Unmitigated	0.1175	0.0784	0.7194	1.5600e-003	0.1460	1.1100e-003	0.1471	0.0364	1.0300e-003	0.0375	0.0000	144.0089	144.0089	8.3900e-003	7.0200e-003	146.3101

4.2 Trip Summary Information

Land Use	Average Daily Trip Rate			Unmitigated	Mitigated
	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Mid Rise	164.19	148.20	123.24	360,427	360,427
Enclosed Parking with Elevator	0.00	0.00	0.00		
Parking Lot	0.00	0.00	0.00		
Strip Mall	50.00	47.43	23.05	70,513	70,513
Total	214.19	195.63	146.29	430,940	430,940

4.3 Trip Type Information

Land Use	Miles			Trip %			Trip Purpose %		
	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Mid Rise	10.80	4.80	5.70	31.00	15.00	54.00	86	11	3
Enclosed Parking with Elevator	9.50	7.30	7.30	0.00	0.00	0.00	0	0	0
Parking Lot	9.50	7.30	7.30	0.00	0.00	0.00	0	0	0
Strip Mall	9.50	7.30	7.30	16.60	64.40	19.00	45	40	15

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Mid Rise	0.528224	0.040364	0.230108	0.128589	0.023276	0.005740	0.009425	0.007440	0.001057	0.000413	0.022096	0.000684	0.002585

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Enclosed Parking with Elevator	0.528224	0.040364	0.230108	0.128589	0.023276	0.005740	0.009425	0.007440	0.001057	0.000413	0.022096	0.000684	0.002585
Parking Lot	0.528224	0.040364	0.230108	0.128589	0.023276	0.005740	0.009425	0.007440	0.001057	0.000413	0.022096	0.000684	0.002585
Strip Mall	0.528224	0.040364	0.230108	0.128589	0.023276	0.005740	0.009425	0.007440	0.001057	0.000413	0.022096	0.000684	0.002585

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr										MT/yr					
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	47.8873	47.8873	5.1300e-003	6.2000e-004	48.2009
Electricity Unmitigated						0.0000	0.0000		0.0000	0.0000	0.0000	47.8873	47.8873	5.1300e-003	6.2000e-004	48.2009
NaturalGas Mitigated	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
NaturalGas Unmitigated	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
--	----------------	-----	-----	----	-----	---------------	--------------	------------	----------------	---------------	-------------	----------	-----------	-----------	-----	-----	------

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Mid Rise	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Enclosed Parking with Elevator	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Strip Mall	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

Mitigated

	Natural Gas Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr	tons/yr										MT/yr					
Apartments Mid Rise	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Enclosed Parking with Elevator	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Strip Mall	0	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total		0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

5.3 Energy by Land Use - Electricity

Unmitigated

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Mid Rise	246592	34.4482	3.6900e-003	4.5000e-004	34.6738
Enclosed Parking with Elevator	77248	10.7913	1.1600e-003	1.4000e-004	10.8620
Parking Lot	1890	0.2640	3.0000e-005	0.0000	0.2658
Strip Mall	17063.2	2.3837	2.6000e-004	3.0000e-005	2.3993
Total		47.8872	5.1400e-003	6.2000e-004	48.2009

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e
Land Use	kWh/yr	MT/yr			
Apartments Mid Rise	246592	34.4482	3.6900e-003	4.5000e-004	34.6738
Enclosed Parking with Elevator	77248	10.7913	1.1600e-003	1.4000e-004	10.8620
Parking Lot	1890	0.2640	3.0000e-005	0.0000	0.2658
Strip Mall	17063.2	2.3837	2.6000e-004	3.0000e-005	2.3993
Total		47.8872	5.1400e-003	6.2000e-004	48.2009

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Landscaping	8.7200e-003	3.3400e-003	0.2896	2.0000e-005		1.6100e-003	1.6100e-003		1.6100e-003	1.6100e-003	0.0000	0.4736	0.4736	4.5000e-004	0.0000	0.4850
Total	0.1456	3.3400e-003	0.2896	2.0000e-005		1.6100e-003	1.6100e-003		1.6100e-003	1.6100e-003	0.0000	0.4736	0.4736	4.5000e-004	0.0000	0.4850

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr										MT/yr					
Architectural Coating	0.0208					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.1161					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Landscaping	8.7200e-003	3.3400e-003	0.2896	2.0000e-005		1.6100e-003	1.6100e-003		1.6100e-003	1.6100e-003	0.0000	0.4736	0.4736	4.5000e-004	0.0000	0.4850
Total	0.1456	3.3400e-003	0.2896	2.0000e-005		1.6100e-003	1.6100e-003		1.6100e-003	1.6100e-003	0.0000	0.4736	0.4736	4.5000e-004	0.0000	0.4850

7.0 Water Detail

7.1 Mitigation Measures Water

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

	Total CO2	CH4	N2O	CO2e
Category	MT/yr			
Mitigated	3.7638	3.5400e-003	2.0800e-003	4.4719
Unmitigated	3.7638	3.5400e-003	2.0800e-003	4.4719

7.2 Water by Land Use

Unmitigated

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Mid Rise	2.54101 / 1.60194	3.6030	3.3800e-003	1.9900e-003	4.2807
Enclosed Parking with Elevator	0 / 0	0.0000	0.0000	0.0000	0.0000
Parking Lot	0 / 0	0.0000	0.0000	0.0000	0.0000
Strip Mall	0.114072 / 0.0699149	0.1608	1.5000e-004	9.0000e-005	0.1912
Total		3.7638	3.5300e-003	2.0800e-003	4.4719

Mitigated

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

	Indoor/Outdoor Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal	MT/yr			
Apartments Mid Rise	2.54101 / 1.60194	3.6030	3.3800e-003	1.9900e-003	4.2807
Enclosed Parking with Elevator	0 / 0	0.0000	0.0000	0.0000	0.0000
Parking Lot	0 / 0	0.0000	0.0000	0.0000	0.0000
Strip Mall	0.114072 / 0.0699149	0.1608	1.5000e-004	9.0000e-005	0.1912
Total		3.7638	3.5300e-003	2.0800e-003	4.4719

8.0 Waste Detail

8.1 Mitigation Measures Waste

Category/Year

	Total CO2	CH4	N2O	CO2e
	MT/yr			
Mitigated	3.9705	0.2347	0.0000	9.8368
Unmitigated	3.9705	0.2347	0.0000	9.8368

8.2 Waste by Land Use

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Mid Rise	17.94	3.6417	0.2152	0.0000	9.0221
Enclosed Parking with Elevator	0	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000
Strip Mall	1.62	0.3289	0.0194	0.0000	0.8147
Total		3.9705	0.2347	0.0000	9.8368

Mitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e
Land Use	tons	MT/yr			
Apartments Mid Rise	17.94	3.6417	0.2152	0.0000	9.0221
Enclosed Parking with Elevator	0	0.0000	0.0000	0.0000	0.0000
Parking Lot	0	0.0000	0.0000	0.0000	0.0000
Strip Mall	1.62	0.3289	0.0194	0.0000	0.8147

2655 The Alameda, Santa Clara - Santa Clara County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Not Applied

Total		3.9705	0.2347	0.0000	9.8368
-------	--	--------	--------	--------	--------

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
----------------	--------	----------------	-----------------	---------------	-----------

User Defined Equipment

Equipment Type	Number
----------------	--------

11.0 Vegetation

Attachment 3: EMFAC2021 Calculations

Summary of Construction Traffic Emissions (EMFAC2021)

Pollutants YEAR	ROG	NOx	CO	SO2	Fugitive	Exhaust	PM10	Fugitive	Exhaust	PM2.5	NBio- CO2	CH4	N2O	CO2e
					PM10	PM10	Total	PM2.5	PM2.5	Total				
					<i>Tons</i>									
Criteria Pollutants														
2023	0.0033	0.0241	0.0410	0.0002	0.0098	0.0017	0.0115	0.0015	0.0007	0.0022	20.7055	0.0013	0.0024	21.4685
2024-2025	0.0108	0.0802	0.1339	0.0007	0.0342	0.0059	0.0401	0.0051	0.0025	0.0076	70.7201	0.0044	0.0084	73.3212
Toxic Air Contaminants (0.5 Mile Trip Length)														
2023	0.0028	0.0053	0.0127	0.00001	0.0004	0.0001	0.0005	0.0001	0.00003	0.0001	1.3484	0.0003	0.0002	1.4212
2024-2025	0.0091	0.0181	0.0420	0.0000	0.0015	0.0002	0.0017	0.0002	0.0001	0.0003	4.5974	0.0010	0.0007	4.8442

CalEEMod Construction Inputs

Phase	CalEEMod	CalEEMod	Total	Total	CalEEMod	Worker Trip	Vendor Trip	Hauling Trip	Worker Vehicle	Vendor Vehicle	Hauling Vehicle	Worker	Vendor	Hauling
	WORKER	VENDOR	Worker	Vendor	HAULING									
Site Preparation	3	0	3	0	0	10.8	7.3	20	LD_Mix	HDT_Mix	HHDT	32.4	0	0
Grading	8	0	352	0	925	10.8	7.3	20	LD_Mix	HDT_Mix	HHDT	3801.6	0	18500
Trenching	8	0	992	0	430	10.8	7.3	20	LD_Mix	HDT_Mix	HHDT	10713.6	0	8600
Building Construction	37	8	6031	1304	112	10.8	7.3	20	LD_Mix	HDT_Mix	HHDT	65134.8	9519.2	2240
Architectural Coating	7	0	966	0	0	10.8	7.3	7.3	LD_Mix	HDT_Mix	HHDT	10432.8	0	0
Paving	15	0	420	0	8	10.8	7.3	20	LD_Mix	HDT_Mix	HHDT	4536	0	160

Number of Days Per Year

2023	9/6/23	12/31/23	117	84
2024/2025	1/1/24	2/10/25	407	291
			524	375 Total Workdays

Phase	Start Date	End Date	Days/Week	Workdays
Site Preparation	9/6/2023	9/6/2023	5	1
Grading	9/8/2023	11/8/2023	5	44
Trenching	11/9/2023	4/30/2024	5	124
Building Construction	5/10/2024	12/24/2024	5	163
Architectural Coating	8/1/2024	2/10/2025	5	138
Paving	11/1/2024	12/10/2024	5	28

Category	Mix %	Adj	ROG_DIURN	ROG_HTSK	ROG_IDLEX	ROG_RESTL	ROG_RUNEX	ROG_RUNLS	ROG_STREX	NOX_IDLEX	NOX_RUNEX	NOX_STREX	CO_IDLEX	CO_RUNEX	CO_STREX	SO2_IDLEX	SO2_RUNEX	SO2_STREX	Road Dust PM10	PM10_PM BW	PM10_PM TW	PM10_ILI EX	PM10_RU NEX	PM10_STREX	Road Dust PM25	PM25_PM BW	PM25_PM TW	PM25_IDL EX	PM25_RUN EX	PM25_STR EX	CO2_IDLEX	CO2_NBIO _RUNEX	CO2_NBIO _STREX	CH4_IDLE X	CH4_RUNEX	CH4_STREX	N2O_IDLEX	N2O_RUNEX	N2O_STREX
Hauling	100.0	1	0.00207604	8.55424E-05	0.322404817	0	0.01953334	0.0077057	0.28839E-07	4.1629787	1.92848649	2.692504236	5.2118988	0.79481483	0.0030555	0.00746083	0.01488345	2.65981E-07	0.0814444	0.025123	0.0022823	0.025823	9.98684E-07	0.028506	0.008781	0.001179	0.0247116	9.183E-07	850.51039	1643.9479	0.0306948	0.235881	0.125647179	9.74075E-08	0.136898	0.202148415	2.46823E-05		
	0.0	0	0.028424515	0.006961572	0.027529656	0	0.04434978	0.05660825	0.052337336	0.9240436	1.235274528	1.956113281	0.673566	0.40377012	1.152494	0.00150213	0.011767743	8.73536E-05	0.299	0.045469	0.012	0.002542	0.014931	0.000112942	0.044499	0.015914	0.003	0.002481	0.0142769	0.0001038	161.33734	1239.5984	8.8359741	0.013943	0.009906777	0.009245497	0.024829	0.159885109	0.00696523
Vendor	50.0	0.5	0.000143802	4.37712E-05	0.136203408	0	0.00796607	0.00038029	2.6442E-07	2.0814953	0.805340325	1.346252013	2.605994	0.35740743	0.000277	0.00373041	0.007443735	1.33093E-07	0.040722	0.017561	0.001142	0.012916	4.93942E-07	0.014263	0.004939	0.001089	0.0123058	4.051E-07	425.2552	821.5295	0.0134624	0.11794	0.06282359	4.87037E-08	0.008449	0.131074308	1.23411E-05		
	50.0	0.5	0.014212257	0.003480786	0.031764828	0	0.02217489	0.02830413	0.026168668	0.4620218	0.609637264	0.698056641	0.338783	0.20188506	0.579247	0.00975106	0.000883871	4.36763E-05	0.027335	0.006	0.001271	0.007465	5.69711E-05	0.007957	0.00315	0.0001216	0.0073384	5.192E-05	80.66807	612.79918	4.417387	0.006471	0.004953388	0.004622749	0.012414	0.079945554	0.003048262		
	1	0	0.01435606	0.003523557	0.179967236	0	0.03194156	0.02868941	0.026168932	2.5435111	1.574875589	2.044308854	2.942777	0.59929248	0.576524	0.00448148	0.013325596	4.38093E-05	0.299	0.063457	0.023561	0.002413	0.020382	5.69705E-05	0.044499	0.02221	0.00589	0.0002305	0.0194942	5.238E-05	505.92387	1441.3231	4.4314394	0.124412	0.067776978	0.004622797	0.080863	0.211016762	0.003060603
Worker	50.0	0.5	0.143306127	0.043683769	0	0.0045285	0.10768412	0.159592017	0	0.021192179	0.122461753	0	0.35011163	1.546631	0	0.001247244	0.00032278	0	0.0036	0.004	0	0.000614	0.000990927	0.00126	0.001	0	0.0005655	0.0009111	0	126.17319	32.650143	0	0.001154545	0.034539145	0	0.00224937	0.015441065		
	25.0	0.25	0.156677436	0.0432923	0	0.00778025	0.12516577	0.145126489	0	0.035722679	0.10064187	0	0.38639467	1.408382	0	0.000818289	0.000217331	0	0.002307	0.002	0	0.000514	0.000767762	0.000807	0.00005	0	0.0004735	0.000706	0	82.773349	21.983712	0	0.00173807	0.028010471	0	0.00255413	0.009913954		
	25.0	0.25	0.074138092	0.021036563	0	0.00307324	0.05534742	0.101568939	0	0.019062039	0.088569484	0	0.22137906	0.96209	0	0.000853405	0.000219425	0	0.002219	0.002	0	0.000345	0.000540097	0.000777	0.00005	0	0.0003173	0.0004966	0	86.33608	22.19552	0	0.000769908	0.021709383	0	0.001616766	0.009562758		
1	0	0.374122256	0.107049562	0	0.0153862	0.28819731	0.406286645	0	0.079376897	0.311454925	0	0.93808037	3.917103	0	0.002918938	0.000799537	0	0.299	0.008126	0.008	0	0.001473	0.002298785	0.044499	0.002644	0.002	0	0.0013963	0.0021137	0	295.28262	76.829375	0	0.00366324	0.084258998	0	0.006440266	0.034917777	

Category	Mtx %	Adj	ROG_DIURN	ROG_HTSK	ROG_IDLEX	ROG_RESTL	ROG_RUNEX	ROG_RUNLS	ROG_STREX	NOX_IDLEX	NOX_RUNEX	NOX_STREX	CO_IDLEX	CO_RUNEX	CO_STREX	SO2_IDLEX	SO2_RUNEX	SO2_STREX	Road Dust	PM10	PM10_PM	PM10_PM	PM10_IDL	PM10_RU	PM10_STREX	Road Dust	PM25	PM25_PM	PM25_PM	PM25_IDL	PM25_RUN	PM25_STR	CO2_NBIO	CO2_NBIO	CO2_NBIO	CH4_IDLE	CH4_RUNEX	CH4_STREX	N2O_IDLEX	N2O_RUNEX	N2O_STREX	
			PM10	BW	TW	EX	NEX	PM10_STREX	PM25	BW	TW	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX	EX
Hauling	100.0	1	0.000199377	5.83846E-05	0.339789936	0	0.01860554	0.00032501	4.36152E-07	4.075118	1.850604526	1.731403881	5.19556	0.77488683	0.000626	0.00728035	0.014633772	1.93499E-07	0.081298	0.035125	0.002182	0.025474	6.09682E-07	0.028454	0.008781	0.003082	0.0243688	5.606E-07	832.31669	1617.1297	0.010973	0.222934	0.121678903	8.02769E-08	0.134072	0.258070714	1.34765E-05	0.024668	0.158249654	0.006031915		
	0.0	0	0.025794994	0.006359754	0.026359118	0	0.03811329	0.05096401	0.04894298	0.8928855	1.11291974	1.40789614	0.673181	0.34617278	1.07433	0.00148998	0.011664295	8.43209E-05	0.299	0.045389	0.012	0.002128	0.012985	0.000106814	0.044499	0.01589	0.003	0.002035	0.0124511	9.821E-05	160.25985	1229.1806	8.5293121	0.013383	0.009658327	0.008772715	0.024668	0.158249654	0.006031915			
Vendor	50.0	0.5	9.79886E-05	2.91428E-05	0.164894908	0	0.009302771	0.0002625	2.18076E-07	2.037759	0.925202263	1.38170419	2.50778	0.38744341	0.000313	0.00364017	0.007317886	9.67497E-08	0.040649	0.017563	0.001091	0.012737	3.04841E-07	0.014237	0.004391	0.001041	0.0121644	2.803E-07	416.13835	808.54485	0.0097965	0.110467	0.006892451	4.01380E-08	0.007836	0.129038357	9.73817E-05	0.024668	0.158249654	0.006031915		
	50.0	0.5	0.012897497	0.003129877	0.013179559	0	0.019056644	0.02548201	0.02447149	0.4464259	0.556460987	0.70394807	0.335691	0.17398639	0.537165	0.00074499	0.005821247	4.21605E-05	0.0227	0.006	0.001064	0.006902	5.3407E-05	0.007945	0.0015	0.003018	0.0062075	8.911E-05	80.129514	634.5903	4.2646561	0.006691	0.004829164	0.004386338	0.012344	0.079124827	0.003015068	0.024668	0.158249654	0.006031915		
		1	0.012995486	0.003190191	0.178074527	0	0.02835941	0.02574451	0.024471708	2.4839883	1.48176325	2.06965226	2.933471	0.5605298	0.537478	0.00438516	0.013150033	4.22572E-05	0.299	0.063348	0.023563	0.002155	0.01923	5.3719E-05	0.044499	0.022172	0.005891	0.0002059	0.0183919	4.939E-05	496.28827	1423.1552	4.2744426	0.123158	0.065668615	0.004386338	0.07938	0.208163184	0.003025696	0.024668	0.158249654	0.006031915
Worker	50.0	0.5	0.136796864	0.040510207	0	0.00394385	0.10236849	0.147535756	0	0.018684555	0.115476587	0	0.32486778	1.445873	0	0.002113349	0.000313927	0.003584	0.004	0	0.000585	0.000954881	0.001254	0.001	0	0.000539	0.000878	0	122.54122	31.754603	0	0.001026569	0.03235985	0	0.002080964	0.014940319	0.024668	0.158249654	0.006031915			
	25.0	0.25	0.148814258	0.041150424	0	0.00690435	0.11745495	0.134116008	0	0.0319581	0.094816504	0	0.35446197	1.306204	0	0.000804162	0.00021249	0.002306	0.002	0	0.000482	0.00072446	0.000807	0.0005	0	0.0004435	0.0006661	0	81.34419	21.494004	0	0.001555571	0.026204278	0	0.002343639	0.009623613	0.024668	0.158249654	0.006031915			
	25.0	0.25	0.072043204	0.020150051	0	0.00277508	0.05338915	0.094795741	0	0.017007912	0.082407943	0	0.2073341	0.905899	0	0.000831592	0.000213499	0.002217	0.002	0	0.000333	0.000526973	0.000776	0.0005	0	0.0003065	0.0004845	0	84.129497	21.596069	0	0.000794556	0.020482249	0	0.001504103	0.009197602	0.024668	0.158249654	0.006031915			
		1	0.357654326	0.1021769681	0	0.01362228	0.2734126	0.376447505	0	0.067650567	0.292701033	0	0.88688396	3.657977	0	0.002847102	0.000739916	0.299	0.008107	0.008	0	0.001401	0.002296134	0.044499	0.002837	0.002	0	0.001289	0.00020286	0	288.01491	74.844475	0	0.001286696	0.079046277	0	0.005928705	0.033761335	0.024668	0.158249654	0.006031915	

CalEEMod EMFAC2021 Emission Factors Input

Year 2025

Season	EmissionType	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
A	CH4_IDLEX	0	0	0	0	0.005194	0.003023	0.013842	0.229861003	0.007514	0	0	0.076044	0
A	CH4_RUNEX	0.001841	0.005577	0.002592	0.003307	0.007222	0.006455	0.009536	0.117132109	0.009593	0.497756349	0.158292	0.090769	0.011159
A	CH4_STREX	0.060617	0.097956	0.077312	0.090898	0.021636	0.011648	0.008314	7.74759E-08	0.016852	0.003733046	0.177199	0.004898	0.025922
A	CO_IDLEX	0	0	0	0	0.195049	0.141036	0.668176	5.176290252	0.524506	0	0	1.692209	0
A	CO_RUNEX	0.606604	1.307107	0.781421	0.865797	0.821777	0.532869	0.296939	0.756535609	0.44406	5.878094388	12.31202	0.85843	1.105311
A	CO_STREX	2.711494	4.855262	3.417927	3.621729	2.164208	1.195973	1.000247	0.000684691	1.872658	0.515229574	7.965438	0.66885	2.373596
A	CO2_NBIO_IDLEX	0	0	0	0	8.602925	13.6884	158.593	813.9732577	87.04447	0	0	189.0522	0
A	CO2_NBIO_RUNEX	237.6743	319.1813	327.6236	394.2305	764.972	810.9955	1213.655	1586.833625	1366.1	1082.148951	187.2679	1017.838	1680.132
A	CO2_NBIO_STREX	61.73081	84.00027	84.00689	100.2571	17.59535	9.640849	8.205073	0.017114195	14.85767	3.177121883	47.30784	3.779827	22.06858
A	NOX_IDLEX	0	0	0	0	0.046413	0.089605	0.847928	3.965211308	0.364367	0	0	1.342517	0
A	NOX_RUNEX	0.033383	0.114688	0.061427	0.085138	0.585978	0.806102	1.006394	1.774057666	0.968278	0.301158242	0.557882	2.407715	1.487818
A	NOX_STREX	0.218516	0.357478	0.309231	0.377914	0.420652	0.228874	1.403485	2.751173324	0.987981	0.039008099	0.129146	0.492123	0.298831
A	PM10_IDLEX	0	0	0	0	0.000685	0.001389	0.001762	0.002096665	0.000404	0	0	0.001209	0
A	PM10_PMBW	0.007137	0.009219	0.00886	0.008972	0.077556	0.090487	0.04526	0.081222471	0.04982	0.123663808	0.012	0.044786	0.044946
A	PM10_PMTW	0.008	0.008	0.008	0.008	0.00942	0.010665	0.012	0.035128275	0.012	0.042521858	0.004	0.010572	0.013235
A	PM10_RUNEX	0.00112	0.001813	0.001292	0.00131	0.01302	0.021567	0.011186	0.025031341	0.015263	0.005684616	0.001925	0.012423	0.028992
A	PM10_STREX	0.001849	0.00275	0.002061	0.002069	0.000206	9.12E-05	0.000101	5.20395E-07	0.000131	1.2108E-05	0.003464	4.08E-05	0.000296
A	PM25_IDLEX	0	0	0	0	0.000656	0.001329	0.001685	0.001999711	0.000387	0	0	0.001155	0
A	PM25_PMBW	0.002498	0.003227	0.003101	0.00314	0.027145	0.03167	0.015841	0.028427865	0.017437	0.043282333	0.0042	0.015675	0.015731
A	PM25_PMTW	0.002	0.002	0.002	0.002	0.002355	0.002666	0.003	0.008782069	0.003	0.010630465	0.001	0.002643	0.003309
A	PM25_RUNEX	0.001031	0.001669	0.001189	0.001207	0.012419	0.020616	0.010694	0.023944936	0.014593	0.005434911	0.001799	0.01187	0.027693
A	PM25_STREX	0.0017	0.002528	0.001895	0.001902	0.000189	8.39E-05	9.28E-05	4.78484E-07	0.000121	1.11329E-05	0.003253	3.76E-05	0.000272
A	ROG_DIURN	0.264632	0.562584	0.283569	0.336782	0.120201	0.063181	0.023118	0.000161301	0.068202	0.010220489	3.860886	0.029457	30.55965
A	ROG_HTSK	0.077597	0.155938	0.078131	0.089235	0.030304	0.015991	0.005603	4.7964E-05	0.016021	0.003785535	3.558651	0.007775	7.988502
A	ROG_IDLEX	0	0	0	0	0.021187	0.015503	0.025251	0.32711902	0.04025	0	0	0.185349	0
A	ROG_RESTL	0	0	0	0	0	0	0	0	0	0	0	0	0
A	ROG_RUNEX	0.006942	0.024558	0.010089	0.013778	0.079612	0.109106	0.032483	0.017799596	0.044456	0.059943987	1.024683	0.053481	0.077128
A	ROG_RUNLS	0.197921	0.439329	0.211003	0.255197	0.16959	0.087065	0.045291	0.000432041	0.075038	0.007986552	3.760078	0.019152	0.188623
A	ROG_STREX	0.273326	0.495732	0.354505	0.447416	0.106693	0.056928	0.045776	4.20633E-07	0.089311	0.013239776	1.305157	0.027862	0.108247
A	SO2_IDLEX	0	0	0	0	8.37E-05	0.000131	0.001472	0.007098942	0.000823	0	0	0.001718	0
A	SO2_RUNEX	0.002349	0.003155	0.003238	0.003895	0.007471	0.007812	0.011512	0.014348163	0.013043	0.00885381	0.001851	0.009458	0.016473
A	SO2_STREX	0.00061	0.00083	0.00083	0.000991	0.000174	9.53E-05	8.11E-05	1.69191E-07	0.000147	3.14091E-05	0.000468	3.74E-05	0.000218
A	TOG_DIURN	0.264632	0.562584	0.283569	0.336782	0.120201	0.063181	0.023118	0.000161301	0.068202	0.010220489	0.08531	0.029457	30.55965
A	TOG_HTSK	0.077597	0.155938	0.078131	0.089235	0.030304	0.015991	0.005603	4.7964E-05	0.016021	0.003785535	3.558651	0.007775	7.988502
A	TOG_IDLEX	0	0	0	0	0.03005	0.020889	0.042478	0.588143126	0.05333	0	0	0.302207	0
A	TOG_RESTL	0	0	0	0	0	0	0	0	0	0	0	0	0
A	TOG_RUNEX	0.010114	0.035818	0.014707	0.020053	0.097862	0.126808	0.046457	0.137213337	0.060464	0.565677917	1.236542	0.152507	0.100988
A	TOG_RUNLS	0.197921	0.439329	0.211003	0.255197	0.16959	0.087065	0.045291	0.000432041	0.075038	0.007986552	3.760078	0.019152	0.188623
A	TOG_STREX	0.299257	0.542764	0.388138	0.489864	0.116815	0.062329	0.050119	4.6054E-07	0.097784	0.014495888	1.419098	0.030505	0.118517
A	N2O_IDLEX	0	0	0	0	0.000637	0.00168	0.024457	0.131219379	0.012456	0	0	0.024955	0
A	N2O_RUNEX	0.003885	0.008627	0.005647	0.007583	0.040583	0.081593	0.156018	0.253304032	0.157183	0.165902975	0.038984	0.126174	0.069141
A	N2O_STREX	0.028873	0.037292	0.035503	0.037751	0.034174	0.018376	0.005858	1.42154E-05	0.01459	0.006142466	0.007691	0.004354	0.031786

CalEEMod EMFAC2021 Fleet Mix Input

Year 2025

FleetMixLandUseSubType	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Mid Rise	0.528224	0.040364	0.230108	0.128589	0.023276	0.00574	0.009425	0.00744	0.001057	0.000413	0.022096	0.000684	0.002585
Enclosed Parking with Elevator	0.528224	0.040364	0.230108	0.128589	0.023276	0.00574	0.009425	0.00744	0.001057	0.000413	0.022096	0.000684	0.002585
Parking Lot	0.528224	0.040364	0.230108	0.128589	0.023276	0.00574	0.009425	0.00744	0.001057	0.000413	0.022096	0.000684	0.002585
Strip Mall	0.528224	0.040364	0.230108	0.128589	0.023276	0.00574	0.009425	0.00744	0.001057	0.000413	0.022096	0.000684	0.002585

Adjustment Factors	Vehicle Category	Fuel	Population	Pop Fract	VMT (miles/day)	VMT Fract	Trips/day	Trip Fract
	HHDT	GAS	2.33035896	1.70966E-05	124.9448223	0.0001166	46.62582199	0.000342
	HHDT	DSL	8692.57496	0.06377287	1008963.948	0.9416827	127877.0897	0.938167
	HHDT	ELEC	63.3712014	0.000464921	6579.674935	0.0061409	825.9971986	0.00606
	HHDT	NG	832.40502	0.00610692	55779.3819	0.0520598	7555.504424	0.055431
			9590.68154		1071447.949		136305.2172	
	LDA	GAS	598860.284	0.189163833	22133914.69	0.8620184	2780384.029	0.878248
	LDA	DSL	1620.03991	0.000511727	46912.85411	0.001827	6871.193241	0.00217
	LDA	ELEC	61443.1924	0.019408249	2670451.983	0.1040023	299852.6978	0.094715
	LDA	PIH	19037.6636	0.006013485	825567.7143	0.0321522	78720.73884	0.024866
			680961.18		25676847.24		3165828.659	
	LDT1	GAS	51680.8552	0.222992328	1664705.874	0.9915742	230185.983	0.993205
	LDT1	DSL	21.282725	9.18306E-05	302.825779	0.0001804	59.13231308	0.000255
	LDT1	ELEC	234.457824	0.001011638	9323.703781	0.0055536	1109.79593	0.004789
	LDT1	PIH	98.1319848	0.000423419	4519.182281	0.0026918	405.7757571	0.001751
			52034.7277		1678851.586		231760.687	
	LDT2	GAS	290874.748	0.209748755	10447705.78	0.9789509	1360240.873	0.980865
	LDT2	DSL	1049.95238	0.000757117	38652.33695	0.0036217	4980.340082	0.003591
	LDT2	ELEC	2157.05904	0.001555448	73663.77305	0.0069023	10962.38395	0.007905
	LDT2	PIH	2561.88514	0.001847366	112327.2154	0.0105251	10593.39505	0.007639
			296643.645		10672349.11		1386776.992	
	LHDT1	GAS	19422.4639	0.045941069	728336.977	0.6336476	289365.7727	0.684453
	LHDT1	DSL	10387.1028	0.024569211	408019.3319	0.3549737	130656.6864	0.30905
	LHDT1	ELEC	196.401964	0.000464561	13079.06139	0.0113787	2746.629156	0.006497
			30005.9687	0.070974841	1149435.37		422769.0882	
	LHDT2	GAS	2512.65228	0.025565973	91345.05406	0.3225651	37434.7751	0.380895
	LHDT2	DSL	4837.2356	0.049218364	188645.0475	0.6661587	60846.33861	0.619105
	LHDT2	ELEC	50.4620201	0.000513446	3193.250687	0.0112763	669.1749743	0.006809
			7400.3499	0.075297782	283183.3523		98281.11371	
	MCY	GAS	28484.893	0.022095845	166414.5147		1 56969.78604	1
	MDV	GAS	159532.218	0.207432201	5551044.411	0.9605893	739781.3765	0.961903
	MDV	DSL	2421.36412	0.003148385	85326.79887	0.0147655	11351.14178	0.014759
	MDV	ELEC	2274.54722	0.002957486	77934.95958	0.0134864	11571.05737	0.015045
	MDV	PIH	1542.36579	0.002005465	64484.39206	0.0111588	6377.682532	0.008293
			165770.495		5778790.561		769081.2582	
	MH	GAS	2337.87649	7.013583236	21506.19156	0.6912933	233.8811638	0.701639
	MH	DSL	994.543666	2.983611331	9603.892712	0.3087067	99.45436656	0.298361
			3332.42015		31110.08427		333.3355304	
	MHDT	GAS	1412.26257	0.009037553	72039.87357	0.1394582	28256.54946	0.180823
	MHDT	DSL	10548.0591	0.067500648	435100.6189	0.8422883	125915.2277	0.805775
	MHDT	ELEC	90.8085123	0.000581115	4838.905804	0.0093674	1182.343378	0.007566
	MHDT	NG	98.9062774	0.000632935	4590.306874	0.0088861	911.9208312	0.005836
			12150.0365		516569.7051		156266.0414	
	OBUS	GAS	430.702276	0.023671729	18962.49127	0.2311741	8617.491144	0.473624
	OBUS	DSL	921.411582	0.050641491	62304.88754	0.7595666	9451.527202	0.519463
	OBUS	ELEC	2.67203053	0.000146857	221.7710452	0.0027036	53.46198693	0.002938
	OBUS	NG	8.1253065	0.000446573	537.746753	0.0065557	72.31522781	0.003975
			1362.9112		82026.89662		18194.79556	
	SBUS	GAS	178.243554	0.016385172	8812.851183	0.3543672	712.9742161	0.065541
	SBUS	DSL	673.204793	0.061884852	15283.75186	0.6145639	9748.005403	0.896093
	SBUS	ELEC	4.48116849	0.000411935	145.0761128	0.0058336	51.24766317	0.004711
	SBUS	NG	25.2843935	0.002324287	627.585971	0.0252354	366.1180183	0.033656
			881.213909		24869.26513		10878.3453	
	UBUS	GAS	46.2191762	0.021676301	4826.657731	0.0818022	184.8767049	0.086705
	UBUS	DSL	405.367492	0.190113029	44987.36567	0.7624463	1621.46997	0.760452
	UBUS	ELEC	23.3120232	0.100202165	2427.539875	0.3589751	93.248093	0.400809
	UBUS	NG	58.1624738	0.02727758	6762.418158	0.1146095	232.6498951	0.10911
			533.061166		59003.98143		2132.244663	

Attachment 4: Project Construction Emissions and Health Risk Calculations

2655 The Alameda, Santa Clara, CA

Year	Unmitigated	DPM	Unmitigated	Unmitigated	Fug PM2.5	Unmitigated
	DPM	EMFAC2021	Emissions	Fug PM2.5	EMFAC2021	Emissions
2023	0.0035	0.0001	0.0036	0.0001	0.0001	0.0001
2024-2025	0.0206	0.0002	0.0208	0.0000	0.0002	0.0002

Year	Mitigated	DPM	Mitigated	Mitigated	Fug PM2.5	Mitigated
	DPM	EMFAC2021	Emissions	Fug PM2.5	EMFAC2021	Emissions
2023	0.0003	0.0001	0.0003	0.00003	0.0001	0.0001
2024-2025	0.0014	0.0002	0.0016	0.0000	0.0002	0.0002

2655 The Alameda, Santa Clara, CA

DPM Emissions and Modeling Emission Rates - Unmitigated

Construction	Year	Activity	DPM (ton/year)	Area Source	DPM Emissions			Modeled Area (m ²)	DPM Emission Rate (g/s/m ²)
					(lb/yr)	(lb/hr)	(g/s)		
	2023	Construction	0.0036	CON_DPM	7.1	0.00163	2.05E-04	1623	1.27E-07
	2024-2025*	Construction	0.0208	CON_DPM	41.7	0.00951	1.20E-03	1623	7.38E-07
	Total		0.0244		48.8	0.0111	0.0014		

* Includes 2025 (two months of construction)

Construction Hours
 hr/day = 12 (6am - 6pm)
 days/yr = 365
 hours/year = 4380

DPM Construction Emissions and Modeling Emission Rates - With Mitigation

Construction	Year	Activity	DPM (ton/year)	Area Source	DPM Emissions			Modeled Area (m ²)	DPM Emission Rate (g/s/m ²)
					(lb/yr)	(lb/hr)	(g/s)		
	2023	Construction	0.0003	CON_DPM	0.6	0.00015	1.83E-05	1623	1.13E-08
	2024-2025*	Construction	0.0016	CON_DPM	3.2	0.00074	9.30E-05	1623	5.73E-08
	Total		0.0019		3.9	0.0009	0.0001		

* Includes 2025 (two months of construction)

Construction Hours
 hr/day = 12 (6am - 6pm)
 days/yr = 365
 hours/year = 4380

2655 The Alameda, Santa Clara, CA

PM2.5 Fugitive Dust Emissions for Modeling - Unmitigated

Construction		Area	PM2.5 Emissions				Modeled Area	PM2.5 Emission Rate
Year	Activity	Source	(ton/year)	(lb/yr)	(lb/hr)	(g/s)	(m ²)	g/s/m ²
2023	Construction	CON_FUG	0.0001	0.2	0.00006	7.13E-06	1,623	4.39E-09
2024-2025*	Construction	CON_FUG	0.0002	0.4	0.00010	1.28E-05	1,623	7.88E-09
Total			0.0003	0.7	0.0002	0.0000		

* Includes 2025 (two months of construction)

Construction Hours

hr/day = 12 (6am - 6pm)
 days/yr = 365
 hours/year = 4380

PM2.5 Fugitive Dust Construction Emissions for Modeling - With Mitigation

Construction		Area	PM2.5 Emissions				Modeled Area	PM2.5 Emission Rate
Year	Activity	Source	(ton/year)	(lb/yr)	(lb/hr)	(g/s)	(m ²)	g/s/m ²
2023	Construction	CON_FUG	0.0001	0.2	0.00004	5.40E-06	1,623	3.33E-09
2024-2025*	Construction	CON_FUG	0.0002	0.4	0.00010	1.28E-05	1,623	7.88E-09
Total			0.0003	0.6	0.0001	0.0000		

* Includes 2025 (two months of construction)

Construction Hours

hr/day = 12 (6am - 6pm)
 days/yr = 365
 hours/year = 4380

2655 The Alameda, Santa Clara, CA - Construction Health Impact Summary

Maximum Impacts at MEI Residential Location - Without Mitigation

Emissions Year	Maximum Concentrations		Cancer Risk (per million)		Hazard Index (-)	Maximum Annual PM2.5 Concentration (µg/m ³)
	Exhaust PM10/DPM (µg/m ³)	Fugitive PM2.5 (µg/m ³)	Infant/Child	Adult		
	2023	0.0048			0.0002	0.86
2024-2025*	0.0279	0.0004	4.59	0.08	0.01	0.03
Total	-	-	5.44	0.09	-	-
Maximum	0.0279	0.0004	-	-	0.01	0.03

* Includes 2025 (two months of construction)

Maximum Impacts at MEI Residential Location - With Mitigation

Emissions Year	Maximum Concentrations		Cancer Risk (per million)		Hazard Index (-)	Maximum Annual PM2.5 Concentration (µg/m ³)
	Exhaust PM10/DPM (µg/m ³)	Fugitive PM2.5 (µg/m ³)	Infant/Child	Adult		
	2023	0.0004			0.0002	0.08
2024-2025*	0.0022	0.0004	0.36	0.01	0.0004	0.003
Total	-	-	0.43	0.01	-	-
Maximum	0.0022	0.0004	-	-	0.0004	0.003

* Includes 2025 (two months of construction)

- Tier 4 Interim Engines and BMPs Mitigation

Maximum Impacts at Kids On Campus - Without Mitigation

Construction Year	Unmitigated Emissions				
	Maximum Concentrations		Child Cancer Risk (per million)	Hazard Index (-)	Maximum Annual PM2.5 Concentration (µg/m ³)
	Exhaust PM10/DPM (µg/m ³)	Fugitive PM2.5 (µg/m ³)			
2023	0.0094	0.0005	3.39	0.002	0.01
2024-2025*	0.0545	0.0009	19.70	0.01	0.06
Total	-	-	23.09	-	-
Maximum	0.0545	0.0009	-	0.01	0.06

* Includes 2025 (two months of construction)

Maximum Impacts at Kids On Campus - With Mitigation

Construction Year	Unmitigated Emissions				
	Maximum Concentrations		Child Cancer Risk (per million)	Hazard Index (-)	Maximum Annual PM2.5 Concentration (µg/m ³)
	Exhaust PM10/DPM (µg/m ³)	Fugitive PM2.5 (µg/m ³)			
2023	0.0008	0.0004	0.30	0.0002	0.001
2024-2025*	0.0042	0.0009	1.53	0.001	0.01
Total	-	-	1.83	-	-
Maximum	0.0042	0.0009	-	0.001	0.01

* Includes 2025 (two months of construction)

- Tier 4 Interim Engines and BMPs Mitigation

**2655 The Alameda, Santa Clara, CA- Construction Impacts - Without Mitigation
Maximum DPM Cancer Risk and PM2.5 Calculations From Construction
Impacts at Kids On Campus (+6 weeks) - 1 meter - Child Exposure**

Student Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹
 ASF = Age sensitivity factor for specified age group
 ED = Exposure duration (years)
 AT = Averaging time for lifetime cancer risk (years)

Inhalation Dose = C_{air} x SAF x 8-Hr BR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)
 SCAF = School Child Adjustment Factor (unitless) for source operation and exposures different than 8 hours/day
 = (24/SHR) x (7days/SDay) x (SCHR/8 hrs)
 SHR = Hours/day of emission source operation
 SDay = Number of days per week of source operation
 SCHR = School operation hours while emission source in operation
 8-Hr BR = Eight-hour breathing rate (L/kg body weight-per 8 hrs)
 A = Inhalation absorption factor
 EF = Exposure frequency (days/year)
 10⁻⁶ = Conversion factor

Values

	Infant	School Child
Age ->	0 - <2	2 - <16
Parameter		
ASF =	10	3
DPM CPF =	1.10E+00	1.10E+00
8-Hr BR* =	1200	520
SCHR =	8	8
SHR =	12	12
SDay =	5	5
A =	1	1
EF =	250	250
AT =	70	70
SCAF =	2.80	2.80

* 95th percentile 8-hr breathing rates for moderate intensity activities

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Exposure Duration (years)	Age	Child - Exposure Information		Child Cancer Risk (per million)	
			DPM Conc (ug/m3)			Age*
			Year	Annual		Sensitivity Factor
1	1	0 - 1	2023	0.0094	10	3.39
2	1	1 - 2	2024-2025**	0.0545	10	19.70
Total Increased Cancer Risk						23.09

* Children assumed to be 6 weeks and older with 2 years of Construction Exposure

** Includes 2025 (two months of construction)

Maximum		
Hazard Index	Fugitive PM2.5	Total PM2.5
0.002	0.0005	0.01
0.011	0.001	0.06

2655 The Alameda, Santa Clara, CA - Construction Impacts - Without Mitigation
Maximum DPM Cancer Risk and PM2.5 Calculations From Construction
Impacts at Off-Site Residential MEI Location - 1.5 meter receptor height (1st Floor Level)

Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x FAH x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹
 ASF = Age sensitivity factor for specified age group
 ED = Exposure duration (years)
 AT = Averaging time for lifetime cancer risk (years)
 FAH = Fraction of time spent at home (unitless)

Inhalation Dose = C_{air} x DBR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)
 DBR = daily breathing rate (L/kg body weight-day)
 A = Inhalation absorption factor
 EF = Exposure frequency (days/year)
 10⁻⁶ = Conversion factor

Values

Age -> Parameter	Infant/Child			Adult
	3rd Trimester	0 - 2	2 - 16	16 - 30
ASF =	10	10	3	1
CPF =	1.10E+00	1.10E+00	1.10E+00	1.10E+00
DBR* =	361	1090	572	261
A =	1	1	1	1
EF =	350	350	350	350
AT =	70	70	70	70
FAH =	1.00	1.00	1.00	0.73

* 95th percentile breathing rates for infants and 80th percentile for children and adults

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Exposure Duration (years)	Age	Infant/Child - Exposure Information		Infant/Child Age Sensitivity Factor	Infant/Child Cancer Risk (per million)	Adult - Exposure Information		Adult Cancer Risk (per million)	Maximum				
			DPM Conc (ug/m3)				Modeled	Age Sensitivity Factor		DPM Conc (ug/m3)	Sensitivity Factor	Hazard Index	Fugitive PM2.5	Total PM2.5
			Year	Annual										
0	0.25	-0.25 - 0*	2023	0.0048	10	0.07	2023	0.0048	-	-	-	-	-	-
1	1	0 - 1	2023	0.0048	10	0.79	2023	0.0048	1	0.01	0.001	0.0002	0.01	
2	1	1 - 2	2024-2025**	0.0279	10	4.59	2024-2025**	0.0279	1	0.08	0.01	0.0004	0.03	
3	1	2 - 3		0.0000	3	0.00		0.0000	1	0.00				
4	1	3 - 4		0.0000	3	0.00		0.0000	1	0.00				
5	1	4 - 5		0.0000	3	0.00		0.0000	1	0.00				
6	1	5 - 6		0.0000	3	0.00		0.0000	1	0.00				
7	1	6 - 7		0.0000	3	0.00		0.0000	1	0.00				
8	1	7 - 8		0.0000	3	0.00		0.0000	1	0.00				
9	1	8 - 9		0.0000	3	0.00		0.0000	1	0.00				
10	1	9 - 10		0.0000	3	0.00		0.0000	1	0.00				
11	1	10 - 11		0.0000	3	0.00		0.0000	1	0.00				
12	1	11 - 12		0.0000	3	0.00		0.0000	1	0.00				
13	1	12 - 13		0.0000	3	0.00		0.0000	1	0.00				
14	1	13 - 14		0.0000	3	0.00		0.0000	1	0.00				
15	1	14 - 15		0.0000	3	0.00		0.0000	1	0.00				
16	1	15 - 16		0.0000	3	0.00		0.0000	1	0.00				
17	1	16-17		0.0000	1	0.00		0.0000	1	0.00				
18	1	17-18		0.0000	1	0.00		0.0000	1	0.00				
19	1	18-19		0.0000	1	0.00		0.0000	1	0.00				
20	1	19-20		0.0000	1	0.00		0.0000	1	0.00				
21	1	20-21		0.0000	1	0.00		0.0000	1	0.00				
22	1	21-22		0.0000	1	0.00		0.0000	1	0.00				
23	1	22-23		0.0000	1	0.00		0.0000	1	0.00				
24	1	23-24		0.0000	1	0.00		0.0000	1	0.00				
25	1	24-25		0.0000	1	0.00		0.0000	1	0.00				
26	1	25-26		0.0000	1	0.00		0.0000	1	0.00				
27	1	26-27		0.0000	1	0.00		0.0000	1	0.00				
28	1	27-28		0.0000	1	0.00		0.0000	1	0.00				
29	1	28-29		0.0000	1	0.00		0.0000	1	0.00				
30	1	29-30		0.0000	1	0.00		0.0000	1	0.00				
Total Increased Cancer Risk						5.44				0.09				

* Third trimester of pregnancy

** Includes 2025 (two months of construction)

2655 The Alameda, Santa Clara, CA - Construction Impacts - Without Mitigation
Maximum DPM Cancer Risk and PM2.5 Calculations From Construction
Impacts at Off-Site Residential MEI Location - 4.5 meter receptor height (2nd Floor Level)

Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x FAH x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹

ASF = Age sensitivity factor for specified age group

ED = Exposure duration (years)

AT = Averaging time for lifetime cancer risk (years)

FAH = Fraction of time spent at home (unitless)

Inhalation Dose = C_{air} x DBR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)

DBR = daily breathing rate (L/kg body weight-day)

A = Inhalation absorption factor

EF = Exposure frequency (days/year)

10⁻⁶ = Conversion factor

Values

Age -> Parameter	Infant/Child			Adult
	3rd Trimester	0 - 2	2 - 16	16 - 30
ASF =	10	10	3	1
CPF =	1.10E+00	1.10E+00	1.10E+00	1.10E+00
DBR* =	361	1090	572	261
A =	1	1	1	1
EF =	350	350	350	350
AT =	70	70	70	70
FAH =	1.00	1.00	1.00	0.73

* 95th percentile breathing rates for infants and 80th percentile for children and adults

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Exposure Duration (years)	Age	Infant/Child - Exposure Information		Infant/Child Age Sensitivity Factor	Infant/Child Cancer Risk (per million)	Adult - Exposure Information		Adult Cancer Risk (per million)	Maximum				
			DPM Conc (ug/m3)				Modeled	Age Sensitivity Factor		DPM Conc (ug/m3)	Sensitivity Factor	Hazard Index	Fugitive PM2.5	Total PM2.5
			Year	Annual										
0	0.25	-0.25 - 0*	2023	0.0042	10	0.06	2023	0.0042	-	-				
1	1	0 - 1	2023	0.0042	10	0.70	2023	0.0042	1	0.01	0.001	0.0002	0.004	
2	1	1 - 2	2024-2025**	0.0247	10	4.05	2024-2025**	0.0247	1	0.07	0.005	0.0003	0.02	
3	1	2 - 3		0.0000	3	0.00		0.0000	1	0.00				
4	1	3 - 4		0.0000	3	0.00		0.0000	1	0.00				
5	1	4 - 5		0.0000	3	0.00		0.0000	1	0.00				
6	1	5 - 6		0.0000	3	0.00		0.0000	1	0.00				
7	1	6 - 7		0.0000	3	0.00		0.0000	1	0.00				
8	1	7 - 8		0.0000	3	0.00		0.0000	1	0.00				
9	1	8 - 9		0.0000	3	0.00		0.0000	1	0.00				
10	1	9 - 10		0.0000	3	0.00		0.0000	1	0.00				
11	1	10 - 11		0.0000	3	0.00		0.0000	1	0.00				
12	1	11 - 12		0.0000	3	0.00		0.0000	1	0.00				
13	1	12 - 13		0.0000	3	0.00		0.0000	1	0.00				
14	1	13 - 14		0.0000	3	0.00		0.0000	1	0.00				
15	1	14 - 15		0.0000	3	0.00		0.0000	1	0.00				
16	1	15 - 16		0.0000	3	0.00		0.0000	1	0.00				
17	1	16-17		0.0000	1	0.00		0.0000	1	0.00				
18	1	17-18		0.0000	1	0.00		0.0000	1	0.00				
19	1	18-19		0.0000	1	0.00		0.0000	1	0.00				
20	1	19-20		0.0000	1	0.00		0.0000	1	0.00				
21	1	20-21		0.0000	1	0.00		0.0000	1	0.00				
22	1	21-22		0.0000	1	0.00		0.0000	1	0.00				
23	1	22-23		0.0000	1	0.00		0.0000	1	0.00				
24	1	23-24		0.0000	1	0.00		0.0000	1	0.00				
25	1	24-25		0.0000	1	0.00		0.0000	1	0.00				
26	1	25-26		0.0000	1	0.00		0.0000	1	0.00				
27	1	26-27		0.0000	1	0.00		0.0000	1	0.00				
28	1	27-28		0.0000	1	0.00		0.0000	1	0.00				
29	1	28-29		0.0000	1	0.00		0.0000	1	0.00				
30	1	29-30		0.0000	1	0.00		0.0000	1	0.00				
Total Increased Cancer Risk						4.80				0.08				

* Third trimester of pregnancy

** Includes 2025 (two months of construction)

**2655 The Alameda, Santa Clara, CA- Construction Impacts - With Mitigation
Maximum DPM Cancer Risk and PM2.5 Calculations From Construction
Impacts at Kids On Campus (+6 weeks) - 1 meter - Child Exposure**

Student Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹
 ASF = Age sensitivity factor for specified age group
 ED = Exposure duration (years)
 AT = Averaging time for lifetime cancer risk (years)

Inhalation Dose = C_{air} x SAF x 8-Hr BR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)
 SCAF = School Child Adjustment Factor (unitless) for source operation and exposures different than 8 hours/day
 = (24/SHR) x (7days/SDay) x (SCHR/8 hrs)
 SHR = Hours/day of emission source operation
 SDay = Number of days per week of source operation
 SCHR = School operation hours while emission source in operation
 8-Hr BR = Eight-hour breathing rate (L/kg body weight-per 8 hrs)
 A = Inhalation absorption factor
 EF = Exposure frequency (days/year)
 10⁻⁶ = Conversion factor

Values

	Infant	School Child
Age ->	0 - <2	2 - <16
Parameter		
ASF =	10	3
DPM CPF =	1.10E+00	1.10E+00
8-Hr BR* =	1200	520
SCHR =	8	8
SHR =	12	12
SDay =	5	5
A =	1	1
EF =	250	250
AT =	70	70
SAF =	2.80	2.80

* 95th percentile 8-hr breathing rates for moderate intensity activities

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Exposure Duration (years)	Age	Child - Exposure Information		Child Cancer Risk (per million)	
			DPM Conc (ug/m3)			Age*
			Year	Annual		Sensitivity Factor
1	1	0 - 1	2023	0.0008	10	0.30
2	1	1 - 2	2024-2025**	0.0042	10	1.53
Total Increased Cancer Risk						1.83

* Children assumed to be 6 weeks and older with 2 years of Construction Exposure

** Includes 2025 (two months of construction)

Maximum		
Hazard Index	Fugitive PM2.5	Total PM2.5
0.0002	0.0004	0.001
0.001	0.001	0.01

2655 The Alameda, Santa Clara, CA - Construction Impacts - With Mitigation
Maximum DPM Cancer Risk and PM2.5 Calculations From Construction
Impacts at Off-Site Residential MEI Location - 1.5 meter receptor height (1st Floor Level)

Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x FAH x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹

ASF = Age sensitivity factor for specified age group

ED = Exposure duration (years)

AT = Averaging time for lifetime cancer risk (years)

FAH = Fraction of time spent at home (unitless)

Inhalation Dose = C_{air} x DBR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)

DBR = daily breathing rate (L/kg body weight-day)

A = Inhalation absorption factor

EF = Exposure frequency (days/year)

10⁻⁶ = Conversion factor

Values

Age -> Parameter	Infant/Child			Adult
	3rd Trimester	0 - 2	2 - 16	16 - 30
ASF =	10	10	3	1
CPF =	1.10E+00	1.10E+00	1.10E+00	1.10E+00
DBR* =	361	1090	572	261
A =	1	1	1	1
EF =	350	350	350	350
AT =	70	70	70	70
FAH =	1.00	1.00	1.00	0.73

* 95th percentile breathing rates for infants and 80th percentile for children and adults

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Exposure Duration (years)	Age	Infant/Child - Exposure Information		Infant/Child Cancer Risk (per million)	Adult - Exposure Information		Adult Cancer Risk (per million)	Maximum					
			DPM Conc (ug/m ³)			Age Sensitivity Factor	Modeled		Age Sensitivity Factor	Hazard Index	Fugitive PM2.5	Total PM2.5		
			Year	Annual	Year		Annual							
0	0.25	-0.25 - 0*	2023	0.0004	10	0.01	2023	0.0004	-	-	-	-	-	-
1	1	0 - 1	2023	0.0004	10	0.07	2023	0.0004	1	0.00	0.0001	0.0002	0.001	
2	1	1 - 2	2024-2025**	0.0022	10	0.36	2024-2025**	0.0022	1	0.01	0.0004	0.0004	0.003	
3	1	2 - 3		0.0000	3	0.00		0.0000	1	0.00				
4	1	3 - 4		0.0000	3	0.00		0.0000	1	0.00				
5	1	4 - 5		0.0000	3	0.00		0.0000	1	0.00				
6	1	5 - 6		0.0000	3	0.00		0.0000	1	0.00				
7	1	6 - 7		0.0000	3	0.00		0.0000	1	0.00				
8	1	7 - 8		0.0000	3	0.00		0.0000	1	0.00				
9	1	8 - 9		0.0000	3	0.00		0.0000	1	0.00				
10	1	9 - 10		0.0000	3	0.00		0.0000	1	0.00				
11	1	10 - 11		0.0000	3	0.00		0.0000	1	0.00				
12	1	11 - 12		0.0000	3	0.00		0.0000	1	0.00				
13	1	12 - 13		0.0000	3	0.00		0.0000	1	0.00				
14	1	13 - 14		0.0000	3	0.00		0.0000	1	0.00				
15	1	14 - 15		0.0000	3	0.00		0.0000	1	0.00				
16	1	15 - 16		0.0000	3	0.00		0.0000	1	0.00				
17	1	16-17		0.0000	1	0.00		0.0000	1	0.00				
18	1	17-18		0.0000	1	0.00		0.0000	1	0.00				
19	1	18-19		0.0000	1	0.00		0.0000	1	0.00				
20	1	19-20		0.0000	1	0.00		0.0000	1	0.00				
21	1	20-21		0.0000	1	0.00		0.0000	1	0.00				
22	1	21-22		0.0000	1	0.00		0.0000	1	0.00				
23	1	22-23		0.0000	1	0.00		0.0000	1	0.00				
24	1	23-24		0.0000	1	0.00		0.0000	1	0.00				
25	1	24-25		0.0000	1	0.00		0.0000	1	0.00				
26	1	25-26		0.0000	1	0.00		0.0000	1	0.00				
27	1	26-27		0.0000	1	0.00		0.0000	1	0.00				
28	1	27-28		0.0000	1	0.00		0.0000	1	0.00				
29	1	28-29		0.0000	1	0.00		0.0000	1	0.00				
30	1	29-30		0.0000	1	0.00		0.0000	1	0.00				
Total Increased Cancer Risk						0.43				0.01				

* Third trimester of pregnancy

** Includes 2025 (two months of construction)

2655 The Alameda, Santa Clara, CA - Construction Impacts - With Mitigation
Maximum DPM Cancer Risk and PM2.5 Calculations From Construction
Impacts at Off-Site Residential MEI Location - 4.5 meter receptor height (2nd Floor Level)

Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x FAH x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹
 ASF = Age sensitivity factor for specified age group
 ED = Exposure duration (years)
 AT = Averaging time for lifetime cancer risk (years)
 FAH = Fraction of time spent at home (unitless)

Inhalation Dose = C_{air} x DBR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)
 DBR = daily breathing rate (L/kg body weight-day)
 A = Inhalation absorption factor
 EF = Exposure frequency (days/year)
 10⁻⁶ = Conversion factor

Values

Age -> Parameter	Infant/Child			Adult
	3rd Trimester	0 - 2	2 - 16	16 - 30
ASF =	10	10	3	1
CPF =	1.10E+00	1.10E+00	1.10E+00	1.10E+00
DBR* =	361	1090	572	261
A =	1	1	1	1
EF =	350	350	350	350
AT =	70	70	70	70
FAH =	1.00	1.00	1.00	0.73

* 95th percentile breathing rates for infants and 80th percentile for children and adults

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Exposure Duration (years)	Age	Infant/Child - Exposure Information		Age Sensitivity Factor	Infant/Child Cancer Risk (per million)	Adult - Exposure Information		Age Sensitivity Factor	Adult Cancer Risk (per million)	Maximum						
			DPM Conc (ug/m ³)				Modeled				DPM Conc (ug/m ³)	Sensitivity	DPM Conc (ug/m ³)	Sensitivity	DPM Conc (ug/m ³)	Sensitivity	DPM Conc (ug/m ³)
			Year	Annual			Year	Annual									
0	0.25	-0.25 - 0*	2023	0.0004	10	0.01	2023	0.0004	-	-							
1	1	0 - 1	2023	0.0004	10	0.06	2023	0.0004	1	0.00	0.0001	0.0001	0.001				
2	1	1 - 2	2024-2025**	0.0019	10	0.31	2024-2025**	0.0019	1	0.01	0.0004	0.0003	0.002				
3	1	2 - 3		0.0000	3	0.00		0.0000	1	0.00							
4	1	3 - 4		0.0000	3	0.00		0.0000	1	0.00							
5	1	4 - 5		0.0000	3	0.00		0.0000	1	0.00							
6	1	5 - 6		0.0000	3	0.00		0.0000	1	0.00							
7	1	6 - 7		0.0000	3	0.00		0.0000	1	0.00							
8	1	7 - 8		0.0000	3	0.00		0.0000	1	0.00							
9	1	8 - 9		0.0000	3	0.00		0.0000	1	0.00							
10	1	9 - 10		0.0000	3	0.00		0.0000	1	0.00							
11	1	10 - 11		0.0000	3	0.00		0.0000	1	0.00							
12	1	11 - 12		0.0000	3	0.00		0.0000	1	0.00							
13	1	12 - 13		0.0000	3	0.00		0.0000	1	0.00							
14	1	13 - 14		0.0000	3	0.00		0.0000	1	0.00							
15	1	14 - 15		0.0000	3	0.00		0.0000	1	0.00							
16	1	15 - 16		0.0000	3	0.00		0.0000	1	0.00							
17	1	16-17		0.0000	1	0.00		0.0000	1	0.00							
18	1	17-18		0.0000	1	0.00		0.0000	1	0.00							
19	1	18-19		0.0000	1	0.00		0.0000	1	0.00							
20	1	19-20		0.0000	1	0.00		0.0000	1	0.00							
21	1	20-21		0.0000	1	0.00		0.0000	1	0.00							
22	1	21-22		0.0000	1	0.00		0.0000	1	0.00							
23	1	22-23		0.0000	1	0.00		0.0000	1	0.00							
24	1	23-24		0.0000	1	0.00		0.0000	1	0.00							
25	1	24-25		0.0000	1	0.00		0.0000	1	0.00							
26	1	25-26		0.0000	1	0.00		0.0000	1	0.00							
27	1	26-27		0.0000	1	0.00		0.0000	1	0.00							
28	1	27-28		0.0000	1	0.00		0.0000	1	0.00							
29	1	28-29		0.0000	1	0.00		0.0000	1	0.00							
30	1	29-30		0.0000	1	0.00		0.0000	1	0.00							
Total Increased Cancer Risk						0.38											

* Third trimester of pregnancy

** Includes 2025 (two months of construction)

Attachment 5: Community Risk Modeling Information and Calculations

CT-EMFAC2017 Emissions Factors for Santa Clara County 2023

File Name: 2655 The Alameda - Santa Clara (SF) - 2023 - Annual.EF
 CT-EMFAC2017 Version: 1.0.2.27401
 Run Date: 9/8/2022 14:00
 Area: Santa Clara (SF)
 Analysis Year: 2023
 Season: Annual

```
=====
```

Vehicle Category	VMT Fraction Across Category	Diesel VMT Fraction Within Category	Gas VMT Fraction Within Category
Truck 1	0.015	0.487	0.513
Truck 2	0.02	0.938	0.047
Non-Truck	0.965	0.014	0.958

```
=====
```

```
=====
```

Road Type: Major/Collector
 Silt Loading Factor: CARB 0.032 g/m2
 Precipitation Correction: CARB P = 64 days N = 365 days

```
=====
```

Fleet Average Running Exhaust Emission Factors (grams/veh-mile)

Pollutant Name	<= 5 mph	10 mph	15 mph	20 mph	25 mph	30 mph	35 mph	40 mph	45 mph
PM2.5	0.009229	0.005981	0.004054	0.002896	0.002194	0.001765	0.001511	0.001375	0.001329
TOG	0.195764	0.127928	0.086105	0.061055	0.046181	0.036838	0.030861	0.027137	0.025044
Diesel PM	0.000904	0.000732	0.000563	0.000446	0.000382	0.000353	0.00035	0.00037	0.000411

```
=====
```

Fleet Average Running Loss Emission Factors (grams/veh-hour)

Pollutant Name	Emission Factor
TOG	1.35761

```
=====
```

Fleet Average Tire Wear Factors (grams/veh-mile)

Pollutant Name	Emission Factor
PM2.5	0.002108

```
=====
```

Fleet Average Brake Wear Factors (grams/veh-mile)

Pollutant Name	Emission Factor
PM2.5	0.016808

```
=====
```

Fleet Average Road Dust Factors (grams/veh-mile)

Pollutant Name	Emission Factor
PM2.5	0.014855

```
=====
```

=====END=====

El Camino Real Traffic Emissions and Health Risk Calculations 2023

Analysis Year = **2023**

Vehicle Type	2019 Caltrans Vehicles (veh/day)	2023 Vehicles (veh/day)
Total	22,390	23,286

Increase From 2019 1.04
Vehicles/Direction 11,643
 Avg Vehicles/Hour/Direction 485

Traffic Data Year = **2019**

Project Traffic Data - Existing ADT	AADT Total	Total Truck
The Alameda and Campbell	22,390	786

Percent of Total Vehicles 3.51%
 Traffic Increase per Year (%) = 1.00%

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
 Cumulative Operation - El Camino Real
 DPM Modeling - Roadway Links, Traffic Volumes, and DPM Emissions
 Year = **2023**

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
DPM_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	91.7	3.4	35	23,286

Emission Factors - DPM

Speed Category Travel Speed (mph) Emissions per Vehicle (g/VMT)	1	2	3	4
	35 0.00035			

Emission Factors from CT-EMFAC2017

2023 Hourly Traffic Volumes and DPM Emissions - DPM_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	3.91%	911	5.04E-06	9	6.50%	1513	8.37E-06	17	5.58%	1299	7.19E-06
2	2.59%	603	3.33E-06	10	7.36%	1714	9.48E-06	18	3.28%	763	4.22E-06
3	2.88%	670	3.70E-06	11	6.33%	1473	8.15E-06	19	2.36%	549	3.04E-06
4	3.34%	777	4.30E-06	12	6.84%	1593	8.82E-06	20	0.92%	214	1.19E-06
5	2.19%	509	2.82E-06	13	6.15%	1433	7.93E-06	21	2.99%	696	3.85E-06
6	3.39%	790	4.37E-06	14	6.15%	1433	7.93E-06	22	4.14%	964	5.33E-06
7	5.98%	1393	7.71E-06	15	5.23%	1219	6.74E-06	23	2.47%	576	3.19E-06
8	4.66%	1085	6.00E-06	16	3.91%	911	5.04E-06	24	0.86%	201	1.11E-06
Total										23,286	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
 Cumulative Operation - El Camino Real
 PM2.5 Modeling - Roadway Links, Traffic Volumes, and PM2.5 Emissions
 Year = 2023

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
PM25_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,286

Emission Factors - PM2.5

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Emissions per Vehicle (g/VMT)	0.001511			

Emission Factors from CT-EMFAC2017

2023 Hourly Traffic Volumes and PM2.5 Emissions - PM25_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	268	6.41E-06	9	7.11%	1656	3.96E-05	17	7.38%	1720	4.11E-05
2	0.42%	97	2.32E-06	10	4.39%	1023	2.44E-05	18	8.17%	1903	4.55E-05
3	0.41%	95	2.27E-06	11	4.66%	1086	2.59E-05	19	5.70%	1326	3.17E-05
4	0.26%	61	1.46E-06	12	5.89%	1371	3.28E-05	20	4.27%	995	2.38E-05
5	0.50%	117	2.78E-06	13	6.15%	1432	3.42E-05	21	3.26%	759	1.81E-05
6	0.90%	211	5.03E-06	14	6.04%	1406	3.36E-05	22	3.30%	768	1.83E-05
7	3.79%	883	2.11E-05	15	7.01%	1633	3.90E-05	23	2.46%	573	1.37E-05
8	7.76%	1808	4.32E-05	16	7.14%	1661	3.97E-05	24	1.86%	434	1.04E-05
Total										23,286	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
 Cumulative Operation - El Camino Real
 TOG Exhaust Modeling - Roadway Links, Traffic Volumes, and TOG Exhaust Emissions
 Year = 2023

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
TEXH_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,286

Emission Factors - TOG Exhaust

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Emissions per Vehicle (g/VMT)	0.03086			

Emission Factors from CT-EMFAC2017

2023 Hourly Traffic Volumes and TOG Exhaust Emissions - TEXH_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	268	1.31E-04	9	7.11%	1656	8.08E-04	17	7.38%	1720	8.39E-04
2	0.42%	97	4.74E-05	10	4.39%	1023	4.99E-04	18	8.17%	1903	9.28E-04
3	0.41%	95	4.63E-05	11	4.66%	1086	5.30E-04	19	5.70%	1326	6.47E-04
4	0.26%	61	2.99E-05	12	5.89%	1371	6.69E-04	20	4.27%	995	4.86E-04
5	0.50%	117	5.69E-05	13	6.15%	1432	6.99E-04	21	3.26%	759	3.70E-04
6	0.90%	211	1.03E-04	14	6.04%	1406	6.86E-04	22	3.30%	768	3.75E-04
7	3.79%	883	4.31E-04	15	7.01%	1633	7.97E-04	23	2.46%	573	2.79E-04
8	7.76%	1808	8.82E-04	16	7.14%	1661	8.11E-04	24	1.86%	434	2.12E-04
Total										23,286	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling

Cumulative Operation - El Camino Real

TOG Evaporative Emissions Modeling - Roadway Links, Traffic Volumes, and TOG Evaporative Emissions

Year = 2023

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
TEVAP_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,286

Emission Factors - PM2.5 - Evaporative TOG

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Emissions per Vehicle per Hour (g/hour)	1.35761			
Emissions per Vehicle per Mile (g/VMT)	0.03879			

Emission Factors from CT-EMFAC2017

2023 Hourly Traffic Volumes and TOG Evaporative Emissions - TEVAP_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	268	1.64E-04	9	7.11%	1656	1.02E-03	17	7.38%	1720	1.05E-03
2	0.42%	97	5.96E-05	10	4.39%	1023	6.27E-04	18	8.17%	1903	1.17E-03
3	0.41%	95	5.82E-05	11	4.66%	1086	6.66E-04	19	5.70%	1326	8.13E-04
4	0.26%	61	3.76E-05	12	5.89%	1371	8.41E-04	20	4.27%	995	6.10E-04
5	0.50%	117	7.15E-05	13	6.15%	1432	8.78E-04	21	3.26%	759	4.65E-04
6	0.90%	211	1.29E-04	14	6.04%	1406	8.62E-04	22	3.30%	768	4.71E-04
7	3.79%	883	5.42E-04	15	7.01%	1633	1.00E-03	23	2.46%	573	3.51E-04
8	7.76%	1808	1.11E-03	16	7.14%	1661	1.02E-03	24	1.86%	434	2.66E-04
Total										23,286	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
 Cumulative Operation - El Camino Real
 Fugitive Road PM2.5 Modeling - Roadway Links, Traffic Volumes, and Fugitive Road PM2.5 Emissions
 Year = 2023

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
FUG_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,286

Emission Factors - Fugitive PM2.5

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Tire Wear - Emissions per Vehicle (g/VMT)	0.00211			
Brake Wear - Emissions per Vehicle (g/VMT)	0.01681			
Road Dust - Emissions per Vehicle (g/VMT)	0.01486			
Total Fugitive PM2.5 - Emissions per Vehicle (g/VMT)	0.03377			

Emission Factors from CT-EMFAC2017

2023 Hourly Traffic Volumes and Fugitive PM2.5 Emissions - FUG_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	268	1.43E-04	9	7.11%	1656	8.84E-04	17	7.38%	1720	9.18E-04
2	0.42%	97	5.19E-05	10	4.39%	1023	5.46E-04	18	8.17%	1903	1.02E-03
3	0.41%	95	5.07E-05	11	4.66%	1086	5.80E-04	19	5.70%	1326	7.08E-04
4	0.26%	61	3.27E-05	12	5.89%	1371	7.32E-04	20	4.27%	995	5.31E-04
5	0.50%	117	6.22E-05	13	6.15%	1432	7.65E-04	21	3.26%	759	4.05E-04
6	0.90%	211	1.12E-04	14	6.04%	1406	7.51E-04	22	3.30%	768	4.10E-04
7	3.79%	883	4.72E-04	15	7.01%	1633	8.72E-04	23	2.46%	573	3.06E-04
8	7.76%	1808	9.65E-04	16	7.14%	1661	8.87E-04	24	1.86%	434	2.32E-04
Total										23,286	

**2655 The Alameda, Santa Clara, CA - El Camino Real Traffic - TACs & PM2.5
 AERMOD Risk Modeling Parameters and Maximum Concentrations
 at Preschool MEI Receptor, 1 m receptor height**

Emission Year 2023
Receptor Information Preschool MEI receptor
 Number of Receptors 1
 Receptor Height 1 meter
 Receptor Distances At Preschool MEI location

Meteorological Conditions
 BAQMD San Jose Airport Met Data 2013-2017
 Land Use Classification Urban
 Wind Speed Variable
 Wind Direction Variable

Preschool MEI Cancer Risk Maximum Concentrations

Meteorological Data Years	Concentration (µg/m3)		
	DPM	Exhaust TOG	Evaporative TOG
2013-2017	0.00003	0.0016	0.0020

Preschool MEI PM2.5 Maximum Concentrations

Meteorological Data Years	PM2.5 Concentration (µg/m3)		
	Total PM2.5	Fugitive PM2.5	Vehicle PM2.5
2013-2017	0.0019	0.0018	0.0001

**2655 The Alameda, Santa Clara, CA - El Camino Real Cancer Risk & PM2.5
Impacts at Preschool MEI - 1 meter receptor height
6 Year Preschool Exposure**

Cancer Risk Calculation Method

Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x SCAF x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹
 ASF = Age sensitivity factor for specified age group
 ED = Exposure duration (years)
 AT = Averaging time for lifetime cancer risk (years)
 SCAF = School Child Adjustment Factor (unitless) for source operation
 and exposures different than 8 hours/day

Inhalation Dose = C_{air} x SAF x 8-Hr BR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)
 8-Hr BR = Eight-hour breathing rate (L/kg body weight-per 8 hrs)
 A = Inhalation absorption factor
 EF = Exposure frequency (days/year)
 10⁻⁶ = Conversion factor

Cancer Potency Factors (mg/kg-day) ⁻¹	
TAC	CPF
DPM	1.10E+00
Vehicle TOG Exhaust	6.28E-03
Vehicle TOG Evaporative	3.70E-04

Values

Age -> Parameter	Infant/Child			Adult
	3rd Trimester	0 - 2	2 - 16	16 - 30
ASF =	10	10	3	1
8-Hr BR* =	1200	1200	250	261
A =	1	1	1	1
EF =	250	250	250	250
AT =	70	70	70	70
SCAF =	2.80	2.80	2.80	0.73

* 95th percentile 8-hr breathing rates for moderate intensity activities

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Maximum - Exposure Information			Age Sensitivity Factor	Concentration (ug/m3)			Cancer Risk (per million)			TOTAL
	Exposure Duration (years)	Age	Year		DPM	Exhaust TOG	Evaporative TOG	DPM	Exhaust TOG	Evaporative TOG	
2	1	1 - 2	2024	10	0.00003	0.0016	0.0020	0.011	0.003	0.0002	0.01
3	1	2 - 3	2025	3	0.00003	0.0016	0.0020	0.001	0.0002	0.00002	0.001
4	1	3 - 4	2026	3	0.00003	0.0016	0.0020	0.001	0.0002	0.00002	0.001
5	1	4 - 5	2027	3	0.00003	0.0016	0.0020	0.001	0.0002	0.00002	0.001
6	1	5 - 6	2028	3	0.00003	0.0016	0.0020	0.001	0.0002	0.00002	0.001
Total Increased Cancer Risk											0.03

Maximum
 Hazard Index 0.00001
 Fugitive PM2.5 0.002
 Total PM2.5 0.002

* Children assumed to be 6 weeks through 6 years with 6 years of Roadway Exposure

CT-EMFAC2017 Emissions Factors for Santa Clara County 2025

File Name: 2655 The Alameda - Santa Clara (SF) - 2023 - Annual.EF
 CT-EMFAC2017 Version: 1.0.2.27401
 Run Date: 9/8/2022 14:07
 Area: Santa Clara (SF)
 Analysis Year: 2025
 Season: Annual

Vehicle Category	VMT Fraction Across Category	Diesel VMT Fraction Within Category	Gas VMT Fraction Within Category
Truck 1	0.015	0.502	0.498
Truck 2	0.02	0.936	0.048
Non-Truck	0.965	0.015	0.951

Road Type: Major/Collector
 Silt Loading Factor: CARB 0.032 g/m2
 Precipitation Correction: CARB P = 64 days N = 365 days

Fleet Average Running Exhaust Emission Factors (grams/veh-mile)

Pollutant Name	<= 5 mph	10 mph	15 mph	20 mph	25 mph	30 mph	35 mph	40 mph	45 mph
PM2.5	0.008489	0.005501	0.00373	0.002665	0.00202	0.001628	0.001397	0.001277	0.00124
TOG	0.172619	0.113109	0.076066	0.0539	0.040836	0.03264	0.027389	0.02411	0.022258
Diesel PM	0.000788	0.00065	0.000505	0.000405	0.00035	0.000326	0.000328	0.000351	0.000395

Fleet Average Running Loss Emission Factors (grams/veh-hour)

Pollutant Name	Emission Factor
TOG	1.255395

Fleet Average Tire Wear Factors (grams/veh-mile)

Pollutant Name	Emission Factor
PM2.5	0.002108

Fleet Average Brake Wear Factors (grams/veh-mile)

Pollutant Name	Emission Factor
PM2.5	0.016801

Fleet Average Road Dust Factors (grams/veh-mile)

Pollutant Name	Emission Factor
PM2.5	0.014826

=====
 END
 =====

El Camino Real Traffic Emissions and Health Risk Calculations 2025

Analysis Year = **2025**

Vehicle Type	2019 Caltrans Vehicles (veh/day)	2025 Vehicles (veh/day)
Total	22,390	23,733

Increase From 2019 1.06
Vehicles/Direction **11,867**
 Avg Vehicles/Hour/Direction 494

Traffic Data Year = **2019**

Project Traffic Data - Existing ADT	AADT Total	Total Truck
The Alameda and Campbell	22,390	786

Percent of Total Vehicles 3.51%
 Traffic Increase per Year (%) = 1.00%

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
Cumulative Operation - El Camino Real
DPM Modeling - Roadway Links, Traffic Volumes, and DPM Emissions
 Year = **2025**

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
DPM_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	91.7	3.4	35	23,733

Emission Factors - DPM

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Emissions per Vehicle (g/VMT)	0.00033			

Emission Factors from CT-EMFAC2017

2025 Hourly Traffic Volumes and DPM Emissions - DPM_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	3.93%	933	4.84E-06	9	6.41%	1521	7.89E-06	17	5.55%	1317	6.83E-06
2	2.62%	622	3.22E-06	10	7.36%	1747	9.06E-06	18	3.16%	750	3.89E-06
3	2.85%	676	3.51E-06	11	6.34%	1505	7.80E-06	19	2.36%	560	2.90E-06
4	3.31%	786	4.07E-06	12	6.92%	1642	8.52E-06	20	0.87%	206	1.07E-06
5	2.17%	515	2.67E-06	13	6.29%	1493	7.74E-06	21	3.09%	733	3.80E-06
6	3.36%	797	4.14E-06	14	6.23%	1479	7.67E-06	22	4.12%	978	5.07E-06
7	6.00%	1424	7.38E-06	15	5.15%	1222	6.34E-06	23	2.58%	612	3.18E-06
8	4.58%	1087	5.64E-06	16	3.84%	911	4.73E-06	24	0.92%	218	1.13E-06
Total										23,736	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
 Cumulative Operation - El Camino Real
 PM2.5 Modeling - Roadway Links, Traffic Volumes, and PM2.5 Emissions
 Year = 2025

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
PM25_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,733

Emission Factors - PM2.5

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Emissions per Vehicle (g/VMT)	0.001397			

Emission Factors from CT-EMFAC2017

2025 Hourly Traffic Volumes and PM2.5 Emissions - PM25_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	273	6.03E-06	9	7.11%	1687	3.73E-05	17	7.39%	1754	3.87E-05
2	0.42%	100	2.20E-06	10	4.39%	1042	2.30E-05	18	8.18%	1941	4.29E-05
3	0.41%	97	2.15E-06	11	4.66%	1106	2.44E-05	19	5.69%	1350	2.98E-05
4	0.26%	62	1.36E-06	12	5.89%	1398	3.09E-05	20	4.28%	1016	2.24E-05
5	0.50%	119	2.62E-06	13	6.15%	1460	3.22E-05	21	3.25%	771	1.70E-05
6	0.91%	216	4.77E-06	14	6.04%	1433	3.17E-05	22	3.30%	783	1.73E-05
7	3.79%	899	1.99E-05	15	7.01%	1664	3.67E-05	23	2.46%	584	1.29E-05
8	7.77%	1844	4.07E-05	16	7.14%	1695	3.74E-05	24	1.86%	441	9.75E-06
Total										23,736	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
 Cumulative Operation - El Camino Real
 TOG Exhaust Modeling - Roadway Links, Traffic Volumes, and TOG Exhaust Emissions
 Year = 2025

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
TEXH_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,733

Emission Factors - TOG Exhaust

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Emissions per Vehicle (g/VMT)	0.02739			

Emission Factors from CT-EMFAC2017

2025 Hourly Traffic Volumes and TOG Exhaust Emissions - TEXH_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	273	1.18E-04	9	7.11%	1687	7.31E-04	17	7.39%	1754	7.59E-04
2	0.42%	100	4.32E-05	10	4.39%	1042	4.51E-04	18	8.18%	1941	8.41E-04
3	0.41%	97	4.21E-05	11	4.66%	1106	4.79E-04	19	5.69%	1350	5.85E-04
4	0.26%	62	2.67E-05	12	5.89%	1398	6.05E-04	20	4.28%	1016	4.40E-04
5	0.50%	119	5.14E-05	13	6.15%	1460	6.32E-04	21	3.25%	771	3.34E-04
6	0.91%	216	9.35E-05	14	6.04%	1433	6.21E-04	22	3.30%	783	3.39E-04
7	3.79%	899	3.90E-04	15	7.01%	1664	7.20E-04	23	2.46%	584	2.53E-04
8	7.77%	1844	7.99E-04	16	7.14%	1695	7.34E-04	24	1.86%	441	1.91E-04
Total										23,736	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling

Cumulative Operation - El Camino Real

TOG Evaporative Emissions Modeling - Roadway Links, Traffic Volumes, and TOG Evaporative Emissions

Year = 2025

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
TEVAP_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,733

Emission Factors - PM2.5 - Evaporative TOG

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Emissions per Vehicle per Hour (g/hour)	1.25540			
Emissions per Vehicle per Mile (g/VMT)	0.03587			

Emission Factors from CT-EMFAC2017

2025 Hourly Traffic Volumes and TOG Evaporative Emissions - TEVAP_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	273	1.55E-04	9	7.11%	1687	9.57E-04	17	7.39%	1754	9.95E-04
2	0.42%	100	5.65E-05	10	4.39%	1042	5.91E-04	18	8.18%	1941	1.10E-03
3	0.41%	97	5.52E-05	11	4.66%	1106	6.27E-04	19	5.69%	1350	7.66E-04
4	0.26%	62	3.50E-05	12	5.89%	1398	7.93E-04	20	4.28%	1016	5.76E-04
5	0.50%	119	6.73E-05	13	6.15%	1460	8.28E-04	21	3.25%	771	4.37E-04
6	0.91%	216	1.22E-04	14	6.04%	1433	8.13E-04	22	3.30%	783	4.44E-04
7	3.79%	899	5.10E-04	15	7.01%	1664	9.43E-04	23	2.46%	584	3.31E-04
8	7.77%	1844	1.05E-03	16	7.14%	1695	9.61E-04	24	1.86%	441	2.50E-04
Total										23,736	

2655 The Alameda, Santa Clara, CA - Offsite Residential Roadway Modeling
 Cumulative Operation - El Camino Real
 Fugitive Road PM2.5 Modeling - Roadway Links, Traffic Volumes, and Fugitive Road PM2.5 Emissions
 Year = 2025

Road Link	Description	Direction	No. Lanes	Link Length (m)	Link Length (mi)	Link Width (m)	Link Width (ft)	Release Height (m)	Average Speed (mph)	Average Vehicles per Day
FUG_ECR	El Camino Real Northbound/Southbound	NB/SB	6	91.6	0.06	27.9	92	1.3	35	23,733

Emission Factors - Fugitive PM2.5

Speed Category	1	2	3	4
Travel Speed (mph)	35			
Tire Wear - Emissions per Vehicle (g/VMT)	0.00211			
Brake Wear - Emissions per Vehicle (g/VMT)	0.01680			
Road Dust - Emissions per Vehicle (g/VMT)	0.01483			
Total Fugitive PM2.5 - Emissions per Vehicle (g/VMT)	0.03374			

Emission Factors from CT-EMFAC2017

2025 Hourly Traffic Volumes and Fugitive PM2.5 Emissions - FUG_ECR

Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s	Hour	% Per Hour	VPH	g/s
1	1.15%	273	1.46E-04	9	7.11%	1687	9.00E-04	17	7.39%	1754	9.35E-04
2	0.42%	100	5.32E-05	10	4.39%	1042	5.56E-04	18	8.18%	1941	1.04E-03
3	0.41%	97	5.19E-05	11	4.66%	1106	5.90E-04	19	5.69%	1350	7.20E-04
4	0.26%	62	3.29E-05	12	5.89%	1398	7.46E-04	20	4.28%	1016	5.42E-04
5	0.50%	119	6.33E-05	13	6.15%	1460	7.79E-04	21	3.25%	771	4.11E-04
6	0.91%	216	1.15E-04	14	6.04%	1433	7.65E-04	22	3.30%	783	4.18E-04
7	3.79%	899	4.80E-04	15	7.01%	1664	8.87E-04	23	2.46%	584	3.11E-04
8	7.77%	1844	9.84E-04	16	7.14%	1695	9.04E-04	24	1.86%	441	2.35E-04
Total										23,736	

**2655 The Alameda, Santa Clara, CA - El Camino Real Traffic - TACs & PM2.5
 AERMOD Risk Modeling Parameters and Maximum Concentrations
 On-Site 1st & 2nd Levels of Residential Receptors
 - At 1.5m (1st Fl) and 6.4m (2nd Fl) receptor heights**

Emission Year 2025
Receptor Information Maximum On-Site Receptor
 Number of Receptors 36
 Receptor Height 1st & 2nd Level of Residential Receptors
 Receptor Distances 7 meter grid spacing in residential areas

Meteorological Conditions
 BAQMD San Jose Airport Met Data 2013-2017
 Land Use Classification Urban
 Wind Speed Variable
 Wind Direction Variable

On-Site Cancer Risk Maximum Concentrations

Meteorological Data Years	Concentration (µg/m3)			
	DPM	Exhaust TOG	Evaporative TOG	
2013-2017	0.00004	0.0019	0.0025	1st Level of Res Recepts
2013-2017	0.00003	0.0017	0.0023	2nd Level of Res Recepts

On-Site PM2.5 Maximum Concentrations

Meteorological Data Years	PM2.5 Concentration (µg/m3)			
	Total PM2.5	Fugitive PM2.5	Vehicle PM2.5	
2013-2017	0.0025	0.0024	0.0001	1st Level of Res Recepts
2013-2017	0.0022	0.0021	0.0001	2nd Level of Res Recepts

**2655 The Alameda, Santa Clara, CA - El Camino Real Cancer Risk & PM2.5
Impacts at On-Site 1st Level of Residential Receptors - 1.5 m (1st Fl) receptor heights
30 Year Residential Exposure**

Cancer Risk Calculation Method

Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x FAH x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹

ASF = Age sensitivity factor for specified age group

ED = Exposure duration (years)

AT = Averaging time for lifetime cancer risk (years)

FAH = Fraction of time spent at home (unitless)

Inhalation Dose = C_{air} x DBR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)

DBR = daily breathing rate (L/kg body weight-day)

A = Inhalation absorption factor

EF = Exposure frequency (days/year)

10⁻⁶ = Conversion factor

Cancer Potency Factors (mg/kg-day)⁻¹

TAC	CPF
DPM	1.10E+00
Vehicle TOG Exhaust	6.28E-03
Vehicle TOG Evaporative	3.70E-04

Values

Age →	Infant/Child			Adult
	3rd Trimester	0 - 2	2 - 16	16 - 30
Parameter				
ASF =	10	10	3	1
DBR* =	361	1090	572	261
A =	1	1	1	1
EF =	350	350	350	350
AT =	70	70	70	70
FAH =	1.00	1.00	1.00	0.73

* 95th percentile breathing rates for infants and 80th percentile for children and adults

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Maximum - Exposure Information				Concentration (ug/m3)			Cancer Risk (per million)			TOTAL
	Exposure Duration (years)	Age	Year	Age Sensitivity Factor	DPM	Exhaust TOG	Evaporative TOG	DPM	Exhaust TOG	Evaporative TOG	
1	1	0 - 1	2025	10	0.00004	0.0019	0.0025	0.0066	0.0018	0.0001	0.009
2	1	1 - 2	2026	10	0.00004	0.0019	0.0025	0.0066	0.0018	0.0001	0.009
3	1	2 - 3	2027	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
4	1	3 - 4	2028	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
5	1	4 - 5	2029	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
6	1	5 - 6	2030	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
7	1	6 - 7	2031	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
8	1	7 - 8	2032	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
9	1	8 - 9	2033	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
10	1	9 - 10	2034	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
11	1	10 - 11	2035	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
12	1	11 - 12	2036	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
13	1	12 - 13	2037	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
14	1	13 - 14	2038	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
15	1	14 - 15	2039	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
16	1	15 - 16	2040	3	0.00004	0.0019	0.0025	0.0010	0.0003	0.0000	0.001
17	1	16 - 17	2041	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
18	1	17 - 18	2042	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
19	1	18 - 19	2043	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
20	1	19 - 20	2044	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
21	1	20 - 21	2045	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
22	1	21 - 22	2046	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
23	1	22 - 23	2047	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
24	1	23 - 24	2048	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
25	1	24 - 25	2049	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
26	1	25 - 26	2050	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
27	1	26 - 27	2051	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
28	1	27 - 28	2052	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
29	1	28 - 29	2053	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
30	1	29 - 30	2054	1	0.00004	0.0019	0.0025	0.0001	0.0000	0.0000	0.000
Total Increased Cancer Risk								0.03	0.008	0.001	0.04

* Third trimester of pregnancy

Maximum
Hazard Index 0.00001
Fugitive PM2.5 0.002
Total PM2.5 0.002

**2655 The Alameda, Santa Clara, CA - El Camino Real Cancer Risk & PM2.5
Impacts at On-Site 2nd Level of Residential Receptors - 6.4 m (2nd Fl) receptor heights
30 Year Residential Exposure**

Cancer Risk Calculation Method

Cancer Risk (per million) = CPF x Inhalation Dose x ASF x ED/AT x FAH x 1.0E6

Where: CPF = Cancer potency factor (mg/kg-day)⁻¹
ASF = Age sensitivity factor for specified age group
ED = Exposure duration (years)
AT = Averaging time for lifetime cancer risk (years)
FAH = Fraction of time spent at home (unitless)

Inhalation Dose = C_{air} x DBR x A x (EF/365) x 10⁻⁶

Where: C_{air} = concentration in air (µg/m³)
DBR = daily breathing rate (L/kg body weight-day)
A = Inhalation absorption factor
EF = Exposure frequency (days/year)
10⁻⁶ = Conversion factor

Cancer Potency Factors (mg/kg-day)⁻¹

TAC	CPF
DPM	1.10E+00
Vehicle TOG Exhaust	6.28E-03
Vehicle TOG Evaporative	3.70E-04

Values

Age → Parameter	Infant/Child			Adult
	3rd Trimester	0 - 2	2 - 16	16 - 30
ASF =	10	10	3	1
DBR* =	361	1090	572	261
A =	1	1	1	1
EF =	350	350	350	350
AT =	70	70	70	70
FAH =	1.00	1.00	1.00	0.73

* 95th percentile breathing rates for infants and 80th percentile for children and adults

Construction Cancer Risk by Year - Maximum Impact Receptor Location

Exposure Year	Maximum - Exposure Information				Concentration (ug/m3)			Cancer Risk (per million)			TOTAL			
	Exposure Duration (years)	Age	Year	Age Sensitivity Factor	DPM	Exhaust TOG	Evaporative TOG	DPM	Exhaust TOG	Evaporative TOG				
												0	0.25	-0.25 - 0*
1	1	0 - 1	2025	10	0.00003	0.0017	0.0023	0.0049	0.0016	0.00013	0.007			
2	1	1 - 2	2026	10	0.00003	0.0017	0.0023	0.0049	0.0016	0.00013	0.007			
3	1	2 - 3	2027	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
4	1	3 - 4	2028	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
5	1	4 - 5	2029	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
6	1	5 - 6	2030	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
7	1	6 - 7	2031	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
8	1	7 - 8	2032	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
9	1	8 - 9	2033	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
10	1	9 - 10	2034	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
11	1	10 - 11	2035	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
12	1	11 - 12	2036	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
13	1	12 - 13	2037	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
14	1	13 - 14	2038	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
15	1	14 - 15	2039	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
16	1	15 - 16	2040	3	0.00003	0.0017	0.0023	0.0008	0.0003	0.00002	0.001			
17	1	16 - 17	2041	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
18	1	17 - 18	2042	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
19	1	18 - 19	2043	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
20	1	19 - 20	2044	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
21	1	20 - 21	2045	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
22	1	21 - 22	2046	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
23	1	22 - 23	2047	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
24	1	23 - 24	2048	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
25	1	24 - 25	2049	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
26	1	25 - 26	2050	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
27	1	26 - 27	2051	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
28	1	27 - 28	2052	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
29	1	28 - 29	2053	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
30	1	29 - 30	2054	1	0.00003	0.0017	0.0023	0.0001	0.0000	0.00000	0.000			
Total Increased Cancer Risk											0.02	0.007	0.001	0.03

* Third trimester of pregnancy

Maximum
Hazard Index 0.00001
Fugitive PM2.5 0.002
Total PM2.5 0.002



BAY AREA AIR QUALITY MANAGEMENT DISTRICT

Risk & Hazard Stationary Source Inquiry Form

This form is required when users request stationary source data from BAAQMD

This form is to be used with the BAAQMD's Google Earth stationary source screening tables.

[Click here for guidance on conducting risk & hazard screening, including roadways & freeways, refer to the District's Risk & Hazard Analysis flow chart.](#)

[Click here for District's Recommended Methods for Screening and Modeling Local Risks and Hazards document.](#)

Table A: Requester Contact Information

Date of Request	8/12/2022
Contact Name	Casey Divine
Affiliation	Illingworth & Rodkin, Inc.
Phone	707-794-0400 x103
Email	cdivine@illingworthrodkin.com
Project Name	2655 The Alameda
Address	2655 The Alameda
City	Santa Clara
County	Santa Clara
Type (residential, commercial, mixed use, industrial, etc.)	Residential
Project Size (# of units or building square feet)	39 du
Comments:	

For Air District assistance, the following steps must be completed:

1. Complete all the contact and project information requested in **Table A**. Incomplete forms will not be processed. Please include a project site map.
2. Download and install the free program Google Earth, <http://www.google.com/earth/download/ge/>, and then download the county specific Google Earth stationary source application files from the District's website, <http://www.baaqmd.gov/Divisions/Planning-and-Research/CEQA-GUIDELINES/Tools-and-Methodology.aspx>. The small points on the map represent stationary sources permitted by the District (Map A on right). These permitted sources include diesel back-up generators, gas stations, dry cleaners, boilers, printers, auto spray booths, etc. Click on a point to view the source's Information Table, including the name, location, and preliminary estimated cancer risk, hazard index, and PM2.5 concentration.
3. Find the project site in Google Earth by inputting the site's address in the Google Earth search box.
4. Identify stationary sources within at least a 1000ft radius of project site. Verify that the location of the source on the map matches with the source's address in the Information Table, by using the Google Earth address search box to confirm the source's address location. Please report any mapping errors to the District.
5. List the stationary source information in **Table B** -ive section only.
6. Note that a small percentage of the stationary sources have Health Risk Screening Assessment (HRSA) data INSTEAD of screening level data. These sources will be noted by an asterisk next to the Plant Name (Map B on right). If HRSA values are presented, these values have already been modeled and cannot be adjusted further.
7. Email this completed form to District staff. District staff will provide the most recent risk, hazard, and PM2.5 data that are available for the source(s). If this information or data are not available, source emissions data will be provided. Staff will respond to inquiries within three weeks.

Note that a public records request received for the same stationary source information will cancel the processing of your SSIF request.

Submit forms, maps, and questions to Matthew Hanson at 415-749-8733, or mhanson@baaqmd.gov

Table B: Google Earth data

Distance from Receptor (feet) or MEI ¹	Plant No.	Facility Name	Address	Cancer Risk ²	Hazard Risk ²	PM _{2.5} ²	Preschool MEI							
							Source No. ³	Type of Source ⁴	Fuel Code ⁵	Status/Comments	Distance Adjustment Multiplier	Adjusted Cancer Risk Estimate	Adjusted Hazard Risk	Adjusted PM2.5
1000	15397_1	Santa Clara University	500 El Camino Real	1.81	0.003	0.002		Generator	Generator	2020 Dataset	0.04	0.07	0.0001	0.0001
970	15397_10	Santa Clara University	500 El Camino Real	4.20	0.01	0.01		Generator	Generator	2020 Dataset	0.04	0.17	0.0003	0.0002
950	15397_12	Santa Clara University	500 El Camino Real	11.71	0.02	0.01		Generator	Generator	2020 Dataset	0.04	0.47	0.001	0.001
980	15397_13	Santa Clara University	500 El Camino Real	7.20	0.01	0.01		Generator	Generator	2020 Dataset	0.04	0.29	0.0004	0.0004
910	15397_14	Santa Clara University	500 El Camino Real	2.44	0.004	0.003		Generator	Generator	2020 Dataset	0.04	0.10	0.0002	0.0001
870	15397_16	Santa Clara University	500 El Camino Real	6.48	0.01	0.01		Generator	Generator	2020 Dataset	0.05	0.32	0.001	0.0004
510	15397_18	Santa Clara University	500 El Camino Real	2.17	0.01	0.003		Generator	Generator	2020 Dataset	0.10	0.22	0.001	0.0003
760	15397_19	Santa Clara University	500 El Camino Real	1.51	0.003	0.002		Generator	Generator	2020 Dataset	0.06	0.09	0.0002	0.0001
370	15397_21	Santa Clara University	500 El Camino Real	1.73	0.003	0.002		Generator	Generator	2020 Dataset	0.18	0.31	0.001	0.0004
575	15397_23	Santa Clara University	500 El Camino Real	1.58	0.003	0.002		Generator	Generator	2020 Dataset	0.09	0.14	0.0003	0.0002

Footnotes:

1. Maximally exposed individual
2. These Cancer Risk, Hazard Index, and PM2.5 columns represent the values in the Google Earth Plant Information Table.
3. Each plant may have multiple permits and sources.
4. Permitted sources include diesel back-up generators, gas stations, dry cleaners, boilers, printers, auto spray booths, etc.
5. Fuel codes: 98 = diesel, 189 = Natural Gas.
6. If a Health Risk Screening Assessment (HRSA) was completed for the source, the application number will be listed here.
7. The date that the HRSA was completed.
8. Engineer who completed the HRSA. For District purposes only.
9. All HRSA completed before 1/5/2010 need to be multiplied by an age sensitivity factor of 1.7.
10. The HRSA "Chronic Health" number represents the Hazard Index.
11. Further information about common sources:
 - a. Sources that only include diesel internal combustion engines can be adjusted using the BAAQMD's Diesel Multiplier worksheet.
 - b. The risk from natural gas boilers used for space heating when <25 MM BTU/hr would have an estimated cancer risk of one in a million or less, and a chronic hazard index of 0.003 or
 - c. BAAQMD Reg 11 Rule 16 required that all co-residential (sharing a wall, floor, ceiling or is in the same building as a residential unit) dry cleaners cease use of perc on July 1, 2010. Therefore, there is no cancer risk, hazard or PM2.5 concentrations from co-residential dry cleaning businesses in the BAAQMD.
 - d. Non co-residential dry cleaners must phase out use of perc by Jan. 1, 2023. Therefore, the risk from these dry cleaners does not need to be factored in over a 70-year period, but instead should reflect
 - e. Gas stations can be adjusted using BAAQMD's Gas Station Distance Multiplier worksheet.
 - f. Unless otherwise noted, exempt sources are considered insignificant. See BAAQMD Reg 2 Rule 1 for a list of exempt sources.
 - g. This spray booth is considered to be insignificant.

Date last updated:
03/13/2018

Project Site

Distance from Receptor (feet) or MEI ¹	FACID (Plant No.)	Distance Adjustment Multiplier	Adjusted Cancer Risk Estimate	Adjusted Hazard Risk	Adjusted PM2.5
720	15397_1	0.07	0.13	0.0002	0.0002
990	15397_10	0.04	0.17	0.0003	0.0002
585	15397_12	0.09	1.05	0.002	0.001
970	15397_13	0.04	0.29	0.0004	0.0004
1000	15397_14	0.04	0.10	0.0002	0.0001
990	15397_16	0.04	0.26	0.0004	0.0003
490	15397_18	0.12	0.26	0.001	0.0003
710	15397_19	0.07	0.11	0.0002	0.0001
485	15397_21	0.12	0.21	0.0004	0.0003
690	15397_23	0.08	0.13	0.0002	0.0002

Gasoline Dispensing Facility (GDF) Distance Multiplier Tool: This distance multiplier tool refines the screening values for cancer risk and chronic hazard index found in the District's Stationary Source Screening Analysis Tool for GDF's, to represent adjusted risk and hazard impacts that can be expected with farther distances from the source of emissions.

Diesel Internal Combustion (IC) Engine Distance Multiplier Tool: This distance multiplier tool refines the screening values for cancer risk and PM_{2.5} concentrations found in the District's Stationary Source Screening Analysis Tool for permitted facilities which contain only diesel IC engines, to represent adjusted risk and hazard impacts that can be expected with farther distances from the source of emissions.

Generic Distance Multiplier Tool: This distance multiplier tool refines the screening values to represent adjusted risk and hazard impacts that can be expected with farther distances from the source of emissions.

Gas Station				
Distance (meters)	Distance (feet)	Distance adjustment multiplier	Enter Risk or Hazard	Adjusted Risk or Hazard
0	0.0	1.000		0.0000
5	16.4	1.000		0.0000
10	32.8	1.000		0.0000
15	49.2	1.000		0.0000
20	65.6	1.000		0.0000
25	82.0	0.728		0.0000
30	98.4	0.559		0.0000
35	114.8	0.445		0.0000
40	131.2	0.365		0.0000
45	147.6	0.305		0.0000
50	164.0	0.260		0.0000
55	180.4	0.225		0.0000
60	196.9	0.197		0.0000
65	213.3	0.174		0.0000
70	229.7	0.155		0.0000
75	246.1	0.139		0.0000
80	262.5	0.126		0.0000
85	278.9	0.114		0.0000
90	295.3	0.104		0.0000
95	311.7	0.096		0.0000
100	328.1	0.088		0.0000
105	344.5	0.082		0.0000
110	360.9	0.076		0.0000
115	377.3	0.071		0.0000
120	393.7	0.066		0.0000
125	410.1	0.062		0.0000
130	426.5	0.058		0.0000
135	442.9	0.055		0.0000
140	459.3	0.052		0.0000
145	475.7	0.049		0.0000
150	492.1	0.046		0.0000
155	508.5	0.044		0.0000
160	524.9	0.042		0.0000
165	541.3	0.040		0.0000
170	557.7	0.038		0.0000
175	574.1	0.036		0.0000
180	590.6	0.034		0.0000
185	607.0	0.033		0.0000
190	623.4	0.031		0.0000
195	639.8	0.030		0.0000
200	656.2	0.029		0.0000
205	672.6	0.028		0.0000
210	689.0	0.027		0.0000
215	705.4	0.026		0.0000
220	721.8	0.025		0.0000
225	738.2	0.024		0.0000
230	754.6	0.023		0.0000
235	771.0	0.022		0.0000
240	787.4	0.022		0.0000
245	803.8	0.021		0.0000
250	820.2	0.020		0.0000
255	836.6	0.020		0.0000
260	853.0	0.019		0.0000
265	869.4	0.018		0.0000
270	885.8	0.018		0.0000
275	902.2	0.017		0.0000
280	918.6	0.017		0.0000
285	935.0	0.016		0.0000
290	951.4	0.016		0.0000
295	967.8	0.015		0.0000
300	984.3	0.015		0.0000

Diesel Backup Generator						
Distance (meters)	Distance (feet)	Distance adjustment multiplier	Enter Risk or Hazard	Adjusted Risk or Hazard	Enter PM2.5 Concentration	Adjusted PM2.5 Concentration
0	0.0	1.000		0		0
5	16.4	1.000		0		0
10	32.8	1.000		0		0
15	49.2	1.000		0		0
20	65.6	1.000		0		0
25	82.0	0.85		0		0
30	98.4	0.73		0		0
35	114.8	0.64		0		0
40	131.2	0.58		0		0
50	164.0	0.5		0		0
60	196.9	0.41		0		0
70	229.7	0.31		0		0
80	262.5	0.28		0		0
90	295.3	0.25		0		0
100	328.1	0.22		0		0
110	360.9	0.18		0		0
120	393.7	0.16		0		0
130	426.5	0.15		0		0
140	459.3	0.14		0		0
150	492.1	0.12		0		0
160	524.9	0.1		0		0
180	590.6	0.09		0		0
200	656.2	0.08		0		0
220	721.8	0.07		0		0
240	787.4	0.06		0		0
260	853.0	0.05		0		0
280	918.6	0.04		0		0

Generic Case		
Distance (meters)	Distance (feet)	Multiplier
0	0.0	1.000
5	16.4	1.000
10	32.8	0.883
15	49.2	0.855
20	65.6	0.827
25	82.0	0.801
30	98.4	0.775
35	114.8	0.750
40	131.2	0.726
45	147.6	0.702
50	164.0	0.679
55	180.4	0.658
60	196.9	0.636
65	213.3	0.616
70	229.7	0.596
75	246.1	0.577
80	262.5	0.558
85	278.9	0.540
90	295.3	0.523
95	311.7	0.506
100	328.1	0.489
105	344.5	0.474
110	360.9	0.458
115	377.3	0.444
120	393.7	0.429
125	410.1	0.415
130	426.5	0.402
135	442.9	0.389
140	459.3	0.376
145	475.7	0.364
150	492.1	0.353
155	508.5	0.341
160	524.9	0.330
165	541.3	0.319
170	557.7	0.309
175	574.1	0.299
180	590.6	0.290
185	607.0	0.280
190	623.4	0.271
195	639.8	0.262
200	656.2	0.254
205	672.6	0.246
210	689.0	0.238
215	705.4	0.230
220	721.8	0.223
225	738.2	0.216
230	754.6	0.209
235	771.0	0.202
240	787.4	0.195
245	803.8	0.189
250	820.2	0.183
255	836.6	0.177
260	853.0	0.171
265	869.4	0.166
270	885.8	0.160
275	902.2	0.155
280	918.6	0.150
285	935.0	0.145
290	951.4	0.141
295	967.8	0.136
300	984.3	0.132




Screening Report


Area of Interest (AOI) Information

Area : 4,567,713.7 ft²

Aug 12 2022 14:47:09 Pacific Daylight Time

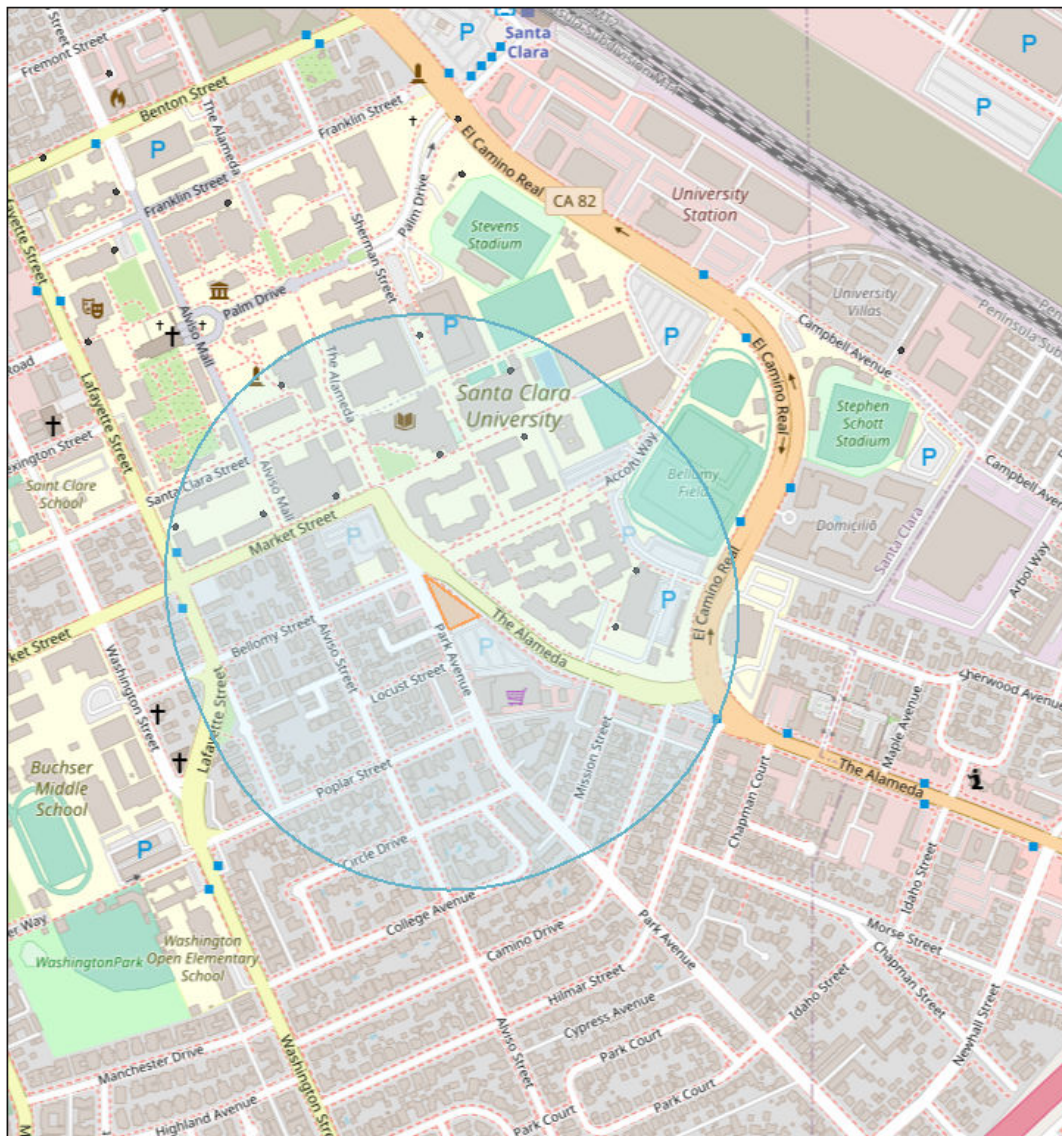

• Permitted Stationary Sources



Map data © OpenStreetMap contributors, CC-BY-SA

Summary

Name	Count	Area(ft ²)	Length(ft)
Permitted Stationary Sources	10	N/A	N/A

Permitted Stationary Sources

#	FacID	FacName	Address	City	Street
1	15397_1	Santa Clara University	500 El Camino Real	Santa Clara	CA
2	15397_10	Santa Clara University	500 El Camino Real	Santa Clara	CA
3	15397_12	Santa Clara University	500 El Camino Real	Santa Clara	CA
4	15397_13	Santa Clara University	500 El Camino Real	Santa Clara	CA
5	15397_14	Santa Clara University	500 El Camino Real	Santa Clara	CA
6	15397_16	Santa Clara University	500 El Camino Real	Santa Clara	CA
7	15397_18	Santa Clara University	500 El Camino Real	Santa Clara	CA
8	15397_19	Santa Clara University	500 El Camino Real	Santa Clara	CA
9	15397_21	Santa Clara University	500 El Camino Real	Santa Clara	CA
10	15397_23	Santa Clara University	500 El Camino Real	Santa Clara	CA

#	Zip	County	Latitude	Longitude	Details
1	95,053.00	Santa Clara	37.35	-121.93	Generator
2	95,053.00	Santa Clara	37.35	-121.94	Generator
3	95,053.00	Santa Clara	37.35	-121.93	Generator
4	95,053.00	Santa Clara	37.35	-121.94	Generator
5	95,053.00	Santa Clara	37.35	-121.94	Generator
6	95,053.00	Santa Clara	37.35	-121.94	Generator
7	95,053.00	Santa Clara	37.35	-121.94	Generator
8	95,053.00	Santa Clara	37.35	-121.94	Generator
9	95,053.00	Santa Clara	37.35	-121.94	Generator
10	95,053.00	Santa Clara	37.35	-121.94	Generator

#	NAICS	Sector	Sub_Sector	Industry	ChronicHI
1	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0028061
2	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0064942
3	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0181196
4	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0111443
5	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0037682
6	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0100219
7	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0070093
8	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0028516
9	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0034340
10	611,310.00	Educational Services	Educational Services	Colleges, Universities, and Professional Schools	0.0028062

#	PM2_5	Cancer Risk {expression/expr0}	Chronic Hazard Index {expression/expr1}	PM2.5 {expression/expr2}	Count
1	0.0023128	1.814	0.003	0.002	1
2	0.0053524	4.197	0.006	0.005	1
3	0.0149337	11.71	0.018	0.015	1
4	0.0091849	7.202	0.011	0.009	1
5	0.0031057	2.435	0.004	0.003	1
6	0.0082598	6.477	0.01	0.008	1
7	0.0026680	2.173	0.007	0.003	1
8	0.0019092	1.509	0.003	0.002	1
9	0.0021901	1.734	0.003	0.002	1
10	0.0020021	1.578	0.003	0.002	1

NOTE: A larger buffer than 1000 feet may be warranted depending on proximity to significant sources.