

# Murrieta Road Warehouse ENERGY ANALYSIS CITY OF MENIFEE

PREPARED BY:

Haseeb Qureshi hqureshi@urbanxroads.com

Michael Tirohn mtirohn@urbanxroads.com

APRIL 22, 2024

# **TABLE OF CONTENTS**

AP LIS LIS	PPENDI ST OF E ST OF T	F CONTENTS	I I II 1
1	INT	FRODUCTION	3
	1.1 1.2	Site LocationProject Description	
2	EXI	ISTING CONDITIONS	8
	<ul><li>2.1</li><li>2.2</li><li>2.3</li><li>2.4</li></ul>	Overview  Electricity  Natural Gas  Transportation Energy Resources	11 12
3	REG	GULATORY BACKGROUND	18
	3.1 3.2	Federal Regulations California Regulations	
4	PR	OJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES	23
	4.1 4.2 4.3 4.4 4.5	Evaluation Criteria  Methodology  Construction Energy Demands  Operational Energy Demands  Summary	23 24 32
5 6		NCLUSIONSFERENCES	
7	CFI	RTIFICATIONS	45



# **APPENDICES**

APPENDIX 4.1: CALEEMOD PROJECT CONSTRUCTION EMISSIONS MODEL OUTPUTS APPENDIX 4.2: CALEEMOD PROJECT OPERATIONAL EMISSIONS MODEL OUTPUTS

APPENDIX 4.3: EMFAC2021

# **LIST OF EXHIBITS**

EXHIBIT 1-A: LOCATION MAP	
EXHIBIT 1-B: SITE PLAN	
LIST OF TABLES	
<u>LIST OF TABLES</u>	
TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS	1
TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2022)	
TABLE 2-2: SCE 2022 POWER CONTENT MIX	
TABLE 4-1: CONSTRUCTION DURATION	24
TABLE 4-2: CONSTRUCTION POWER COST	25
TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE	25
TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS	26
TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES	27
TABLE 4-6: CONSTRUCTION TRIPS AND VMT	28
TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES	29
TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES	30
TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION	32
TABLE 4-10: STATIONARY SOURCE EQUIPMENT FUEL CONSUMPTION ESTIMATES	33
TABLE 4-11: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY	33



# **LIST OF ABBREVIATED TERMS**

% Percent (1) Reference

AQIA Murrieta Road Warehouse Air Quality Impact Analysis

BACM Best Available Control Measures

BTU British Thermal Units

CalEEMod California Emissions Estimator Model

CAPCOA California Air Pollution Control Officers Association

CARB California Air Resources Board
CCR California Code of Regulations
CEC California Energy Commission

CEQA California Environmental Quality Act

City City of Menifee

CPEP Clean Power and Electrification Pathway
CPUC California Public Utilities Commission

DMV Department of Motor Vehicles
EIA Energy Information Administration
EPA Environmental Protection Agency

EMFAC EMissions FACtor

FERC Federal Energy Regulatory Commission

Final EIR Renaissance Specific Plan Final Environmental Impact

Report

GHG Greenhouse Gas GWh Gigawatt Hour

HHD Heavy-Heavy Duty Trucks
hp-hr-gal Horsepower Hours Per Gallon
IEPR Integrated Energy Policy Report
ISO Independent Service Operator

ISTEA Intermodal Surface Transportation Efficiency Act

ITE Institute of Transportation Engineers

kBTU Thousand-British Thermal Units

kWh Kilowatt Hour
LDA Light Duty Auto
LDT1/LDT2 Light-Duty Trucks

LHD1/LHD2 Light-Heavy Duty Trucks
MDV Medium Duty Trucks

MHD Medium-Heavy Duty Trucks



MMcfd Million Cubic Feet Per Day

mpg Miles Per Gallon

MPO Metropolitan Planning Organization

PG&E Pacific Gas and Electric
Project Murrieta Road Warehouse

PV Photovoltaic

RSP Renaissance Specific Plan
SCAB South Coast Air Basin

SCE Southern California Edison

SDAB San Diego Air Basin

sf Square Feet

SoCalGas Southern California Gas

TEA-21 Transportation Equity Act for the 21<sup>st</sup> Century

U.S. United States

VMT Vehicle Miles Traveled



This page intentionally left blank



#### **EXECUTIVE SUMMARY**

#### **ES.1** SUMMARY OF FINDINGS

The results of this *Murrieta Road Warehouse Energy Analysis* is summarized below based on the significance criteria in Section 5 of this report consistent with Appendix G of the *CEQA Guidelines* (*CEQA Guidelines*) (1). Table ES-1 shows the findings of significance for potential energy impacts under CEQA.

**TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS** 

Analysis	Report Section	Significance Findings			
Analysis		Unmitigated	Mitigated		
Energy Impact #1: Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?	5.0	Less Than Significant	n/a		
Energy Impact #2: Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?	5.0	Less Than Significant	n/a		

# **ES.2** PROJECT REQUIREMENTS

The Project would be required to comply with regulations imposed by the federal and state agencies that regulate energy use and consumption through various means and programs. Those that are directly and indirectly applicable to the Project and that would assist in the reduction of energy usage include:

- Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)
- The Transportation Equity Act for the 21st Century (TEA-21)
- Integrated Energy Policy Report (IEPR)
- State of California Energy Plan
- California Code Title 24, Part 6, Energy Efficiency Standards
- California Code Title 24, Part 11, California Green Building Standards Code (CALGreen)
- AB 1493 Pavley Regulations and Fuel Efficiency Standards
- California's Renewable Portfolio Standard (RPS)
- Clean Energy and Pollution Reduction Act of 2015 (SB 350)

Consistency with the above regulations is discussed in detail in section 5 of this report.



This page intentionally left blank



# 1 INTRODUCTION

This report presents the results of the energy analysis prepared by Urban Crossroads, Inc., for the proposed Murrieta Road Warehouse Project (Project). The purpose of this report is to ensure that energy implication is considered by the City of Menifee (Lead Agency), as the lead agency, and to quantify anticipated energy usage associated with construction and operation of the proposed Project, determine if the usage amounts are efficient, typical, or wasteful for the land use type, and to emphasize avoiding or reducing inefficient, wasteful, and unnecessary consumption of energy.

#### 1.1 SITE LOCATION

The proposed project is located east of Geary Street, south of Ethanac Road, and west of Murrieta Road in the City of Menifee as shown on Exhibit 1-A.


#### 1.2 PROJECT DESCRIPTION

A preliminary site plan for the proposed Project is shown on Exhibit 1-B. The proposed Project is to consist of the development of an approximately 517,720 square foot (SF) warehouse building. To provide a conservative analysis, a three percent buffer in building square footage has been included, which would equal 533,252 SF of building area. The Project would also include 4.5 acres (approximately 1.5 linear miles) of construction activities for offsite roadway and utility improvements as detailed in Section 3.4. The proposed Project is anticipated to have an opening year of 2026.




# **EXHIBIT 1-A: LOCATION MAP**



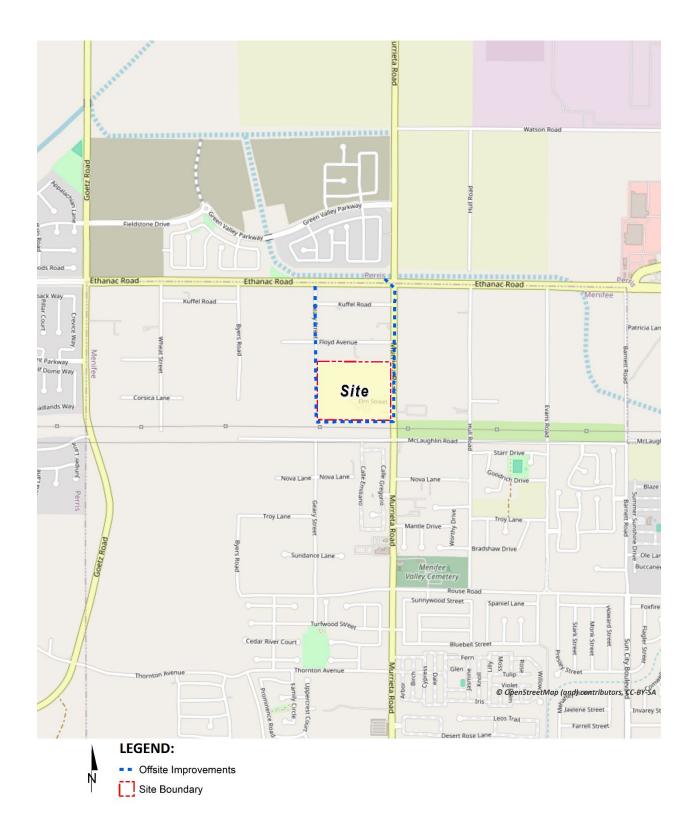

**EXHIBIT 1-B: SITE PLAN** 

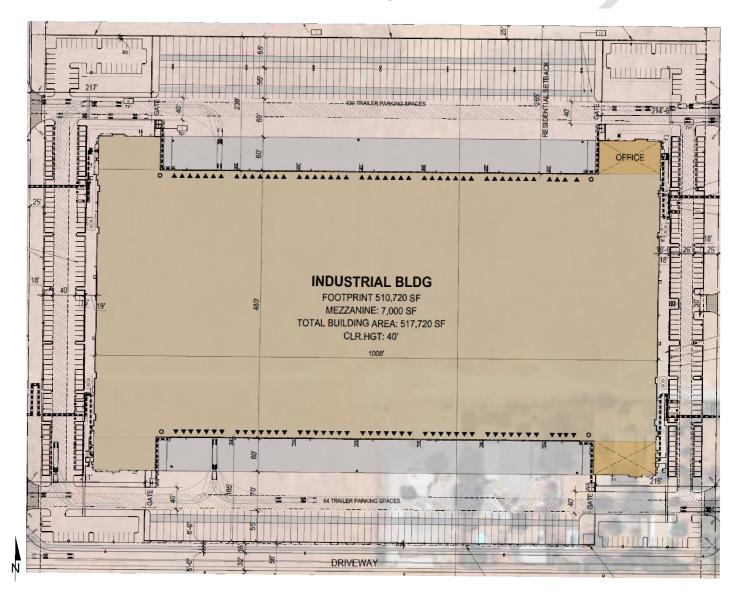



This page intentionally left blank



# 2 EXISTING CONDITIONS

This section provides an overview of the existing energy conditions in the Project region.

# 2.1 OVERVIEW

The most recent data for California's estimated total energy consumption and natural gas consumption is from 2021, released by the United States (U.S.) Energy Information Administration's (EIA) California State Profile and Energy Estimates in 2021 and included (2):

- As of 2021, approximately 7,359 trillion British Thermal Unit (BTU) of energy was consumed
- As of 2021, approximately 605 million barrels of petroleum
- As of 2021, approximately 2,101 billion cubic feet of natural gas
- As of 2021, approximately 1 million short tons of coal

According to the EIA, in 2022 the U.S. petroleum consumption comprised about 90% of all transportation energy use, excluding fuel consumed for aviation and most marine vessels (3). In 2022, about 251,923 million gallons (or about 5.99 million barrels) of finished petroleum products were consumed in the U.S., an average of about 690 million gallons per day (or about 16.4 million barrels per day) (4). In 2021, California consumed approximately 12,157 million gallons in motor gasoline (33.31 million per day) and approximately 3,541 million gallons of diesel fuel (9.7 million per day) (5).

The most recent data provided by the EIA for energy use in California is reported from 2021 and provided by demand sectors as follows:

- Approximately 37.8% transportation sector
- Approximately 23.2% industrial sector
- Approximately 20.0% residential sector
- Approximately 19.0% commercial sector (6)

According to the EIA, California used approximately 247,250 gigawatt hours of electricity in 2021 (7). By sector in 2021, residential uses utilized 36.5% of the state's electricity, followed by 43.9% for commercial uses, 19.2% for industrial uses, and 0.3% for transportation. Electricity usage in California for differing land uses varies substantially by the type of uses in a building, type of construction materials used in a building, and the efficiency of all electricity-consuming devices within a building (7).

According to the EIA, California used approximately 200,871 million therms of natural gas in 2021 (8). In 2021 (the most recent year for which data is available), by sector, industrial uses utilized 33% of the state's natural gas, followed by 30% used as fuel in the electric power sector, 21% from residential, 11% from commercial, 1% from transportation uses and the remaining 3% was utilized for the operations, processing and production of natural gas itself (8). While the supply of natural gas in the United States and production in the lower 48 states has increased greatly since 2008, California produces little, and imports 90% of its supply of natural gas (8).



In 2022, total system electric generation for California was 287,220 gigawatt hours (GWh). California's massive electricity in-state generation system generated approximately 203,257 GWh which accounted for approximately 71% of the electricity it uses; the rest was imported from the Pacific Northwest (12%) and the U.S. Southwest (17%) (9). Natural gas is the main source for electricity generation at 47.46% of the total in-state electric generation system power as shown in Table 2-1.

An updated summary of, and context for energy consumption and energy demands within the State is presented in "U.S. Energy Information Administration, California State Profile and Energy Estimates, Quick Facts" excerpted below (10):

- In 2022, California was the seventh-largest producer of crude oil among the 50 states, and, as of January 2022, the state ranked third in crude oil refining capacity.
- California is the largest consumer of jet fuel and second-largest consumer of motor gasoline among the 50 states.
- In 2020, California was the second-largest total energy consumer among the states, but its per capita energy consumption was less than in all but three other states.
- In 2022, renewable resources, including hydroelectric power and small-scale, customer-sited solar power, accounted for 49% of California's in-state electricity generation. Natural gas fueled another 42%. Nuclear power supplied almost all the rest.
- In 2022, California was the fourth-largest electricity producer in the nation. The state was also the
  nation's third-largest electricity consumer, and additional needed electricity supplies came from
  out-of-state generators.

As indicated below, California is one of the nation's leading energy-producing states, and California's per capita energy use is among the nation's most efficient. Given the nature of the Project, the remainder of this discussion will focus on the three sources of energy that are most relevant to the Project—namely, electricity, natural gas, and transportation fuel for vehicle trips associated with the uses planned for the Project.



TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2022)

Fuel Type	California In-State Generation (GWh)	% of California In-State Generation	Northwest Imports (GWh)	Southwest Imports (GWh)	Total Imports (GWh)	Total California Energy Mix (GWh)	Total California Power Mix
Coal	273	0.13%	181	5,716	5,897	6,170	2.15%
Natural Gas	96,457	47.46%	44	7,994	8,038	104,495	36.38%
Oil	65	0.03%	-	-	-	65	0.2%
Other (Waste Heat/Petroleum Coke)	315	0.15%	-	-	-	315	0.11%
Unspecified	-	0.0%	12,485	7,943	20,428	20,428	7.11%
Total Thermal and Unspecified	97,110	47.78%	12,710	21,653	34,363	121,473	45.77%
Nuclear	17,627	8.67%	397	8,342	8,739	26,366	9.18%
Large Hydro	14,607	7.19%	10,803	1,118	11,921	26,528	9.24%
Biomass	5,366	2.64%	771	25	797	6,162	2.15%
Geothermal	11,110	5.47%	253	2,048	2,301	13,412	4.67%
Small Hydro	3,005	1.48%	211	13	225	3,230	1.12%
Solar	40,494	19.92%	231	8,225	8,456	48,950	17.04%
Wind	13,938	6.86%	8,804	8,357	17,161	31,099	10.83%
Total Non-GHG and Renewables	106,147	52.22%	21,471	28,129	49,599	155,747	54.23%
SYSTEM TOTALS	203,257	100.0%	34,180	49,782	83,962	287,220	100.0%

Source: CECs 2022 Total System Electric Generation



#### 2.2 ELECTRICITY

The usage associated with electricity use were calculated using CalEEMod Version 2022.1.1.12. The Southern California region's electricity reliability has been of concern for the past several years due to the planned retirement of aging facilities that depend upon once-through cooling technologies, as well as the June 2013 retirement of the San Onofre Nuclear Generating Station (San Onofre). While the once-through cooling phase-out has been ongoing since the May 2010 adoption of the State Water Resources Control Board's once-through cooling policy, the retirement of San Onofre complicated the situation. California Independent Service Operator (ISO) studies revealed the extent to which the South Coast Air Basin (SCAB) and the San Diego Air Basin (SDAB) region were vulnerable to low-voltage and post-transient voltage instability concerns. A preliminary plan to address these issues was detailed in the 2013 Integrative Energy Policy Report (IEPR) after a collaborative process with other energy agencies, utilities, and air districts (11). Similarly, the subsequent 2022 IEPR's provides information and policy recommendations on advancing a clean, reliable, and affordable energy system.

California's electricity industry is an organization of traditional utilities, private generating companies, and state agencies, each with a variety of roles and responsibilities to ensure that electrical power is provided to consumers. The California ISO is a nonprofit public benefit corporation and is the impartial operator of the State's wholesale power grid and is charged with maintaining grid reliability, and to direct uninterrupted electrical energy supplies to California's homes and communities. While utilities still own transmission assets, the ISO routes electrical power along these assets, maximizing the use of the transmission system and its power generation resources. The ISO matches buyers and sellers of electricity to ensure that enough power is available to meet demand. To these ends, every five minutes the ISO forecasts electrical demands, accounts for operating reserves, and assigns the lowest cost power plant unit to meet demands while ensuring adequate system transmission capacities and capabilities (12).

Part of the ISO's charge is to plan and coordinate grid enhancements to ensure that electrical power is provided to California consumers. To this end, utilities file annual transmission expansion/modification plans to accommodate the State's growing electrical needs. The ISO reviews and either approves or denies the proposed additions. In addition, and perhaps most importantly, the ISO works with other areas in the western United States electrical grid to ensure that adequate power supplies are available to the State. In this manner, continuing reliable and affordable electrical power is assured to existing and new consumers throughout the State.

Electricity is currently provided to the Project site by Southern California Edison (SCE). SCE provides electric power to more than 15 million persons in 15 counties and in 180 incorporated cities, within a service area encompassing approximately 50,000 square miles. Based on SCE's 2022 Power Content Label Mix, SCE derives electricity from varied energy resources including: fossil fuels, hydroelectric generators, nuclear power plants, geothermal power plants, solar power generation, and wind farms. SCE also purchases from independent power producers and utilities, including out-of-state suppliers (13).

Table 2-2, SCE's specific proportional shares of electricity sources in 2022. As indicated in Table 2-2, the 2022 SCE Power Mix has renewable energy at 33.2% of the overall energy resources.



Geothermal resources are at 5.7%, wind power is at 9.8%, large hydroelectric sources are at 3.4%, solar energy is at 17.0%, and coal is at 0% (14).

**TABLE 2-2: SCE 2022 POWER CONTENT MIX** 

Energy Resources	2022 SCE Power Mix
Eligible Renewable	33.2%
Biomass & Waste	0.1%
Geothermal	5.7%
Eligible Hydroelectric	0.5%
Solar	17.0%
Wind	9.8%
Coal	0.0%
Large Hydroelectric	3.4%
Natural Gas	24.7%
Nuclear	8.3%
Other	0.1%
Unspecified Sources of power*	30.3%
Total	100%

<sup>\* &</sup>quot;Unspecified sources of power" means electricity from transactions that are not traceable to specific generation sources

#### 2.3 NATURAL GAS

The following summary of natural gas customers and volumes, supplies, delivery of supplies, storage, service options, and operations is excerpted from information provided by the California Public Utilities Commission (CPUC).

"The CPUC regulates natural gas utility service for approximately 10.8 million customers that receive natural gas from Pacific Gas and Electric (PG&E), Southern California Gas (SoCalGas), San Diego Gas & Electric (SDG&E), Southwest Gas, and several smaller natural gas utilities. The CPUC also regulates independent storage operators: Lodi Gas Storage, Wild Goose Storage, Central Valley Storage and Gill Ranch Storage.

California's natural gas utilities provide service to over 11 million gas meters. SoCalGas and PG&E provide service to about 5.9 million and 4.3 million customers, respectively, while SDG&E provides service to over 800, 000 customers. In 2018, California gas utilities forecasted that they would deliver about 4740 million cubic feet per day (MMcfd) of gas to their customers, on average, under normal weather conditions.

The overwhelming majority of natural gas utility customers in California are residential and small commercials customers, referred to as "core" customers. Larger volume gas customers, like electric generators and industrial customers, are called "noncore" customers. Although very small in number relative to core customers, noncore customers



consume about 65% of the natural gas delivered by the state's natural gas utilities, while core customers consume about 35%.

A significant amount of gas (about 19%, or 1131 MMcfd, of the total forecasted California consumption in 2018) is also directly delivered to some California large volume consumers, without being transported over the regulated utility pipeline system. Those customers, referred to as "bypass" customers, take service directly from interstate pipelines or directly from California producers.

SDG&E and Southwest Gas' southern division are wholesale customers of SoCalGas, i.e., they receive deliveries of gas from SoCalGas and in turn deliver that gas to their own customers. (Southwest Gas also provides natural gas distribution service in the Lake Tahoe area.) Similarly, West Coast Gas, a small gas utility, is a wholesale customer of PG&E. Some other wholesale customers are municipalities like the cities of Palo Alto, Long Beach, and Vernon, which are not regulated by the CPUC.

Natural gas from out-of-state production basins is delivered into California via the interstate natural gas pipeline system. The major interstate pipelines that deliver out-of-state natural gas to California gas utilities are Gas Transmission Northwest Pipeline, Kern River Pipeline, Transwestern Pipeline, El Paso Pipeline, Ruby Pipeline, Mojave Pipeline, and Tuscarora. Another pipeline, the North Baja - Baja Norte Pipeline takes gas off the El Paso Pipeline at the California/Arizona border and delivers that gas through California into Mexico. While the Federal Energy Regulatory Commission (FERC) regulates the transportation of natural gas on the interstate pipelines, and authorizes rates for that service, the California Public Utilities Commission may participate in FERC regulatory proceedings to represent the interests of California natural gas consumers.

The gas transported to California gas utilities via the interstate pipelines, as well as some of the California-produced gas, is delivered into the PG&E and SoCalGas intrastate natural gas transmission pipelines systems (commonly referred to as California's "backbone" pipeline system). Natural gas on the utilities' backbone pipeline systems is then delivered to the local transmission and distribution pipeline systems, or to natural gas storage fields. Some large volume noncore customers take natural gas delivery directly off the high-pressure backbone and local transmission pipeline systems, while core customers and other noncore customers take delivery off the utilities' distribution pipeline systems. The state's natural gas utilities operate over 100,000 miles of transmission and distribution pipelines, and thousands more miles of service lines.

Bypass customers take most of their deliveries directly off the Kern/Mojave pipeline system, but they also take a significant amount of gas from California production.

PG&E and SoCalGas own and operate several natural gas storage fields that are located within their service territories in northern and southern California, respectively. These storage fields, and four independently owned storage utilities - Lodi Gas Storage, Wild Goose Storage, Central Valley Storage, and Gill Ranch Storage - help meet peak seasonal and daily natural gas demand and allow California natural gas customers to secure



natural gas supplies more efficiently. PG&E is a 25% owner of the Gill Ranch Storage field. These storage fields provide a significant amount of infrastructure capacity to help meet California's natural gas requirements, and without these storage fields, California would need much more pipeline capacity in order to meet peak gas requirements.

Prior to the late 1980s, California regulated utilities provided virtually all natural gas services to all their customers. Since then, the Commission has gradually restructured the California gas industry in order to give customers more options while assuring regulatory protections for those customers that wish to, or are required to, continue receiving utility-provided services.

The option to purchase natural gas from independent suppliers is one of the results of this restructuring process. Although the regulated utilities procure natural gas supplies for most core customers, core customers have the option to purchase natural gas from independent natural gas marketers, called "core transport agents" (CTA). Contact information for core transport agents can be found on the utilities' web sites. Noncore customers, on the other hand, make natural gas supply arrangements directly with producers or with marketers.

Another option resulting from the restructuring process occurred in 1993, when the Commission removed the utilities' storage service responsibility for noncore customers, along with the cost of this service from noncore customers' transportation rates. The Commission also encouraged the development of independent storage fields, and in subsequent years, all the independent storage fields in California were established. Noncore customers and marketers may now take storage service from the utility or from an independent storage provider (if available), and pay for that service, or may opt to take no storage service at all. For core customers, the Commission assures that the utility has adequate storage capacity set aside to meet core requirements, and core customers pay for that service.

In a 1997 decision, the Commission adopted PG&E's "Gas Accord", which unbundled PG&E's backbone transmission costs from noncore transportation rates. This decision gave customers and marketers the opportunity to obtain pipeline capacity rights on PG&E's backbone transmission pipeline system, if desired, and pay for that service at rates authorized by the Commission. The Gas Accord also required PG&E to set aside a certain amount of backbone transmission capacity in order to deliver gas to its core customers. Subsequent Commission decisions modified and extended the initial terms of the Gas Accord. The "Gas Accord" framework is still in place today for PG&E's backbone and storage rates and services and is now simply referred to as PG&E Gas Transmission and Storage (GT&S).

In a 2006 decision, the Commission adopted a similar gas transmission framework for Southern California, called the "firm access rights" system. SoCalGas and SDG&E implemented the firm access rights (FAR) system in 2008, and it is now referred to as the backbone transmission system (BTS) framework. As under the PG&E backbone transmission system, SoCalGas backbone transmission costs are unbundled from noncore



transportation rates. Noncore customers and marketers may obtain, and pay for, firm backbone transmission capacity at various receipt points on the SoCalGas system. A certain amount of backbone transmission capacity is obtained for core customers to assure meeting their requirements.

Many if not most noncore customers now use a marketer to provide for several of the services formerly provided by the utility. That is, a noncore customer may simply arrange for a marketer to procure its supplies, and obtain any needed storage and backbone transmission capacity, in order to assure that it will receive its needed deliveries of natural gas supplies. Core customers still mainly rely on the utilities for procurement service, but they have the option to take procurement service from a CTA. Backbone transmission and storage capacity is either set aside or obtained for core customers in amounts to assure very high levels of service.

In order properly operate their natural gas transmission pipeline and storage systems, PG&E and SoCalGas must balance the amount of gas received into the pipeline system and delivered to customers or to storage fields. Some of these utilities' storage capacity is dedicated to this service, and under most circumstances, customers do not need to precisely match their deliveries with their consumption. However, when too much or too little gas is expected to be delivered into the utilities' systems, relative to the amount being consumed, the utilities require customers to more precisely match up their deliveries with their consumption. And, if customers do not meet certain delivery requirements, they could face financial penalties. The utilities do not profit from these financial penalties the amounts are then returned to customers as a whole. If the utilities find that they are unable to deliver all the gas that is expected to be consumed, they may even call for a curtailment of some gas deliveries. These curtailments are typically required for just the largest, noncore customers. It has been many years since there has been a significant curtailment of core customers in California." (15)

As indicated in the preceding discussions, natural gas is available from a variety of in-state and out-of-state sources and is provided throughout the state in response to market supply and demand. Complementing available natural gas resources, biogas may soon be available via existing delivery systems, thereby increasing the availability and reliability of resources in total. The CPUC oversees utility purchases and transmission of natural gas to ensure reliable and affordable natural gas deliveries to existing and new consumers throughout the State.

Based on information provided by the Project applicant, no natural gas would be used as a result of the Project, and as such use of natural gas is not considered in the analysis.

#### 2.4 Transportation Energy Resources

The Project would generate additional vehicle trips with resulting consumption of energy resources, predominantly gasoline and diesel fuel. The Department of Motor Vehicles (DMV) identified 36.2 million registered vehicles in California (6), and those vehicles consume an



estimated 17.2 billion gallons of fuel each year<sup>1</sup>. Gasoline (and other vehicle fuels) are commercially provided commodities and would be available to the Project patrons and employees via commercial outlets.

California's on-road transportation system includes 396,616 lane miles, more than 26.6 million passenger vehicles and light trucks, and almost 9.0 million medium- and heavy-duty vehicles (6). While gasoline consumption has been declining since 2008 it is still by far the dominant fuel. California is the second-largest consumer of petroleum products, after Texas, and accounts for 8% of the nation's total consumption. The State is the largest U.S. consumer of motor gasoline and jet fuel, and 83% of the petroleum consumed in California is used in the transportation sector (16).

California accounts for less than 1% of total U.S. natural gas reserves and production. As with crude oil, California's natural gas production has experienced a gradual decline since 1985. In 2021, about 33% of the natural gas delivered to consumers went to the State's industrial sector, and about 31% was delivered to the electric power sector. Natural gas fueled more than two-fifths of the State's utility-scale electricity generation in 2021. The residential sector, where three-fifths of California households use natural gas for home heating, accounted for 22% of natural gas deliveries. The commercial sector received 12% of the deliveries to end users and the transportation sector consumed the remaining 1% (16).

URBAN CROSSROADS

15382-06 EA Report

<sup>&</sup>lt;sup>1</sup> Fuel consumptions estimated utilizing information from EMFAC2021.

This page intentionally left blank



# 3 REGULATORY BACKGROUND

Federal and state agencies regulate energy use and consumption through various means and programs. On the federal level, the United States Department of Transportation, the United States Department of Energy, and the United States Environmental Protection Agency (EPA) are three federal agencies with substantial influence over energy policies and programs. On the state level, the CPUC and the CEC are two agencies with authority over different aspects of energy. Relevant federal and state energy-related laws and plans are summarized below.

### 3.1 FEDERAL REGULATIONS

# 3.1.1 Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)

The ISTEA promoted the development of inter-modal transportation systems to maximize mobility as well as address national and local interests in air quality and energy. ISTEA contained factors that Metropolitan Planning Organizations (MPOs) were to address in developing transportation plans and programs, including some energy-related factors. To meet the new ISTEA requirements, MPOs adopted explicit policies defining the social, economic, energy, and environmental values guiding transportation decisions.

# 3.1.2 THE TRANSPORTATION EQUITY ACT FOR THE 21<sup>ST</sup> CENTURY (TEA-21)

The TEA-21 was signed into law in 1998 and builds upon the initiatives established in the ISTEA legislation, discussed above. TEA-21 authorizes highway, highway safety, transit, and other efficient surface transportation programs. TEA-21 continues the program structure established for highways and transit under ISTEA, such as flexibility in the use of funds, emphasis on measures to improve the environment, and focus on a strong planning process as the foundation of good transportation decisions. TEA-21 also provides for investment in research and its application to maximize the performance of the transportation system through, for example, deployment of Intelligent Transportation Systems, to help improve operations and management of transportation systems and vehicle safety.

#### 3.2 CALIFORNIA REGULATIONS

#### 3.2.1 Integrated Energy Policy Report (IEPR)

Senate Bill 1389 (Bowen, Chapter 568, Statutes of 2002) requires the CEC to prepare a biennial integrated energy policy report that assesses major energy trends and issues facing the state's electricity, natural gas, and transportation fuel sectors and provides policy recommendations to conserve resources; protect the environment; ensure reliable, secure, and diverse energy supplies; enhance the state's economy; and protect public health and safety (Public Resources Code § 25301[a]). The CEC prepares these assessments and associated policy recommendations every two years, with updates in alternate years, as part of the Integrated Energy Policy Report.

The 2022 IEPR was adopted February 2023, and continues to work towards improving electricity, natural gas, and transportation fuel energy use in California. The 2022 IEPR introduces a new



framework for embedding equity and environmental justice at the CEC and the California Energy Planning Library which allows for easier access to energy data and analytics for a wide range of users. Additionally, energy reliability, western electricity integration, gasoline cost factors and price spikes, the role of hydrogen in California's clean energy future, fossil gas transition and distributed energy resources are topics discussed within the 2022 IEPR (17).

#### 3.2.2 STATE OF CALIFORNIA ENERGY PLAN

The CEC is responsible for preparing the State Energy Plan, which identifies emerging trends related to energy supply, demand, conservation, public health and safety, and the maintenance of a healthy economy. The Plan calls for the state to assist in the transformation of the transportation system to improve air quality, reduce congestion, and increase the efficient use of fuel supplies with the least environmental and energy costs. To further this policy, the plan identifies several strategies, including assistance to public agencies and fleet operators and encouragement of urban designs that reduce vehicle miles traveled (VMT) and accommodate pedestrian and bicycle access.

#### 3.2.3 CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on August 1, 2009, and is administered by the California Building Standards Commission.

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards that became effective on January 1, 2023. The CEC anticipates that the 2022 energy code will provide \$1.5 billion in consumer benefits and reduce GHG emissions by 10 million metric tons (18). The Project would be required to comply with the applicable standards in place at the time building permit document submittals are made. These require, among other items (19):

#### **NONRESIDENTIAL MANDATORY MEASURES**

- Short-term bicycle parking. If the new project or an additional alteration is anticipated to generate visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors' entrance, readily visible to passers-by, for 5% of new visitor motorized vehicle parking spaces being added, with a minimum of one two-bike capacity rack (5.106.4.1.1).
- Long-term bicycle parking. For new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5% of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility (5.106.4.1.2).
- Designated parking for clean air vehicles. In new projects or additions to alterations that add 10 or more vehicular parking spaces, provide designated parking for any combination of low-emitting, fuel-efficient and carpool/van pool vehicles as shown in Table 5.106.5.2 (5.106.5.2).



- EV charging stations. New construction shall facilitate the future installation of EV supply equipment. The compliance requires empty raceways for future conduit and documentation that the electrical system has adequate capacity for the future load. The number of spaces to be provided for is contained in Table 5.106. 5.3.3 (5.106.5.3). Additionally, Table 5.106.5.4.1 specifies requirements for the installation of raceway conduit and panel power requirements for medium- and heavy-duty electric vehicle supply equipment for warehouses, grocery stores, and retail stores.
- Outdoor light pollution reduction. Outdoor lighting systems shall be designed to meet the backlight, uplight and glare ratings per Table 5.106.8 (5.106.8).
- Construction waste management. Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste in accordance with Section 5.408.1.1. 5.405.1.2, or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent (5.408.1).
- Excavated soil and land clearing debris. 100% of trees, stumps, rocks and associated vegetation and soils resulting primarily from land clearing shall be reuse or recycled. For a phased project, such material may be stockpiled on site until the storage site is developed (5.408.3).
- Recycling by Occupants. Provide readily accessible areas that serve the entire building and are
  identified for the depositing, storage, and collection of non-hazardous materials for
  recycling, including (at a minimum) paper, corrugated cardboard, glass, plastics, organic
  waste, and metals or meet a lawfully enacted local recycling ordinance, if more restrictive
  (5.410.1).
- Water conserving plumbing fixtures and fittings. Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following:
  - Water Closets. The effective flush volume of all water closets shall not exceed
     1.28 gallons per flush (5.303.3.1)
  - Urinals. The effective flush volume of wall-mounted urinals shall not exceed
     0.125 gallons per flush (5.303.3.2.1). The effective flush volume of floor- mounted or other urinals shall not exceed 0.5 gallons per flush (5.303.3.2.2).
  - Showerheads. Single showerheads shall have a minimum flow rate of not more than 1.8 gallons per minute and 80 psi (5.303.3.3.1). When a shower is served by more than one showerhead, the combine flow rate of all showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi (5.303.3.3.2).
  - Faucets and fountains. Nonresidential lavatory faucets shall have a maximum flow rate of not more than 0.5 gallons per minute at 60 psi (5.303.3.4.1). Kitchen faucets shall have a maximum flow rate of not more than 1.8 gallons per minute of 60 psi (5.303.3.4.2). Wash fountains shall have a maximum flow rate of not more than 1.8 gallons per minute (5.303.3.4.3). Metering faucets shall not deliver more than 0.20 gallons per cycle (5.303.3.4.4). Metering faucets for wash fountains shall have a maximum flow rate not more than 0.20 gallons per cycle (5.303.3.4.5).
- Outdoor potable water uses in landscaped areas. Nonresidential developments shall comply
  with a local water efficient landscape ordinance or the current California Department of
  Water Resources' Model Water Efficient Landscape Ordinance (MWELO), whichever is more
  stringent (5.304.1).



- Water meters. Separate submeters or metering devices shall be installed for new buildings or additions in excess of 50,000 sf or for excess consumption where any tenant within a new building or within an addition that is project to consume more than 1,000 gallons per day (GPD) (5.303.1.1 and 5.303.1.2).
- Outdoor water uses in rehabilitated landscape projects equal or greater than 2,500 sf. Rehabilitated landscape projects with an aggregate landscape area equal to or greater than 2,500 sf requiring a building or landscape permit (5.304.3).
- Commissioning. For new buildings 10,000 sf and over, building commissioning shall be included in the design and construction processes of the building project to verify that the building systems and components meet the owner's or owner representative's project requirements (5.410.2)

#### 3.2.4 AB 1493 Payley Regulations and Fuel Efficiency Standards

California AB 1493, enacted on July 22, 2002, required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. Under this legislation, CARB adopted regulations to reduce GHG emissions from non-commercial passenger vehicles (cars and light-duty trucks). Although aimed at reducing GHG emissions, specifically, a co-benefit of the Pavley standards is an improvement in fuel efficiency and consequently a reduction in fuel consumption.

#### 3.2.5 CALIFORNIA'S RENEWABLE PORTFOLIO STANDARD (RPS)

First established in 2002 under Senate Bill (SB) 1078, California's Renewable Portfolio Standards (RPS) requires retail sellers of electric services to increase procurement from eligible renewable resources to 44% of total retail sales by 2024 (20).

# 3.2.6 CLEAN ENERGY AND POLLUTION REDUCTION ACT OF 2015 (SB 350)

In October 2015, the legislature approved, and the Governor signed SB 350, which reaffirms California's commitment to reducing its GHG emissions and addressing climate change. Key provisions include an increase in the renewables portfolio standard (RPS), higher energy efficiency requirements for buildings, initial strategies towards a regional electricity grid, and improved infrastructure for electric vehicle charging stations. Specifically, SB 350 requires the following to reduce statewide GHG emissions:

- Increase the amount of electricity procured from renewable energy sources from 33% to 50% by 2030, with interim targets of 40% by 2024, and 45% by 2027.
- Double the energy efficiency in existing buildings by 2030. This target will be achieved through the California Public Utility Commission (CPUC), the CEC, and local publicly owned utilities.
- Reorganize the Independent System Operator (ISO) to develop more regional electrify transmission markets and to improve accessibility in these markets, which will facilitate the growth of renewable energy markets in the western United States (California Leginfo 2015).



This page intentionally left blank



# 4 PROJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES

#### 4.1 EVALUATION CRITERIA

Appendix F of the *State CEQA Guidelines* (21), states that the means of achieving the goal of energy conservation includes the following:

- Decreasing overall per capita energy consumption;
- Decreasing reliance on fossil fuels such as coal, natural gas, and oil; and
- Increasing reliance on renewable energy sources.

In compliance with Appendix G of the *State CEQA Guidelines* (22), this report analyzes the Project's anticipated energy use during construction and operations to determine if the Project would:

- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation; or
- Conflict with or obstruct a state or local plan for renewable energy or energy efficiency

#### 4.2 METHODOLOGY

Information from the CalEEMod Version 2022 outputs for the *Murrieta Road Warehouse* (PPT220047) Air Quality Impact Analysis (AQIA) (23) was utilized in this analysis, detailing Project related construction equipment, transportation energy demands, and facility energy demands.

# 4.2.1 CALEEMOD

In May 2022, the SCAQMD, in conjunction with the California Air Pollution Control Officers Association (CAPCOA) and other California air districts, released the latest version of the CalEEMod Version 2022.1.1.21. The purpose of this model is to calculate construction-source and operational-source criteria pollutants and GHG emissions from direct and indirect sources as well as energy usage (24). Accordingly, the latest version of CalEEMod has been used to determine the proposed Project's anticipated transportation and facility energy demands. Outputs from the annual model runs are provided in Appendices 4.1 and 4.2.

#### 4.2.2 EMISSION FACTORS MODEL

On May 2, 2022, the EPA approved the 2021 version of the EMissions FACtor model (EMFAC2021) web database for use in State Implementation Plan and transportation conformity analyses. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from onroad mobile sources (25). This energy study utilizes the different fuel types for each vehicle class from the annual EMFAC2021 emission inventory in order to derive the average vehicle fuel economy which is then used to determine the estimated annual fuel consumption associated with vehicle usage during Project construction and operational activities. For purposes of



analysis, the 2024 through 2026 analysis years were utilized to determine the average vehicle fuel economy used throughout the duration of the Project. Outputs from the EMFAC2021 model run is provided in Appendix 4.3.

#### 4.3 CONSTRUCTION ENERGY DEMANDS

The focus within this section is the energy implications of the construction process, specifically the power cost from on-site electricity consumption during construction of the proposed Project.

#### 4.3.1 CONSTRUCTION POWER COST

The total Project construction power costs is the summation of the products of the area (sf) by the construction duration and the typical power cost.

#### **CONSTRUCTION DURATION**

For purposes of analysis, construction of Project is expected to commence in October 2024 and would last through September 2025 (23). The construction schedule utilized in the analysis, shown in Table 4-1, represents a "worst-case" analysis scenario. The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines* (26).

**Working Days Construction Activity Start Date End Date** Offsite Grading 10/15/2024 12/2/2024 35 Offsite Paving 9/30/2025 216 12/3/2024 Site Preparation 10/1/2024 10/14/2024 10 Grading 10/15/2024 12/2/2024 35 9/30/2025 **Building Construction** 12/3/2024 216 9/3/2025 9/30/2025 Paving 20 9/30/2025 **Architectural Coating** 7/9/2025 60

**TABLE 4-1: CONSTRUCTION DURATION** 

#### **PROJECT CONSTRUCTION POWER COST**

The 2024 National Construction Estimator identifies a typical power cost per 1,000 sf of construction per month of \$2.66, which was used to calculate the Project's total construction power cost (27).

As shown on Table 4-2, the total power cost of the on-site electricity usage during the construction of the Project is estimated to be approximately \$26,763.27.



**TABLE 4-2: CONSTRUCTION POWER COST** 

Land Use	Power Cost (per 1,000 SF of construction per month)	<b>Size</b> (1,000 SF)	Construction Duration (months)	Project Construction Power Cost
Warehousing	\$2.66	533.252	11	\$15,602.95
Parking	\$2.66 381.419 11		11	\$11,160.32
	\$26,763.27			

#### 4.3.2 CONSTRUCTION ELECTRICITY USAGE

The total Project construction electricity usage is the summation of the products of the power cost (estimated in Table 4-2) by the utility provider cost per kilowatt hour (kWh) of electricity.

#### PROJECT CONSTRUCTION ELECTRICITY USAGE

The SCE's general service rate schedule was used to determine the Project's electrical usage. As of January 1, 2024, SCE's general service rate is approximately \$0.14 per kilowatt hours (kWh) of electricity for industrial services (28). As shown on Table 4-3, the total electricity usage from onsite Project construction related activities is estimated to be approximately 185,669 kWh.

**TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE** 

Land Use	Cost per kWh	Project Construction Electricity Usage (kWh)
Warehousing	\$0.14	108,245
Parking	\$0.14	77,424
CONSTRUCTION	185,669	

#### **4.3.3** Construction Equipment Fuel Estimates

Fuel consumed by construction equipment would be the primary energy resource expended over the course of Project construction.

#### **CONSTRUCTION EQUIPMENT**

A summary of construction equipment by phase is provided at Table 4-4. Consistent with industry standards and typical construction practices, each piece of equipment listed in Table 4-4 would operate up to a total of eight (8) hours per day.



**TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS** 

Construction Activity	Equipment	Amount	Hours Per Day
Cita Dranaration	Rubber Tired Dozers	3	8
Site Preparation	Crawler Tractors	4	8
	Graders	1	8
	Excavators	2	8
Grading	Scrapers	2	8
	Rubber Tired Dozers	1	8
	Crawler Tractors	2	8
	Cranes	1	8
	Forklifts	3	8
Building Construction	Generator Sets	1	8
	Welders	1	8
	Tractors/Loaders/Backhoes	3	8
	Pavers	2	8
Paving	Paving Equipment	2	8
	Rollers	2	8
Architectural Coating	Air Compressors	1	8

#### PROJECT CONSTRUCTION EQUIPMENT FUEL CONSUMPTION

Project construction activity timeline estimates, construction equipment schedules, equipment power ratings, load factors, and associated fuel consumption estimates are presented in Table 4-5. The aggregate fuel consumption rate for all equipment is estimated at 18.5 horsepower hour per gallon (hp-hr-gal.), obtained from CARB 2018 Emissions Factors Tables and cited fuel consumption rate factors presented in Table D-24 of the Moyer guidelines (29). For the purposes of this analysis, the calculations are based on all construction equipment being diesel-powered, which is consistent with industry standards.



TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES

Construction Activity	Duration (Days)	Equipment	HP Rating	Quantity	Usage Hours	Load Factor	HP- hrs/day	Total Fuel Consumption
Site Preparation	10	Rubber Tired Dozers	367	3	8	0.40	3,523	1,904
Site Preparation	10	Crawler Tractors	87	4	8	0.43	1,197	647
		Graders	148	1	8	0.41	485	918
		Excavators	36	2	8	0.38	219	414
Grading	35	Scrapers	423	2	8	0.48	3,249	6,146
		Rubber Tired Dozers	367	1	8	0.40	1,174	2,222
		Crawler Tractors	87	2	8	0.43	599	1,132
		Forklifts	82	3	8	0.20	394	4,596
	216	Generator Sets	14	1	8	0.74	83	968
Building Construction		Cranes	367	1	8	0.29	851	9,941
		Welders	46	1	8	0.45	166	1,933
		Tractors/Loaders/Backhoes	84	3	8	0.37	746	8,709
		Pavers	81	2	8	0.42	544	588
Paving	20	Paving Equipment	89	2	8	0.36	513	554
		Rollers	36	2	8	0.38	219	237
Architectural Coating	60	Air Compressors	37	1	8	0.48	142	461
CONSTRUCTION FUEL DEMAND (GALLONS FUEL)							41,371	

Diesel fuel would be supplied by existing commercial fuel providers serving the Project area and region<sup>2</sup>. As previously presented in Table 4-5, Project construction activities would consume an estimated 41,371 gallons of diesel fuel. Project construction would represent a "single-event" diesel fuel demand and would not require ongoing or permanent commitment of diesel fuel resources for this purpose.

#### 4.3.4 CONSTRUCTION TRIPS AND VMT

Construction generates on-road vehicle emissions from vehicle usage for workers, vendors, and haul truck commuting to and from the site. The number of workers, vendor, and haul trips are presented below in Table 4-6. It should be noted that for vendor trips, specifically, CalEEMod only assigns vendor trips to the Building Construction phase. Vendor trips would likely occur during all phases of construction. As such, the CalEEMod defaults for vendor trips have been adjusted based on a ratio of the total vendor trips to the number of days of each subphase of activity.

TABLE 4-6: CONSTRUCTION TRIPS AND VMT

Construction Activity	Worker Trips Per Day	Vendor Trips Per Day	Hauling Trips Per Day
Offsite Grading	0	1	3
Offsite Paving	0	0	0
Site Preparation	18	4	0
Grading	20	11	107
Building Construction	224	67	0
Paving	15	6	0
Architectural Coating	45	0	0

#### 4.3.5 CONSTRUCTION WORKER FUEL ESTIMATES

With respect to estimated VMT for the Project, the construction worker trips (personal vehicles used by workers commuting to the Project from home) would generate an estimated 969,659 VMT during the 11 months of construction (23). Based on CalEEMod methodology, it is assumed that 50% of all construction worker trips are from light-duty-auto vehicles (LDA), 25% are from light-duty-trucks (LDT1<sup>3</sup>), and 25% are from light-duty-trucks (LDT2<sup>4</sup>). Data regarding Project related construction worker trips were based on CalEEMod defaults utilized within the AQIA.

Vehicle fuel efficiencies for LDA, LDT1, and LDT2 were estimated using information generated within the 2021 version of the EMFAC developed by CARB. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, and VMT from motor vehicles

**OURBAN** 

15382-06 EA Report

<sup>&</sup>lt;sup>2</sup> Based on Appendix A of the CalEEMod User's Guide, Construction consists of several types of off-road equipment. Since the majority of the off-road construction equipment used for construction projects are diesel fueled, CalEEMod assumes all of the equipment operates on diesel fuel.

<sup>&</sup>lt;sup>3</sup> Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

 $<sup>^4</sup>$  Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.

that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (25). EMFAC2021 was run for the LDA, LDT1, and LDT2 vehicle class within the Riverside (SC) sub-area for the 2024 and 2025 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.

**TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES** 

Year	Construction Activity	<b>Duration</b> (Days)	Worker Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)		
	LDA								
	Site Preparation	10	9	18.5	1,665	31.51	53		
	Grading	35	10	18.5	6,475	31.51	206		
	Building Construction	21	112	18.5	43,512	31.51	1,381		
				LDT1					
2024	Site Preparation	10	5	18.5	925	24.62	38		
2024	Grading	35	5	18.5	3,238	24.62	131		
	Building Construction	21	56	18.5	21,756	24.62	884		
	LDT2								
	Site Preparation	10	5	18.5	925	24.57	38		
	Grading	35	5	18.5	3,238	24.57	132		
	Building Construction	21	56	18.5	21,756	24.57	885		
	LDA								
	Building Construction	195	112	18.5	404,040	32.49	12,436		
	Paving	20	8	18.5	2,960	32.49	91		
	Architectural Coating	60	23	18.5	25,530	32.49	786		
			,	LDT1					
2025	Building Construction	195	56	18.5	202,020	25.14	8,036		
2023	Paving	20	4	18.5	1,480	25.14	59		
	Architectural Coating	60	12	18.5	13,320	25.14	530		
				LDT2					
	Building Construction	195	56	18.5	202,020	25.29	7,988		
	Paving	20	4	18.5	1,480	25.29	59		
	Architectural Coating	60	12	18.5	13,320	25.29	527		
		TO	OTAL CONST	RUCTION V	VORKER FUEL	CONSUMPTION	34,257		

As previously shown in Table 4-7, the estimated annual fuel consumption resulting from Project construction worker trips is 34,257 gallons during full construction of the Project. It should be



noted that construction worker trips would represent a "single-event" gasoline fuel demand and would not require ongoing or permanent commitment of fuel resources for this purpose.

## 4.3.6 Construction Vendor/Hauling Fuel Estimates

With respect to estimated VMT, the construction vendor trips (vehicles that deliver materials to the site during construction) would generate an estimated 555,715 VMT along area roadways for the Project over the duration of construction activity (23). It is assumed that 50% of all vendor trips are from medium-heavy duty trucks (MHD), 50% of all vendor trips are from heavy-heavy duty trucks (HHD), and 100% of all hauling trips are from HHDs. These assumptions are consistent with the CalEEMod defaults utilized within the within the AQIA (23). Vehicle fuel efficiencies for MHDs and HHDs were estimated using information generated within EMFAC2021. EMFAC2021 was run for the MHD and HHD vehicle classes within the Riverside (SC) sub-area for the 2024 and 2025 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.

Based on Table 4-8, it is estimated that 78,582 gallons of fuel will be consumed related to construction vendor trips during full construction of the Project. It should be noted that Project construction vendor trips would represent a "single-event" diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

**TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES** 

Year	Construction Activity	<b>Duration</b> (Days)	Vendor Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)						
				MHD									
	Site Preparation	10	6	10.2	612	8.49	72						
	Grading	35	2	10.2	714	8.49	84						
	Offsite Grading	35	1	10.2	357	8.49	42						
	Building Construction	21	112	10.2 23,990		8.49	2,825						
	HHD (Vendor)												
2024	Site Preparation	10	6	10.2	612	6.12	100						
	Grading	35	2	10.2	714	6.12	117						
	Offsite Grading	35	1	10.2	357	6.12	58						
	Building Construction	21	112	10.2	23,990	6.12	3,919						
			Н	HD (Haulin	g)								
	Grading	35	107	20	74,900	6.12	12,237						
	Offsite Grading	35	3	20	2,100	6.12	343						

Year	Construction Activity	<b>Duration</b> (Days)	Vendor Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)								
	MHD														
	Building Construction	195	112	10.2	222,768	8.58	25,960								
	Paving	60	3	10.2	1,836	8.58	214								
2025	HHD (Vendor)														
	Building Construction	195	112	9.2	200,928	6.22	32,316								
	Paving	60 3		10.2 1,836		6.22	295								
		TO	RUCTION V	RUCTION VENDOR FUEL CONSUMPTION											

### 4.3.7 CONSTRUCTION ENERGY EFFICIENCY/CONSERVATION MEASURES

Starting in 2014, CARB adopted the nation's first regulation aimed at cleaning up off-road construction equipment such as bulldozers, graders, and backhoes. These requirements ensure fleets gradually turnover the oldest and dirtiest equipment to newer, cleaner models and prevent fleets from adding older, dirtier equipment. As such, the equipment used for Project construction would conform to CARB regulations and California emissions standards. It should also be noted that there are no unusual Project characteristics or construction processes that would require the use of equipment that would be more energy intensive than is used for comparable activities; or equipment that would not conform to current emissions standards (and related fuel efficiencies). Equipment employed in construction of the Project would therefore not result in inefficient wasteful, or unnecessary consumption of fuel.

Construction contractors would be required to comply with applicable CARB regulation regarding retrofitting, repowering, or replacement of diesel off-road construction equipment. Additionally, CARB has adopted the Airborne Toxic Control Measure to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to diesel particulate matter and other Toxic Air Contaminants. Compliance with anti-idling and emissions regulations would result in a more efficient use of construction-related energy and the minimization or elimination of wasteful or unnecessary consumption of energy. Idling restrictions and the use of newer engines and equipment would result in less fuel combustion and energy consumption.

Additional construction-source energy efficiencies would occur due to required California regulations and best available control measures (BACM). For example, CCR Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than five minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. Section 2449(d)(3) requires that grading plans shall reference the requirement that a sign shall be posted on-site stating that construction workers need to shut off engines at or before five minutes of idling." In this manner, construction equipment operators are required to be informed that engines are to be turned off at or prior to five minutes of idling. Enforcement of idling limitations is realized through periodic site inspections conducted by County building officials, and/or in response to citizen complaints.



A full analysis related to the energy needed to form construction materials is not included in this analysis due to a lack of detailed Project-specific information on construction materials. At this time, an analysis of the energy needed to create Project-related construction materials would be extremely speculative and thus has not been prepared.

In general, construction processes promote conservation and efficient use of energy by reducing raw materials demands, with related reduction in energy demands associated with raw materials extraction, transportation, processing, and refinement. Use of materials in bulk reduces energy demands associated with preparation and transport of construction materials as well as the transport and disposal of construction waste and solid waste in general, with corollary reduced demands on area landfill capacities and energy consumed by waste transport and landfill operations.

### 4.4 OPERATIONAL ENERGY DEMANDS

Energy consumption in support of or related to Project operations would include transportation fuel demands (fuel consumed by passenger car and truck vehicles accessing the Project site), fuel demands from operational equipment, and facilities energy demands (energy consumed by building operations and site maintenance activities).

### **4.4.1** Transportation Fuel Demands

Energy that would be consumed by Project-generated traffic is a function of total VMT and estimated vehicle fuel economies of vehicles accessing the Project site. The VMT per vehicle class can be determined by evaluated in the vehicle fleet mix and the total VMT.

As with worker and vendors trips, operational vehicle fuel efficiencies were estimated using information generated within EMFAC2021 developed by CARB (25). EMFAC2021 was run for the Riverside (SC) sub-area for the 2026 calendar year. Data from EMFAC2021 is shown in Appendix 4.4.

The estimated transportation energy demands were previously summarized on Table 4-9. As summarized on Table 4-9 the Project would result in 6,613,608 annual VMT and an estimated annual fuel consumption of 434,971 gallons of fuel.

TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION

Vehicle Type	Average Vehicle Fuel Economy (mpg)	Annual VMT	Estimated Annual Fuel Consumption (gallons)
LDA	33.43	2,568,602	76,826
LDT1	25.70	196,815	7,657
LDT2	26.01	1,060,799	40,786
MDV	20.88	819,665	39,257
LHDT1	16.89	106,821	6,323
LHDT2	16.01	30,494	1,905
MHDT	8.71	256,148	29,424



Vehicle Type	Average Vehicle Fuel Economy (mpg)	Annual VMT	Estimated Annual Fuel Consumption (gallons)
HHDT	6.33	1,454,650	229,949
MCY	42.07	119,614	2,843
	TOTAL (ALL VEHICLES)	6,613,608	434,971

#### 4.4.2 STATIONARY SOURCE ENERGY DEMANDS

Fuel consumption estimates from stationary sources are presented in Table 4-10. As previously stated, the aggregate fuel consumption rate for all equipment is estimated at 18.5 hp-hr-gal., obtained from CARB 2018 Emissions Factors Tables and cited fuel consumption rate factors presented in Table D-24 of the Moyer guidelines. For the purposes of this analysis, the calculations are based on a 300 hp diesel-fueled generator. Diesel fuel would be supplied by existing commercial fuel providers serving the region. As presented in Table 4-10, Project stationary sources would consume an estimated 592 gallons of diesel fuel.

**TABLE 4-10: STATIONARY SOURCE EQUIPMENT FUEL CONSUMPTION ESTIMATES** 

Equipment	HP Rating	Quantity	Usage Hours	Annual Hourly Usage	Load Factor	HP-hrs/day	Total Fuel Consumption
Fire Pump	300	1	1	50	0.73	219	592
		STATION	ARY SOURCE FL	IEL DEMA	ND (GALLONS	DIESEL FUEL)	592

### 4.4.3 On-Site Cargo Handling Equipment Fuel Demands

It is common for industrial buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. Consistent with the City of Menifee's Industrial Good Neighbor Policies (30), the analysis assumes that all on-site cargo handling equipment would be electrically powered.

#### 4.4.4 FACILITY ENERGY DEMANDS

Project building operations activities would result in the consumption of electricity, which would be supplied to the Project by SCE. Electricity usage associated with the Project was estimated based on data provided by the Project applicant. As summarized on Table 4-11 the Project would result in 816,024 kWh/year of electricity.

Based on information provided by the Project Applicant, the Project would not use natural gas for the building envelope. As such, natural gas consumption has not been analyzed in this study.

**TABLE 4-11: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY** 

Land Use Electricity Demand (kWh/year)
--



Warehousing	747,391
Parking	68,633
TOTAL PROJECT ENERGY DEMAND	816,024

### 4.4.5 OPERATIONAL ENERGY EFFICIENCY/CONSERVATION MEASURES

Energy efficiency/energy conservation attributes of the Project would be complemented by increasingly stringent state and federal regulatory actions addressing vehicle fuel economies and vehicle emissions standards; and enhanced building/utilities energy efficiencies mandated under California building codes (e.g., Title 24, California Green Building Standards Code).

#### **ENHANCED VEHICLE FUEL EFFICIENCIES**

Project annual fuel consumption estimates presented previously in Table 4-9 represent likely potential maximums that would occur for the Project. Under subsequent future conditions, average fuel economies of vehicles accessing the Project site can be expected to improve as older, less fuel-efficient vehicles are removed from circulation, and in response to fuel economy and emissions standards imposed on newer vehicles entering the circulation system.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. The location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands.

### 4.5 SUMMARY

### 4.5.1 CONSTRUCTION ENERGY DEMANDS

The estimated power cost of on-site electricity usage during the construction of the Project is assumed to be approximately \$26,763.27. Additionally, based on the assumed power cost, it is estimated that the total electricity usage during construction, after full Project buildout, is calculated to be approximately 185,669 kWh.

Construction equipment used by the Project would result in single event consumption of approximately 41,371 gallons of diesel fuel. Construction equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed construction process that are unusual or energy-intensive, and Project construction equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

CCR Title 13, Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than 5 minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. BACMs inform construction equipment operators of this requirement. Enforcement of idling limitations is realized through periodic site inspections conducted by County building officials, and/or in response to citizen complaints.



Construction worker trips for full construction of the Project would result in the estimated fuel consumption of 34,257 gallons of fuel. Additionally, fuel consumption from construction vendor and hauling trips (MHDs and HHDs) will total approximately 78,582 gallons. Diesel fuel would be supplied by City and regional commercial vendors. Indirectly, construction energy efficiencies and energy conservation would be achieved using bulk purchases, transport and use of construction materials. The 2022 IEPR released by the CEC has shown that fuel efficiencies are getting better within on and off-road vehicle engines due to more stringent government requirements (17). As supported by the preceding discussions, Project construction energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

#### 4.5.2 OPERATIONAL ENERGY DEMANDS

#### **TRANSPORTATION ENERGY DEMANDS**

Annual vehicular trips and related VMT generated by the operation of the Project would result in a fuel demand of 434,971 gallons of fuel.

Fuel would be provided by current and future commercial vendors. Trip generation and VMT generated by the Project are consistent with other industrial uses of similar scale and configuration, as reflected respectively in the Institute of Transportation Engineers (ITE) Trip Generation Manual (11th Ed., 2021); and CalEEMod. As such, Project operations would not result in excessive and wasteful vehicle trips and VMT, nor excess and wasteful vehicle energy consumption compared to other industrial uses.

It should be noted that the state strategy for the transportation sector for medium and heavy-duty trucks is focused on making trucks more efficient and expediting truck turnover rather than reducing VMT from trucks. This is in contrast to the passenger vehicle component of the transportation sector where both per-capita VMT reductions and an increase in vehicle efficiency are forecasted to be needed to achieve the overall state emissions reductions goals.

Heavy duty trucks involved in goods movements are generally controlled on the technology side and through fleet turnover of older trucks and engines to newer and cleaner trucks and engines. The first battery-electric heavy-heavy duty trucks are being tested this year and SCAQMD is looking to integrate this new technology into large-scale truck operations. The following state strategies reduce GHG emissions from the medium and heavy-duty trucks:

- CARB's Mobile Source Strategy focuses on reducing GHGs through the transition to zero and low emission vehicles and from medium-duty and heavy-duty trucks.
- CARB's Sustainable Freight Action Plan establishes a goal to improve freight efficiency by 25% by 2030, deploy over 100,000 freight vehicles and equipment capable of zero emission operation and maximize both zero and near-zero emission freight vehicles and equipment powered by renewable energy by 2030.
- CARB's Emissions Reduction Plan for Ports and Goods Movement (Goods Movement Plan) in California focuses on reducing heavy-duty truck-related emissions focus on establishment of emissions standards for trucks, fleet turnover, truck retrofits, and restriction on truck idling (CARB 2006). While the focus of Goods Movement Plan is to reduce criteria air pollutant and air toxic



emissions, the strategies to reduce these pollutants would also generally have a beneficial effect in reducing GHG emissions.

- CARB's On-Road Truck and Bus Regulation (2010) requires diesel trucks and buses that operate in California to be upgraded to reduce emissions. Newer heavier trucks and buses must meet particulate matter filter requirements beginning January 1, 2012. Lighter and older heavier trucks must be replaced starting January 1, 2015. By January 1, 2023, nearly all trucks and buses will need to have 2010 model year engines or equivalent (31).
- CARB's Heavy-Duty (Tractor-Trailer) GHG Regulation requires SmartWay tractor trailers that include idle-reduction technologies, aerodynamic technologies, and low-rolling resistant tires that would reduce fuel consumption and associated GHG emissions.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. The location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands. The Project would implement sidewalks, facilitating and encouraging pedestrian access. Facilitating pedestrian and bicycle access would reduce VMT and associated energy consumption. In compliance with the California Green Building Standards Code and County requirements, the Project would promote the use of bicycles as an alternative mean of transportation by providing short-term and/or long-term bicycle parking accommodations. As supported by the preceding discussions, Project transportation energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

### **FACILITY ENERGY DEMANDS**

Project facility operational energy demands are estimated to be: 816,024 kWh/year of electricity which would be supplied by SCE. Based on information provided by the Project Applicant, the Project would not use natural gas. As such, natural gas consumption has not been analyzed in this study. The Project proposes conventional industrial uses reflecting contemporary energy efficient/energy conserving designs and operational programs. The Project does not propose uses that are inherently energy intensive and the energy demands in total would be comparable to other industrial uses of similar scale and configuration.

Implementation of the Project would increase the demand for electricity at the Project site and petroleum consumption in the region during operation. However, the electrical consumption demands of the Project during operation would conform to the state's Title 24 and to CALGreen standards, which implement conservation measures. Further, the proposed Project would not directly require the construction of new energy generation or supply facilities and providers of electricity are in compliance with regulatory requirements that assist in conservation, including requirements that electrical providers achieve state-mandated renewal energy production requirements. With compliance with Title 24 conservation standards and other regulatory requirements, the Project would not be wasteful or inefficient or unnecessarily consume energy resources during construction or operation and would result in a less-than-significant impact with respect to consumption of energy resources. Lastly, the Project will comply with the applicable 2022 Title 24 standards. Compliance with applicable Title 24 standards will ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary.



This page intentionally left blank



## 5 CONCLUSIONS

#### 5.1 ENERGY IMPACT 1

Would the Project result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation?

### **Impact Analysis**

A significant impact would occur if the proposed Project would result in the inefficient, wasteful, or unnecessary use of energy.

#### Construction

Based on CalEEMod estimations within the modeling output files used to estimate GHG emissions associated with future development projects, construction-related vehicle trips would result in approximately 1,525,374 VMT and consume an estimated 112,839 gallons of gasoline and diesel combined during future development projects construction phases. Limitations on idling of vehicles and equipment and requirements that equipment be properly maintained would result in fuel savings. California Code of Regulations, Title 13, Sections 2449 and 2485, limit idling from both on-road and off-road diesel- powered equipment and are enforced by the ARB. Additionally, given the cost of fuel, contractors and owners have a strong financial incentive to avoid wasteful, inefficient, and unnecessary consumption of energy during construction.

Due to the temporary nature of construction and the financial incentives for developers and contractors to use energy-consuming resources in an efficient manner, the construction phase of the proposed project would not result in wasteful, inefficient, and unnecessary consumption of energy. Therefore, the construction-related impacts related to electricity and fuel consumption would be less than significant.

### Operation

### **Electricity and Natural Gas**

Operation of the proposed project would consume energy as part of building operations and transportation activities. Building operations would involve energy consumption for multiple purposes including, but not limited to, building heating and cooling, refrigeration, lighting, and electronics. Based on client provided energy use estimations, operations for the Project would result in approximately 816,024 kWh of electricity.

Future development projects would be designed and constructed in accordance with the City's latest adopted energy efficiency standards, which are based on the California Title 24 energy efficiency standards. Title 24 standards include a broad set of energy conservation requirements that apply to the structural, mechanical, electrical, and plumbing systems in a building. For example, the Title 24 Lighting Power Density requirements define the maximum wattage of lighting that can be used in a building based on its square footage. Title 24 standards are widely



regarded as the most advanced energy efficiency standards, would help reduce the amount of energy required for lighting, water heating, and heating and air conditioning in buildings and promote energy conservation.

### Fuel

Operational energy would also be consumed during vehicle trips associated with future development projects envisioned under the proposed project. Fuel consumption would be primarily related to vehicle use by residents, visitors, and employees associated with future development projects. Based on CalEEMod energy use estimations, project-related vehicle trips would result in approximately 6,613,608 VMT and consume an estimated 434,971 gallons of gasoline and diesel combined, annually (see Appendix 4.2).

The Project is located on an infill site that is surrounded by existing urban uses, the existing transportation facilities and infrastructure would provide future residents, visitors, and employees associated with the Project access to a mix of land uses in close proximity to the Project, thus further reducing fuel consumption demand. Additionally, the Project will also be providing parking and EV infrastructure that would further promote fuel efficient vehicles. For these reasons, operational-related transportation fuel consumption would not result in a significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources. Therefore, the operational impact related to vehicle fuel consumption would be less than significant.

### 5.2 ENERGY IMPACT 2

# Would the Project conflict with or obstruct a state or local plan for renewable energy or energy efficiency?

### Impact Analysis

A significant impact would occur if the proposed Project would conflict with or obstruct a State or local plan for renewable energy or energy efficiency.

### Construction

As discussed in Section 5.1, above, the proposed project would result in energy consumption through the combustion of fossil fuels in construction vehicles, worker commute vehicles, and construction equipment, and the use of electricity for temporary buildings, lighting, and other sources. California Code of Regulations Title 13, Sections 2449 and 2485, limit idling from both on- road and off-road diesel-powered equipment and are enforced by the ARB. The proposed project would comply with these regulations. There are no policies at the local level applicable to energy conservation specific to the construction phase. Thus, it is anticipated that construction of the proposed project would not conflict with any applicable plan, policy, or regulation adopted for the purpose of reducing energy use or increasing the use of renewable energy. Therefore, construction-related energy efficiency and renewable energy standards consistency impacts would be less than significant.



### Operation

California's Renewable Portfolio Standard (RPS) establishes a goal of renewable energy for local providers to be 44 percent by 2040. Similarly, the State is promoting renewable energy targets to meet the 2022 Scoping Plan greenhouse gas emissions reductions. As discussed in Section 5.1, above, the Project would consume approximately 816,024 kWh of electricity annually.

Future development projects would be designed and constructed in accordance with the City's latest adopted energy efficiency standards, which are based on the California Title 24 energy efficiency standards. Title 24 standards include a broad set of energy conservation requirements that apply to the structural, mechanical, electrical, and plumbing systems in a building. For example, the Title 24 Lighting Power Density requirements define the maximum wattage of lighting that can be used in a building based on its square footage. Title 24 standards are widely regarded as the most advanced energy efficiency standards, would help reduce the amount of energy required for lighting, water heating, and heating and air conditioning in buildings and promote energy conservation.

Compliance with the aforementioned mandatory measures would ensure that future development projects would not conflict with any applicable plan, policy, or regulation adopted for the purpose of reducing energy use or increasing the use of renewable energy. Therefore, operational energy efficiency and renewable energy standards consistency impacts would be less than significant.



This page intentionally left blank



## 6 REFERENCES

- 1. Association of Environmental Professionals. 2023 CEQA California Environmental Quality Act. 2023.
- 2. **Administration, U.S. Energy Information.** California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/data.php?sid=CA#ConsumptionExpenditures.
- 3. **U.S. Energy Information Administration.** Use of Energy in the United States Explained Energy Use for Transportation. [Online] https://www.eia.gov/energyexplained/use-of-energy/transportation.php.
- 4. —. Use of Energy in the United States Explained Energy Use for Transportation. [Online] https://www.eia.gov/dnav/pet/hist/LeafHandler.ashx?n=PET&s=MTPUPUS1&f=A.
- 5. —. Prime Supplier Sales Volume, California, Annual. [Online] 2020. https://www.eia.gov/dnav/pet/pet\_cons\_prim\_dcu\_SCA\_a.htm.
- 6. —. California Energy Consumption by End-Use Sector. *California State Profile and Energy Estimates*. [Online] https://www.eia.gov/state/?sid=CA#tabs-2.
- 7. —. California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/seds/sep\_fuel/html/pdf/fuel\_use\_es.pdf.
- 8. —. California State Profile and Energy Estimates. [Online] https://www.eia.gov/dnav/ng/ng\_cons\_sum\_dcu\_SCA\_a.htm.
- 9. **California Energy Commission.** 2022 Total System Electric Generation. *CA.gov.* [Online] https://www.energy.ca.gov/data-reports/energy-almanac/california-electricity-data/2022-total-system-electric-generation.
- 10. **U.S. Energy Information Administration.** California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/?sid=CA.
- 11. California Energy Commission. 2013 Integrated Energy Policy Report. 2013.
- 12. **California ISO.** Understanding the ISO. [Online] http://www.caiso.com/about/Pages/OurBusiness/UnderstandingthelSO/default.aspx.
- 13. **Southern California Edison.** *Southern California Edison's Service Area.* [Online] https://download.newsroom.edison.com/create\_memory\_file/?f\_id=5cc32d492cfac24d21aecf4c&c ontent\_verified=True.
- 14. **Southern Californai Edison.** 2022 Power Content Label. *Southern California Edison.* [Online] https://www.sce.com/sites/default/files/custom-files/PDF\_Files/SCE\_2022\_Power\_Content\_Label\_B%26W.pdf.
- 15. **California Public Utilities Commission.** Natural Gas and California. [Online] https://www.cpuc.ca.gov/industries-and-topics/natural-gas/natural-gas-and-california.
- 16. **U.S. Energy Information Administration.** California Analysis. *Energy Information Administration*. [Online] https://www.eia.gov/beta/states/states/ca/analysis.
- 17. **California Energy Commission Staff.** 2022 Integrated Energy Policy Report Update. [Online] 2022. https://www.energy.ca.gov/sites/default/files/2023-02/Adopted\_2022\_IEPR\_Update\_with\_errata\_ada.pdf.
- 18. California Energy Commission. Energy Commission Adopts Updated Building Standards to Improve Efficiency, Reduce Emissions from Homes and Businesses. [Online] August 11, 2021. https://www.energy.ca.gov/news/2021-08/energy-commission-adopts-updated-building-standards-improve-efficiency-reduce-0.



- 19. **California Department of General Services.** 2022 CALGreen Code. *CALGreen.* [Online] https://codes.iccsafe.org/content/CAGBC2022P1.
- 20. **California Energy Commission.** Renewables Portfolio Standard (RPS). [Online] 2002. http://www.energy.ca.gov/portfolio/.
- 21. **State of California.** *California Environmental Quality Act Guideline, California Public Resources Code, Title 14, Division 6, Chapter 3,*.
- 22. Association of Environmental Professionals. 2019 CEQA California Environmental Quality Act. 2019.
- 23. Urban Crossroads, Inc. Murrieta Road Warehouse Air Quality Impact Analysis. 2024.
- 24. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] May 2023. www.caleemod.com.
- 25. **California Department of Transportation.** EMFAC Software. [Online] http://www.dot.ca.gov/hq/env/air/pages/emfac.htm.
- 26. State of California. 2023 CEQA California Environmental Quality Act. 2023.
- 27. Pray, Richard. 2024 National Construction Estimator. Carlsbad: Craftsman Book Company, 2024.
- 28. **Southern California Edison.** Schedule GS-1 General Service. *Regulatory Information Rates Pricing.* [Online] https://www.sce.com/regulatory/tariff-books/rates-pricing-choices.
- 29. **California Air Resources Board.** Methods to Find the Cost-Effectiveness of Funding Air Quality Projects For Evaluating Motor Vehicle Registration Fee Projects And Congestion Mitigation and Air Quality Improvement (CMAQ) Projects, Emission Factor Tables. 2018.
- 30. **City of Menifee.** Industrial Good Neighbor Policies. [Online] https://www.cityofmenifee.us/DocumentCenter/View/16937/Industrial-Good-Neighbor-Policies?bidId=.
- 31. **California Air Resources Board.** Truck and Bus Regulation. [Online] https://ww2.arb.ca.gov/ourwork/programs/truck-and-bus-regulation.



This page intentionally left blank



## 7 CERTIFICATIONS

The contents of this energy analysis report represent an accurate depiction of the environmental impacts associated with the proposed Murrieta Road Warehouse. The information contained in this energy analysis report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at <a href="mailto:hqueshi@urbanxroads.com">hqueshi@urbanxroads.com</a>.

Haseeb Qureshi
Principal
Urban Crossroads, Inc.
hqureshi@urbanxroads.com

### **EDUCATION**

Master of Science in Environmental Studies California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design University of California, Irvine • June 2006

### **PROFESSIONAL AFFILIATIONS**

AEP – Association of Environmental Professionals AWMA – Air and Waste Management Association ASTM – American Society for Testing and Materials

### **PROFESSIONAL CERTIFICATIONS**

Planned Communities and Urban Infill – Urban Land Institute • June 2011 Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008 Principles of Ambient Air Monitoring – California Air Resources Board • August 2007 AB2588 Regulatory Standards – Trinity Consultants • November 2006 Air Dispersion Modeling – Lakes Environmental • June 2006



This page intentionally left blank



# **APPENDIX 4.1:**

**CALEEMOD PROJECT CONSTRUCTION EMISSIONS MODEL OUTPUTS** 



# 15382 Murrieta Road Warehouse Construction Detailed Report

# Table of Contents

- 1. Basic Project Information
  - 1.1. Basic Project Information
  - 1.2. Land Use Types
  - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
  - 2.1. Construction Emissions Compared Against Thresholds
  - 2.2. Construction Emissions by Year, Unmitigated
- 3. Construction Emissions Details
  - 3.1. Offsite Grading (2024) Unmitigated
  - 3.3. Offsite Paving (2024) Unmitigated
  - 3.5. Offsite Paving (2025) Unmitigated
  - 3.7. Site Preparation (2024) Unmitigated
  - 3.9. Grading (2024) Unmitigated
  - 3.11. Building Construction (2024) Unmitigated

- 3.13. Building Construction (2025) Unmitigated
- 3.15. Paving (2025) Unmitigated
- 3.17. Architectural Coating (2025) Unmitigated
- 4. Operations Emissions Details
  - 4.10. Soil Carbon Accumulation By Vegetation Type
    - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
    - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
    - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 5. Activity Data
  - 5.1. Construction Schedule
  - 5.2. Off-Road Equipment
    - 5.2.1. Unmitigated
  - 5.3. Construction Vehicles
    - 5.3.1. Unmitigated
  - 5.4. Vehicles
    - 5.4.1. Construction Vehicle Control Strategies
  - 5.5. Architectural Coatings

- 5.6. Dust Mitigation
  - 5.6.1. Construction Earthmoving Activities
  - 5.6.2. Construction Earthmoving Control Strategies
- 5.7. Construction Paving
- 5.8. Construction Electricity Consumption and Emissions Factors
- 5.18. Vegetation
  - 5.18.1. Land Use Change
    - 5.18.1.1. Unmitigated
  - 5.18.1. Biomass Cover Type
    - 5.18.1.1. Unmitigated
  - 5.18.2. Sequestration
    - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
  - 6.1. Climate Risk Summary
  - 6.2. Initial Climate Risk Scores
  - 6.3. Adjusted Climate Risk Scores
  - 6.4. Climate Risk Reduction Measures

- 7. Health and Equity Details
  - 7.1. CalEnviroScreen 4.0 Scores
  - 7.2. Healthy Places Index Scores
  - 7.3. Overall Health & Equity Scores
  - 7.4. Health & Equity Measures
  - 7.5. Evaluation Scorecard
  - 7.6. Health & Equity Custom Measures
- 8. User Changes to Default Data

# 1. Basic Project Information

# 1.1. Basic Project Information

Data Field	Value
Project Name	15382 Murrieta Road Warehouse Construction
Construction Start Date	10/1/2024
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.50
Precipitation (days)	0.20
Location	33.738326192783376, -117.20875294804574
County	Riverside-South Coast
City	Menifee
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5512
EDFZ	11
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.21

# 1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
Unrefrigerated Warehouse-No Rail	533	1000sqft	12.2	533,252	158,289	_	_	_

Parking Lot		8.76	Acre	8.76	0.00	0.00	_	_	_
Road Widen	ing	0.50	Mile	4.50	0.00	0.00	_	_	_

# 1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

# 2. Emissions Summary

# 2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	2.23	46.6	21.8	50.2	0.06	0.25	4.33	4.58	0.24	1.04	1.28	_	10,552	10,552	0.39	0.52	21.0	10,737
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.63	1.48	29.6	39.7	0.12	0.34	5.93	6.03	0.33	2.75	2.86	_	15,061	15,061	0.43	1.36	0.48	15,478
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.85	7.92	7.63	17.4	0.02	0.08	1.98	2.06	0.07	0.48	0.55	_	4,300	4,300	0.16	0.24	4.21	4,381
Annual (Max)	_	-	<u> </u>	-	-	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.16	1.45	1.39	3.18	< 0.005	0.01	0.36	0.38	0.01	0.09	0.10	_	712	712	0.03	0.04	0.70	725

# 2.2. Construction Emissions by Year, Unmitigated

Year	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
						7			1	_	7				1	1		

Daily - Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2025	2.23	46.6	21.8	50.2	0.06	0.25	4.33	4.58	0.24	1.04	1.28	_	10,552	10,552	0.39	0.52	21.0	10,737
Daily - Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_
2024	1.63	1.48	29.6	39.7	0.12	0.34	5.93	6.03	0.33	2.75	2.86	_	15,061	15,061	0.43	1.36	0.48	15,478
2025	1.50	1.33	12.9	29.5	0.04	0.12	3.50	3.62	0.12	0.84	0.96	_	7,583	7,583	0.29	0.44	0.45	7,723
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2024	0.23	0.21	4.03	6.44	0.01	0.04	0.84	0.89	0.04	0.28	0.32	_	2,043	2,043	0.06	0.16	1.23	2,093
2025	0.85	7.92	7.63	17.4	0.02	0.08	1.98	2.06	0.07	0.48	0.55	_	4,300	4,300	0.16	0.24	4.21	4,381
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2024	0.04	0.04	0.73	1.18	< 0.005	0.01	0.15	0.16	0.01	0.05	0.06	_	338	338	0.01	0.03	0.20	347
2025	0.16	1.45	1.39	3.18	< 0.005	0.01	0.36	0.38	0.01	0.09	0.10	_	712	712	0.03	0.04	0.70	725

# 3. Construction Emissions Details

# 3.1. Offsite Grading (2024) - Unmitigated

Location	TOG	ROG		СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Dust From Material Movemen	_	_	_	_	_	_	< 0.005	< 0.005	_	< 0.005	< 0.005	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	-	_	_	_	_	-	-	_	-	_	_	-	_	-	_	_
Dust From Material Movemen	_	_	_	_	_	_	< 0.005	< 0.005	_	< 0.005	< 0.005	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Dust From Material Movemen	_	_	_	_	_	_	< 0.005	< 0.005	_	< 0.005	< 0.005	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	-	-	_	_	_	_	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	0.04	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	31.1	31.1	< 0.005	< 0.005	< 0.005	32.5
Hauling	0.01	< 0.005	0.24	0.06	< 0.005	< 0.005	0.05	0.06	< 0.005	0.01	0.02	_	200	200	< 0.005	0.03	0.01	210
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	2.98	2.98	< 0.005	< 0.005	< 0.005	3.12
Hauling	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	_	19.2	19.2	< 0.005	< 0.005	0.02	20.1
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.49	0.49	< 0.005	< 0.005	< 0.005	0.52
Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	3.18	3.18	< 0.005	< 0.005	< 0.005	3.33

# 3.3. Offsite Paving (2024) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

# 3.5. Offsite Paving (2025) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	-	_	_	_	-	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

# 3.7. Site Preparation (2024) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.68	15.7	30.0	0.05	0.10	_	0.10	0.10	_	0.10	_	5,529	5,529	0.22	0.04	_	5,548
Dust From Material Movemen	_	_	_	_	_	_	5.66	5.66	_	2.69	2.69	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_
Off-Road Equipmen		0.02	0.43	0.82	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	151	151	0.01	< 0.005	_	152
Dust From Material Movemen	<u> </u>	_		-	_	_	0.16	0.16	_	0.07	0.07	_	_	_	-	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.08	0.15	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	25.1	25.1	< 0.005	< 0.005	_	25.2

Dust From Material Movemen		_	_	_	_	_	0.03	0.03	_	0.01	0.01		_	_	_	_	_	
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	-	-	-	-	_	_	_	-	-	_	_	_
Worker	0.09	0.08	0.10	1.10	0.00	0.00	0.23	0.23	0.00	0.05	0.05	_	231	231	0.01	0.01	0.03	234
Vendor	0.01	< 0.005	0.15	0.04	< 0.005	< 0.005	0.03	0.04	< 0.005	0.01	0.01	_	124	124	< 0.005	0.02	0.01	130
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	_	6.42	6.42	< 0.005	< 0.005	0.01	6.51
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	3.40	3.40	< 0.005	< 0.005	< 0.005	3.56
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	_	1.06	1.06	< 0.005	< 0.005	< 0.005	1.08
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.56	0.56	< 0.005	< 0.005	< 0.005	0.59
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

# 3.9. Grading (2024) - Unmitigated

Location	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.82	19.9	36.2	0.06	0.18	_	0.18	0.18	_	0.18	_	6,715	6,715	0.27	0.05	_	6,738
Dust From Material Movemen	_	_	_	-	-	_	2.68	2.68	_	0.98	0.98	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.08	1.91	3.47	0.01	0.02	_	0.02	0.02	_	0.02	_	644	644	0.03	0.01	_	646
Dust From Material Movemen	_	_	_	_	_	_	0.26	0.26	_	0.09	0.09	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.01	0.35	0.63	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	107	107	< 0.005	< 0.005	_	107
Dust From Material Movemen	_	_	_	-	_	_	0.05	0.05	_	0.02	0.02	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.11	0.10	0.11	1.26	0.00	0.00	0.26	0.26	0.00	0.06	0.06	_	265	265	0.01	0.01	0.03	268
Vendor	0.01	0.01	0.41	0.12	< 0.005	< 0.005	0.09	0.10	< 0.005	0.03	0.03	_	342	342	0.01	0.05	0.02	357
Hauling	0.30	0.11	8.85	2.08	0.05	0.14	1.94	2.08	0.14	0.54	0.69	_	7,508	7,508	0.13	1.21	0.41	7,872
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.01	0.01	0.01	0.13	0.00	0.00	0.03	0.03	0.00	0.01	0.01	_	25.7	25.7	< 0.005	< 0.005	0.05	26.1
Vendor	< 0.005	< 0.005	0.04	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	32.8	32.8	< 0.005	< 0.005	0.04	34.3
Hauling	0.03	0.01	0.85	0.20	< 0.005	0.01	0.19	0.20	0.01	0.05	0.07	_	720	720	0.01	0.12	0.65	755
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	_	4.25	4.25	< 0.005	< 0.005	0.01	4.31
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	5.42	5.42	< 0.005	< 0.005	0.01	5.68
Hauling	0.01	< 0.005	0.16	0.04	< 0.005	< 0.005	0.03	0.04	< 0.005	0.01	0.01	_	119	119	< 0.005	0.02	0.11	125

# 3.11. Building Construction (2024) - Unmitigated

Location		ROG	NOx	со	SO2		i i			PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.35	9.48	15.7	0.03	0.09	_	0.09	0.09	_	0.09	_	2,630	2,630	0.11	0.02	_	2,639

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmer		0.02	0.54	0.89	< 0.005	0.01	_	0.01	< 0.005	_	< 0.005	_	149	149	0.01	< 0.005	_	150
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmer		< 0.005	0.10	0.16	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	24.7	24.7	< 0.005	< 0.005	_	24.8
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	-
Worker	1.19	1.08	1.27	14.1	0.00	0.00	2.93	2.93	0.00	0.69	0.69	_	2,963	2,963	0.14	0.11	0.33	3,000
Vendor	0.09	0.06	2.47	0.75	0.02	0.03	0.57	0.60	0.03	0.16	0.19	_	2,082	2,082	0.04	0.31	0.15	2,176
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	-	_	_	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_
Worker	0.07	0.06	0.07	0.84	0.00	0.00	0.17	0.17	0.00	0.04	0.04	_	170	170	0.01	0.01	0.31	173
Vendor	0.01	< 0.005	0.14	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	_	118	118	< 0.005	0.02	0.14	124
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.01	0.01	0.01	0.15	0.00	0.00	0.03	0.03	0.00	0.01	0.01	_	28.2	28.2	< 0.005	< 0.005	0.05	28.6
Vendor	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	19.6	19.6	< 0.005	< 0.005	0.02	20.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

# 3.13. Building Construction (2025) - Unmitigated

	TOG	ROG	NOx	co	so2	PM10E	PM10D	PM10T		PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
																	IX	
Onsite	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_			_			_			_	_	_	_	_	_		_
Off-Road Equipmen		0.35	9.48	15.7	0.03	0.09	_	0.09	0.09	_	0.09	_	2,630	2,630	0.11	0.02	_	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.35	9.48	15.7	0.03	0.09	_	0.09	0.09	_	0.09	_	2,630	2,630	0.11	0.02	-	2,639
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.19	5.07	8.37	0.01	0.05	_	0.05	0.05	_	0.05	_	1,405	1,405	0.06	0.01	_	1,410
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.03	0.92	1.53	< 0.005	0.01	_	0.01	0.01	-	0.01	_	233	233	0.01	< 0.005	-	233
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	-	_		_	_	_	_	_	_
Worker	1.20	1.00	0.98	17.3	0.00	0.00	2.93	2.93	0.00	0.69	0.69	_	3,157	3,157	0.13	0.11	11.6	3,205
Vendor	0.09	0.04	2.25	0.70	0.02	0.03	0.57	0.60	0.03	0.16	0.19	_	2,050	2,050	0.04	0.31	5.82	2,150
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	1.06	0.94	1.08	13.1	0.00	0.00	2.93	2.93	0.00	0.69	0.69	_	2,902	2,902	0.14	0.11	0.30	2,939
Vendor	0.09	0.04	2.36	0.72	0.02	0.03	0.57	0.60	0.03	0.16	0.19	_	2,051	2,051	0.04	0.31	0.15	2,145
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_	_	_
Worker	0.56	0.50	0.63	7.38	0.00	0.00	1.56	1.56	0.00	0.37	0.37	_	1,570	1,570	0.07	0.06	2.67	1,592
Vendor	0.05	0.02	1.26	0.38	0.01	0.02	0.31	0.32	0.02	0.08	0.10	_	1,095	1,095	0.02	0.17	1.35	1,147
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	-	_	_	_	_	_	_	-	-	_	_	_	_	_	_
Worker	0.10	0.09	0.11	1.35	0.00	0.00	0.29	0.29	0.00	0.07	0.07	_	260	260	0.01	0.01	0.44	264
Vendor	0.01	< 0.005	0.23	0.07	< 0.005	< 0.005	0.06	0.06	< 0.005	0.02	0.02	-	181	181	< 0.005	0.03	0.22	190
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

# 3.15. Paving (2025) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Off-Road Equipmen		0.23	7.21	10.6	0.01	0.09	_	0.09	0.08	_	0.08	_	1,511	1,511	0.06	0.01	_	1,517
Paving	_	1.74	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	-	_	-	_	_	-	_	_	_	_	_	_	_	_
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.01	0.39	0.58	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	82.8	82.8	< 0.005	< 0.005	_	83.1
Paving	_	0.10	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.07	0.11	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	13.7	13.7	< 0.005	< 0.005	_	13.8
Paving	_	0.02	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.08	0.07	0.07	1.16	0.00	0.00	0.20	0.20	0.00	0.05	0.05	_	211	211	0.01	0.01	0.78	215
Vendor	0.01	< 0.005	0.20	0.06	< 0.005	< 0.005	0.05	0.05	< 0.005	0.01	0.02	-	184	184	< 0.005	0.03	0.52	193
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_

Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	_	10.8	10.8	< 0.005	< 0.005	0.02	10.9
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	10.1	10.1	< 0.005	< 0.005	0.01	10.5
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	_	1.79	1.79	< 0.005	< 0.005	< 0.005	1.81
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	1.67	1.67	< 0.005	< 0.005	< 0.005	1.74
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

### 3.17. Architectural Coating (2025) - Unmitigated

		_ ` _	·	<i>y</i> .		<u> </u>			· J ,									
Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipment		0.03	1.43	1.28	< 0.005	0.04	_	0.04	0.04	_	0.04	_	178	178	0.01	< 0.005	_	179
Architect ural Coatings	_	43.0	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipment		< 0.005	0.23	0.21	< 0.005	0.01	_	0.01	0.01	_	0.01	_	29.3	29.3	< 0.005	< 0.005	_	29.4
Architect ural Coatings	_	7.06	_	_	_	_	_	_	20 / 35	_	_	_	_	_	_	_	_	_

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmer		< 0.005	0.04	0.04	< 0.005	< 0.005	-	< 0.005	< 0.005	-	< 0.005	-	4.85	4.85	< 0.005	< 0.005	-	4.86
Architect ural Coatings	_	1.29	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Worker	0.24	0.20	0.20	3.46	0.00	0.00	0.59	0.59	0.00	0.14	0.14	_	631	631	0.03	0.02	2.32	641
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.03	0.03	0.04	0.45	0.00	0.00	0.10	0.10	0.00	0.02	0.02	_	96.6	96.6	< 0.005	< 0.005	0.16	98.0
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	<u> </u>	_	_	_	_	_
Worker	0.01	0.01	0.01	0.08	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	_	16.0	16.0	< 0.005	< 0.005	0.03	16.2
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

# 4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n	TOG	ROG		СО	SO2	PM10E				PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

#### 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Annual	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

#### 4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

				any, tony					,								1_	
Species	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	-	_	_	_	-	_	_	_	_	_	_	_	-	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Annual	_	_	_	-	_	_	_	_	_	_	_		_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_	_	_
Subtotal	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

# 5. Activity Data

#### 5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Offsite Grading	Linear, Grading & Excavation	10/15/2024	12/2/2024	5.00	35.0	_
Offsite Paving	Linear, Paving	12/3/2024	9/30/2025	5.00	216	_
Site Preparation	Site Preparation	10/1/2024	10/14/2024	5.00	10.0	_
Grading	Grading	10/15/2024	12/2/2024	5.00	35.0	_
Building Construction	Building Construction	12/3/2024	9/30/2025	5.00	216	_
Paving	Paving	9/3/2025	9/30/2025	5.00	20.0	_
Architectural Coating	Architectural Coating	7/9/2025	9/30/2025	5.00	60.0	_

### 5.2. Off-Road Equipment

#### 5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horoopowor	Load Factor
Fliase Name	Equipment Type	ruei Type	Engine nei	Number per Day	Hours Fer Day	Horsepower	LUAU FACIOI

Site Preparation	Rubber Tired Dozers	Diesel	Tier 4 Interim	3.00	8.00	367	0.40
Site Preparation	Crawler Tractors	Diesel	Tier 4 Interim	4.00	8.00	87.0	0.43
Grading	Graders	Diesel	Tier 4 Interim	1.00	8.00	148	0.41
Grading	Excavators	Diesel	Tier 4 Interim	2.00	8.00	36.0	0.38
Grading	Scrapers	Diesel	Tier 4 Interim	2.00	8.00	423	0.48
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	1.00	8.00	367	0.40
Grading	Crawler Tractors	Diesel	Tier 4 Interim	2.00	8.00	87.0	0.43
Building Construction	Forklifts	Diesel	Tier 4 Interim	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Tier 4 Interim	1.00	8.00	14.0	0.74
Building Construction	Cranes	Diesel	Tier 4 Interim	1.00	8.00	367	0.29
Building Construction	Welders	Diesel	Tier 4 Interim	1.00	8.00	46.0	0.45
Building Construction	Tractors/Loaders/Backh oes	Diesel	Tier 4 Interim	3.00	8.00	84.0	0.37
Paving	Pavers	Diesel	Tier 4 Interim	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Tier 4 Interim	2.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Tier 4 Interim	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Tier 4 Interim	1.00	8.00	37.0	0.48

### 5.3. Construction Vehicles

### 5.3.1. Unmitigated

Phase Name	Тгір Туре	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	_	_	_	_
Site Preparation	Worker	17.5	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	4.00	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	_	_	HHDT
Grading	_	_	_	_

Grading	Worker	20.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	11.0	10.2	HHDT,MHDT
Grading	Hauling	107	20.0	HHDT
Grading	Onsite truck	_	_	HHDT
Building Construction	_	_	_	_
Building Construction	Worker	224	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	67.0	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	_	_	HHDT
Paving	_	_	_	_
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	6.00	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	_	_	HHDT
Architectural Coating	_	_	_	_
Architectural Coating	Worker	44.8	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	0.00	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	_	_	HHDT
Offsite Grading	_	_	_	_
Offsite Grading	Worker	0.00	18.5	LDA,LDT1,LDT2
Offsite Grading	Vendor	1.00	10.2	HHDT,MHDT
Offsite Grading	Hauling	2.86	20.0	HHDT
Offsite Grading	Onsite truck	_	_	HHDT
Offsite Paving	_	_	_	_
Offsite Paving	Worker	0.00	18.5	LDA,LDT1,LDT2
Offsite Paving	Vendor	0.00	10.2	HHDT,MHDT

Offsite Paving	Hauling	0.00	20.0	HHDT
Offsite Paving	Onsite truck	_	_	HHDT

#### 5.4. Vehicles

#### 5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

### 5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	799,878	266,626	22,895

### 5.6. Dust Mitigation

#### 5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Offsite Grading	800	_	4.50	0.00	_
Site Preparation	_	_	35.0	0.00	_
Grading	30,000	_	140	0.00	_
Paving	0.00	0.00	0.00	0.00	13.3

#### 5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

### 5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Unrefrigerated Warehouse-No Rail	0.00	0%
Parking Lot	8.76	100%
Road Widening	4.50	100%

### 5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2024	0.00	532	0.03	< 0.005
2025	0.00	532	0.03	< 0.005

### 5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

#### 5.18.1. Biomass Cover Type

#### 5.18.1.1. Unmitigated

Biomass Cover Typ	De .	Initial Acres	Final Acres
• •			

#### 5.18.2. Sequestration

#### 5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

### 6. Climate Risk Detailed Report

#### 6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	27.9	annual days of extreme heat
Extreme Precipitation	2.60	annual days with precipitation above 20 mm
Sea Level Rise	_	meters of inundation depth
Wildfire	7.84	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events. Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.41 meters

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

#### 6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score	
Temperature and Extreme Heat	3	0	0	N/A	
Extreme Precipitation	N/A	N/A	N/A	N/A	
Sea Level Rise	1	0	0	N/A	
Wildfire	1	0	0	N/A	
Flooding	N/A	N/A	N/A	N/A	
Drought	N/A	N/A	N/A	N/A	
Snowpack Reduction	N/A	N/A	N/A	N/A	

Air Quality Degradation	0	0	0	N/A
-------------------------	---	---	---	-----

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

#### 6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	3	1	1	3
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

#### 6.4. Climate Risk Reduction Measures

### 7. Health and Equity Details

#### 7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	_

AQ-Ozone	91.1
AQ-PM	51.4
AQ-DPM	21.5
Drinking Water	67.4
Lead Risk Housing	21.2
Pesticides	70.2
Toxic Releases	24.2
Traffic	74.1
Effect Indicators	_
CleanUp Sites	0.00
Groundwater	0.00
Haz Waste Facilities/Generators	50.1
Impaired Water Bodies	12.5
Solid Waste	22.1
Sensitive Population	_
Asthma	48.8
Cardio-vascular	78.2
Low Birth Weights	53.5
Socioeconomic Factor Indicators	_
Education	79.3
Housing	24.9
Linguistic	16.4
Poverty	46.8
Unemployment	73.4

### 7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	_
Above Poverty	60.29770307
Employed	40.65186706
Median HI	53.71487232
Education	_
Bachelor's or higher	37.28987553
High school enrollment	21.68612858
Preschool enrollment	56.08879764
Transportation	_
Auto Access	87.47593995
Active commuting	24.03438984
Social	_
2-parent households	65.68715514
Voting	37.14872321
Neighborhood	_
Alcohol availability	82.31746439
Park access	26.70345182
Retail density	10.84306429
Supermarket access	22.85384319
Tree canopy	2.014628513
Housing	_
Homeownership	88.6179905
Housing habitability	84.80687797
Low-inc homeowner severe housing cost burden	74.63107917
Low-inc renter severe housing cost burden	62.78711664
Uncrowded housing	64.30129603

_
49.23649429
1.9
51.4
4.3
3.1
46.1
2.1
9.6
20.7
41.6
70.6
50.9
20.0
57.3
3.6
36.5
19.6
33.7
7.6
_
80.1
59.6
36.0
_
7.4
0.0

Children	31.0
Elderly	48.0
English Speaking	75.4
Foreign-born	34.0
Outdoor Workers	12.6
Climate Change Adaptive Capacity	_
Impervious Surface Cover	83.3
Traffic Density	34.3
Traffic Access	23.0
Other Indices	_
Hardship	58.4
Other Decision Support	_
2016 Voting	52.4

### 7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	55.0
Healthy Places Index Score for Project Location (b)	50.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

#### 7.4. Health & Equity Measures

No Health & Equity Measures selected.

#### 7.5. Evaluation Scorecard

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Health & Equity Evaluation Scorecard not completed.

### 7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

# 8. User Changes to Default Data

Screen	Justification
Construction: Construction Phases	Construction schedule based on data provided by the Project applicant.
Construction: Off-Road Equipment	Crawler tractors used during site preparation and grading in lieu of tractors/loaders/backhoes in order to account for fugitive dust emissions. All equipment is assumed to operate for 8 hours per day.
Construction: Trips and VMT	Vendor trips assigned to site preparation, grading, building construction, and paving phases based on the duration of each phase.
Construction: Architectural Coatings	SCAQMD Rule 1113

This page intentionally left blank



### APPENDIX 4.2:

**CALEEMOD PROJECT OPERATIONAL EMISSIONS MODEL OUTPUTS** 



# 15382 Murrietta Road Warehouse Ops Detailed Report

#### Table of Contents

- 1. Basic Project Information
  - 1.1. Basic Project Information
  - 1.2. Land Use Types
  - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
  - 2.4. Operations Emissions Compared Against Thresholds
  - 2.5. Operations Emissions by Sector, Unmitigated
  - 2.6. Operations Emissions by Sector, Mitigated
- 4. Operations Emissions Details
  - 4.1. Mobile Emissions by Land Use
    - 4.1.1. Unmitigated
    - 4.1.2. Mitigated
  - 4.2. Energy
    - 4.2.1. Electricity Emissions By Land Use Unmitigated

- 4.2.2. Electricity Emissions By Land Use Mitigated
- 4.2.3. Natural Gas Emissions By Land Use Unmitigated
- 4.2.4. Natural Gas Emissions By Land Use Mitigated
- 4.3. Area Emissions by Source
  - 4.3.1. Unmitigated
  - 4.3.2. Mitigated
- 4.4. Water Emissions by Land Use
  - 4.4.1. Unmitigated
  - 4.4.2. Mitigated
- 4.5. Waste Emissions by Land Use
  - 4.5.1. Unmitigated
  - 4.5.2. Mitigated
- 4.6. Refrigerant Emissions by Land Use
  - 4.6.1. Unmitigated
  - 4.6.2. Mitigated
- 4.7. Offroad Emissions By Equipment Type
  - 4.7.1. Unmitigated

- 4.7.2. Mitigated
- 4.8. Stationary Emissions By Equipment Type
  - 4.8.1. Unmitigated
  - 4.8.2. Mitigated
- 4.9. User Defined Emissions By Equipment Type
  - 4.9.1. Unmitigated
  - 4.9.2. Mitigated
- 4.10. Soil Carbon Accumulation By Vegetation Type
  - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
  - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
  - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
  - 4.10.4. Soil Carbon Accumulation By Vegetation Type Mitigated
  - 4.10.5. Above and Belowground Carbon Accumulation by Land Use Type Mitigated
  - 4.10.6. Avoided and Sequestered Emissions by Species Mitigated
- 5. Activity Data
  - 5.9. Operational Mobile Sources
    - 5.9.1. Unmitigated

- 5.9.2. Mitigated
- 5.10. Operational Area Sources
  - 5.10.1. Hearths
    - 5.10.1.1. Unmitigated
    - 5.10.1.2. Mitigated
  - 5.10.2. Architectural Coatings
  - 5.10.3. Landscape Equipment
  - 5.10.4. Landscape Equipment Mitigated
- 5.11. Operational Energy Consumption
  - 5.11.1. Unmitigated
  - 5.11.2. Mitigated
- 5.12. Operational Water and Wastewater Consumption
  - 5.12.1. Unmitigated
  - 5.12.2. Mitigated
- 5.13. Operational Waste Generation
  - 5.13.1. Unmitigated
  - 5.13.2. Mitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.14.2. Mitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.15.2. Mitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.1.2. Mitigated

- 5.18.2. Sequestration
  - 5.18.2.1. Unmitigated
  - 5.18.2.2. Mitigated
- 6. Climate Risk Detailed Report
  - 6.1. Climate Risk Summary
  - 6.2. Initial Climate Risk Scores
  - 6.3. Adjusted Climate Risk Scores
  - 6.4. Climate Risk Reduction Measures
- 7. Health and Equity Details
  - 7.1. CalEnviroScreen 4.0 Scores
  - 7.2. Healthy Places Index Scores
  - 7.3. Overall Health & Equity Scores
  - 7.4. Health & Equity Measures
  - 7.5. Evaluation Scorecard
  - 7.6. Health & Equity Custom Measures
- 8. User Changes to Default Data

# 1. Basic Project Information

### 1.1. Basic Project Information

Data Field	Value
Project Name	15382 Murrietta Road Warehouse Ops
Operational Year	2026
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.50
Precipitation (days)	0.20
Location	33.73835946754633, -117.2087167428099
County	Riverside-South Coast
City	Menifee
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5512
EDFZ	11
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.22

# 1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
Unrefrigerated Warehouse-No Rail	533	1000sqft	12.2	533,252	158,289	_	_	_

User Defined Industrial	533	User Defined Unit	0.00	0.00	0.00	_	_	_
Parking Lot	8.76	Acre	8.76	0.00	0.00	_	_	_

### 1.3. User-Selected Emission Reduction Measures by Emissions Sector

Sector	#	Measure Title
Energy	E-10-B	Establish Onsite Renewable Energy Systems: Solar Power

# 2. Emissions Summary

### 2.4. Operations Emissions Compared Against Thresholds

Un/Mit.	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	10.4	22.0	26.8	87.3	0.33	0.60	18.6	19.2	0.57	4.79	5.36	506	36,396	36,902	52.2	4.18	93.9	39,545
Mit.	10.4	22.0	26.8	87.3	0.33	0.60	18.6	19.2	0.57	4.79	5.36	506	36,341	36,848	52.2	4.17	93.9	39,490
% Reduced	_	_	_	_	_	_	_	_	_	_	_	_	< 0.5%	< 0.5%	< 0.5%	_	_	< 0.5%
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	6.12	18.0	27.8	53.3	0.32	0.56	18.6	19.2	0.54	4.79	5.32	506	35,324	35,830	52.2	4.20	2.43	38,388
Mit.	6.12	18.0	27.8	53.3	0.32	0.56	18.6	19.2	0.54	4.79	5.32	506	35,269	35,776	52.2	4.20	2.43	38,333
% Reduced	_	_	_	_	_	_	_	_	_	_	_	_	< 0.5%	< 0.5%	< 0.5%	_	_	< 0.5%
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unmit.	6.64	18.6	19.0	54.7	0.23	0.35	13.6	13.9	0.33	3.49	3.81	506	26,015	26,521	52.0	3.21	29.5	28,807
Mit.	6.64	18.6	19.0	54.7	0.23	0.35	13.6	13.9	0.33	3.49	3.81	506	25,960	26,467	51.9	3.21	29.5	28,752
% Reduced	_	_	_	_	_	_	_	_	_	_	_	_	< 0.5%	< 0.5%	< 0.5%	_	_	< 0.5%
Annual (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.21	3.40	3.46	9.98	0.04	0.06	2.47	2.54	0.06	0.64	0.70	83.8	4,307	4,391	8.60	0.53	4.89	4,769
Mit.	1.21	3.40	3.46	9.98	0.04	0.06	2.47	2.54	0.06	0.64	0.70	83.8	4,298	4,382	8.60	0.53	4.89	4,760
% Reduced	_	_	_	_	_	_	_	_	_	_	_	_	< 0.5%	< 0.5%	< 0.5%	< 0.5%	_	< 0.5%

# 2.5. Operations Emissions by Sector, Unmitigated

Sector	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	-	_	-	_	_
Mobile	5.22	4.37	23.9	61.6	0.33	0.41	18.6	19.0	0.39	4.79	5.18	_	34,159	34,159	0.76	3.58	93.9	35,338
Area	4.13	16.6	0.20	23.2	< 0.005	0.04	_	0.04	0.03	_	0.03	_	95.4	95.4	< 0.005	< 0.005	_	95.7
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	829	829	0.08	0.01	_	834
Water	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Waste	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
Stationar y	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	10.4	22.0	26.8	87.3	0.33	0.60	18.6	19.2	0.57	4.79	5.36	506	36,396	36,902	52.2	4.18	93.9	39,545
Daily, Winter (Max)	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	5.04	4.19	25.1	50.8	0.32	0.41	18.6	19.0	0.39	4.79	5.18	_	33,183	33,183	0.77	3.60	2.43	34,277
Area	_	12.8		_	_	_	_		_	_	_	_	_		_	_	_	_

Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00		829	829	0.08	0.01	_	834
Water	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Waste	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
Stationar y	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	6.12	18.0	27.8	53.3	0.32	0.56	18.6	19.2	0.54	4.79	5.32	506	35,324	35,830	52.2	4.20	2.43	38,388
Average Daily	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Mobile	3.67	3.04	18.5	38.5	0.23	0.30	13.6	13.9	0.28	3.49	3.77	_	24,243	24,243	0.56	2.62	29.5	25,067
Area	2.83	15.4	0.13	15.9	< 0.005	0.03	_	0.03	0.02	_	0.02	_	65.3	65.3	< 0.005	< 0.005	_	65.6
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	829	829	0.08	0.01	_	834
Water	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Waste	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
Stationar y	0.15	0.13	0.38	0.34	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	69.0	69.0	< 0.005	< 0.005	0.00	69.2
Total	6.64	18.6	19.0	54.7	0.23	0.35	13.6	13.9	0.33	3.49	3.81	506	26,015	26,521	52.0	3.21	29.5	28,807
Annual	_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	0.67	0.56	3.37	7.02	0.04	0.05	2.47	2.53	0.05	0.64	0.69	_	4,014	4,014	0.09	0.43	4.89	4,150
Area	0.52	2.82	0.02	2.90	< 0.005	0.01	_	0.01	< 0.005	_	< 0.005	_	10.8	10.8	< 0.005	< 0.005	_	10.9
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	137	137	0.01	< 0.005	_	138
Water	_	_	_	-	_	_	_	_	_	_	_	39.1	134	173	4.02	0.10	_	303
Waste	_	_	_	-	_	_	_	_	_	_	_	44.7	0.00	44.7	4.47	0.00	_	156
Stationar y	0.03	0.02	0.07	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.4	11.4	< 0.005	< 0.005	0.00	11.5
Total	1.21	3.40	3.46	9.98	0.04	0.06	2.47	2.54	0.06	0.64	0.70	83.8	4,307	4,391	8.60	0.53	4.89	4,769

### 2.6. Operations Emissions by Sector, Mitigated

	Secto	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
--	-------	-----	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	5.22	4.37	23.9	61.6	0.33	0.41	18.6	19.0	0.39	4.79	5.18	_	34,159	34,159	0.76	3.58	93.9	35,338
Area	4.13	16.6	0.20	23.2	< 0.005	0.04	_	0.04	0.03	_	0.03	_	95.4	95.4	< 0.005	< 0.005	_	95.7
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	774	774	0.07	0.01	_	778
Water	_	_	_	_	_	_	_	_	_	_	<u> </u>	236	809	1,045	24.3	0.59	_	1,827
Waste	_	_	_	_	_	_	_	_	_	_	<u> </u>	270	0.00	270	27.0	0.00	_	945
Stationar y	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	10.4	22.0	26.8	87.3	0.33	0.60	18.6	19.2	0.57	4.79	5.36	506	36,341	36,848	52.2	4.17	93.9	39,490
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	5.04	4.19	25.1	50.8	0.32	0.41	18.6	19.0	0.39	4.79	5.18	_	33,183	33,183	0.77	3.60	2.43	34,277
Area	_	12.8	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	774	774	0.07	0.01	_	778
Water	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Waste	_	_	_	_	_	_	_	_	_	_	<u> </u>	270	0.00	270	27.0	0.00	_	945
Stationar y	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	6.12	18.0	27.8	53.3	0.32	0.56	18.6	19.2	0.54	4.79	5.32	506	35,269	35,776	52.2	4.20	2.43	38,333
Average Daily	_	_	_	-	-	_	_	_	_	_	_	_	-	_	_	-	_	_
Mobile	3.67	3.04	18.5	38.5	0.23	0.30	13.6	13.9	0.28	3.49	3.77	_	24,243	24,243	0.56	2.62	29.5	25,067
Area	2.83	15.4	0.13	15.9	< 0.005	0.03	_	0.03	0.02	_	0.02	_	65.3	65.3	< 0.005	< 0.005	_	65.6
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	774	774	0.07	0.01	_	778
Water	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Waste	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945

Stationar y	0.15	0.13	0.38	0.34	< 0.005	0.02	0.00	0.02	0.02	0.00	0.02	0.00	69.0	69.0	< 0.005	< 0.005	0.00	69.2
Total	6.64	18.6	19.0	54.7	0.23	0.35	13.6	13.9	0.33	3.49	3.81	506	25,960	26,467	51.9	3.21	29.5	28,752
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	0.67	0.56	3.37	7.02	0.04	0.05	2.47	2.53	0.05	0.64	0.69	_	4,014	4,014	0.09	0.43	4.89	4,150
Area	0.52	2.82	0.02	2.90	< 0.005	0.01	_	0.01	< 0.005	_	< 0.005	_	10.8	10.8	< 0.005	< 0.005	_	10.9
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	128	128	0.01	< 0.005	_	129
Water	_	_	_	_	_	_	_	_	_	_	_	39.1	134	173	4.02	0.10	_	303
Waste	_	_	_	_	_	_	_	_	_	_	_	44.7	0.00	44.7	4.47	0.00	_	156
Stationar y	0.03	0.02	0.07	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.4	11.4	< 0.005	< 0.005	0.00	11.5
Total	1.21	3.40	3.46	9.98	0.04	0.06	2.47	2.54	0.06	0.64	0.70	83.8	4,298	4,382	8.60	0.53	4.89	4,760

# 4. Operations Emissions Details

### 4.1. Mobile Emissions by Land Use

#### 4.1.1. Unmitigated

Land Use	TOG	ROG		со	SO2	PM10E						BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	4.45	4.00	2.65	56.7	0.13	0.05	12.5	12.5	0.05	3.14	3.19	_	12,795	12,795	0.39	0.28	42.3	12,929
User Defined Industrial	0.78	0.37	21.2	4.93	0.20	0.36	6.15	6.51	0.34	1.65	1.99	_	21,364	21,364	0.37	3.30	51.6	22,408

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	5.22	4.37	23.9	61.6	0.33	0.41	18.6	19.0	0.39	4.79	5.18	_	34,159	34,159	0.76	3.58	93.9	35,338
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_
Unrefrige rated Warehou se-No Rail	4.28	3.83	2.94	45.8	0.12	0.05	12.5	12.5	0.05	3.14	3.19	_	11,812	11,812	0.40	0.30	1.10	11,912
User Defined Industrial	0.76	0.35	22.1	4.98	0.20	0.36	6.15	6.51	0.34	1.65	1.99	_	21,371	21,371	0.37	3.30	1.34	22,365
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Total	5.04	4.19	25.1	50.8	0.32	0.41	18.6	19.0	0.39	4.79	5.18	_	33,183	33,183	0.77	3.60	2.43	34,277
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.57	0.51	0.40	6.37	0.02	0.01	1.66	1.67	0.01	0.42	0.43	_	1,446	1,446	0.05	0.04	2.21	1,460
User Defined Industrial	0.10	0.05	2.96	0.66	0.03	0.05	0.82	0.86	0.05	0.22	0.26	_	2,568	2,568	0.04	0.40	2.68	2,690
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.67	0.56	3.37	7.02	0.04	0.05	2.47	2.53	0.05	0.64	0.69	_	4,014	4,014	0.09	0.43	4.89	4,150

### 4.1.2. Mitigated

		(	,	J, J-		,		-, <u>,</u>	- J,									
Land	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Use																		

Daily, Summer	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
(Max)																		
Unrefrige rated Warehou se-No Rail	4.45	4.00	2.65	56.7	0.13	0.05	12.5	12.5	0.05	3.14	3.19	_	12,795	12,795	0.39	0.28	42.3	12,929
User Defined Industrial	0.78	0.37	21.2	4.93	0.20	0.36	6.15	6.51	0.34	1.65	1.99	_	21,364	21,364	0.37	3.30	51.6	22,408
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	5.22	4.37	23.9	61.6	0.33	0.41	18.6	19.0	0.39	4.79	5.18	_	34,159	34,159	0.76	3.58	93.9	35,338
Daily, Winter (Max)		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	4.28	3.83	2.94	45.8	0.12	0.05	12.5	12.5	0.05	3.14	3.19	_	11,812	11,812	0.40	0.30	1.10	11,912
User Defined Industrial	0.76	0.35	22.1	4.98	0.20	0.36	6.15	6.51	0.34	1.65	1.99	_	21,371	21,371	0.37	3.30	1.34	22,365
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	5.04	4.19	25.1	50.8	0.32	0.41	18.6	19.0	0.39	4.79	5.18	_	33,183	33,183	0.77	3.60	2.43	34,277
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.57	0.51	0.40	6.37	0.02	0.01	1.66	1.67	0.01	0.42	0.43	_	1,446	1,446	0.05	0.04	2.21	1,460

User Defined Industrial	0.10	0.05	2.96	0.66	0.03	0.05	0.82	0.86	0.05	0.22	0.26	_	2,568	2,568	0.04	0.40	2.68	2,690
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.67	0.56	3.37	7.02	0.04	0.05	2.47	2.53	0.05	0.64	0.69	_	4,014	4,014	0.09	0.43	4.89	4,150

### 4.2. Energy

#### 4.2.1. Electricity Emissions By Land Use - Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2				_	PM2.5D		BCO2	NBCO2	СО2Т	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	764	764	0.07	0.01	_	768
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	-	_	_	_	_	_	_	_	_	65.1	65.1	0.01	< 0.005	_	65.5
Total	_	_	_	_	_	_	_	_	_	_	_	_	829	829	0.08	0.01	_	834
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	764	764	0.07	0.01	_	768

User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	65.1	65.1	0.01	< 0.005	_	65.5
Total	_	_	_	_	_	_	_	_	_	_	_	_	829	829	0.08	0.01	_	834
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_		_	_	_					126	126	0.01	< 0.005		127
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	10.8	10.8	< 0.005	< 0.005	_	10.8
Total	_	_	_	_	_	_	_	_	_	_	_	_	137	137	0.01	< 0.005	_	138

### 4.2.2. Electricity Emissions By Land Use - Mitigated

Land Use	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_	_	_	_	_	_	_	_	709	709	0.07	0.01	_	713
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00

Parking Lot	_	_	_	_		_	_	_		_	_	_	65.1	65.1	0.01	< 0.005	_	65.5
Total	_	_	_	_	_	_	_	_	_	_	_	_	774	774	0.07	0.01	_	778
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_		_	_	709	709	0.07	0.01	_	713
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	65.1	65.1	0.01	< 0.005	_	65.5
Total	_	_	_	_	_	_	_	_	_	_	_	_	774	774	0.07	0.01	_	778
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_		_	_	117	117	0.01	< 0.005	_	118
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	10.8	10.8	< 0.005	< 0.005	_	10.8
Total	_	_	_	_	_	_	_	_	_	_	_	_	128	128	0.01	< 0.005	_	129

### $4.2.3. \ Natural \ Gas \ Emissions \ By \ Land \ Use$ - Unmitigated

•		10 (, 5.5.	,	<i>y</i> ,, <i>y</i> .		,		,,		, ,	Jan 11 1 J. J. 1							
Land	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Use																		

Daily, Summer (Max)	_		_	_		_	_		_	_		_	_	_				_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00

User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00

# 4.2.4. Natural Gas Emissions By Land Use - Mitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T				BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	-	_	_	_	_	_	_	_	_	_	-	_	_	-	-	_	_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	-	_	-	_	_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00

User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00		0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00

# 4.3. Area Emissions by Source

## 4.3.1. Unmitigated

Source	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products		11.4	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings		1.38	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Landsca Equipmen	4.13 nt	3.81	0.20	23.2	< 0.005	0.04	_	0.04	0.03	_	0.03	_	95.4	95.4	< 0.005	< 0.005	_	95.7
Total	4.13	16.6	0.20	23.2	< 0.005	0.04	_	0.04	0.03	_	0.03	_	95.4	95.4	< 0.005	< 0.005	_	95.7
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	11.4	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings		1.38	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	12.8	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	2.09	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-
Architect ural Coatings	_	0.25	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	-
Landsca pe Equipme nt	0.52	0.48	0.02	2.90	< 0.005	0.01	_	0.01	< 0.005	_	< 0.005	_	10.8	10.8	< 0.005	< 0.005	_	10.9
Total	0.52	2.82	0.02	2.90	< 0.005	0.01	_	0.01	< 0.005	_	< 0.005	_	10.8	10.8	< 0.005	< 0.005	_	10.9

# 4.3.2. Mitigated

				<i>y</i> .														
Source	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily,	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Summer																		
(Max)																		

Consum er Products	_	11.4	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	1.38	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	4.13	3.81	0.20	23.2	< 0.005	0.04	_	0.04	0.03	_	0.03	_	95.4	95.4	< 0.005	< 0.005	_	95.7
Total	4.13	16.6	0.20	23.2	< 0.005	0.04	_	0.04	0.03	_	0.03	_	95.4	95.4	< 0.005	< 0.005	_	95.7
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	11.4	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	1.38	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_	-
Total	_	12.8	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	2.09	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.25	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	0.52	0.48	0.02	2.90	< 0.005	0.01	-	0.01	< 0.005	_	< 0.005	_	10.8	10.8	< 0.005	< 0.005	-	10.9
Total	0.52	2.82	0.02	2.90	< 0.005	0.01	_	0.01	< 0.005	_	< 0.005	_	10.8	10.8	< 0.005	< 0.005	_	10.9
						-				_		-	_	-	-			

# 4.4. Water Emissions by Land Use

## 4.4.1. Unmitigated

Criteria	Pollutan	ts (Ib/day	y tor dali	y, ton/yr	tor annu	ıaı) and (	GHGS (I	b/day for	daliy, iv	11/yr for	annuai)							
Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	СО2Т	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827

Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_	_	_	_	_	_	_	39.1	134	173	4.02	0.10	_	303
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	39.1	134	173	4.02	0.10	_	303

# 4.4.2. Mitigated

Land Use	TOG	ROG			SO2	PM10E				PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_		_	_	_		_	_	_	236	809	1,045	24.3	0.59	_	1,827
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige Warehous Rail		_	_	_	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	-	_	_	_	_	_	_	_	236	809	1,045	24.3	0.59	_	1,827
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	39.1	134	173	4.02	0.10	_	303
User Defined Industrial	_	_	_	_	_	-	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot		_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	Ī <u> </u>	_	_	_	_	_	_	_	39.1	134	173	4.02	0.10	_	303

# 4.5. Waste Emissions by Land Use

## 4.5.1. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated Warehou se-No	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
Daily, Winter (Max)	_	_	-	-	_		_	-	_	-	-	_	_	_	_	-	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
User Defined Industrial	_	_	-	-	_	_	_	-	_	-	-	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
Annual	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	44.7	0.00	44.7	4.47	0.00	-	156
User Defined Industrial	_	_	_	_	-	_	_	_	_	-	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	<u> </u>	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	44.7	0.00	44.7	4.47	0.00	_	156

# 4.5.2. Mitigated

Cillena	Poliulai	is (ib/ua	y ioi dali			iai) and t		b/day for										
Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_		_	_	_	_	_	_	_	270	0.00	270	27.0	0.00		945
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_		_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	270	0.00	270	27.0	0.00	_	945
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated	_	_	_	_	_	_	_	_	_	_	_	44.7	0.00	44.7	4.47	0.00	_	156
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_		_			_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	44.7	0.00	44.7	4.47	0.00	_	156

# 4.6. Refrigerant Emissions by Land Use

#### 4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

#### 4.6.2. Mitigated

L	_and	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
ι	Jse																		

Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

# 4.7. Offroad Emissions By Equipment Type

### 4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

			,	J, J		,			,									
Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_		_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

#### 4.7.2. Mitigated

Equipme Type	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

# 4.8. Stationary Emissions By Equipment Type

# 4.8.1. Unmitigated

				, ,					J.									
Equipme	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
nt																		
Туре																		
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Fire Pump	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Fire Pump	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505

Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	<u> </u>	_	_	_	_
Fire Pump	0.03	0.02	0.07	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.4	11.4	< 0.005	< 0.005	0.00	11.5
Total	0.03	0.02	0.07	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.4	11.4	< 0.005	< 0.005	0.00	11.5

#### 4.8.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

				<i>J</i> , <i>J</i>					J,									
Equipme nt Type	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	СО2Т	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Fire Pump	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Fire Pump	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Total	1.08	0.98	2.75	2.51	< 0.005	0.14	0.00	0.14	0.14	0.00	0.14	0.00	504	504	0.02	< 0.005	0.00	505
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Fire Pump	0.03	0.02	0.07	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.4	11.4	< 0.005	< 0.005	0.00	11.5
Total	0.03	0.02	0.07	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.4	11.4	< 0.005	< 0.005	0.00	11.5

# 4.9. User Defined Emissions By Equipment Type

#### 4.9.1. Unmitigated

Equipme Type	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

## 4.9.2. Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

				<i>,</i> ,														
Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	СО2Т	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

# 4.10. Soil Carbon Accumulation By Vegetation Type

### 4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

### 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Land Use	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

# 4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

						nual) and												
Species	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	-	_	_	_	_	_	_	-	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Sequest	_	_	_	-	_	_	_	_	_	_	-	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

### 4.10.4. Soil Carbon Accumulation By Vegetation Type - Mitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n	TOG	ROG		СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_		_	_			_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

### 4.10.5. Above and Belowground Carbon Accumulation by Land Use Type - Mitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

# 4.10.6. Avoided and Sequestered Emissions by Species - Mitigated

	TOG	ROG						PM10T		PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
	TOG	RUG	IVUX	<del></del>	302	PIVITUE	PIVITUD	PIVITUT	PIVIZ.3E	PIVIZ.3D	FIVIZ.51	BCOZ	NBCO2	CO21	СП4	INZU	IV.	COZE
Daily, Summer	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
(Max)																		
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	<u> </u>	_	_		_	_		_	_	_	_	_
Subtotal	_	_	_	_	_	_	<u> </u>	_	_		_	_		_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

# 5. Activity Data

# 5.9. Operational Mobile Sources

# 5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Unrefrigerated Warehouse-No Rail	933	75.2	29.9	248,774	17,876	1,440	572	4,765,495
User Defined Industrial	202	16.0	0.53	53,553	6,975	552	18.4	1,848,113
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

# 5.9.2. Mitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
---------------	---------------	----------------	--------------	------------	-------------	--------------	------------	----------

Unrefrigerated Warehouse-No Rail	933	75.2	29.9	248,774	17,876	1,440	572	4,765,495
User Defined Industrial	202	16.0	0.53	53,553	6,975	552	18.4	1,848,113
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

# 5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.1.2. Mitigated

# 5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	799,878	266,626	22,895

# 5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

# 5.10.4. Landscape Equipment - Mitigated

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

# 5.11. Operational Energy Consumption

### 5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	805,088	346	0.0330	0.0040	0.00
User Defined Industrial	0.00	346	0.0330	0.0040	0.00
Parking Lot	68,633	346	0.0330	0.0040	0.00

#### 5.11.2. Mitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	747,391	346	0.0330	0.0040	0.00
User Defined Industrial	0.00	346	0.0330	0.0040	0.00
Parking Lot	68,633	346	0.0330	0.0040	0.00

## 5.12. Operational Water and Wastewater Consumption

### 5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)	
Unrefrigerated Warehouse-No Rail	123,314,525	2,509,785	
User Defined Industrial	0.00	0.00	
Parking Lot	0.00	0.00	

#### 5.12.2. Mitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)	
Unrefrigerated Warehouse-No Rail	123,314,525	2,509,785	
User Defined Industrial	0.00	0.00	
Parking Lot	0.00	0.00	

# 5.13. Operational Waste Generation

# 5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)	
Unrefrigerated Warehouse-No Rail	501	_	
User Defined Industrial	0.00	_	
Parking Lot	0.00	_	

### 5.13.2. Mitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)	
Unrefrigerated Warehouse-No Rail	501	_	
User Defined Industrial	0.00	_	
Parking Lot	0.00	_	

# 5.14. Operational Refrigeration and Air Conditioning Equipment

## 5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
_a 555 ./p5		1.10901	· · · ·	- (g)	oporations zouit i tato	Joint Double Trains	

### 5.14.2. Mitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Land Ose Type	Lquipinent Type	rteingerant	OWI	Qualitity (kg)	Operations Leak Mate	Dervice Leak Mate	Tillies Oct viceu

# 5.15. Operational Off-Road Equipment

### 5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

#### 5.15.2. Mitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor

## 5.16. Stationary Sources

# 5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
Fire Pump	Diesel	1.00	1.00	50.0	300	0.73

#### 5.16.2. Process Boilers

Faurinment Tune	Fuel Type	Mussbar	Doilor Doting (MMDtu/br)	Doily Hoot Input (MMDtu/doy)	Applied Heat Input (MMDtu/ur)
Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)

#### 5.17. User Defined

Equipment Type Fuel Type

## 5.18. Vegetation

5.18.1. Land Use Change

#### 5.18.1.1. Unmitigated

Vegetation Land Use Type Vegetation Soil Type Initial Acres Final Acres

#### 5.18.1.2. Mitigated

 Vegetation Land Use Type
 Vegetation Soil Type
 Initial Acres
 Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type Initial Acres Final Acres

5.18.1.2. Mitigated

Biomass Cover Type Initial Acres Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type Number Electricity Saved (kWh/year) Natural Gas Saved (btu/year)

5.18.2.2. Mitigated

Tree Type Number Electricity Saved (kWh/year) Natural Gas Saved (btu/year)

# 6. Climate Risk Detailed Report

### 6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	27.9	annual days of extreme heat

Extreme Precipitation	2.60	annual days with precipitation above 20 mm
Sea Level Rise	_	meters of inundation depth
Wildfire	7.84	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events. Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.41 meters

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

#### 6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	3	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

#### 6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	3	1	1	3
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

#### 6.4. Climate Risk Reduction Measures

# 7. Health and Equity Details

### 7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	_
AQ-Ozone	91.1
AQ-PM	51.4
AQ-DPM	21.5
Drinking Water	67.4
Lead Risk Housing	21.2
Pesticides	70.2

Toxic Releases	24.2
Traffic	74.1
Effect Indicators	_
CleanUp Sites	0.00
Groundwater	0.00
Haz Waste Facilities/Generators	50.1
Impaired Water Bodies	12.5
Solid Waste	22.1
Sensitive Population	_
Asthma	48.8
Cardio-vascular	78.2
Low Birth Weights	53.5
Socioeconomic Factor Indicators	_
Education	79.3
Housing	24.9
Linguistic	16.4
Poverty	46.8
Unemployment	73.4

# 7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

The maximum Health Flaces index score is 100. A high score (i.e., greater than 50) reflects healthler community conditions compared to other census tracts in the state.				
Indicator	Result for Project Census Tract			
Economic	_			
Above Poverty	60.29770307			
Employed	40.65186706			
Median HI	53.71487232			
Education	_			

Bachelor's or higher	37.28987553
High school enrollment	21.68612858
Preschool enrollment	56.08879764
Transportation	_
Auto Access	87.47593995
Active commuting	24.03438984
Social	_
2-parent households	65.68715514
Voting	37.14872321
Neighborhood	_
Alcohol availability	82.31746439
Park access	26.70345182
Retail density	10.84306429
Supermarket access	22.85384319
Tree canopy	2.014628513
Housing	_
Homeownership	88.6179905
Housing habitability	84.80687797
Low-inc homeowner severe housing cost burden	74.63107917
Low-inc renter severe housing cost burden	62.78711664
Uncrowded housing	64.30129603
Health Outcomes	_
Insured adults	49.23649429
Arthritis	1.9
Asthma ER Admissions	51.4
High Blood Pressure	4.3
Cancer (excluding skin)	3.1

Asthma	46.1
Coronary Heart Disease	2.1
Chronic Obstructive Pulmonary Disease	9.6
Diagnosed Diabetes	20.7
Life Expectancy at Birth	41.6
Cognitively Disabled	70.6
Physically Disabled	50.9
Heart Attack ER Admissions	20.0
Mental Health Not Good	57.3
Chronic Kidney Disease	3.6
Obesity	36.5
Pedestrian Injuries	19.6
Physical Health Not Good	33.7
Stroke	7.6
Health Risk Behaviors	_
Binge Drinking	80.1
Current Smoker	59.6
No Leisure Time for Physical Activity	36.0
Climate Change Exposures	_
Wildfire Risk	7.4
SLR Inundation Area	0.0
Children	31.0
Elderly	48.0
English Speaking	75.4
Foreign-born	34.0
Outdoor Workers	12.6
Climate Change Adaptive Capacity	_

Impervious Surface Cover	83.3
Traffic Density	34.3
Traffic Access	23.0
Other Indices	_
Hardship	58.4
Other Decision Support	_
2016 Voting	52.4

### 7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	55.0
Healthy Places Index Score for Project Location (b)	50.0
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	No
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

#### 7.4. Health & Equity Measures

No Health & Equity Measures selected.

#### 7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

### 7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

# 8. User Changes to Default Data

Screen	Justification	

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Operations: Vehicle Data	Trips adjusted based on Project traffic study and to separate trucks and passenger vehicles.
Operations: Fleet Mix	Fleet mix adjusted to separate trucks and passenger vehicles.
Operations: Energy Use	Project will not use natural gas. Electrical demand estimated by the applicant.

This page intentionally left blank



**APPENDIX 4.3:** 

EMFAC2021



Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area Region: Riverside (SC) Calendar Year: 2024 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for CVMT and EVMT, trips/day for Trips, kWh/day for Energy Consumption, tons/day for Emissions, 1000 gallons/day for Fuel Consumption

Region	endar \h	icle Catego	Model Year	Speed	Fuel	Population	Total VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Gasoline	7.589475903	347.9694468	0.092180823	92.18082291	321404.9638	347.9694468	1967302.751	6.12	HHDT
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Diesel	14792.02338	1911347.779	313.0439759	313043.9759		1911347.779			
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Electricity	47.99547895	5148.201829	0	0		5148.201829			
Riverside (SC)	2024	HHDT	Aggregate	Aggregate	Natural Gas	740.0705237	50458.80082	8.268807048	8268.807048		50458.80082			
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Gasoline	469145.3818	20418129.53	688.4836596	688483.6596	700469.6115	20418129.53	22069128.65	31.51	LDA
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Diesel	1473.049219	54327.45303	1.267188759	1267.188759		54327.45303			
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Electricity	19934.69439	945704.6798	0	0		945704.6798			
Riverside (SC)	2024	LDA	Aggregate	Aggregate	Plug-in Hybrid	12893.65575	650966.9876	10.71876311	10718.76311		650966.9876			
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Gasoline	40643.24621	1523061.246	62.04624692	62046.24692	62104.32538	1523061.246	1529163.988	24.62	LDT1
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Diesel	18.16927182	339.6979643	0.013831102	13.83110227		339.6979643			
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Electricity	60.98632141	2789.967089	0	0		2789.967089			
Riverside (SC)	2024	LDT1	Aggregate	Aggregate	Plug-in Hybrid	52.35545177	2973.077776	0.044247357	44.24735695		2973.077776			
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Gasoline	196761.1569	8732860.794	359.674683	359674.683	361927.3798	8732860.794	8893408.735	24.57	LDT2
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Diesel	611.2140627	29007.74721	0.880423066	880.4230662		29007.74721			
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Electricity	1212.721837	43455.52608	0	0		43455.52608			
Riverside (SC)	2024	LDT2	Aggregate	Aggregate	Plug-in Hybrid		88084.6679	1.372273758	1372.273758		88084.6679			
Riverside (SC)	2024	LHDT1	Aggregate	Aggregate	Gasoline	17828.73734	656766.0119	48.36247552	48362.47552	75554.20605	656766.0119	1221087.42	16.16	LHDT1
Riverside (SC)	2024	LHDT1	Aggregate	Aggregate	Diesel	15247.60565	560367.9206	27.19173053	27191.73053		560367.9206			
Riverside (SC)	2024	LHDT1	Aggregate	Aggregate	Electricity	53.50587181	3953.487241	0	0		3953.487241			
Riverside (SC)	2024	LHDT2	Aggregate	Aggregate	Gasoline	2494.679179	89754.81853	7.38743171	7387.43171	22224.411	89754.81853	344827.7113	15.52	LHDT2
Riverside (SC)	2024	LHDT2	Aggregate	Aggregate	Diesel	6844.928194	254103.3578	14.83697929	14836.97929		254103.3578			
Riverside (SC)	2024	LHDT2	Aggregate	Aggregate	Electricity	13.8489928	969.5349487	0	0		969.5349487			
Riverside (SC)	2024	MCY	Aggregate	Aggregate	Gasoline	24077.0623	140258.0803	3.359217865	3359.217865	3359.217865	140258.0803	140258.0803	41.75	MCY
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Gasoline	158529.7591	6468418.76	332.0736912	332073.6912	337278.1883	6468418.76	6673535.232	19.79	MDV
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Diesel	2456.219583	102039.6434	4.306633032	4306.633032		102039.6434			
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Electricity	1347.135818	48185.7285	0	0		48185.7285			
Riverside (SC)	2024	MDV	Aggregate	Aggregate	Plug-in Hybrid		54891.09982	0.897864131	897.864131		54891.09982			
Riverside (SC)	2024	МН	Aggregate	Aggregate	Gasoline	4781.777946	41623.53594	8.518926412	8518.926412	10212.97469	41623.53594	59176.14669	5.79	MH
Riverside (SC)	2024	MH	Aggregate	Aggregate	Diesel	2046.063726	17552.61075	1.694048275	1694.048275		17552.61075			
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Gasoline	1238.0029	49965.95549	9.588666638	9588.666638	73502.73221	49965.95549	624307.4842	8.49	MHDT
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Diesel	12954.3675	564761.4751	63.06414519	63064.14519		564761.4751			
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Electricity	40.46425607	2074.722372	0	0		2074.722372			
Riverside (SC)	2024	MHDT	Aggregate	Aggregate	Natural Gas	158.0466253	7505.331205	0.849920382	849.9203818		7505.331205			
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Gasoline	374.6153087	12781.812	2.496601383	2496.601383	4662.380277	12781.812	30088.9967	6.45	OBUS
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Diesel	219.2789175	15140.91273	1.951181612	1951.181612		15140.91273			
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Electricity	0.821516166	55.60331633	0	0		55.60331633			
Riverside (SC)	2024	OBUS	Aggregate	Aggregate	Natural Gas	34.6553722	2110.668656	0.214597282	214.5972817		2110.668656			
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Gasoline	423.5817437	16753.46749	1.914821769	1914.821769	5918.221943	16753.46749	37909.3201	6.41	SBUS
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Diesel	491.8063992	10225.99182	1.394925642	1394.925642		10225.99182			
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Electricity	2.445505521	61.99924762	0	0		61.99924762			
Riverside (SC)	2024	SBUS	Aggregate	Aggregate	Natural Gas	443.1589434	10867.86154	2.608474532	2608.474532	440540500	10867.86154	40624 2224	4.40	115116
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Gasoline	146.2127201	18511.1132	3.282633075	3282.633075	11054.35384	18511.1132	49631.8201	4.49	UBUS
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Diesel	0.3117338	30.10971099	0.002675115	2.675115035		30.10971099			
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Electricity	0.120004951	18.36371585	0	0		18.36371585			
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Natural Gas	252.109466	31072.23347	7.769045647	7769.045647		31072.23347			

Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area Region: Riverside (SC) Calendar Year: 2025 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/year for CVMT and EVMT, trips/year for Trips, kWh/year for Energy Consumption, tons/year for Emissions, 1000 gallons/year for Fuel Consumption

Region	CalYr	VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Gasoline	6.232252524	99371.98783	25.79228907	25792.28907	101108506.3	99371.98783	628654469	6.22	HHDT
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Diesel	15281.49903	608590780.5	98441.69512	98441695.12		608590780.5			
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Electricity	103.9487733	3711251.372	0	0		3711251.372			
Riverside (SC)	2025	HHDT	Aggregate	Aggregate	Natural Gas	781.6601067	16253065.06	2641.018889	2641018.889		16253065.06			
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Gasoline	469318.5342	7069696742	233640.8392	233640839.2	237972453.1	7069696742	7731851082	32.49	LDA
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Diesel	1383.809245	17348619.14	401.5501025	401550.1025		17348619.14			
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Electricity	23756.17576	400228725.7	0	0		400228725.7			
Riverside (SC)	2025	LDA	Aggregate	Aggregate	Plug-in Hybrid	14087.23202	244576995.3	3930.063858	3930063.858		244576995.3			
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Gasoline	39844.42885	520364522.5	20792.5115	20792511.5	20818193.33	520364522.5	523372421.3	25.14	LDT1
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Diesel	16.26032827	103465.9915	4.209768622	4209.768622		103465.9915			
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Electricity	84.57619148	1419047.948	0	0		1419047.948			
Riverside (SC)	2025	LDT1	Aggregate	Aggregate	Plug-in Hybrid		1485384.837	21.47206695	21472.06695		1485384.837			
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Gasoline	201900.7772	3113968961	124925.7475	124925747.5	125794940.4	3113968961	3181443320	25.29	LDT2
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Diesel	648.0824816	10590241.49	314.4122046	314412.2046		10590241.49			
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Electricity	1658.408696	20347292.45	0	0		20347292.45			
Riverside (SC)	2025	LDT2	Aggregate	Aggregate	Plug-in Hybrid	1963.286623	36536825.27	554.7806116	554780.6116		36536825.27			
Riverside (SC)	2025	LHDT1	Aggregate	Aggregate	Gasoline	17598.36242	213353834.7	15312.53647	15312536.47	24003042.2	213353834.7	396504079	16.52	LHDT1
Riverside (SC)	2025	LHDT1	Aggregate	Aggregate	Diesel	15075.59282	179795007.6	8690.505724	8690505.724		179795007.6			
Riverside (SC)	2025	LHDT1	Aggregate	Aggregate	Electricity	149.6982853	3355236.777	0	0		3355236.777			
Riverside (SC)	2025	LHDT2	Aggregate	Aggregate	Gasoline	2462.303572	28909710.9	2332.556643	2332556.643	7083262.981	28909710.9	111569142.9	15.75	LHDT2
Riverside (SC)	2025	LHDT2	Aggregate	Aggregate	Diesel	6820.445818	81845755.43	4750.706338	4750706.338		81845755.43			
Riverside (SC)	2025	LHDT2	Aggregate	Aggregate	Electricity	38.18158868	813676.5443	0	0		813676.5443			
Riverside (SC)	2025	MCY	Aggregate	Aggregate	Gasoline	24005.46384	48076778.33	1147.719718	1147719.718	1147719.718	48076778.33	48076778.33	41.89	MCY
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Gasoline	157992.5704	2237557559	112252.3556	112252355.6	114050749.8	2237557559	2317416092	20.32	MDV
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Diesel	2427.253752	34535565.58	1435.800067	1435800.067		34535565.58			
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Electricity	1830.142844	22404262.33	0	0		22404262.33			
Riverside (SC)	2025	MDV	Aggregate	Aggregate	Plug-in Hybrid	1324.504282	22918705.54	362.5940561	362594.0561		22918705.54			
Riverside (SC)	2025	MH	Aggregate	Aggregate	Gasoline	4508.467531	12686060.51	2596.110402	2596110.402	3133401.858	12686060.51	18251559.38	5.82	MH
Riverside (SC)	2025	MH	Aggregate	Aggregate	Diesel	2015.081247	5565498.876	537.2914562	537291.4562	2240240267	5565498.876	100010577.0	0.50	MUST
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Gasoline	1219.56756	16258107.41	3079.691557	3079691.557	23180482.67	16258107.41	198913577.3	8.58	MHDT
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Diesel	13275.74248	178264039.8	19822.20637	19822206.37		178264039.8			
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Electricity	118.7135177	1927831.815	0	0		1927831.815			
Riverside (SC)	2025	MHDT	Aggregate	Aggregate	Natural Gas	169.7860028	2463598.288	278.5847433	278584.7433	1200210 855	2463598.288	0000002 221	C F0	ODLIC
Riverside (SC)	2025	OBUS	Aggregate	Aggregate	Gasoline	362.5102847	3973469.472	767.779865	767779.865	1399319.855	3973469.472	9096903.331	6.50	OBUS
Riverside (SC)	2025	OBUS	Aggregate	Aggregate	Diesel	224.9321911 2.021694394	4433634.446 43903.58221	566.704758	566704.758 0		4433634.446			
Riverside (SC) Riverside (SC)	2025	OBUS OBUS	Aggregate	Aggregate	Electricity	36.9521167	647895.8309	0 64.83523184	64835.23184		43903.58221 647895.8309			
	2025	SBUS	Aggregate	Aggregate	Natural Gas	426.2067312	5513087.576			1027077 222		12437964.83	6.42	SBUS
Riverside (SC)	2025		Aggregate	Aggregate	Gasoline	483.8964136	3247482.464	628.8352147	628835.2147	1937977.332	3247482.464	1243/904.03	0.42	3003
Riverside (SC)	2025	SBUS	Aggregate	Aggregate	Diesel			442.2329792	442232.9792					
Riverside (SC) Riverside (SC)	2025 2025	SBUS SBUS	Aggregate	Aggregate	Electricity Natural Gas	5.22909553 457.8096259	46812.91987 3630581.873	0 866.9091376	0 866909.1376		46812.91987 3630581.873			
Riverside (SC)	2025	UBUS	Aggregate	Aggregate		146.4959788	6064495.771	1075.353622	1075353.622	3585374.021		16262363.44	4.54	UBUS
Riverside (SC)	2025	UBUS	Aggregate	Aggregate	Gasoline Diesel	0.3117338	9845.875493	0.874762616	874.7626165	JJ0J5/4.UZ1	9845.875493	10202303.44	4.54	0003
		UBUS	Aggregate	Aggregate		0.20926462	11038.80379	0.874762616	0		11038.80379			
Riverside (SC) Riverside (SC)	2025 2025	UBUS	Aggregate	Aggregate	Electricity	252.5418031	1038.80379	0 2509.145637	2509145.637		1038.80379			
riverside (SC)	2025	0003	Aggregate	Aggregate	ivaturai GaS	2J2.J410U31	10170302.33	ZJUJ.14JUJ/	2303143.037		10170302.33			

Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area Region: Riverside (SC) Calendar Year: 2026 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/year for CVMT and EVMT, trips/year for Trips, kWh/year for Energy Consumption, tons/year for Emissions, 1000 gallons/year for Fuel Consumption

Region	CalYr	VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Gasoline	5.301713201	88229.69411	22.389626	22389.626	101770226.7	88229.69411	643794571.5	6.33	HHDT
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Diesel	15687.78827	620397368.1	99038.52843	99038528.43		620397368.1			
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Electricity	181.0556624	6506746.829	0	0		6506746.829			
Riverside (SC)	2026	HHDT	Aggregate	Aggregate	Natural Gas	822.9858358	16802226.89	2709.308594	2709308.594		16802226.89			
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Gasoline	470220.2179	7057630632	228291.9855	228291985.5	232727251.3	7057630632	7780982874	33.43	LDA
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Diesel	1278.903087	15842914.66	362.4298198	362429.8198		15842914.66			
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Electricity	27110.24505	449137199	0	0		449137199			
Riverside (SC)	2026	LDA	Aggregate	Aggregate	Plug-in Hybrid	15111.22646	258372127.8	4072.836004	4072836.004		258372127.8			
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Gasoline	39097.73904	512092396.9	20046.41678	20046416.78	20077600.28	512092396.9	516039672.8	25.70	LDT1
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Diesel	13.62192751	85491.27079	3.456180277	3456.180277		85491.27079			
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Electricity	113.2552136	1912051.079	0	0		1912051.079			
Riverside (SC)	2026	LDT1	Aggregate	Aggregate	Plug-in Hybrid	101.686721	1949733.5	27.72732249	27727.32249		1949733.5			
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Gasoline	207104.2919	3188588605	124658.5	124658500	125602870.5	3188588605	3266755068	26.01	LDT2
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Diesel	682.5626595	11042133.81	320.5825209	320582.5209		11042133.81			
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Electricity	2094.273367	25313331.28	0	0		25313331.28			
Riverside (SC)	2026	LDT2	Aggregate	Aggregate	Plug-in Hybrid	2291.195555	41810997.9	623.7879079	623787.9079		41810997.9			
Riverside (SC)	2026	LHDT1	Aggregate	Aggregate	Gasoline	17398.34216	211980566.6	14856.36322	14856363.22	23340640.16	211980566.6	394313795.7	16.89	LHDT1
Riverside (SC)	2026	LHDT1	Aggregate	Aggregate	Diesel	14868.32038	176178204.8	8484.276943	8484276.943		176178204.8			
Riverside (SC)	2026	LHDT1	Aggregate	Aggregate	Electricity	286.9935654	6155024.303	0	0		6155024.303			
Riverside (SC)	2026	LHDT2	Aggregate	Aggregate	Gasoline	2430.034218	28474363.93	2254.550563	2254550.563	6901025.208	28474363.93	110466846.5	16.01	LHDT2
Riverside (SC)	2026	LHDT2	Aggregate	Aggregate	Diesel	6777.719033	80500413.14	4646.474645	4646474.645		80500413.14			
Riverside (SC)	2026	LHDT2	Aggregate	Aggregate	Electricity	73.06243174	1492069.403	0	0		1492069.403			
Riverside (SC)	2026	MCY	Aggregate	Aggregate	Gasoline	23937.33086	47588474.8	1131.168291	1131168.291	1131168.291	47588474.8	47588474.8	42.07	MCY
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Gasoline	157654.7501	2229684065	109204.4529	109204452.9	110985154.2	2229684065	2317334670	20.88	MDV
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Diesel	2395.180805	33615739.37	1373.708941	1373708.941		33615739.37			
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Electricity	2298.450518	27709764.61	0	0		27709764.61			
Riverside (SC)	2026	MDV	Aggregate	Aggregate	Plug-in Hybrid	1539.714974	26325101.32	406.9923832	406992.3832		26325101.32			
Riverside (SC)	2026	MH	Aggregate	Aggregate	Gasoline	4250.734566	11874026.02	2428.259492	2428259.492	2950041.448	11874026.02	17276463.67	5.86	MH
Riverside (SC)	2026	MH	Aggregate	Aggregate	Diesel	1981.725027	5402437.651	521.7819562	521781.9562		5402437.651			
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Gasoline	1204.155669	16197892.54	3029.327139	3029327.139	23248097.76	16197892.54	202387910.7	8.71	MHDT
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Diesel	13571.64646	180090692.7	19927.8634	19927863.4		180090692.7			
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Electricity	219.063018	3525537.472	0	0		3525537.472			
Riverside (SC)	2026	MHDT	Aggregate	Aggregate	Natural Gas	180.8134913	2573788.019	290.9072294	290907.2294		2573788.019			
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Gasoline	350.9276772	3792461.932	724.7861649	724786.1649	1355315.638	3792461.932	8991247.491	6.63	OBUS
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Diesel	230.0918445	4448228.077	563.6496968	563649.6968		4448228.077			
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Electricity	3.398598414	72614.76405	0	0		72614.76405			
Riverside (SC)	2026	OBUS	Aggregate	Aggregate	Natural Gas	39.09901647	677942.718	66.87977673	66879.77673		677942.718			
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Gasoline	428.6165302	5545212.153	631.2466895	631246.6895	1939473.005	5545212.153	12478375.54	6.43	SBUS
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Diesel	474.8674611	3148064.322	427.9079442	427907.9442		3148064.322			
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Electricity	8.960082283	80288.33983	0	0		80288.33983			
Riverside (SC)	2026	SBUS	Aggregate	Aggregate	Natural Gas	472.4302591	3704810.727	880.318371	880318.371		3704810.727			
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Gasoline	146.7792196	6075856.23	1063.782316	1063782.316	3577136.731	6075856.23	16295121.7	4.56	UBUS
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Diesel	0.3117338	9845.875493	0.874762591	874.7625913		9845.875493			
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Electricity	0.298524289	16072.6725	0	0		16072.6725			
Riverside (SC)	2026	UBUS	Aggregate	Aggregate	Natural Gas	252.9741581	10193346.92	2512.479652	2512479.652		10193346.92			

This page intentionally left blank

