

Avenue L4 Warehouse

ENERGY ANALYSIS

CITY OF LANCASTER

PREPARED BY:

Haseeb Qureshi hqureshi@urbanxroads.com

Alyssa Barnett abarnett@urbanxroads.com

MARCH 13, 2023

14925-02 EA Report

TABLE OF CONTENTS

APF LIST LIST LIST EXE	PENDI F OF E F OF T	CES	 1
1		RODUCTION	
	1.1 1.2	Site Location Project Description	
2	EXI	STING CONDITIONS	8
2	2.1 2.2 2.3 2.4	Overview	11 12
3	REC	GULATORY BACKGROUND	18
1	3.1 3.2	Federal Regulations California Regulations	
4	PRO	OJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES	22
4	4.1 4.2 4.3 4.4 4.5	Evaluation Criteria	22 23 30
5		NCLUSIONS	-
6 7		FERENCES	



APPENDICES

APPENDIX 4.1: CALEEMOD CONSTRUCTION EMISSIONS MODEL OUTPUTS APPENDIX 4.2: CALEEMOD OPERATIONAL EMISSIONS MODEL OUTPUTS APPENDIX 4.2: EMFAC2021 EMISSIONS INVENTORY

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP EXHIBIT 1-B: SITE PLAN	
<u>LIST OF TABLES</u>	
TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS	1
TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2021)	10
TABLE 2-2: SCE 2021 POWER CONTENT MIX	
TABLE 4-1: CONSTRUCTION DURATION	23
TABLE 4-2: CONSTRUCTION POWER COST	24
TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE	24
TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS	
TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES	
TABLE 4-6: CONSTRUCTION TRIPS AND VMT	
TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES	
TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES	
TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION	
TABLE 4-10: ON-SITE CARGO HANDLING EQUIPMENT FUEL CONSUMPTION ESTIMATES	
TABLE 4-10: ON SITE CARGO HARDEING EQUI MENT FOLE CONSONI HON ESTIMATES	



LIST OF ABBREVIATED TERMS

(1) Reference

AQIA Air Quality Impact Analysis

BACM Best Available Control Measures

CalEEMod California Emissions Estimator Model

CARB California Air Resources Board
CEC California Energy Commission

CEQA California Environmental Quality Act
CPUC California Public Utilities Commission

DMV Department of Motor Vehicles

EIA Energy Information Administration

EIR Environmental Impact Report

EMFAC Emissions Factor

FERC Federal Energy Regulatory Commission

GPA General Plan Amendment

GS-1 General Service Rate Schedule

GWh Gigawatt Hour HHDT Heavy-Heavy Duty

Hp-hr-gal Horsepower-Hour Per Gallon
IEPR Integrative Energy Policy Report
ISO Independent Service Operator

ISTEA Intermodal Surface Transportation Efficiency Act

ITE Institute of Transportation Engineers

kBTU Kilo-British Thermal Units

kWh Kilowatt Hour
LDA Light Duty Auto
LDT1/LDT2 Light-Duty Trucks

MDAB Mojave Desert Air Basin MDV Medium Duty Trucks

MHDT Medium-Heavy Duty Trucks

mpg Miles Per Gallon

MPO Metropolitan Planning Organization

PG&E Pacific Gas and Electric
Project Avenue L4 Warehouse
SCE Southern California Edison

SDAB San Diego Air Basin

SDG&E San Diego Gas and Electric



sf Square Feet

SoCalGas Southern California Gas SW Gas Southwest Gas Company

TEA-21 Transportation Equity Act for the 21st Century

VMT Vehicle Miles Traveled



This page intentionally left blank



EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this Avenue L4 Warehouse Energy Analysis is summarized below based on the significance criteria in Section 3 of this report consistent with Appendix G of the California Environmental Quality Act (CEQA) Guidelines (1). Table ES-1 shows the findings of significance for potential energy impacts under CEQA.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Amelysis	Report	Significance Findings			
Analysis	Section	Unmitigated	Mitigated		
Energy Impact #1: Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation.	5.0	Less Than Significant	n/a		
Energy Impact #2: Conflict with or obstruct a state or local plan for renewable energy or energy efficiency.	5.0	Less Than Significant	n/a		

ES.2 MITIGATION MEASURES

Because the proposed Project does not result in a potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation nor does it conflict with or obstruct a state or local plan for renewable energy or energy efficiency, impacts would be less than significant, and no mitigation is required.

The following measures were identified in the Avenue L4 Warehouse Air Quality Impact Analysis (AQIA) report (2). Although these measures are designed to reduce Project air quality emissions, they would also assist in the reduction of fuel and energy usage. As a conservative measure, no credit has been assumed from the following measures.

MM AQ-1

The Project shall implement the following measures in order to reduce operational mobile source air pollutant emissions to the extent feasible:

- Only haul trucks meeting model year 2010 engine emission standards shall be used for the onroad transport of materials to and from the Project site.
- Legible, durable, weather-proof signs shall be placed at truck access gates, loading docks, and truck parking areas that identify applicable California Air Resources Board (CARB) anti-idling regulations. At a minimum, each sign shall include: (1) instructions for truck drivers to shut off engines when not in use; (2) instructions for drivers of diesel trucks to restrict idling to no more than 5 minutes once the vehicle is stopped, the transmission is set to "neutral" or "park," and the



parking brake is engaged; and (3) telephone numbers of the building facilities manager and CARB to report violations. Prior to the issuance of an occupancy permit, the City of Lancaster shall conduct a site inspection to ensure that the signs are in place.

- Prior to tenant occupancy, the Project Applicant or successor in interest shall provide documentation to the City demonstrating that occupants/tenants of the Project site have been provided documentation on funding opportunities, such as the Carl Moyer Program, that provide incentives for using cleaner-than-required engines and equipment.
- The minimum number of automobile electric vehicle (EV) charging stations required by the California Code of Regulations Title 24 shall be provided. In addition, the buildings shall include electrical infrastructure sufficiently sized to accommodate the potential installation of additional auto and truck EV charging stations in the future.
- Conduit shall be installed to tractor trailer parking areas in logical locations determined by the
 Project Applicant during construction document plan check, for the purpose of accommodating
 the future installation of EV truck charging stations at such time this technology becomes
 commercially available.

MM AQ-2

The Project shall implement the following measure in order to reduce operational energy source air pollutant emissions to the extent feasible:

- The Project shall include rooftop solar panels to the extent feasible, with a capacity that matches the maximum allowed for distributed solar connections to the grid.
- Install Energy Star-rated heating, cooling, lighting, and appliances.
- Provide information on energy efficiency, energy-efficient lighting and lighting control systems, energy management, and existing energy incentive programs to future tenants of the Project.
- Structures shall be equipped with outdoor electric outlets in the front and rear of the structures to facilitate use of electrical lawn and garden equipment.

MM AQ-3

The Project shall include the following language within tenant lease agreements in order to reduce operational air pollutant emissions to the extent feasible:

- Require tenants to use the cleanest technologies available and to provide the necessary
 infrastructure to support zero-emission vehicles, equipment, and appliances that would be
 operating on site. This requirement shall apply to equipment such as forklifts, handheld
 landscaping equipment, yard trucks, office appliances, etc.
- Require future tenants to exclusively use zero-emission light and medium-duty delivery trucks and vans, when economically feasible.
- Tenants shall be in, and monitor compliance with, all current air quality regulations for on-road trucks including the CARB's Heavy-Duty (Tractor-Trailer) Greenhouse Gas Regulation, Periodic Smoke Inspection Program, and the Statewide Truck and Bus Regulation.
- Cold storage operations shall be prohibited unless additional environmental review, including a Health Risk Assessment, is conducted and certified pursuant to the CEQA.



This page intentionally left blank



1 INTRODUCTION

This report presents the results of the energy analysis prepared by Urban Crossroads, Inc., for the proposed Avenue L4 Warehouse (Project). The purpose of this report is to ensure that energy implication is considered by the City of Lancaster, as the lead agency, and to quantify anticipated energy usage associated with construction of the proposed Project, determine if the usage amounts are efficient, typical, or wasteful for the land use type, and to emphasize avoiding or reducing inefficient, wasteful, and unnecessary consumption of energy.

1.1 SITE LOCATION

The proposed project is located south of Avenue L and west of Sierra Highway in the City of Lancaster, as shown on Exhibit 1-A. The Project site is currently vacant and is surrounded by a mix of uses. This includes undeveloped land to the west and the south. The area to the north and east of the site consists of industrial truck and utility storage activities. The City of Lancaster General Plan designates the Project site as Light Industrial use.

1.2 PROJECT DESCRIPTION

The Project is proposed to consist of a single building with a total of 217,700 square feet (sf) as shown on Exhibit 1-B. For the purposes of this analysis, the Project has been evaluated assuming 32,655 sf of general light industrial use (15% of overall square footage) and 185,045 sf of warehouse use (remaining 85% of the overall square footage). The Project is anticipated to be developed within a single phase with an anticipated opening year of 2024.

The on-site Project-related emission sources are expected to include loading dock activity and entry gate & truck movements. This study is intended to describe energy impacts associated with the expected typical operational activities at the Project site. To present a conservative approach, this report assumes the Project will operate 24-hours daily for seven days per week.

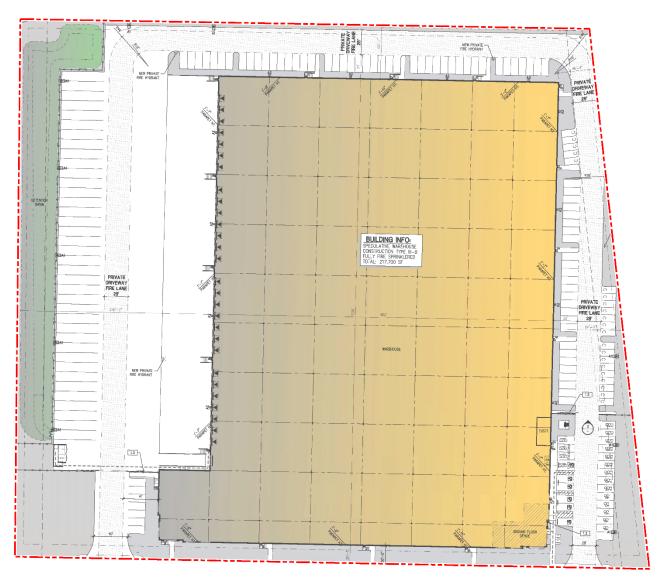


EXHIBIT 1-A: LOCATION MAP





EXHIBIT 1-B: SITE PLAN







This page intentionally left blank



2 EXISTING CONDITIONS

This section provides an overview of the existing energy conditions in the Project region.

2.1 OVERVIEW

The most recent data for California's estimated total energy consumption and natural gas consumption is from 2020, released by the United States (U.S.) Energy Information Administration's (EIA) California State Profile and Energy Estimates in 2021 and included (3):

- As of 2020, approximately 6,923 trillion British Thermal Unit (BTU) of energy was consumed
- As of 2020, approximately 524 million barrels of petroleum
- As of 2020, approximately 2,075 billion cubic feet of natural gas
- As of 2020, approximately 1 million short tons of coal

According to the EIA, in 2021 the U.S. petroleum consumption comprised about 77% of all transportation energy use, excluding fuel consumed for aviation and most marine vessels (4). In 2021, about 249,790 million gallons (or about 5.95 million barrels) of finished petroleum products were consumed in the U.S., an average of about 684 million gallons per day (or about 16 million barrels per day) (5). In 2021, California consumed approximately 12,157 million gallons in motor gasoline (33.31 million per day) and approximately 3,541 million gallons of diesel fuel (9.7 million per day) (6).

The most recent data provided by the EIA for energy use in California by demand sector is from 2020 and is reported as follows:

- Approximately 34.0% transportation
- Approximately 24.6% industrial
- Approximately 21.8% residential
- Approximately 19.6% commercial (7)

According to the EIA, California used approximately 247,250 gigawatt hours of electricity in 2021 (8). By sector in 2021, residential uses utilized 36.5% of the state's electricity, followed by 43.9% for commercial uses, 19.2% for industrial uses, and 0.3% for transportation. Electricity usage in California for differing land uses varies substantially by the type of uses in a building, type of construction materials used in a building, and the efficiency of all electricity-consuming devices within a building (8).

According to the EIA, California used approximately 200,871 million therms of natural gas in 2021 (9). In 2021 (the most recent year for which data is available), by sector, industrial uses utilized 33% of the state's natural gas, followed by 30% used as fuel in the electric power sector, 21% from residential, 11% from commercial, 1% from transportation uses and the remaining 3% was utilized for the operations, processing and production of natural gas itself (9). While the supply of natural gas in the United States and production in the lower 48 states has increased greatly since 2008, California produces little, and imports 90% of its supply of natural gas (9).



In 2021, total system electric generation for California was 277,764 gigawatt hours (GWh). California's massive electricity in-state generation system generated approximately 194,127 GWh which accounted for approximately 70% of the electricity it uses; the rest was imported from the Pacific Northwest (12%) and the U.S. Southwest (18%) (10). Natural gas is the main source for electricity generation at 50.2% of the total in-state electric generation system power as shown in Table 2-1.

An updated summary of, and context for energy consumption and energy demands within the State is presented in "U.S. Energy Information Administration, California State Profile and Energy Estimates, Quick Facts" excerpted below (8):

- In 2021, California was the seventh-largest producer of crude oil among the 50 states, and, as of January 2021, it ranked third in crude oil refining capacity.
- California is the largest consumer of jet fuel and second-largest consumer of motor gasoline among the 50 states and, the state accounted for 15% of the nation's jet fuel consumption and 10% of motor gasoline consumption in 2020.
- In 2019, California was the second-largest total energy consumer among the states, but its per capita energy consumption was less than in all other states except Rhode Island, due in part to its mild climate and its energy efficiency programs.
- In 2021, California was the nation's top producer of electricity from solar, geothermal, and biomass energy. The state was fourth in the nation in conventional hydroelectric power generation, down from second in 2019, in part because of drought and increased water demand.
- In 2021, California was the fourth-largest electricity producer in the nation, but the state was also the nation's second-largest consumer of electricity, and in 2020, it received about 30% of its electricity supply from generating facilities outside of California, including imports from Mexico.

As indicated below, California is one of the nation's leading energy-producing states, and California's per capita energy use is among the nation's most efficient. Given the nature of the Project, the remainder of this discussion will focus on the three sources of energy that are most relevant to the Project—namely, electricity, natural gas, and transportation fuel for vehicle trips associated with the uses planned for the Project.



TABLE 2-1: TOTAL ELECRICITY SYSTEM POWER (CALIFORNIA 2021)

Fuel Type	California In-State Generation (GWh)	% of California In- State Generation	Northwest Imports (GWh)	Southwest Imports (GWh)	Total Imports (GWh)	% of Imports	Total California Energy Mix	Total California Power Mix
Coal	303	0.2%	181	7,788	7,969	9.5%	8,272	3.0%
Natural Gas	97,431	50.2%	45	7,880	7,925	9.5%	105,356	379.0%
Oil	37	0.0%	-	-	-	0.0%	37	0.0%
Other (Waste Heat/Petroleum Coke)	382	0.2%	68	15	83	0.1%	465	0.2%
Nuclear	16,477	8.5%	524	8,756	9,281	11.1%	25,758	9.3%
Large Hydro	12,036	6.2%	12,042	1,578	13,620	16.3%	25,656	9.2%
Unspecified ¹	-	0.0%	8,156	10,731	18,887	22.6%	18,887	6.8%
Total Thermal and Non-Renewables	126,666	65.2%	21,017	36,748	57,764	6910.0%	184,431	66.4%
Biomass	5,381	2.8%	864	26	890	1.1%	6,271	2.3%
Geothermal	11,116	5.7%	192	1,906	2,098	2.5%	13,214	4.8%
Small Hydro	2,531	1.3%	304	1	304	0.4%	2,835	1.0%
Solar	33,260	17.1%	220	5,979	6,199	7.4%	39,458	14.2%
Wind	15,173	7.8%	9,976	6,405	16,381	19.6%	31,555	11.4%
Total Renewables	67,461	34.8%	11,555	14,317	25,872	3090.0%	93,333	33.6%
SYSTEM TOTALS	194,127	100.0%	32,572	51,064	83,636	100.0%	277,764	100.0%

Source: CECs 2021 Total System Electric Generation



¹ Unspecified power refers to electricity that is not traceable to a specific generating facility, such as electricity traded through open market transactions.

2.2 ELECTRICITY

The usage associated with electricity use was calculated using CalEEMod Version 2022.1. The Southern California region's electricity reliability has been of concern for the past several years due to the planned retirement of aging facilities that depend upon once-through cooling technologies, as well as the June 2013 retirement of the San Onofre Nuclear Generating Station (San Onofre). While the once-through cooling phase-out has been ongoing since the May 2010 adoption of the State Water Resources Control Board's once-through cooling policy, the retirement of San Onofre complicated the situation. California Independent Service Operator (ISO) studies revealed the extent to which the Mojave Desert Air Basin (MDAB) and the San Diego Air Basin (SDAB) region were vulnerable to low-voltage and post-transient voltage instability concerns. A preliminary plan to address these issues was detailed in the 2013 Integrative Energy Policy Report (IEPR) after a collaborative process with other energy agencies, utilities, and air districts (11). Similarly, the subsequent 2022 IEPR's provides information and policy recommendations on advancing a clean, reliable, and affordable energy system.

California's electricity industry is an organization of traditional utilities, private generating companies, and state agencies, each with a variety of roles and responsibilities to ensure that electrical power is provided to consumers. The California ISO is a nonprofit public benefit corporation and is the impartial operator of the State's wholesale power grid and is charged with maintaining grid reliability, and to direct uninterrupted electrical energy supplies to California's homes and communities. While utilities still own transmission assets, the ISO routes electrical power along these assets, maximizing the use of the transmission system and its power generation resources. The ISO matches buyers and sellers of electricity to ensure that enough power is available to meet demand. To these ends, every five minutes the ISO forecasts electrical demands, accounts for operating reserves, and assigns the lowest cost power plant unit to meet demands while ensuring adequate system transmission capacities and capabilities (12).

Part of the ISO's charge is to plan and coordinate grid enhancements to ensure that electrical power is provided to California consumers. To this end, utilities file annual transmission expansion/modification plans to accommodate the State's growing electrical needs. The ISO reviews and either approves or denies the proposed additions. In addition, and perhaps most importantly, the ISO works with other areas in the western United States electrical grid to ensure that adequate power supplies are available to the State. In this manner, continuing reliable and affordable electrical power is assured to existing and new consumers throughout the State.

Electricity is currently provided in the vicinity of the Project by Southern California Edison (SCE). SCE provides electric power to more than 15 million persons in 15 counties and in 180 incorporated cities, within a service area encompassing approximately 50,000 square miles. Based on SCE's 2018 Power Content Label Mix, SCE derives electricity from varied energy resources including: fossil fuels, hydroelectric generators, nuclear power plants, geothermal power plants, solar power generation, and wind farms. SCE also purchases from independent power producers and utilities, including out-of-state suppliers (13).

Table 2-2 presents SCE's specific proportional shares of electricity sources in 2021. As indicated in Table 2-2, the 2021 SCE Power Mix has renewable energy at 31.4% of the overall energy



resources. Geothermal resources are at 5.7%, wind power is at 10.2%, large hydroelectric sources are at 2.3%, solar energy is at 14.9%, and coal is at 0% (14).

TABLE 2-2: SCE 2021 POWER CONTENT MIX

Energy Resources	2021 SCE Power Mix
Eligible Renewable	31.4%
Biomass & Waste	0.1%
Geothermal	5.7%
Eligible Hydroelectric	0.5%
Solar	14.9%
Wind	10.2%
Coal	0.0%
Large Hydroelectric	2.3%
Natural Gas	22.3%
Nuclear	9.2%
Other	0.2%
Unspecified Sources of power*	34.6%
Total	100%

^{* &}quot;Unspecified sources of power" means electricity from transactions that are not traceable to specific generation sources

2.3 NATURAL GAS

The following summary of natural gas customers and volumes, supplies, delivery of supplies, storage, service options, and operations is excerpted from information provided by the California Public Utilities Commission (CPUC).

"The CPUC regulates natural gas utility service for approximately 10.8 million customers that receive natural gas from Pacific Gas and Electric (PG&E), Southern California Gas (SoCalGas), San Diego Gas & Electric (SDG&E), Southwest Gas, and several smaller natural gas utilities. The CPUC also regulates independent storage operators: Lodi Gas Storage, Wild Goose Storage, Central Valley Storage and Gill Ranch Storage.

California's natural gas utilities provide service to over 11 million gas meters. SoCalGas and PG&E provide service to about 5.9 million and 4.3 million customers, respectively, while SDG&E provides service to over 800, 000 customers. In 2018, California gas utilities forecasted that they would deliver about 4740 million cubic feet per day (MMcfd) of gas to their customers, on average, under normal weather conditions.

The overwhelming majority of natural gas utility customers in California are residential and small commercials customers, referred to as "core" customers. Larger volume gas customers, like electric generators and industrial customers, are called "noncore" customers. Although very small in number relative to core customers, noncore customers



consume about 65% of the natural gas delivered by the state's natural gas utilities, while core customers consume about 35%.

A significant amount of gas (about 19%, or 1131 MMcfd, of the total forecasted California consumption in 2018) is also directly delivered to some California large volume consumers, without being transported over the regulated utility pipeline system. Those customers, referred to as "bypass" customers, take service directly from interstate pipelines or directly from California producers.

SDG&E and Southwest Gas' southern division are wholesale customers of SoCalGas, i.e., they receive deliveries of gas from SoCalGas and in turn deliver that gas to their own customers. (Southwest Gas also provides natural gas distribution service in the Lake Tahoe area.) Similarly, West Coast Gas, a small gas utility, is a wholesale customer of PG&E. Some other wholesale customers are municipalities like the cities of Palo Alto, Long Beach, and Vernon, which are not regulated by the CPUC.

Natural gas from out-of-state production basins is delivered into California via the interstate natural gas pipeline system. The major interstate pipelines are Gas Transmission Northwest Pipeline, Kern River Pipeline, Transwestern Pipeline, El Paso Pipeline, Ruby Pipeline, Mojave Pipeline, and Tuscarora. Another pipeline, the North Baja - Baja Norte Pipeline takes gas off the El Paso Pipeline at the California/Arizona border and delivers that gas through California into Mexico. While the Federal Energy Regulatory Commission (FERC) regulates the transportation of natural gas on the interstate pipelines, and authorizes rates for that service, the CPUC may participate in FERC regulatory proceedings to represent the interests of California natural gas consumers.

The gas transported to California gas utilities via the interstate pipelines, as well as some of the California-produced gas, is delivered into the PG&E and SoCalGas intrastate natural gas transmission pipelines systems (commonly referred to as California's "backbone" pipeline system). Natural gas on the utilities' backbone pipeline systems is then delivered to the local transmission and distribution pipeline systems, or to natural gas storage fields. Some large volume noncore customers take natural gas delivery directly off the high-pressure backbone and local transmission pipeline systems, while core customers and other noncore customers take delivery off the utilities' distribution pipeline systems. The state's natural gas utilities operate over 100,000 miles of transmission and distribution pipelines, and thousands more miles of service lines.

Bypass customers take most of their deliveries directly off the Kern/Mojave pipeline system, but they also take a significant amount of gas from California production.

PG&E and SoCalGas own and operate several natural gas storage fields that are located within their service territories in northern and southern California, respectively. These storage fields, and four independently owned storage utilities - Lodi Gas Storage, Wild Goose Storage, Central Valley Storage, and Gill Ranch Storage - help meet peak seasonal and daily natural gas demand and allow California natural gas customers to secure natural gas supplies more efficiently. PG&E is a 25% owner of the Gill Ranch Storage field.



These storage fields provide a significant amount of infrastructure capacity to help meet California's natural gas requirements, and without these storage fields, California would need much more pipeline capacity in order to meet peak gas requirements.

Prior to the late 1980s, California regulated utilities provided virtually all natural gas services to all their customers. Since then, the Commission has gradually restructured the California gas industry in order to give customers more options while assuring regulatory protections for those customers that wish to, or are required to, continue receiving utility-provided services.

The option to purchase natural gas from independent suppliers is one of the results of this restructuring process. Although the regulated utilities procure natural gas supplies for most core customers, core customers have the option to purchase natural gas from independent natural gas marketers, called "core transport agents" (CTA). Contact information for core transport agents can be found on the utilities' web sites. Noncore customers, on the other hand, make natural gas supply arrangements directly with producers or with marketers.

Another option resulting from the restructuring process occurred in 1993, when the Commission removed the utilities' storage service responsibility for noncore customers, along with the cost of this service from noncore customers' transportation rates. The Commission also encouraged the development of independent storage fields, and in subsequent years, all the independent storage fields in California were established. Noncore customers and marketers may now take storage service from the utility or from an independent storage provider (if available), and pay for that service, or may opt to take no storage service at all. For core customers, the Commission assures that the utility has adequate storage capacity set aside to meet core requirements, and core customers pay for that service.

In a 1997 decision, the Commission adopted PG&E's "Gas Accord", which unbundled PG&E's backbone transmission costs from noncore transportation rates. This decision gave customers and marketers the opportunity to obtain pipeline capacity rights on PG&E's backbone transmission pipeline system, if desired, and pay for that service at rates authorized by the Commission. The Gas Accord also required PG&E to set aside a certain amount of backbone transmission capacity in order to deliver gas to its core customers. Subsequent Commission decisions modified and extended the initial terms of the Gas Accord. The "Gas Accord" framework is still in place today for PG&E's backbone and storage rates and services and is now simply referred to as PG&E Gas Transmission and Storage (GT&S).

In a 2006 decision, the Commission adopted a similar gas transmission framework for Southern California, called the "firm access rights" system. SoCalGas and SDG&E implemented the firm access rights (FAR) system in 2008, and it is now referred to as the backbone transmission system (BTS) framework. As under the PG&E backbone transmission system, SoCalGas backbone transmission costs are unbundled from noncore transportation rates. Noncore customers and marketers may obtain, and pay for, firm



backbone transmission capacity at various receipt points on the SoCalGas system. A certain amount of backbone transmission capacity is obtained for core customers to assure meeting their requirements.

Many if not most noncore customers now use a marketer to provide for several of the services formerly provided by the utility. That is, a noncore customer may simply arrange for a marketer to procure its supplies, and obtain any needed storage and backbone transmission capacity, in order to assure that it will receive its needed deliveries of natural gas supplies. Core customers still mainly rely on the utilities for procurement service, but they have the option to take procurement service from a CTA. Backbone transmission and storage capacity is either set aside or obtained for core customers in amounts to assure very high levels of service.

In order properly operate their natural gas transmission pipeline and storage systems, PG&E and SoCalGas must balance the amount of gas received into the pipeline system and delivered to customers or to storage fields. Some of these utilities' storage capacity is dedicated to this service, and under most circumstances, customers do not need to precisely match their deliveries with their consumption. However, when too much or too little gas is expected to be delivered into the utilities' systems, relative to the amount being consumed, the utilities require customers to more precisely match up their deliveries with their consumption. And, if customers do not meet certain delivery requirements, they could face financial penalties. The utilities do not profit from these financial penalties - the amounts are then returned to customers as a whole. If the utilities find that they are unable to deliver all the gas that is expected to be consumed, they may even call for a curtailment of some gas deliveries. These curtailments are typically required for just the largest, noncore customers. It has been many years since there has been a significant curtailment of core customers in California." (15)

As indicated in the preceding discussions, natural gas is available from a variety of in-state and out-of-state sources and is provided throughout the State in response to market supply and demand. Complementing available natural gas resources, biogas may soon be available via existing delivery systems, thereby increasing the availability and reliability of resources in total. The CPUC oversees utility purchases and transmission of natural gas to ensure reliable and affordable natural gas deliveries to existing and new consumers throughout the State.

Based on information provided by the Project applicant, no natural gas would be used as a result of the Project, and as such use of natural gas is not considered in the analysis.

2.4 Transportation Energy Resources

The Project would generate additional vehicle trips with resulting consumption of energy resources, predominantly gasoline and diesel fuel. The Department of Motor Vehicles (DMV) identified 36.2 million registered vehicles in California (16), and those vehicles consume an estimated 17.2 billion gallons of fuel each year². Gasoline (and other vehicle fuels) are



² Fuel consumptions estimated utilizing information from EMFAC2021.

commercially provided commodities and would be available to the Project patrons and employees via commercial outlets.

California's on-road transportation system includes 396,616 lane miles, more than 26.6 million passenger vehicles and light trucks, and almost 9.0 million medium- and heavy-duty vehicles (16). While gasoline consumption has been declining since 2008 it is still by far the dominant fuel. California is the second-largest consumer of petroleum products, after Texas, and accounts for 10% of the nation's total consumption. The State is the largest U.S. consumer of motor gasoline and jet fuel, and 85% of the petroleum consumed in California is used in the transportation sector (17).

California accounts for less than 1% of total U.S. natural gas reserves and production. As with crude oil, California's natural gas production has experienced a gradual decline since 1985. In 2019, about 37% of the natural gas delivered to consumers went to the State's industrial sector, and about 28% was delivered to the electric power sector. Natural gas fueled more than two-fifths of the State's utility-scale electricity generation in 2019. The residential sector, where two-thirds of California households use natural gas for home heating, accounted for 22% of natural gas deliveries. The commercial sector received 12% of the deliveries to end users and the transportation sector consumed the remaining 1% (17).



This page intentionally left blank



3 REGULATORY BACKGROUND

Federal and state agencies regulate energy use and consumption through various means and programs. On the federal level, the U.S. Department of Transportation, the U.S. Department of Energy, and the U.S. Environmental Protection Agency (EPA) are three federal agencies with substantial influence over energy policies and programs. On the state level, the CPUC and the CEC are two agencies with authority over different aspects of energy. Relevant federal and state energy-related laws and plans are summarized below.

3.1 FEDERAL REGULATIONS

3.1.1 Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA)

ISTEA promoted the development of inter-modal transportation systems to maximize mobility as well as address national and local interests in air quality and energy. ISTEA contained factors that Metropolitan Planning Organizations (MPOs) were to address in developing transportation plans and programs, including some energy-related factors. To meet the new ISTEA requirements, MPOs adopted explicit policies defining the social, economic, energy, and environmental values guiding transportation decisions.

3.1.2 THE TRANSPORTATION EQUITY ACT FOR THE 21ST CENTURY (TEA-21)

The TEA-21 was signed into law in 1998 and builds upon the initiatives established in the ISTEA legislation, discussed above. The TEA-21 authorizes highway, highway safety, transit, and other efficient surface transportation programs. The TEA-21 continues the program structure established for highways and transit under ISTEA, such as flexibility in the use of funds, emphasis on measures to improve the environment, and focus on a strong planning process as the foundation of good transportation decisions. The TEA-21 also provides for investment in research and its application to maximize the performance of the transportation system through, for example, deployment of Intelligent Transportation Systems (ITS), to help improve operations and management of transportation systems and vehicle safety.

3.2 CALIFORNIA REGULATIONS

3.2.1 Integrated Energy Policy Report (IEPR)

Senate Bill 1389 (Bowen, Chapter 568, Statutes of 2002) requires the CEC to prepare a biennial integrated energy policy report that assesses major energy trends and issues facing the State's electricity, natural gas, and transportation fuel sectors and provides policy recommendations to conserve resources; protect the environment; ensure reliable, secure, and diverse energy supplies; enhance the State's economy; and protect public health and safety (Public Resources Code § 25301[a]). The CEC prepares these assessments and associated policy recommendations every two years, with updates in alternate years, as part of the IEPR.

The 2022 IEPR was adopted February, 2023, and continues to work towards improving electricity, natural gas, and transportation fuel energy use in California. The 2022 IEPR introduces a new



framework for embedding equity and environmental justice at the CEC and the California Energy Planning Library which allows for easier access to energy data and analytics for a wide range of users. Additionally, energy reliability, western electricity integration, gasoline cost factors and price spikes, the role of hydrogen in California's clean energy future, fossil gas transition and distributed energy resources are topics discussed within the 2022 IEPR (18).

3.2.2 STATE OF CALIFORNIA ENERGY PLAN

The CEC is responsible for preparing the State Energy Plan, which identifies emerging trends related to energy supply, demand, conservation, public health and safety, and the maintenance of a healthy economy. The State Energy Plan calls for the State to assist in the transformation of the transportation system to improve air quality, reduce congestion, and increase the efficient use of fuel supplies with the least environmental and energy costs. To further this policy, the plan identifies several strategies, including assistance to public agencies and fleet operators and encouragement of urban designs that reduce vehicle miles traveled (VMT) and accommodate pedestrian and bicycle access.

3.2.3 CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

California Code of Regulations (CCR) Title 24 Part 6: The California Energy Code was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption.

The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on August 1, 2009, and is administered by the California Building Standards Commission.

CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards that will be effective on January 1, 2023³. The Project would be required to comply with the applicable standards in place at the time plan check submittals are made (19).

3.2.4 AB 1493 Payley Regulations and Fuel Efficiency Standards

California AB 1493, enacted on July 22, 2002, required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. Under this legislation, CARB adopted regulations to reduce GHG emissions from non-commercial passenger vehicles (cars and light-duty trucks). Although aimed at reducing GHG emissions, specifically, a co-benefit of the Pavley standards is an improvement in fuel efficiency and consequently a reduction in fuel consumption.



³ The 2022 California Green Building Standard Code will be published July 1, 2022.

3.2.5 CALIFORNIA'S RENEWABLE PORTFOLIO STANDARD (RPS)

First established in 2002 under Senate Bill (SB) 1078, California's Renewable Portfolio Standards (RPS) requires retail sellers of electric services to increase procurement from eligible renewable resources to 33% of total retail sales by 2020 (20).

3.2.6 CLEAN ENERGY AND POLLUTION REDUCTION ACT OF 2015 (SB 350)

In October 2015, the legislature approved, and the Governor signed SB 350, which reaffirms California's commitment to reducing its GHG emissions and addressing climate change. Key provisions include an increase in the renewables portfolio standard (RPS), higher energy efficiency requirements for buildings, initial strategies towards a regional electricity grid, and improved infrastructure for electric vehicle charging stations. Specifically, SB 350 requires the following to reduce statewide GHG emissions:

- Increase the amount of electricity procured from renewable energy sources from 33% to 50% by 2030, with interim targets of 40% by 2024, and 25% by 2027.
- Double the energy efficiency in existing buildings by 2030. This target will be achieved through the California Public Utility Commission (CPUC), the CEC, and local publicly owned utilities.
- Reorganize the Independent System Operator (ISO) to develop more regional electricity transmission markets and to improve accessibility in these markets, which will facilitate the growth of renewable energy markets in the western United States (California Leginfo 2015).



This page intentionally left blank



4 PROJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES

4.1 EVALUATION CRITERIA

Appendix F of the *State CEQA Guidelines* (21), states that the means of achieving the goal of energy conservation includes the following:

- Decreasing overall per capita energy consumption;
- Decreasing reliance on fossil fuels such as coal, natural gas and oil; and
- Increasing reliance on renewable energy sources.

In compliance with Appendix G of the *State CEQA Guidelines* (22), this report analyzes the project's anticipated energy use during construction and operations to determine if the Project would:

- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation; or
- Conflict with or obstruct a state or local plan for renewable energy or energy efficiency.

4.2 METHODOLOGY

Information from the CalEEMod version 2022.1 outputs for the *Avenue L4 Warehouse Air Quality Analysis* (AQIA) (23) was utilized in this analysis, detailing Project related construction equipment, transportation energy demands, and facility energy demands.

4.2.1 CALEEMOD

In May 2022 the California Air Pollution Control Officers Association (CAPCOA) in conjunction with other California air districts, including the Antelope Valley Air Quality Management District (AVAQMD), released the latest version of CalEEMod version 2022.1. The purpose of this model is to calculate construction-source and operational-source criteria pollutant (VOCs, NO_X, SO_X, CO, PM₁₀, and PM_{2.5}) and GHG emissions from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from mitigation measures (24). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality emissions. Output from the model runs for both construction and operational activity are provided in Appendices 4.1 through 4.2.

4.2.2 EMISSION FACTORS MODEL

On May 2, 2022, the EPA approved the 2021 version of the EMissions FACtor model (EMFAC2021) web database for use in State Implementation Plan and transportation conformity analyses. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the California Air Resources Board (CARB) to project changes in future emissions from on-road mobile sources (25). This energy study utilizes the different fuel types for each vehicle class from the annual EMFAC2021 emission inventory in order to derive



the average vehicle fuel economy which is then used to determine the estimated annual fuel consumption associated with vehicle usage during Project construction and operational activities. For purposes of analysis, the 2023 and 2024 analysis years were utilized to determine the average vehicle fuel economy used throughout the construction duration of the Project.

4.3 CONSTRUCTION ENERGY DEMANDS

The focus within this section is the energy implications of the construction process, specifically the power cost from on-site electricity consumption during construction of the proposed Project.

4.3.1 CONSTRUCTION POWER COST

The total Project construction power costs is the summation of the products of the area (sf) by the construction duration and the typical power cost.

CONSTRUCTION DURATION

Construction is expected to commence in July 2023 and will last through October 2024 (23). The construction schedule utilized in the analysis, shown in Table 4-1, represents a "worst-case" analysis scenario. The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per *CEQA Guidelines* (26).

Phase Name Start Date End Date Days Site Preparation 07/04/2023 07/17/2023 10 07/18/2023 08/28/2023 30 Grading **Building Construction** 08/29/2023 10/21/2024 300 09/24/2024 10/21/2024 20 Paving 08/27/2024 10/21/2024 40 Architectural Coating

TABLE 4-1: CONSTRUCTION DURATION

PROJECT CONSTRUCTION POWER COST

The 2023 National Construction Estimator identifies a typical power cost per 1,000 sf of construction per month of \$2.50, which was used to calculate the Project's total construction power cost (27).

As shown on Table 4-2, the total power cost of the on-site electricity usage during the construction of the Project is estimated to be approximately \$14,464.50.



TABLE 4-2: CONSTRUCTION POWER COST

Land Use	Power Cost (per 1,000 SF of construction per month)	Size (1,000 SF)	Construction Duration (months)	Project Construction Power Cost
General Light Industrial (15%)	\$2.50	32.655	15	\$1,224.56
Warehousing (85%)	\$2.50	185.045	15	\$6,939.19
Parking	\$2.50	41.936	15	\$1,572.60
Other Asphalt Surfaces	\$2.50	126.084	15	\$4,728.15
	\$14,464.50			

4.3.2 CONSTRUCTION ELECTRICITY USAGE

The total Project construction electricity usage is the summation of the products of the power cost (estimated in Table 4-2) by the utility provider cost per kilowatt hour (kWh) of electricity.

PROJECT CONSTRUCTION ELECTRICITY USAGE

The SCE's general service rate schedule was used to determine the Project's electrical usage. As of January 1, 2023, SCE's general service rate is \$0.13 per kilowatt hours (kWh) of electricity for commercial services and \$0.16 per kWh for residential uses (28). As shown on Table 4-3, the total electricity usage from on-site Project construction related activities is estimated to be approximately 111,265 kWh.

TABLE 4-3: CONSTRUCTION ELECTRICITY USAGE

Land Use	Cost per kWh	Project Construction Electricity Usage (kWh)		
General Light Industrial (15%)	\$0.13	9,420		
Warehousing (85%)	\$0.13	53,378		
Parking	\$0.13	12,097		
Other Asphalt Surfaces	\$0.13	36,370		
CONSTRUCTION	111,265			

4.3.3 Construction Equipment Fuel Estimates

Fuel consumed by construction equipment would be the primary energy resource expended over the course of Project construction.

CONSTRUCTION EQUIPMENT

Site specific construction fleet may vary due to specific project needs at the time of construction. The associated construction equipment was generally based on CalEEMod defaults. A detailed summary of construction equipment assumptions by phase is provided at Table 4-4.



TABLE 4-4: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Phase Name	Equipment	Number	Hours Per Day
Site Dynamayatian	Rubber Tired Dozers	3	8
Site Preparation	Crawler Tractors	4	8
	Excavators	2	8
	Graders	1	8
Grading	Rubber Tired Dozers	1	8
	Scrapers	2	8
	Crawler Tractors	2	8
	Cranes	1	8
	Forklifts	3	8
Building Construction	Generator Sets	1	8
	Welders	1	8
	Crawler Tractors	3	8
	Pavers	2	8
Paving	Paving Equipment	2	8
	Rollers	2	8
Architectural Coating	Air Compressors	1	8

PROJECT CONSTRUCTION EQUIPMENT FUEL CONSUMPTION

Project construction activity timeline estimates, construction equipment schedules, equipment power ratings, load factors, and associated fuel consumption estimates are presented in Table 4-5. The aggregate fuel consumption rate for all equipment is estimated at 18.5 horsepower hour per gallon (hp-hr-gal.), obtained from CARB 2018 Emissions Factors Tables and cited fuel consumption rate factors presented in Table D-24 of the Moyer guidelines (29). For the purposes of this analysis, the calculations are based on all construction equipment being diesel-powered which is consistent with industry standards. Diesel fuel would be supplied by existing commercial fuel providers serving the Project area and region⁴. As presented in Table 4-5, Project construction activities would consume an estimated 52,302 gallons of diesel fuel. Project construction would represent a "single-event" diesel fuel demand and would not require ongoing or permanent commitment of diesel fuel resources for this purpose.



⁴ Based on Appendix A of the CalEEMod User's Guide, Construction consists of several types of off-road equipment. Since the majority of the off-road construction equipment used for construction projects are diesel fueled, CalEEMod assumes all of the equipment operates on diesel fuel.

TABLE 4-5: CONSTRUCTION EQUIPMENT FUEL CONSUMPTION ESTIMATES

Phase Name	Duration (Days)	Equipment	HP Rating	Quantity	Usage Hours	Load Factor	HP- hrs/day	Total Fuel Consumption
Cita Duamanatian	10	Rubber Tired Dozers	367	3	8	0.40	3,523	1,904
Site Preparation	10	Crawler Tractors	87	4	8	0.43	1,197	647
		Excavators	36	2	8	0.38	219	355
		Graders	148	1	8	0.41	485	787
Grading	30	Rubber Tired Dozers	367	1	8	0.40	1,174	1,904
		Scrapers	423	2	8	0.48	3,249	5,268
		Crawler Tractors	87	2	8	0.43	599	971
		Cranes	367	1	8	0.29	851	13,807
		Forklifts	82	3	8	0.20	394	6,383
Building Construction	300	Generator Sets	14	1	8	0.74	83	1,344
		Welders	46	1	8	0.45	166	2,685
		Crawler Tractors	87	3	8	0.43	898	14,560
		Pavers	81	2	8	0.42	544	588
Paving	20	Paving Equipment	89	2	8	0.36	513	554
		Rollers	36	2	8	0.38	219	237
Architectural Coating	40	Air Compressors	37	1	8	0.48	142	307
	<u> </u>		CONSTRUCT	ION FUEL D	EMAND (C	SALLONS DI	ESEL FUEL)	52,302



4.3.4 CONSTRUCTION TRIPS AND VMT

Construction generates on-road vehicle emissions from vehicle usage for workers and vendors truck commuting to and from the site. The number of workers and vendor trips are presented below in Table 4-6. It should be noted that for vendor trips, specifically, CalEEMod only assigns vendor trips to the Building Construction phase. Vendor trips would likely occur during all phases of construction. As such, the CalEEMod defaults for vendor trips have been adjusted based on a ratio of the total vendor trips to the number of days of each subphase of activity.

Worker Trips Vendor Trips Phase Name Per Day Per Day Site Preparation 2 18 Grading 20 4 **Building Construction** 91 32 0 **Paving** 15 0 **Architectural Coating** 18

TABLE 4-6: CONSTRUCTION TRIPS AND VMT

4.3.5 CONSTRUCTION WORKER FUEL ESTIMATES

With respect to estimated VMT for the Project, the construction worker trips (personal vehicles used by workers commuting to the Project from home) would generate an estimated 545,195 VMT during the 15 months of construction (23). Based on CalEEMod methodology, it is assumed that 50% of all construction worker trips are from light-duty-auto vehicles (LDA), 25% are from light-duty-trucks (LDT1⁵), and 25% are from light-duty-trucks (LDT2⁶). Data regarding Project related construction worker trips were based on CalEEMod defaults utilized within the Project's AOIA.

Vehicle fuel efficiencies for LDA, LDT1, and LDT2 were estimated using information generated within the 2021 version of the EMFAC developed by CARB. EMFAC2021 is a mathematical model that was developed to calculate emission rates, fuel consumption, and VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (25). EMFAC2021 was run for the LDA, LDT1, and LDT2 vehicle class within the California sub-area for the 2023 and 2024 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.

As shown in Table 4-7, the estimated annual fuel consumption resulting from Project construction worker trips is 20,038 gallons during full construction of the Project. It should be noted that construction worker trips would represent a "single-event" gasoline fuel demand and would not require ongoing or permanent commitment of fuel resources for this purpose.



⁵ Vehicles under the LDT1 category have a gross vehicle weight rating (GVWR) of less than 6,000 lbs. and equivalent test weight (ETW) of less than or equal to 3,750 lbs.

⁶ Vehicles under the LDT2 category have a GVWR of less than 6,000 lbs. and ETW between 3,751 lbs. and 5,750 lbs.

TABLE 4-7: CONSTRUCTION WORKER FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Worker Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)		
				LDA					
	Site Preparation	10	9	18.5	1,665	30.32	55		
	Grading	30	10	18.5	5,550	30.32	183		
	Building Construction	89	46	18.5	75,739	30.32	2,498		
				LDT1					
2023	Site Preparation	10	5	18.5	925	24.35	38		
2023	Grading	30	5	18.5	2,775	24.35	114		
	Building Construction	89	23	18.5	37,870	24.35	1,555		
	LDT2								
	Site Preparation	10	5	18.5	925	23.69	39		
	Grading	30	5	18.5	2,775	23.69	117		
	Building Construction	89	23	18.5	37,870	23.69	1,599		
	LDA								
	Building Construction	211	46	18.5	179,561	31.04	5,785		
	Paving	20	8	18.5	2,960	31.04	95		
	Architectural Coating	40	9	18.5	6,660	31.04	215		
	LDT1								
2024	Building Construction	211	23	18.5	89,781	24.70	3,635		
2024	Paving	20	4	18.5	1,480	24.70	60		
	Architectural Coating	40	5	18.5	3,700	24.70	150		
				LDT2					
	Building Construction	211	23	18.5	89,781	24.35	3,686		
	Paving	20	4	18.5	1,480	24.35	61		
	Architectural Coating	40	5	18.5	3,700	24.35	152		
	TOTAL CONSTRUCTION WORKER FUEL CONSUMPTION								



4.3.6 CONSTRUCTION VENDOR FUEL ESTIMATES

With respect to estimated VMT, the construction vendor trips (vehicles that deliver materials to the site during construction) would generate an estimated 99,348 VMT along area roadways for the Project over the duration of construction activity (23). It is assumed that 50% of all vendor trips are from medium-heavy duty trucks (MHD) and 50% of all vendor trips are from heavy-heavy duty trucks (HHD). These assumptions are consistent with the CalEEMod defaults utilized within the within the AQIA (30).

Vehicle fuel efficiencies for MHDs and HHDs were estimated using information generated within EMFAC2021. EMFAC2021 was run for the MHD and HHD vehicle classes within the California subarea for the 2023 and 2024 calendar years. Data from EMFAC2021 is shown in Appendix 4.3.

Based on Table 4-8, it is estimated that 13,767 gallons of fuel will be consumed related to construction vendor trips during full construction of the Project. It should be noted that Project construction vendor trips would represent a "single-event" diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

TABLE 4-8: CONSTRUCTION VENDOR FUEL CONSUMPTION ESTIMATES

Year	Construction Activity	Duration (Days)	Vendor Trips/Day	Trip Length (miles)	VMT	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)			
	MHD									
	Site Preparation	10	1	10.2	102	8.32	12			
	Grading	30	2	10.2	612	8.32	74			
2022	Building Construction	89	16	10.2	14,525	8.32	1,747			
2023	HHD (Vendor)									
	Site Preparation	10	1	10.2	102	6.28	16			
	Grading	30	2	10.2	612	6.28	98			
	Building Construction	89	16	10.2	14,525	6.28	2,314			
	MHD									
2024	Building Construction	211	16	10.2	34,435	8.39	4,104			
2024			Н	HD (Vendo	r)					
	Building Construction	211	16	10.2	34,435	6.37	5,402			
	TOTAL CONSTRUCTION VENDOR FUEL CONSUMPTION									

4.3.7 CONSTRUCTION ENERGY EFFICIENCY/CONSERVATION MEASURES

Starting in 2014, CARB adopted the nation's first regulation aimed at cleaning up off-road construction equipment such as bulldozers, graders, and backhoes. These requirements ensure fleets gradually turnover the oldest and dirtiest equipment to newer, cleaner models and prevent fleets from adding older, dirtier equipment. As such, the equipment used for Project construction



would conform to CARB regulations and California emissions standards. It should also be noted that there are no unusual Project characteristics or construction processes that would require the use of equipment that would be more energy intensive than is used for comparable activities; or equipment that would not conform to current emissions standards (and related fuel efficiencies). Equipment utilized in the construction of the Project would therefore not result in inefficient wasteful, or unnecessary consumption of fuel.

Construction contractors would be required to comply with applicable CARB regulation regarding retrofitting, repowering, or replacement of diesel off-road construction equipment. Additionally, CARB has adopted the Airborne Toxic Control Measure to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to diesel particulate matter and other Toxic Air Contaminants. Compliance with anti-idling and emissions regulations would result in a more efficient use of construction-related energy and the minimization or elimination of wasteful or unnecessary consumption of energy. Idling restrictions and the use of newer engines and equipment would result in less fuel combustion and energy consumption.

Additional construction-source energy efficiencies would occur due to required California regulations and best available control measures (BACM). For example, CCR Title 13, Motor Vehicles, Section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than five minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. Section 2449(d)(3) requires that grading plans shall reference the requirement that a sign must be posted on-site stating that construction workers need to shut off engines at or before five minutes of idling." In this manner, construction equipment operators are required to be informed that engines are to be turned off at or prior to five minutes of idling.

A full analysis related to the energy needed to form construction materials is not included in this analysis Because at this time, an analysis of the energy needed to create Project-related construction materials would be extremely speculative and thus has not been prepared.

In general, construction processes promote conservation and efficient use of energy by reducing raw materials demands, with related reduction in energy demands associated with raw materials extraction, transportation, processing, and refinement. Use of materials in bulk reduces energy demands associated with preparation and transport of construction materials as well as the transport and disposal of construction waste and solid waste in general, with corollary reduced demands on area landfill capacities and energy consumed by waste transport and landfill operations.

4.4 OPERATIONAL ENERGY DEMANDS

Energy consumption in support of or related to Project operations would include transportation fuel demands (fuel consumed by passenger car and truck vehicles accessing the Project site), fuel demands from operational equipment, and facilities energy demands (energy consumed by building operations and site maintenance activities).



4.4.1 Transportation Fuel Demands

Energy that would be consumed by Project-generated traffic is a function of total VMT and estimated vehicle fuel economies of vehicles accessing the Project site. The VMT per vehicle class was determined by evaluating the vehicle fleet mix and the total VMT. As with worker and vendors trips, operational vehicle fuel efficiencies were estimated using information generated within EMFAC2021 developed by CARB (25). EMFAC2021 was run for the Los Angeles County (Mojave Desert) area for the 2024 calendar year. Data from EMFAC2021 is shown in Appendix 4.3.

The estimated transportation energy demands are summarized on Table 4-9. As summarized on Table 4-9 the Project would result in 1,768,249 annual VMT and an estimated annual fuel consumption of 162,556 gallons of fuel.

Average Vehicle Fuel Estimated Annual Fuel Vehicle Type Annual VMT Economy (mpg) **Consumption** (gallons) LDA 31.04 14,596 453,021 24.70 35,884 1,453 LDT1 LDT2 24.35 139,764 5,739 MDV 15.93 119,127 7,479 MCY 15.93 22,254 1,397 LHD1 16.19 138.582 8.557 LHD2 15.93 38,553 2,421 MHD 8.39 209,284 24,943 HHD 6.37 611,778 95,971 **TOTAL (ALL VEHICLES)** 1,768,249 162,556

TABLE 4-9: TOTAL PROJECT-GENERATED TRAFFIC ANNUAL FUEL CONSUMPTION

4.4.2 On-Site Cargo Handling Equipment Fuel Demands

It is common for industrial buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. For this particular Project, on-site modeled operational equipment includes up to one (1) 175 horsepower (hp), natural gas-powered cargo handling equipment – port tractors operating at 4 hours a day⁷ for 365 days of the year.

Project operational activity estimates and associated fuel consumption estimates are based on the annual EMFAC2021 offroad emissions for the 2024 operational year and were used to derive the total annual fuel consumption associated with on-site equipment. As presented in Table 4-10, Project on-site equipment would consume an estimated 4,642 gallons of natural gas.

_



⁷ Based on Table II-3, Port and Rail Cargo Handling Equipment Demographics by Type, from CARB's Technology Assessment: Mobile Cargo Handling Equipment document, a single piece of equipment could operate up to 2 hours per day (Total Average Annual Activity divided by Total Number Pieces of Equipment). As such, the analysis conservatively assumes that the tractor/loader/backhoe would operate up to 4 hours per day.

TABLE 4-10: ON-SITE CARGO HANDLING EQUIPMENT FUEL CONSUMPTION ESTIMATES

Equipment	Quantity	Usage Hours	Days of Operation	EMFAC2021 Fuel Consumption (gal./yr)	EMFAC2021 Activity (hrs./yr)	Total Fuel Consumption
Cargo Handling Equipment	1	4	365	17,909	5,633	4,642
ON-SITE	CARGO HAN	IDLING EC	QUIPMENT FU	EL DEMAND (GA	LLONS FUEL)	4,642

4.4.3 FACILITY ENERGY DEMANDS

Project building operations activities would result in the consumption of electricity, which would be supplied to the Project by SCE. Annual electricity demands of the Project are summarized in Table 4-11. As summarized on Table 4-11 the Project would result in 1,215,961 kWh/year of electricity.

Based on information provided by the Project Applicant, the Project would not use natural gas for the building envelope. As such, natural gas consumption has not been analyzed in this study.

TABLE 4-11: PROJECT ANNUAL OPERATIONAL ENERGY DEMAND SUMMARY

Land Use	Electricity Demand (kWh/year)
General Light Industrial (15%)	313,251
Warehousing (85%)	866,078
Parking	36,632
Other Asphalt Surfaces	0
TOTAL PROJECT ENERGY DEMAND	1,215,961

4.4.4 OPERATIONAL ENERGY EFFICIENCY/CONSERVATION MEASURES

Energy efficiency/energy conservation attributes of the Project would be complemented by increasingly stringent state and federal regulatory actions addressing vehicle fuel economies and vehicle emissions standards; and enhanced building/utilities energy efficiencies mandated under California building codes (e.g., Title24, California Green Building Standards Code).

ENHANCED VEHICLE FUEL EFFICIENCIES

Project annual fuel consumption estimates presented previously in Table 4-9 represent likely potential maximums that would occur for the Project. Under subsequent future conditions, average fuel economies of vehicles accessing the Project site can be expected to improve as older, less fuel-efficient vehicles are removed from circulation, and in response to fuel economy and emissions standards imposed on newer vehicles entering the circulation system.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. Location of the



Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands.

4.5 SUMMARY

4.5.1 CONSTRUCTION ENERGY DEMANDS

The estimated power cost of on-site electricity usage during the construction of the Project is assumed to be approximately \$14,464.50. Additionally, based on the assumed power cost, it is estimated that the total electricity usage during construction, after full Project buildout, is calculated to be approximately 111,265 kWh.

Construction equipment used by the Project would result in single event consumption of approximately 52,302 gallons of diesel fuel. Construction equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed construction process that are unusual or energy-intensive, and Project construction equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

CCR Title 13, Title 13, Motor Vehicles, Section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than 5 minutes, thereby precluding unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. BACMs inform construction equipment operators of this requirement.

Construction worker trips for full construction of the Project would result in the estimated fuel consumption of 20,038 gallons of fuel. Additionally, fuel consumption from construction vendor trips (MHDs and HHDs) will total approximately 13,767 gallons. Diesel fuel would be supplied by City and regional commercial vendors. Indirectly, construction energy efficiencies and energy conservation would be achieved using bulk purchases, transport and use of construction materials. The 2022 IEPR released by the CEC has shown that fuel efficiencies are getting better within on and off-road vehicle engines due to more stringent government requirements (31). As supported by the preceding discussions, Project construction energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

4.5.2 OPERATIONAL ENERGY DEMANDS

TRANSPORTATION ENERGY DEMANDS

Annual vehicular trips and related VMT generated by the operation of the Project would result in a fuel demand of 162,556 gallons of fuel.

Fuel would be provided by current and future commercial vendors. Trip generation and VMT generated by the Project are consistent with other industrial uses of similar scale and configuration, as reflected respectively in the Institute of Transportation Engineers (ITE) Trip Generation Manual (11th Ed., 2021); and CalEEMod. As such, Project operations would not result in excessive and wasteful vehicle trips and VMT, nor excess and wasteful vehicle energy consumption compared to other industrial uses.



It should be noted that the state strategy for the transportation sector for medium and heavy-duty trucks is focused on making trucks more efficient and expediting truck turnover rather than reducing VMT from trucks. This is in contrast to the passenger vehicle component of the transportation sector where both per-capita VMT reductions and an increase in vehicle efficiency are forecasted to be needed to achieve the overall state emissions reductions goals.

Heavy duty trucks involved in goods movements are generally controlled on the technology side and through fleet turnover of older trucks and engines to newer and cleaner trucks and engines. The first battery-electric heavy-heavy duty trucks are being tested this year and SCAQMD is looking to integrate this new technology into large-scale truck operations. The following state strategies reduce GHG emissions from the medium and heavy-duty trucks:

- CARB's Mobile Source Strategy focuses on reducing GHGs through the transition to zero and low emission vehicles and from medium-duty and heavy-duty trucks.
- CARB's Sustainable Freight Action Plan establishes a goal to improve freight efficiency by 25% by 2030, deploy over 100,000 freight vehicles and equipment capable of zero emission operation and maximize both zero and near-zero emission freight vehicles and equipment powered by renewable energy by 2030.
- CARB's Emissions Reduction Plan for Ports and Goods Movement (Goods Movement Plan) in California focuses on reducing heavy-duty truck-related emissions focus on establishment of emissions standards for trucks, fleet turnover, truck retrofits, and restriction on truck idling (CARB 2006). While the focus of Goods Movement Plan is to reduce criteria air pollutant and air toxic emissions, the strategies to reduce these pollutants would also generally have a beneficial effect in reducing GHG emissions.
- CARB's On-Road Truck and Bus Regulation (2010) requires diesel trucks and buses that operate in California to be upgraded to reduce emissions. Newer heavier trucks and buses must meet particulate matter filter requirements beginning January 1, 2012. Lighter and older heavier trucks must be replaced starting January 1, 2015. By January 1, 2023, nearly all trucks and buses will need to have 2010 model year engines or equivalent (32).
- CARB's Heavy-Duty (Tractor-Trailer) GHG Regulation requires SmartWay tractor trailers that include idle-reduction technologies, aerodynamic technologies, and low-rolling resistant tires that would reduce fuel consumption and associated GHG emissions.

The proposed Project would implement project design features that would facilitate the accessibility, parking, and loading of trucks on-site.

Enhanced fuel economies realized pursuant to federal and state regulatory actions, and related transition of vehicles to alternative energy sources (e.g., electricity, natural gas, biofuels, hydrogen cells) would likely decrease future gasoline fuel demands per VMT. Location of the Project proximate to regional and local roadway systems tends to reduce VMT within the region, acting to reduce regional vehicle energy demands. The Project would implement sidewalks, facilitating and encouraging pedestrian access. Facilitating pedestrian and bicycle access would reduce VMT and associated energy consumption. In compliance with the California Green Building Standards Code and City requirements, the Project would promote the use of bicycles as an alternative mean of transportation by providing short-term and/or long-term bicycle



parking accommodations. As supported by the preceding discussions, Project transportation energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

ON-SITE CARGO HANDLING EQUIPMENT FUEL DEMANDS

As previously stated, it is common for industrial buildings to require the operation of exterior cargo handling equipment in the building's truck court areas. On-site cargo handling equipment used by the Project would result in approximately 4,642 gallons of natural gas. On-site equipment use of fuel would not be atypical for the type of construction proposed because there are no aspects of the Project's proposed operations that are unusual or energy-intensive, and Project on-site equipment would conform to the applicable CARB emissions standards, acting to promote equipment fuel efficiencies.

FACILITY ENERGY DEMANDS

Project facility operational energy demands are estimated to be: 1,215,961 kWh/year of electricity which would be supplied by SCE. Based on information provided by the Project Applicant, the Project would not use natural gas. As such, natural gas consumption has not been analyzed in this study. The Project proposes conventional industrial uses reflecting contemporary energy efficient/energy conserving designs and operational programs. The Project does not propose uses that are inherently energy intensive and the energy demands in total would be comparable to other industrial uses of similar scale and configuration.



This page intentionally left blank



5 CONCLUSIONS

5.1 ENERGY IMPACT 1

Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation.

As supported by the preceding analyses, Project construction and operations would not result in the inefficient, wasteful, or unnecessary consumption of energy. The Project would therefore not cause or result in the need for additional energy producing or transmission facilities. The Project would not engage in wasteful or inefficient uses of energy and aims to achieve energy conservations goals within the State of California.

5.2 ENERGY IMPACT 2

Conflict with or obstruct a state or local plan for renewable energy or energy efficiency.

The Project's consistency with the applicable state and local plans is discussed below.

CONSISTENCY WITH ISTEA

Transportation and access to the Project site is provided by the local and regional roadway systems. The Project would not interfere with, nor otherwise obstruct intermodal transportation plans or projects that may be realized pursuant to the ISTEA because SCAG is not planning for intermodal facilities on or through the Project site.

CONSISTENCY WITH TEA-21

The Project site is located along major transportation corridors with proximate access to the Interstate freeway system. The site selected for the Project facilitates access acts to reduce VMT, takes advantage of existing infrastructure systems, and promotes land use compatibility through collocation of similar uses. The Project supports the strong planning processes emphasized under TEA-21. The Project is therefore consistent with, and would not otherwise interfere with, nor obstruct implementation of TEA-21.

CONSISTENCY WITH IEPR

Electricity would be provided to the Project by SCE. SCE's *Clean Power and Electrification Pathway* (CPEP) white paper builds on existing state programs and policies. As such, the Project is consistent with, and would not otherwise interfere with, nor obstruct implementation the goals presented in the 2022 IEPR.

Additionally, the Project will comply with the applicable Title 24 standards which would ensure that the Project energy demands would not be inefficient, wasteful, or otherwise unnecessary. As such, development of the proposed Project would support the goals presented in the 2022 IEPR.



CONSISTENCY WITH STATE OF CALIFORNIA ENERGY PLAN

The Project site is located along major transportation corridors with proximate access to the Interstate freeway system. The site selected for the Project facilitates access and takes advantage of existing infrastructure systems. The Project therefore supports urban design and planning processes identified under the State of California Energy Plan, is consistent with, and would not otherwise interfere with, nor obstruct implementation of the State of California Energy Plan.

CONSISTENCY WITH CALIFORNIA CODE TITLE 24, PART 6, ENERGY EFFICIENCY STANDARDS

As previously stated, CCR, Title 24, Part 11: CALGreen is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on January 1, 2009, and is administered by the California Building Standards Commission. CALGreen is updated on a regular basis, with the most recent approved update consisting of the 2022 California Green Building Code Standards that were published on July 1, 2022 and will become effective on January 1, 2023. The Project would be required to comply with the applicable standards in place at the time plan check submittals are made.

CONSISTENCY WITH AB 1493

AB 1493 is not applicable to the Project as it is a statewide measure establishing vehicle emissions standards. No feature of the Project would interfere with implementation of the requirements under AB 1493.

CONSISTENCY WITH RPS

California's RPS is not applicable to the Project as it is a statewide measure that establishes a renewable energy mix. No feature of the Project would interfere with implementation of the requirements under RPS.

CONSISTENCY WITH SB 350

The proposed Project would use energy from SCE, which have committed to diversifying their portfolio of energy sources by increasing energy from wind and solar sources. No feature of the Project would interfere with implementation of SB 350. Additionally, the Project would be designed and constructed to implement the energy efficiency measures for new industrial developments and would include several measures designed to reduce energy consumption.

As shown above, the Project would not conflict with any of the state or local plans. As such, a less than significant impact is expected.



This page intentionally left blank



6 REFERENCES

- 1. Association of Environmental Professionals. 2020 CEQA California Environmental Quality Act. 2020.
- 2. **Urban Crossroads, Inc.** *Avenue L4 Warehouse Air Quality Impact Analysis.* 2023.
- 3. **Administration, U.S. Energy Information.** California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/data.php?sid=CA#ConsumptionExpenditures.
- 4. **U.S. Energy Information Administration.** Use of Energy in the United States Explained Energy Use for Transportation. [Online] https://www.eia.gov/energyexplained/use-of-energy/transportation.php.
- 5. —. Use of Energy in the United States Explained Energy Use for Transportation. [Online] https://www.eia.gov/dnav/pet/PET_CONS_PSUP_DC_NUS_MBBLPD_A.htm.
- 6. —. Prime Supplier Sales Volume, California, Annual. 2020.
- 7. —. California Energy Consumption by End-Use Sector. *California State Profile and Energy Estimates*. [Online] https://www.eia.gov/state/?sid=CA#tabs-2.
- 8. —. California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/seds/sep_fuel/html/pdf/fuel_use_es.pdf.
- 9. —. California State Profile and Energy Estimates. [Online] https://www.eia.gov/dnav/ng/ng_cons_sum_dcu_nus_m.htm.
- 10. **California Energy Commission.** 2021 Total System Electric Generation. *CA.gov.* [Online] https://www.energy.ca.gov/data-reports/energy-almanac/california-electricity-data/2021-total-system-electric-generation#:~:text=Total%20generation%20for%20California%20was,from%2090%2C208%20GWh%20in%202020)..
- 11. —. 2013 Integrated Energy Policy Report. 2013.
- 12. **California ISO.** Understanding the ISO. [Online] http://www.caiso.com/about/Pages/OurBusiness/UnderstandingtheISO/default.aspx.
- 13. **Southern California Edison.** *Southern California Edison's Service Area.* [Online] https://download.newsroom.edison.com/create_memory_file/?f_id=5cc32d492cfac24d21aecf4c&c ontent verified=True.
- 14. **Southern Californai Edison.** 2021 Power Content Label. *Southern California Edison.* [Online] https://www.sce.com/sites/default/files/custom-files/Web%20files/2021%20Power%20Content%20Label.pdf.
- 15. **California Public Utilities Commission.** Natural Gas and California. [Online] https://www.cpuc.ca.gov/industries-and-topics/natural-gas/natural-gas-and-california.
- 16. **Department of Motor Vehicles.** State of California Department of Motor Vehicles Statistics For Publication January Through December 2021. 2021.
- 17. **U.S. Energy Information Administration.** California Analysis. *Energy Information Administration.* [Online] https://www.eia.gov/beta/states/states/ca/analysis.
- 18. California Energy Commission Staff. 2022 Integrated Energy Policy Report Update. [Online] https://www.energy.ca.gov/sites/default/files/2023-02/Adopted_2022_IEPR_Update_with_errata_ada.pdf.



- 19. **The California Energy Commission.** 2022 Building Energy Efficiency Standards. *California Energy Commission.* [Online] 2022. https://www.energy.ca.gov/programs-and-topics/programs/building-energy-efficiency-standards/2022-building-energy-efficiency.
- 20. **California Energy Commission.** Renewables Portfolio Standard (RPS). [Online] 2002. http://www.energy.ca.gov/portfolio/.
- 21. **State of California.** *California Environmental Quality Act Guideline, California Public Resources Code, Title 14, Division 6, Chapter 3,*.
- 22. Association of Environmental Professionals. 2019 CEQA California Environmental Quality Act. 2019.
- 23. **Urban Crossroads, Inc.** *Avenue L4 Warehouse Air Quality Analysis.* 2023.
- 24. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] May 2022. www.caleemod.com.
- 25. **California Department of Transportation.** EMFAC Software. [Online] http://www.dot.ca.gov/hq/env/air/pages/emfac.htm.
- 26. **State of California.** 2019 CEQA California Environmental Quality Act. 2019.
- 27. Pray, Richard. 2023 National Construction Estimator. Carlsbad: Craftsman Book Company, 2023.
- 28. **Southern California Edison.** Rates & Pricing Choices. *Southern California Edison*. [Online] https://www.sce.com/regulatory/tariff-books/rates-pricing-choices.
- 29. **California Air Resources Board.** Methods to Find the Cost-Effectiveness of Funding Air Quality Projects For Evaluating Motor Vehicle Registration Fee Projects And Congestion Mitigation and Air Quality Improvement (CMAQ) Projects, Emission Factor Tables. 2018.
- 30. **Urban Crossroads, Inc.** 534 Struck Avenue Air Quality Impact Analysis. 2022.
- 31. California Energy Commission Staff. 2021 Integrated Energy Policy Report Update. [Online] 2021. https://www.energy.ca.gov/data-reports/reports/integrated-energy-policy-report/2021-integrated-energy-policy-report.
- 32. **California Air Resources Board.** Truck and Bus Regulation. [Online] https://ww2.arb.ca.gov/ourwork/programs/truck-and-bus-regulation.
- 33. **California Energy Commission.** *Transportation Energy Demand Forecast 2018-2030.* 2018.
- 34. **U.S. Department of Energy.** Alternate Fuels Data Center. *U.S. Department of Energy.* [Online] https://afdc.energy.gov/states/ca.
- 35. **U.S. Energy Information Administration.** California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/?sid=CA.
- 36. —. California State Profile and Energy Estimates. [Online] https://www.eia.gov/state/seds/sep_fuel/html/pdf/fuel_use_es.pdf.



This page intentionally left blank



7 CERTIFICATIONS

The contents of this energy report represent an accurate depiction of the environmental impacts associated with the proposed Avenue L4 Warehouse. The information contained in this energy report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at hqueshi@urbanxroads.com.

Haseeb Qureshi
Principal
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies California State University, Fullerton • May, 2010

Bachelor of Arts in Environmental Analysis and Design University of California, Irvine • June, 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Planners AWMA – Air and Waste Management Association ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Environmental Site Assessment – American Society for Testing and Materials • June, 2013 Planned Communities and Urban Infill – Urban Land Institute • June, 2011 Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April, 2008 Principles of Ambient Air Monitoring – CARB • August, 2007 AB2588 Regulatory Standards – Trinity Consultants • November, 2006 Air Dispersion Modeling – Lakes Environmental • June, 2006



This page intentionally left blank



APPENDIX 4.1:

CALEEMOD CONSTRUCTION EMISSIONS MODEL OUTPUTS



Avenue L-4 Warehouse (Construction) Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
- 3. Construction Emissions Details
 - 3.1. Site Preparation (2023) Unmitigated
 - 3.3. Grading (2023) Unmitigated
 - 3.5. Building Construction (2023) Unmitigated
 - 3.7. Building Construction (2024) Unmitigated
 - 3.9. Paving (2024) Unmitigated
 - 3.11. Architectural Coating (2024) Unmitigated

- 4. Operations Emissions Details
 - 4.10. Soil Carbon Accumulation By Vegetation Type
 - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
 - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
 - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 5. Activity Data
 - 5.1. Construction Schedule
 - 5.2. Off-Road Equipment
 - 5.2.1. Unmitigated
 - 5.3. Construction Vehicles
 - 5.3.1. Unmitigated
 - 5.4. Vehicles
 - 5.4.1. Construction Vehicle Control Strategies
 - 5.5. Architectural Coatings
 - 5.6. Dust Mitigation
 - 5.6.1. Construction Earthmoving Activities
 - 5.6.2. Construction Earthmoving Control Strategies

- 5.7. Construction Paving
- 5.8. Construction Electricity Consumption and Emissions Factors
- 5.18. Vegetation
 - 5.18.1. Land Use Change
 - 5.18.1.1. Unmitigated
 - 5.18.1. Biomass Cover Type
 - 5.18.1.1. Unmitigated
 - 5.18.2. Sequestration
 - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
 - 6.1. Climate Risk Summary
 - 6.2. Initial Climate Risk Scores
 - 6.3. Adjusted Climate Risk Scores
 - 6.4. Climate Risk Reduction Measures
- 7. Health and Equity Details
 - 7.1. CalEnviroScreen 4.0 Scores
 - 7.2. Healthy Places Index Scores

- 7.3. Overall Health & Equity Scores
- 7.4. Health & Equity Measures
- 7.5. Evaluation Scorecard
- 7.6. Health & Equity Custom Measures
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	Avenue L-4 Warehouse (Construction)
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	4.50
Precipitation (days)	13.0
Location	34.6576113529509, -118.13521824505384
County	Los Angeles-Mojave Desert
City	Lancaster
Air District	Antelope Valley AQMD
Air Basin	Mojave Desert
TAZ	3664
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)		Special Landscape Area (sq ft)	Population	Description
General Light Industry	32.7	1000sqft	1.89	32,655	49,600	0.00	_	_
Unrefrigerated Warehouse-No Rail	185	1000sqft	4.25	185,045	0.00	0.00	_	_

Parking Lot	160	Space	0.96	0.00	0.00	0.00	_	_
Other Asphalt Surfaces	126	1000sqft	2.89	0.00	0.00	0.00	_	_

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

		•	,	J , J		,	,		J.									
Un/Mit.	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.52	28.3	20.6	42.3	0.06	0.24	5.91	6.02	0.22	2.75	2.85	_	7,300	7,300	0.29	0.24	10.5	7,388
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.40	28.2	20.7	38.1	0.05	0.24	1.89	2.13	0.22	0.46	0.68		7,096	7,096	0.27	0.24	0.27	7,175
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_		_
Unmit.	0.58	3.47	7.46	15.2	0.02	0.07	0.87	0.95	0.07	0.25	0.29	_	3,031	3,031	0.11	0.12	2.19	3,073
Annual (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.11	0.63	1.36	2.77	< 0.005	0.01	0.16	0.17	0.01	0.05	0.05	_	502	502	0.02	0.02	0.36	509

2.2. Construction Emissions by Year, Unmitigated

Year	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	1.07	1.01	20.2	38.5	0.06	0.19	5.91	6.02	0.18	2.75	2.85	_	7,139	7,139	0.29	0.21	8.90	7,172
2024	1.52	28.3	20.6	42.3	0.05	0.24	1.89	2.13	0.22	0.46	0.68	_	7,300	7,300	0.26	0.24	10.5	7,388
Daily - Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	1.01	0.91	12.0	24.3	0.04	0.11	1.46	1.57	0.11	0.35	0.46	_	5,008	5,008	0.18	0.21	0.23	5,075
2024	1.40	28.2	20.7	38.1	0.05	0.24	1.89	2.13	0.22	0.46	0.68	_	7,096	7,096	0.27	0.24	0.27	7,175
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	0.35	0.32	5.04	10.1	0.02	0.04	0.76	0.81	0.04	0.25	0.29	_	1,978	1,978	0.07	0.06	1.02	1,999
2024	0.58	3.47	7.46	15.2	0.02	0.07	0.87	0.95	0.07	0.21	0.28	_	3,031	3,031	0.11	0.12	2.19	3,073
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
2023	0.06	0.06	0.92	1.85	< 0.005	0.01	0.14	0.15	0.01	0.05	0.05	_	327	327	0.01	0.01	0.17	331
2024	0.11	0.63	1.36	2.77	< 0.005	0.01	0.16	0.17	0.01	0.04	0.05	_	502	502	0.02	0.02	0.36	509

3. Construction Emissions Details

3.1. Site Preparation (2023) - Unmitigated

Location	TOG	ROG		СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	<u> </u>	<u> </u>	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.68	15.7	30.0	0.05	0.10	_	0.10	0.10	_	0.10	_	5,530	5,530	0.22	0.04	_	5,549

Dust From Material Movemen	<u> </u>	_	_	_	_	_	5.66	5.66	_	2.69	2.69	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Average Daily	_	_	-	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_
Off-Road Equipmen		0.02	0.43	0.82	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	152	152	0.01	< 0.005	_	152
Dust From Material Movemen		_	_	_	_	_	0.16	0.16	_	0.07	0.07	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.08	0.15	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	25.1	25.1	< 0.005	< 0.005	_	25.2
Dust From Material Movemen	_	_	_	_	_	_	0.03	0.03	-	0.01	0.01	_	_	-	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	-	-	_	_	_	_	_	_	_	_	-	-	_	_	-
Worker	0.13	0.12	0.12	2.03	0.00	0.00	0.24	0.24	0.00	0.06	0.06	_	270	270	0.01	0.01	1.21	274
Vendor	< 0.005	< 0.005	0.07	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	0.01	_	61.8	61.8	< 0.005	0.01	0.17	64.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

8 / 31

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	_	6.76	6.76	< 0.005	< 0.005	0.01	6.85
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	1.69	1.69	< 0.005	< 0.005	< 0.005	1.77
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	_	1.12	1.12	< 0.005	< 0.005	< 0.005	1.13
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	0.28	0.28	< 0.005	< 0.005	< 0.005	0.29
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2023) - Unmitigated

Location	TOG	ROG	NOx	co	SO2	PM10E		PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.82	19.9	36.2	0.06	0.18	_	0.18	0.18	_	0.18	_	6,715	6,715	0.27	0.05	_	6,738
Dust From Material Movemen		_	_	_	_	_	2.67	2.67	_	0.98	0.98	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	
Off-Road Equipmen		0.07	1.64	2.97	0.01	0.02	_	0.02	0.01	_	0.01	_	552	552	0.02	< 0.005	_	554
Dust From Material Movement	_	_	_	_	_	_	0.22	0.22	_	0.08	0.08	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.01	0.30	0.54	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	91.4	91.4	< 0.005	< 0.005	_	91.7
Dust From Material Movement	_	_	_	_	_	_	0.04	0.04	_	0.01	0.01	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	-	_	_	_	_	-	-	-	-	_	_	_	_	_	_	_	_
Worker	0.14	0.13	0.13	2.26	0.00	0.00	0.26	0.26	0.00	0.06	0.06	_	300	300	0.01	0.01	1.34	305
Vendor	0.01	< 0.005	0.13	0.05	< 0.005	< 0.005	0.03	0.04	< 0.005	0.01	0.01	_	124	124	< 0.005	0.02	0.35	129
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_
Average Daily	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_	_	
Worker	0.01	0.01	0.01	0.14	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	_	22.5	22.5	< 0.005	< 0.005	0.05	22.8
Vendor	< 0.005	< 0.005	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	10.2	10.2	< 0.005	< 0.005	0.01	10.6

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	<u> </u>	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	_	3.73	3.73	< 0.005	< 0.005	0.01	3.78
Vendor	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	_	1.68	1.68	< 0.005	< 0.005	< 0.005	1.76
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Building Construction (2023) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.37	10.2	16.9	0.03	0.09	_	0.09	0.09	_	0.09	_	2,806	2,806	0.11	0.02	_	2,815
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.37	10.2	16.9	0.03	0.09	_	0.09	0.09	_	0.09	_	2,806	2,806	0.11	0.02	_	2,815
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.09	2.50	4.14	0.01	0.02	_	0.02	0.02	_	0.02	_	686	686	0.03	0.01	_	689
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Off-Road Equipmer		0.02	0.46	0.75	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	114	114	< 0.005	< 0.005	_	114
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.65	0.60	0.60	10.3	0.00	0.00	1.19	1.19	0.00	0.28	0.28	_	1,365	1,365	0.06	0.05	6.10	1,386
Vendor	0.04	0.03	1.07	0.43	0.01	0.01	0.27	0.29	0.01	0.08	0.09	_	989	989	< 0.005	0.14	2.80	1,035
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	-	_	_	_	_	-	_	_	_	_	_	_
Worker	0.59	0.51	0.68	6.98	0.00	0.00	1.19	1.19	0.00	0.28	0.28	_	1,212	1,212	0.06	0.05	0.16	1,227
Vendor	0.04	0.03	1.13	0.44	0.01	0.01	0.27	0.29	0.01	0.08	0.09	_	990	990	< 0.005	0.14	0.07	1,033
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	-	_	_	_	_	-	_	_	_	_	_	_	_	_	_	_
Worker	0.15	0.12	0.18	1.91	0.00	0.00	0.29	0.29	0.00	0.07	0.07	_	305	305	0.01	0.01	0.65	309
Vendor	0.01	0.01	0.28	0.11	< 0.005	< 0.005	0.07	0.07	< 0.005	0.02	0.02	_	242	242	< 0.005	0.03	0.30	253
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.03	0.02	0.03	0.35	0.00	0.00	0.05	0.05	0.00	0.01	0.01	-	50.5	50.5	< 0.005	< 0.005	0.11	51.2
Vendor	< 0.005	< 0.005	0.05	0.02	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	_	40.1	40.1	< 0.005	0.01	0.05	41.9
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2024) - Unmitigated

Loca	ation	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
------	-------	-----	-----	-----	----	-----	-------	-------	-------	--------	--------	--------	------	-------	------	-----	-----	---	------

Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.37	10.2	16.9	0.03	0.09	_	0.09	0.09	_	0.09	-	2,805	2,805	0.11	0.02	_	2,815
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.37	10.2	16.9	0.03	0.09	_	0.09	0.09	_	0.09	_	2,805	2,805	0.11	0.02	_	2,815
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	-	_
Off-Road Equipmen		0.22	5.89	9.76	0.02	0.05	_	0.05	0.05	_	0.05	_	1,620	1,620	0.07	0.01	-	1,625
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.04	1.08	1.78	< 0.005	0.01	_	0.01	0.01	_	0.01	_	268	268	0.01	< 0.005	_	269
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	-	_	_	_	_	-	-	-	-	-	_	_	_	_	_	-	-
Worker	0.62	0.54	0.56	9.64	0.00	0.00	1.19	1.19	0.00	0.28	0.28	_	1,342	1,342	0.06	0.05	5.68	1,362
Vendor	0.04	0.03	1.02	0.40	0.01	0.01	0.27	0.29	0.01	0.08	0.09	_	976	976	< 0.005	0.14	2.80	1,022
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.54	0.49	0.60	6.54	0.00	0.00	1.19	1.19	0.00	0.28	0.28	_	1,192	1,192	0.06	0.05	0.15	1,207
Vendor	0.03	0.03	1.08	0.41	0.01	0.01	0.27	0.29	0.01	0.08	0.09	_	977	977	< 0.005	0.14	0.07	1,020
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_
Worker	0.31	0.29	0.37	4.23	0.00	0.00	0.68	0.68	0.00	0.16	0.16		708	708	0.04	0.03	1.42	718
Vendor	0.02	0.02	0.63	0.23	< 0.005	0.01	0.16	0.17	0.01	0.04	0.05	_	564	564	< 0.005	0.08	0.70	589
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.06	0.05	0.07	0.77	0.00	0.00	0.12	0.12	0.00	0.03	0.03	_	117	117	0.01	< 0.005	0.24	119
Vendor	< 0.005	< 0.005	0.11	0.04	< 0.005	< 0.005	0.03	0.03	< 0.005	0.01	0.01	_	93.4	93.4	< 0.005	0.01	0.12	97.6
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2024) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.23	7.21	10.6	0.01	0.09	_	0.09	0.08	_	0.08	_	1,512	1,512	0.06	0.01	_	1,517
Paving	_	0.50	_	_	_	_	_	_	_	<u> </u>	<u> </u>	_	_	<u> </u>	<u> </u>	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
(Max)																		
Off-Road Equipmen		0.23	7.21	10.6	0.01	0.09	_	0.09	0.08	_	0.08	_	1,512	1,512	0.06	0.01	_	1,517
Paving	_	0.50	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_
Off-Road Equipmen		0.01	0.39	0.58	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	82.8	82.8	< 0.005	< 0.005	_	83.1
Paving	_	0.03	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.07	0.11	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	13.7	13.7	< 0.005	< 0.005	-	13.8
Paving	_	0.01	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	-	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Worker	0.10	0.09	0.09	1.59	0.00	0.00	0.20	0.20	0.00	0.05	0.05	_	221	221	0.01	0.01	0.94	225
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	-	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Worker	0.09	0.08	0.10	1.08	0.00	0.00	0.20	0.20	0.00	0.05	0.05	_	196	196	0.01	0.01	0.02	199

Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	0.01	0.07	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	_	11.1	11.1	< 0.005	< 0.005	0.02	11.2
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	_	1.83	1.83	< 0.005	< 0.005	< 0.005	1.86
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2024) - Unmitigated

Location	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.03	1.43	1.28	< 0.005	0.04	_	0.04	0.04	_	0.04	_	178	178	0.01	< 0.005	_	179
Architect ural Coatings	_	26.4	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		0.03	1.43	1.28	< 0.005	0.04	_	0.04	0.04	_	0.04	_	178	178	0.01	< 0.005	_	179

Architect Coatings	_	26.4	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	-	-	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.16	0.14	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	-	19.5	19.5	< 0.005	< 0.005	_	19.6
Architect ural Coatings	_	2.89	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Off-Road Equipmen		< 0.005	0.03	0.03	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	-	3.23	3.23	< 0.005	< 0.005	_	3.24
Architect ural Coatings	_	0.53	_	_	_	_	-	_	_	-	_	_	_	_	_	_	_	_
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.12	0.11	0.11	1.91	0.00	0.00	0.24	0.24	0.00	0.06	0.06	_	265	265	0.01	0.01	1.12	269
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.11	0.10	0.12	1.29	0.00	0.00	0.24	0.24	0.00	0.06	0.06	_	236	236	0.01	0.01	0.03	239
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	0.01	0.01	0.01	0.16	0.00	0.00	0.03	0.03	0.00	0.01	0.01	_	26.6	26.6	< 0.005	< 0.005	0.05	27.0
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	_	4.40	4.40	< 0.005	< 0.005	0.01	4.46
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Vegetatio n	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Species	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided			_	_	_	_	_	_	_	_	_	_		_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_		_	_	_	_	<u> </u>	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	<u> </u>	<u> </u>	_	_	_	_	<u> </u>	_	_	_

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	7/4/2023	7/17/2023	5.00	10.0	_
Grading	Grading	7/18/2023	8/28/2023	5.00	30.0	_

Building Construction	Building Construction	8/29/2023	10/21/2024	5.00	300	_
Paving	Paving	9/24/2024	10/21/2024	5.00	20.0	_
Architectural Coating	Architectural Coating	8/27/2024	10/21/2024	5.00	40.0	_

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Tier 4 Interim	3.00	8.00	367	0.40
Grading	Excavators	Diesel	Tier 4 Interim	2.00	8.00	36.0	0.38
Grading	Graders	Diesel	Tier 4 Interim	1.00	8.00	148	0.41
Grading	Rubber Tired Dozers	Diesel	Tier 4 Interim	1.00	8.00	367	0.40
Building Construction	Cranes	Diesel	Tier 4 Interim	1.00	8.00	367	0.29
Building Construction	Forklifts	Diesel	Tier 4 Interim	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Tier 4 Interim	1.00	8.00	14.0	0.74
Building Construction	Welders	Diesel	Tier 4 Interim	1.00	8.00	46.0	0.45
Paving	Pavers	Diesel	Tier 4 Interim	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Tier 4 Interim	2.00	8.00	89.0	0.36
Paving	Rollers	Diesel	Tier 4 Interim	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Tier 4 Interim	1.00	8.00	37.0	0.48
Site Preparation	Crawler Tractors	Diesel	Tier 4 Interim	4.00	8.00	87.0	0.43
Grading	Scrapers	Diesel	Tier 4 Interim	2.00	8.00	423	0.48
Grading	Crawler Tractors	Diesel	Tier 4 Interim	2.00	8.00	87.0	0.43
Building Construction	Crawler Tractors	Diesel	Tier 4 Interim	3.00	8.00	87.0	0.43

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	_	_	_	_
Site Preparation	Worker	18.0	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	2.00	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	0.00	0.00	HHDT
Grading	_	_	_	_
Grading	Worker	20.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	4.00	10.2	HHDT,MHDT
Grading	Hauling	0.00	20.0	HHDT
Grading	Onsite truck	0.00	0.00	HHDT
Building Construction	_	_	_	_
Building Construction	Worker	91.0	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	32.0	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	0.00	0.00	HHDT
Paving	_	_	_	_
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	0.00	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	0.00	0.00	HHDT
Architectural Coating	_	_	_	_
Architectural Coating	Worker	18.0	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	0.00	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	0.00	0.00	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Non-applicable. No control strategies activated by user.

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	326,550	108,850	10,074

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Site Preparation	0.00	0.00	35.0	0.00	_
Grading	0.00	0.00	120	0.00	_
Paving	0.00	0.00	0.00	0.00	3.85

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	3	74%	74%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
General Light Industry	0.00	0%
Unrefrigerated Warehouse-No Rail	0.00	0%
Parking Lot	0.96	100%

Other Asphalt Surfaces	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2023	0.00	532	0.03	< 0.005
2024	0.00	532	0.03	< 0.005

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Alexandra and the state	Manager Call Time	Lattice I. A consist	The state of the s
etation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

D: 0 -	The second secon		
Biomass Cover Type	Unitial Acres	LEinal Acres	

5.18.2. Sequestration

5.18.2.1. Unmitigated

				10.0.10.1
Tree Type	Nur	ımber	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit	
emperature and Extreme Heat 34.8 annual days of extreme		annual days of extreme heat	
Extreme Precipitation	1.35	annual days with precipitation above 20 mm	
Sea Level Rise	0.00	meters of inundation depth	
Wildfire	1.27	annual hectares burned	

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	_
AQ-Ozone	88.7

AQ-PM	8.86
AQ-DPM	31.1
Drinking Water	53.1
Lead Risk Housing	43.0
Pesticides	0.00
Toxic Releases	97.0
Traffic	54.4
Effect Indicators	_
CleanUp Sites	0.00
Groundwater	0.00
Haz Waste Facilities/Generators	72.6
Impaired Water Bodies	0.00
Solid Waste	81.6
Sensitive Population	_
Asthma	98.7
Cardio-vascular	87.7
Low Birth Weights	74.0
Socioeconomic Factor Indicators	_
Education	33.5
Housing	24.9
Linguistic	26.4
Poverty	81.5
Unemployment	47.0

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator Result for Project Census Tract

_
10.68907994
7.955857821
12.98601309
_
27.70435006
4.144745284
69.84473245
_
11.9209547
57.48748877
_
0.61593738
46.63159245
_
62.53047607
2.194276915
56.08879764
77.85191839
53.25291929
_
1.642499679
15.56525087
21.82728089
76.74836392
51.79006801

Insured adults	27.22956499
Arthritis	93.9
Asthma ER Admissions	1.3
High Blood Pressure	92.9
Cancer (excluding skin)	91.6
Asthma	16.4
Coronary Heart Disease	88.8
Chronic Obstructive Pulmonary Disease	53.7
Diagnosed Diabetes	79.4
Life Expectancy at Birth	3.3
Cognitively Disabled	46.5
Physically Disabled	69.8
Heart Attack ER Admissions	1.6
Mental Health Not Good	23.2
Chronic Kidney Disease	90.3
Obesity	31.1
Pedestrian Injuries	19.6
Physical Health Not Good	47.6
Stroke	70.4
Health Risk Behaviors	_
Binge Drinking	11.9
Current Smoker	16.1
No Leisure Time for Physical Activity	49.0
Climate Change Exposures	_
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	0.4

Elderly	95.7
English Speaking	65.0
Foreign-born	22.2
Outdoor Workers	94.5
Climate Change Adaptive Capacity	_
Impervious Surface Cover	64.0
Traffic Density	60.4
Traffic Access	23.0
Other Indices	_
Hardship	55.1
Other Decision Support	_
2016 Voting	14.5

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	66.0
Healthy Places Index Score for Project Location (b)	5.00
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Total Project area is 9.99 acres
Construction: Construction Phases	Construction schedule based on direction provided by the Applicant
Construction: Off-Road Equipment	Construction equipment based on direction provided by the Applicant
Construction: Trips and VMT	Vendor Trips adjusted based on CalEEMod defaults for Building Construction and number of days for Site Preparation, Grading, and Building Construction
Construction: Architectural Coatings	Rule 1113

This page intentionally left blank



APPENDIX 4.2:

CALEEMOD OPERATIONAL EMISSIONS MODEL OUTPUTS



Avenue L-4 Warehouses (General Light Industrial Operations) Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
- 4. Operations Emissions Details
 - 4.1. Mobile Emissions by Land Use
 - 4.1.1. Unmitigated
 - 4.2. Energy
 - 4.2.1. Electricity Emissions By Land Use Unmitigated
 - 4.2.3. Natural Gas Emissions By Land Use Unmitigated

- 4.3. Area Emissions by Source
 - 4.3.2. Unmitigated
- 4.4. Water Emissions by Land Use
 - 4.4.2. Unmitigated
- 4.5. Waste Emissions by Land Use
 - 4.5.2. Unmitigated
- 4.6. Refrigerant Emissions by Land Use
 - 4.6.1. Unmitigated
- 4.7. Offroad Emissions By Equipment Type
 - 4.7.1. Unmitigated
- 4.8. Stationary Emissions By Equipment Type
 - 4.8.1. Unmitigated
- 4.9. User Defined Emissions By Equipment Type
 - 4.9.1. Unmitigated
- 4.10. Soil Carbon Accumulation By Vegetation Type
 - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
 - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated

- 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated
- 5. Activity Data
 - 5.9. Operational Mobile Sources
 - 5.9.1. Unmitigated
 - 5.10. Operational Area Sources
 - 5.10.1. Hearths
 - 5.10.1.1. Unmitigated
 - 5.10.2. Architectural Coatings
 - 5.10.3. Landscape Equipment
 - 5.11. Operational Energy Consumption
 - 5.11.1. Unmitigated
 - 5.12. Operational Water and Wastewater Consumption
 - 5.12.1. Unmitigated
 - 5.13. Operational Waste Generation
 - 5.13.1. Unmitigated
 - 5.14. Operational Refrigeration and Air Conditioning Equipment
 - 5.14.1. Unmitigated

- 5.15. Operational Off-Road Equipment
 - 5.15.1. Unmitigated
- 5.16. Stationary Sources
 - 5.16.1. Emergency Generators and Fire Pumps
 - 5.16.2. Process Boilers
- 5.17. User Defined
- 5.18. Vegetation
 - 5.18.1. Land Use Change
 - 5.18.1.1. Unmitigated
 - 5.18.1. Biomass Cover Type
 - 5.18.1.1. Unmitigated
 - 5.18.2. Sequestration
 - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
 - 6.1. Climate Risk Summary
 - 6.2. Initial Climate Risk Scores
 - 6.3. Adjusted Climate Risk Scores

- 6.4. Climate Risk Reduction Measures
- 7. Health and Equity Details
 - 7.1. CalEnviroScreen 4.0 Scores
 - 7.2. Healthy Places Index Scores
 - 7.3. Overall Health & Equity Scores
 - 7.4. Health & Equity Measures
 - 7.5. Evaluation Scorecard
 - 7.6. Health & Equity Custom Measures
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	Avenue L-4 Warehouses (General Light Industrial Operations)
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	4.50
Precipitation (days)	13.0
Location	34.6576113529509, -118.13521824505384
County	Los Angeles-Mojave Desert
City	Lancaster
Air District	Antelope Valley AQMD
Air Basin	Mojave Desert
TAZ	3664
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)		Special Landscape Area (sq ft)	Population	Description
General Light Industry	32.7	1000sqft	1.89	32,655	49,600	0.00	_	_
User Defined Industrial	32.7	User Defined Unit	0.00	0.00	0.00	0.00	_	_

Parking Lot	160	Space	0.96	0.00	0.00	0.00	_	_
Other Asphalt Surfaces	126	1000sqft	2.89	0.00	0.00	0.00	_	_

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.02	1.73	1.17	7.72	0.02	0.02	0.46	0.47	0.02	0.09	0.10	36.3	2,143	2,179	3.75	0.19	15.0	2,345
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.83	1.52	4.08	6.29	0.05	0.05	0.98	1.03	0.05	0.20	0.25	36.3	5,751	5,787	3.77	0.67	9.00	6,089
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.65	1.37	0.93	4.67	0.01	0.01	0.33	0.35	0.01	0.06	0.08	36.3	1,613	1,649	3.74	0.15	10.6	1,799
Annual (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.12	0.25	0.17	0.85	< 0.005	< 0.005	0.06	0.06	< 0.005	0.01	0.01	6.01	267	273	0.62	0.03	1.75	298

2.5. Operations Emissions by Sector, Unmitigated

Sector	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	0.77	0.72	1.16	6.30	0.02	0.02	0.46	0.47	0.02	0.09	0.10	_	1,758	1,758	0.05	0.15	6.54	1,811
Area	0.25	1.01	0.01	1.42	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	5.84	5.84	< 0.005	< 0.005	_	6.01
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	334	334	0.03	< 0.005	_	336
Water	_	_	_	_	_	_	_	_	_	_	_	14.5	44.8	59.3	1.49	0.04	_	107
Waste	_	_	_	-	_	_	_	_	_	_	_	21.8	0.00	21.8	2.18	0.00	_	76.4
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8.50	8.50
Total	1.02	1.73	1.17	7.72	0.02	0.02	0.46	0.47	0.02	0.09	0.10	36.3	2,143	2,179	3.75	0.19	15.0	2,345
Daily, Winter (Max)	-	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	_	_
Mobile	0.83	0.75	4.08	6.29	0.05	0.05	0.98	1.03	0.05	0.20	0.25	_	5,372	5,372	0.07	0.63	0.50	5,561
Area	_	0.78	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	334	334	0.03	< 0.005	_	336
Water	_	_	_	-	_	_	_	_	_	_	_	14.5	44.8	59.3	1.49	0.04	_	107
Waste	_	_	_	_	_	_	_	_	_	_	_	21.8	0.00	21.8	2.18	0.00	_	76.4
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8.50	8.50
Total	0.83	1.52	4.08	6.29	0.05	0.05	0.98	1.03	0.05	0.20	0.25	36.3	5,751	5,787	3.77	0.67	9.00	6,089
Average Daily	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	0.52	0.48	0.92	3.97	0.01	0.01	0.33	0.35	0.01	0.06	0.07	_	1,231	1,231	0.04	0.11	2.07	1,267
Area	0.12	0.89	0.01	0.70	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	2.88	2.88	< 0.005	< 0.005	_	2.96
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	334	334	0.03	< 0.005	_	336
Water	_	_	_	_	_	_	_	_	_	_	_	14.5	44.8	59.3	1.49	0.04	_	107
Waste	_	_	_	_	_	_	_	_	_	_	_	21.8	0.00	21.8	2.18	0.00	_	76.4
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8.50	8.50

Total	0.65	1.37	0.93	4.67	0.01	0.01	0.33	0.35	0.01	0.06	0.08	36.3	1,613	1,649	3.74	0.15	10.6	1,799
Annual	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_
Mobile	0.10	0.09	0.17	0.72	< 0.005	< 0.005	0.06	0.06	< 0.005	0.01	0.01	_	204	204	0.01	0.02	0.34	210
Area	0.02	0.16	< 0.005	0.13	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	0.48	0.48	< 0.005	< 0.005	_	0.49
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	55.3	55.3	0.01	< 0.005	_	55.7
Water	_	_	_	_	_	_	_	_	_	_	_	2.40	7.41	9.81	0.25	0.01	_	17.7
Waste	_	_	_	_	_	_	_	_	_	_	_	3.61	0.00	3.61	0.36	0.00	_	12.6
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	1.41	1.41
Total	0.12	0.25	0.17	0.85	< 0.005	< 0.005	0.06	0.06	< 0.005	0.01	0.01	6.01	267	273	0.62	0.03	1.75	298

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	0.74	0.69	0.33	6.03	0.01	< 0.005	0.32	0.33	< 0.005	0.06	0.06	_	937	937	0.05	0.03	3.98	952
User Defined Industrial	0.03	0.03	0.83	0.27	0.01	0.01	0.13	0.14	0.01	0.03	0.04	_	821	821	< 0.005	0.12	2.56	859
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00

Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.77	0.72	1.16	6.30	0.02	0.02	0.46	0.47	0.02	0.09	0.10	_	1,758	1,758	0.05	0.15	6.54	1,811
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	0.68	0.63	0.37	4.75	0.01	< 0.005	0.32	0.33	< 0.005	0.06	0.06	_	838	838	0.05	0.03	0.10	850
User Defined Industrial	0.15	0.12	3.71	1.53	0.04	0.05	0.66	0.70	0.04	0.14	0.19	_	4,534	4,534	0.02	0.59	0.40	4,711
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.83	0.75	4.08	6.29	0.05	0.05	0.98	1.03	0.05	0.20	0.25	_	5,372	5,372	0.07	0.63	0.50	5,561
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	0.09	0.08	0.05	0.69	< 0.005	< 0.005	0.04	0.04	< 0.005	0.01	0.01	_	104	104	0.01	< 0.005	0.21	106
User Defined Industrial	< 0.005	< 0.005	0.12	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	0.01	_	99.4	99.4	< 0.005	0.01	0.13	104
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.10	0.09	0.17	0.72	< 0.005	< 0.005	0.06	0.06	< 0.005	0.01	0.01	_	204	204	0.01	0.02	0.34	210

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Land	TOG	ROG	NOx	ily, ton/yi	SO2	PM10E	PM10D	PM10T	PM2.5E		PM2.5T	BCO2	NBCO2	СООТ	CH4	N2O	R	CO2e
Jse	IUG	RUG	INUX		502	PINITUE	PINTUD	PINITUT	PIVIZ.5E	PINIZ.5D	PIVIZ.51	BCO2	NBCO2	СО2Т	CH4	IN2U	K	COZe
Daily, Summer Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light ndustry	_	_	_	_	_	_	_	_	_	_	_	_	299	299	0.03	< 0.005	_	301
Jser Defined ndustrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	-	-	-	_	-	_	_	-	_	35.0	35.0	< 0.005	< 0.005	-	35.2
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	_	334	334	0.03	< 0.005	_	336
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light ndustry	_	_	_	_	_	_	-	_	_	_	_	_	299	299	0.03	< 0.005	-	301
Jser Defined ndustrial	_	_	_	_	_	_	-	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	-	_	-	_	_	-	_	_	-	_	35.0	35.0	< 0.005	< 0.005	-	35.2
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
otal	_	_	_	_	_	_	_	_	_	_	_	_	334	334	0.03	< 0.005	_	336

Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	_	49.5	49.5	< 0.005	< 0.005	_	49.8
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	_	5.79	5.79	< 0.005	< 0.005	_	5.83
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	_	55.3	55.3	0.01	< 0.005	_	55.7

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	-	-	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00

Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	-	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00		0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	-	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	-	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	-	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	-	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	<u> </u>	0.00

4.3. Area Emissions by Source

4.3.2. Unmitigated

Source	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	0.71	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.06	_	_	_	_	-	-	_	_	_	_	_	_	_	-	_	_
Landsca pe Equipme nt	0.25	0.23	0.01	1.42	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	5.84	5.84	< 0.005	< 0.005	_	6.01
Total	0.25	1.01	0.01	1.42	< 0.005	< 0.005	_	< 0.005	< 0.005		< 0.005	_	5.84	5.84	< 0.005	< 0.005		6.01
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	0.71	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.06	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	0.78	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	0.13	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.01	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	0.02	0.02	< 0.005	0.13	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	0.48	0.48	< 0.005	< 0.005	_	0.49

1	Total .	0.02	0.16	< 0.005	0.13	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	0.48	0.48	< 0.005	< 0.005	_	0.49

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T		PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	-	-	_	-	-	_	-	-	-	_	_	-	_	-	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	14.5	44.8	59.3	1.49	0.04	_	107
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	-	_	-	_	_	-	-	-	0.00	0.00	0.00	0.00	0.00	-	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	14.5	44.8	59.3	1.49	0.04	_	107
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	14.5	44.8	59.3	1.49	0.04	_	107
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00

Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	14.5	44.8	59.3	1.49	0.04	_	107
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_		_	_	_	_	_	_	_	_	2.40	7.41	9.81	0.25	0.01	_	17.7
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_		_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	2.40	7.41	9.81	0.25	0.01	_	17.7

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

Land Use	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	21.8	0.00	21.8	2.18	0.00	_	76.4
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00

Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	21.8	0.00	21.8	2.18	0.00	_	76.4
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	21.8	0.00	21.8	2.18	0.00	_	76.4
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	21.8	0.00	21.8	2.18	0.00	_	76.4
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	-	_	_	_	_	_	_	3.61	0.00	3.61	0.36	0.00	_	12.6
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Parking Lot	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Other Asphalt Surfaces	_	_	_	_	_	_	_	_	_	_	-	0.00	0.00	0.00	0.00	0.00	-	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	3.61	0.00	3.61	0.36	0.00	_	12.6

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

ontona	i Ollataii	10 (15) 44	iy ioi aai	iy, toii/yi	ioi aiiii	iai) and	01103 (1	orday ioi	dully, iv	117 91 101	ariridarj							
Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	СО2Т	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8.50	8.50
Total	_	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	8.50	8.50
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8.50	8.50
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	8.50	8.50
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
General Light Industry	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	1.41	1.41
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	1.41	1.41

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Equipme nt Type	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	<u> </u>	_	_	_	_	_	_	_	<u> </u>	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipme nt						PM10E				PM2.5D		BCO2	NBCO2	СО2Т	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Vegetatio n	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Total	_	_	_	-	_	_	_	_	_	_	-	_	_	_	-	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	<u> </u>	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Species	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_		_
Subtotal	_	_	_	_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

_																		
Remove	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_		_		_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_		_		_		_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

5. Activity Data

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
General Light Industry	150	13.0	5.21	40,057	1,215	105	42.2	324,467
User Defined Industrial	10.00	0.87	0.35	2,670	298	25.9	10.3	79,679
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	48,983	16,328	10,074

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
General Light Industry	313,251	349	0.0330	0.0040	0.00
User Defined Industrial	0.00	349	0.0330	0.0040	0.00
Parking Lot	36,632	349	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	349	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
General Light Industry	7,551,469	802,741
User Defined Industrial	0.00	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
General Light Industry	40.5	0.00
User Defined Industrial	0.00	0.00
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
,	Other commercial A/C and heat pumps	R-410A	2,088	0.30	4.00	4.00	18.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
=quipmont typo	1 401 1990	2119.110 1101	rtambor por Bay	ribaro r or Day	1 lordopolitor	2000 1 00101

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

F	quipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
	-quipinioni 13po	1 401 1990	rtambor por Day	riodio por Day	Tiouro por Tour	1 Torooporror	Loud I doloi

5.16.2. Process Boilers

E	Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
	1 1 21	31		5 (1 \	

5.17. User Defined

Equipment Type	Fuel Type
_	_

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

 Vegetation Land Use Type
 Vegetation Soil Type
 Initial Acres
 Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type Initial Acres Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type Number Electricity Saved (kWh/year) Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	34.8	annual days of extreme heat
Extreme Precipitation	1.35	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	1.27	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A

Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	_
AQ-Ozone	88.7
AQ-PM	8.86
AQ-DPM	31.1
Drinking Water	53.1
Lead Risk Housing	43.0
Pesticides	0.00
Toxic Releases	97.0
Traffic	54.4
Effect Indicators	_
CleanUp Sites	0.00
Groundwater	0.00

Haz Waste Facilities/Generators	72.6
Impaired Water Bodies	0.00
Solid Waste	81.6
Sensitive Population	_
Asthma	98.7
Cardio-vascular	87.7
Low Birth Weights	74.0
Socioeconomic Factor Indicators	_
Education	33.5
Housing	24.9
Linguistic	26.4
Poverty	81.5
Unemployment	47.0

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	_
Above Poverty	10.68907994
Employed	7.955857821
Median HI	12.98601309
Education	_
Bachelor's or higher	27.70435006
High school enrollment	4.144745284
Preschool enrollment	69.84473245
Transportation	
Auto Access	11.9209547

Social	_
2-parent households	0.61593738
Voting	46.63159245
Neighborhood	_
Alcohol availability	62.53047607
Park access	2.194276915
Retail density	56.08879764
Supermarket access	77.85191839
Tree canopy	53.25291929
Housing	_
Homeownership	1.642499679
Housing habitability	15.56525087
Low-inc homeowner severe housing cost burden	21.82728089
Low-inc renter severe housing cost burden	76.74836392
Uncrowded housing	51.79006801
Health Outcomes	_
Insured adults	27.22956499
Arthritis	93.9
Asthma ER Admissions	1.3
High Blood Pressure	92.9
Cancer (excluding skin)	91.6
Asthma	16.4
Coronary Heart Disease	88.8
Chronic Obstructive Pulmonary Disease	53.7
Diagnosed Diabetes	79.4
Life Expectancy at Birth	3.3

Cognitively Disabled	46.5
Physically Disabled	69.8
Heart Attack ER Admissions	1.6
Mental Health Not Good	23.2
Chronic Kidney Disease	90.3
Obesity	31.1
Pedestrian Injuries	19.6
Physical Health Not Good	47.6
Stroke	70.4
Health Risk Behaviors	_
Binge Drinking	11.9
Current Smoker	16.1
No Leisure Time for Physical Activity	49.0
Climate Change Exposures	_
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	0.4
Elderly	95.7
English Speaking	65.0
Foreign-born	22.2
Outdoor Workers	94.5
Climate Change Adaptive Capacity	_
Impervious Surface Cover	64.0
Traffic Density	60.4
Traffic Access	23.0
Other Indices	_
Hardship	55.1

Other Decision Support	
2016 Voting	14.5

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract						
CalEnviroScreen 4.0 Score for Project Location (a)	66.0						
Healthy Places Index Score for Project Location (b)	5.00						
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No						
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes						
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No						

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Total Project area (without Warehouse) is 5.75 acres
Operations: Vehicle Data	Trip characteristics based on information provided in the Traffic analysis
Operations: Fleet Mix	Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic analysis
Operations: Energy Use	The Project will not use natural gas

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Avenue L-4 Warehouses (Warehouse Operations) Detailed Report

Table of Contents

- 1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
- 2. Emissions Summary
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
- 4. Operations Emissions Details
 - 4.1. Mobile Emissions by Land Use
 - 4.1.1. Unmitigated
 - 4.2. Energy
 - 4.2.1. Electricity Emissions By Land Use Unmitigated
 - 4.2.3. Natural Gas Emissions By Land Use Unmitigated
 - 4.3. Area Emissions by Source

- 4.3.2. Unmitigated
- 4.4. Water Emissions by Land Use
 - 4.4.2. Unmitigated
- 4.5. Waste Emissions by Land Use
 - 4.5.2. Unmitigated
- 4.6. Refrigerant Emissions by Land Use
 - 4.6.1. Unmitigated
- 4.7. Offroad Emissions By Equipment Type
 - 4.7.1. Unmitigated
- 4.8. Stationary Emissions By Equipment Type
 - 4.8.1. Unmitigated
- 4.9. User Defined Emissions By Equipment Type
 - 4.9.1. Unmitigated
- 4.10. Soil Carbon Accumulation By Vegetation Type
 - 4.10.1. Soil Carbon Accumulation By Vegetation Type Unmitigated
 - 4.10.2. Above and Belowground Carbon Accumulation by Land Use Type Unmitigated
 - 4.10.3. Avoided and Sequestered Emissions by Species Unmitigated

- 5. Activity Data
 - 5.9. Operational Mobile Sources
 - 5.9.1. Unmitigated
 - 5.10. Operational Area Sources
 - 5.10.1. Hearths
 - 5.10.1.1. Unmitigated
 - 5.10.2. Architectural Coatings
 - 5.10.3. Landscape Equipment
 - 5.11. Operational Energy Consumption
 - 5.11.1. Unmitigated
 - 5.12. Operational Water and Wastewater Consumption
 - 5.12.1. Unmitigated
 - 5.13. Operational Waste Generation
 - 5.13.1. Unmitigated
 - 5.14. Operational Refrigeration and Air Conditioning Equipment
 - 5.14.1. Unmitigated
 - 5.15. Operational Off-Road Equipment

- 5.15.1. Unmitigated
- 5.16. Stationary Sources
 - 5.16.1. Emergency Generators and Fire Pumps
 - 5.16.2. Process Boilers
- 5.17. User Defined
- 5.18. Vegetation
 - 5.18.1. Land Use Change
 - 5.18.1.1. Unmitigated
 - 5.18.1. Biomass Cover Type
 - 5.18.1.1. Unmitigated
 - 5.18.2. Sequestration
 - 5.18.2.1. Unmitigated
- 6. Climate Risk Detailed Report
 - 6.1. Climate Risk Summary
 - 6.2. Initial Climate Risk Scores
 - 6.3. Adjusted Climate Risk Scores
 - 6.4. Climate Risk Reduction Measures

- 7. Health and Equity Details
 - 7.1. CalEnviroScreen 4.0 Scores
 - 7.2. Healthy Places Index Scores
 - 7.3. Overall Health & Equity Scores
 - 7.4. Health & Equity Measures
 - 7.5. Evaluation Scorecard
 - 7.6. Health & Equity Custom Measures
- 8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	Avenue L-4 Warehouses (Warehouse Operations)
Lead Agency	_
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	4.50
Precipitation (days)	13.0
Location	34.6576113529509, -118.13521824505384
County	Los Angeles-Mojave Desert
City	Lancaster
Air District	Antelope Valley AQMD
Air Basin	Mojave Desert
TAZ	3664
EDFZ	7
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
Unrefrigerated Warehouse-No Rail	185	1000sqft	4.25	185,045	0.00	0.00	_	_
User Defined Industrial	185	User Defined Unit	0.00	0.00	0.00	0.00	_	_

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	2.80	6.81	9.95	19.3	0.10	0.16	1.94	2.10	0.16	0.42	0.58	176	11,873	12,049	18.0	1.65	223	13,212
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.27	5.39	10.4	9.51	0.10	0.15	1.94	2.09	0.14	0.42	0.57	176	11,708	11,884	18.0	1.65	190	13,014
Average Daily (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	1.64	5.75	7.74	11.3	0.07	0.12	1.42	1.54	0.11	0.31	0.42	176	8,889	9,064	18.0	1.26	199	10,090
Annual (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unmit.	0.30	1.05	1.41	2.07	0.01	0.02	0.26	0.28	0.02	0.06	0.08	29.1	1,472	1,501	2.97	0.21	33.0	1,670

2.5. Operations Emissions by Sector, Unmitigated

Sector	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily,	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Summer (Max)																		

Mobile	1.37	1.24	9.89	11.3	0.10	0.15	1.94	2.09	0.14	0.42	0.57	_	10,777	10,777	0.10	1.43	34.4	11,241
Area	1.43	5.57	0.07	8.05	< 0.005	0.01	_	0.01	0.01	_	0.01	_	33.1	33.1	< 0.005	< 0.005	_	34.1
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	827	827	0.08	0.01	_	832
Water	_	_	_	_	_	_	_	_	_	_	_	82.0	235	317	8.43	0.20	_	588
Waste	_	_	_	_	_	_	_	_	_	_	_	93.7	0.00	93.7	9.37	0.00	_	328
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	189	189
Total	2.80	6.81	9.95	19.3	0.10	0.16	1.94	2.10	0.16	0.42	0.58	176	11,873	12,049	18.0	1.65	223	13,212
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	1.27	1.14	10.4	9.51	0.10	0.15	1.94	2.09	0.14	0.42	0.57	_	10,645	10,645	0.11	1.44	0.89	11,077
Area	_	4.25	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	827	827	0.08	0.01	_	832
Water	_	_	_	_	_	_	_	_	_	_	_	82.0	235	317	8.43	0.20	_	588
Waste	_	_	_	_	_	_	_	_	_	_	_	93.7	0.00	93.7	9.37	0.00	_	328
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	189	189
Total	1.27	5.39	10.4	9.51	0.10	0.15	1.94	2.09	0.14	0.42	0.57	176	11,708	11,884	18.0	1.65	190	13,014
Average Daily	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_	_	_
Mobile	0.94	0.84	7.71	7.35	0.07	0.11	1.42	1.53	0.11	0.31	0.42	_	7,810	7,810	0.08	1.05	10.9	8,136
Area	0.71	4.90	0.03	3.97	< 0.005	0.01	_	0.01	0.01	_	0.01	_	16.3	16.3	< 0.005	< 0.005	_	16.8
Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	827	827	0.08	0.01	_	832
Water	_	_		_	_	_	_	_	_	_	_	82.0	235	317	8.43	0.20	_	588
Waste	_	_	_	_	_	_	_	_	_	_	_	93.7	0.00	93.7	9.37	0.00	_	328
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	189	189
Total	1.64	5.75	7.74	11.3	0.07	0.12	1.42	1.54	0.11	0.31	0.42	176	8,889	9,064	18.0	1.26	199	10,090
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Mobile	0.17	0.15	1.41	1.34	0.01	0.02	0.26	0.28	0.02	0.06	0.08	_	1,293	1,293	0.01	0.17	1.80	1,347
Area	0.13	0.90	0.01	0.72	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	2.70	2.70	< 0.005	< 0.005	_	2.78

Energy	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	137	137	0.01	< 0.005	_	138
Water	_	_	_	_	_	_	_	_	_	_	_	13.6	39.0	52.5	1.40	0.03	_	97.4
Waste	_	_	_	_	_	_	_	_	_	_	_	15.5	0.00	15.5	1.55	0.00	_	54.3
Refrig.	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	31.2	31.2
Total	0.30	1.05	1.41	2.07	0.01	0.02	0.26	0.28	0.02	0.06	0.08	29.1	1,472	1,501	2.97	0.21	33.0	1,670

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	1.01	0.95	0.45	8.27	0.01	0.01	0.45	0.45	0.01	0.08	0.08	_	1,287	1,287	0.07	0.04	5.46	1,307
User Defined Industrial	0.36	0.29	9.44	2.98	0.09	0.14	1.50	1.64	0.14	0.35	0.49	_	9,490	9,490	0.04	1.39	28.9	9,933
Total	1.37	1.24	9.89	11.3	0.10	0.15	1.94	2.09	0.14	0.42	0.57	_	10,777	10,777	0.10	1.43	34.4	11,241
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated Warehou se-No Rail	0.93	0.86	0.50	6.53	0.01	0.01	0.45	0.45	0.01	0.08	0.08	_	1,151	1,151	0.07	0.05	0.14	1,167
User Defined Industrial	0.34	0.28	9.94	2.99	0.09	0.14	1.50	1.64	0.14	0.35	0.49	_	9,494	9,494	0.04	1.39	0.75	9,910
Total	1.27	1.14	10.4	9.51	0.10	0.15	1.94	2.09	0.14	0.42	0.57	_	10,645	10,645	0.11	1.44	0.89	11,077
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.12	0.12	0.07	0.95	< 0.005	< 0.005	0.06	0.06	< 0.005	0.01	0.01	_	143	143	0.01	0.01	0.29	145
User Defined Industrial	0.05	0.04	1.34	0.40	0.01	0.02	0.20	0.22	0.02	0.05	0.06	_	1,150	1,150	< 0.005	0.17	1.51	1,201
Total	0.17	0.15	1.41	1.34	0.01	0.02	0.26	0.28	0.02	0.06	0.08		1,293	1,293	0.01	0.17	1.80	1,347

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Land Use	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_	_	_	_	_	_	_	_	827	827	0.08	0.01	_	832

User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	_	827	827	0.08	0.01	_	832
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_		_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	827	827	0.08	0.01	_	832
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	_	827	827	0.08	0.01	_	832
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	_	137	137	0.01	< 0.005	_	138
User Defined Industrial	_	-	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	_	137	137	0.01	< 0.005	_	138

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige Warehous Rail		0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	-	0.00	0.00	0.00	0.00	_	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	-	_	_	_	_	-	_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	-	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	-	0.00	0.00	0.00	0.00	-	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
Annual	_	_	_	_	_	_	_	-	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	_	0.00	0.00	0.00	0.00	_	0.00
User Defined Industrial	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	-	0.00	0.00	0.00	0.00	-	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	_	0.00	0.00	_	0.00	<u> </u>	0.00	0.00	0.00	0.00	_	0.00

4.3. Area Emissions by Source

4.3.2. Unmitigated

Source	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	3.96	_	_	-	_	-	-	-	_	_	_	_	-	_	_	_	_
Architect ural Coatings	_	0.29	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	1.43	1.32	0.07	8.05	< 0.005	0.01	_	0.01	0.01	_	0.01	_	33.1	33.1	< 0.005	< 0.005	_	34.1
Total	1.43	5.57	0.07	8.05	< 0.005	0.01	_	0.01	0.01		0.01	_	33.1	33.1	< 0.005	< 0.005		34.1
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	3.96	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.29	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	4.25	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Consum er Products	_	0.72	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Architect ural Coatings	_	0.05	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Landsca pe Equipme nt	0.13	0.12	0.01	0.72	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	2.70	2.70	< 0.005	< 0.005	_	2.78

Total	0.13	0.90	0.01	0.72	< 0.005	< 0.005	_	< 0.005	< 0.005	_	< 0.005	_	2.70	2.70	< 0.005	< 0.005	_	2.78
				• · · · =														

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T		PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	-	_	_	-	-	_	_	_	_	_	_	_	-	-	-	-	-	-
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	82.0	235	317	8.43	0.20	-	588
User Defined Industrial	_		_	-	_	_	-	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	82.0	235	317	8.43	0.20	_	588
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail	_	_	_	_	_	_	_	_	_	_	_	82.0	235	317	8.43	0.20	_	588
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	-	_	_	_	_	_	_	_	82.0	235	317	8.43	0.20	_	588
Annual	_	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated	_	_	_	_	_	_	_	_	_	_	_	13.6	39.0	52.5	1.40	0.03	_	97.4
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	13.6	39.0	52.5	1.40	0.03	_	97.4

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_	_		_		_		93.7	0.00	93.7	9.37	0.00	_	328
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	93.7	0.00	93.7	9.37	0.00	_	328
Daily, Winter (Max)		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail			_	_	_	_	_	_	_	_	_	93.7	0.00	93.7	9.37	0.00		328

User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	93.7	0.00	93.7	9.37	0.00	_	328
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_	_		_			_	15.5	0.00	15.5	1.55	0.00		54.3
User Defined Industrial	_	_	_	_	_	_	_	_	_	_	_	0.00	0.00	0.00	0.00	0.00	_	0.00
Total	_	_	_	_	_	_	_	_	_	_	_	15.5	0.00	15.5	1.55	0.00	_	54.3

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Land Use	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	189	189
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	189	189
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Unrefrige rated	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	189	189
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	189	189
Annual	_	_	_	_	_	_	_	_	_	_	_	_		_	_	_	_	_
Unrefrige rated Warehou se-No Rail		_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	31.2	31.2
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	31.2	31.2

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

			,	, ,														
Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipme nt Type	TOG	ROG	NOx	СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Equipme nt Type	TOG	ROG		со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Annual	_	_	_	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetatio n	TOG			со	SO2	PM10E				PM2.5D		BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Land Use	TOG	ROG		СО	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

Total	_	_	_	-	_	_	_	_	_	_	-	_	_	_	-	_	_	_
Annual	_	_	_	_	_	_	_	_	_	_	_	_	_	<u> </u>	_	_	_	_
Total	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Species	TOG	ROG	NOx	со	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	_	-	_	-	-	_	_	-	-	-	_	-	-	_	_	-	-	-
Avoided	_	_	_		_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Daily, Winter (Max)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Annual	_	_	<u> </u>	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Avoided	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Sequest ered	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Remove d	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
Subtotal	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_
_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_

5. Activity Data

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Unrefrigerated Warehouse-No Rail	206	17.9	7.14	55,010	1,669	145	57.9	445,584
User Defined Industrial	114	9.88	3.96	30,445	3,440	298	119	918,519

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	277,568	92,523	_

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	180

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	866,078	349	0.0330	0.0040	0.00
User Defined Industrial	0.00	349	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Unrefrigerated Warehouse-No Rail	42,791,656	0.00
User Defined Industrial	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
Unrefrigerated Warehouse-No Rail	174	0.00
User Defined Industrial	0.00	0.00

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Unrefrigerated Warehouse-No Rail	Cold storage	User Defined	150	7.50	7.50	7.50	25.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

_							
	quipment Type	Fuel Type	Engine Tier	Number per Deu	Hours Dor Doy	Horoopower	Load Factor
	quipment type	ruei Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
	9a.p		g				

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

		Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
--	--	----------------	-----------	----------------	---------------	----------------	------------	-------------

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Innut (MMRtu/vr)
_quipinent type	i dei Type	INGITIDE	Doller Rating (MMDtd/III)	Daily Heat Input (MiMbtu/day)	Annual Fleat Input (MMDtu/yl)

5.17. User Defined

Equipment Type	Fuel Type
	**

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Venetation Lend Hea Time	Variation Call Time	Initial Asses	Final Assas
Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
3	-3		

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres
Biomaco Covor Typo	Titlat / toroo	i iliai rioloo

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
man Wha			· · · · · · · · · · · · · · · · · · ·

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	34.8	annual days of extreme heat
Extreme Precipitation	1.35	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth

Wildfire 1.27 annual hectares burned	
--------------------------------------	--

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	N/A	N/A	N/A	N/A

Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	N/A	N/A	N/A	N/A
Wildfire	N/A	N/A	N/A	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	N/A	N/A	N/A	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	_
AQ-Ozone	88.7
AQ-PM	8.86
AQ-DPM	31.1
Drinking Water	53.1
Lead Risk Housing	43.0
Pesticides	0.00
Toxic Releases	97.0
Traffic	54.4

Effect Indicators	_
CleanUp Sites	0.00
Groundwater	0.00
Haz Waste Facilities/Generators	72.6
Impaired Water Bodies	0.00
Solid Waste	81.6
Sensitive Population	_
Asthma	98.7
Cardio-vascular	87.7
Low Birth Weights	74.0
Socioeconomic Factor Indicators	_
Education	33.5
Housing	24.9
Linguistic	26.4
Poverty	81.5
Unemployment	47.0

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.		
Result for Project Census Tract		
_		
10.68907994		
7.955857821		
12.98601309		
_		
27.70435006		
4.144745284		

Preschool enrollment	69.84473245
Transportation	_
Auto Access	11.9209547
Active commuting	57.48748877
Social	_
2-parent households	0.61593738
Voting	46.63159245
Neighborhood	_
Alcohol availability	62.53047607
Park access	2.194276915
Retail density	56.08879764
Supermarket access	77.85191839
Tree canopy	53.25291929
Housing	
Homeownership	1.642499679
Housing habitability	15.56525087
Low-inc homeowner severe housing cost burden	21.82728089
Low-inc renter severe housing cost burden	76.74836392
Uncrowded housing	51.79006801
Health Outcomes	_
Insured adults	27.22956499
Arthritis	93.9
Asthma ER Admissions	1.3
High Blood Pressure	92.9
Cancer (excluding skin)	91.6
Asthma	16.4
Coronary Heart Disease	88.8

Chronic Obstructive Pulmonary Disease	53.7
Diagnosed Diabetes	79.4
Life Expectancy at Birth	3.3
Cognitively Disabled	46.5
Physically Disabled	69.8
Heart Attack ER Admissions	1.6
Mental Health Not Good	23.2
Chronic Kidney Disease	90.3
Obesity	31.1
Pedestrian Injuries	19.6
Physical Health Not Good	47.6
Stroke	70.4
Health Risk Behaviors	_
Binge Drinking	11.9
Current Smoker	16.1
No Leisure Time for Physical Activity	49.0
Climate Change Exposures	_
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	0.4
Elderly	95.7
English Speaking	65.0
Foreign-born	22.2
Outdoor Workers	94.5
Climate Change Adaptive Capacity	_
Impervious Surface Cover	64.0
Traffic Density	60.4

Traffic Access	23.0
Other Indices	_
Hardship	55.1
Other Decision Support	_
2016 Voting	14.5

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	66.0
Healthy Places Index Score for Project Location (b)	5.00
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification						
Operations: Vehicle Data	Trip characteristics based on information provided in the Traffic analysis						

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Operations: Fleet Mix	Passenger Car Mix estimated based on the CalEEMod default fleet mix and the ratio of the vehicle classes (LDA, LDT1, LDT2, MDV, & MCY). Truck Mix based on information in the Traffic analysis						
Operations: Energy Use	The Project will not use natural gas						
	Per 17 CCR 95371, new refrigeration equipment containing >50 lbs of refrigerant in new facilities is prohibited from utilizing refrigerants with a GWP of 150 or greater as of 1 Jan 2022						

This page intentionally left blank



APPENDIX 4.2:

EMFAC2021 Emissions Inventory



Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area Region: Los Angeles (MD) Calendar Year: 2023 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/year for CVMT and EVMT, trips/year for Trips, kWh/year for Energy Consumption, tons/year for Emissions, 1000 gallons/year for Fuel Consumption

Region	CalYr	VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Los Angeles (MD)	2023	HHDT	Aggregate	Aggregate	Gasoline	0.024732928	4508.806862	0.884504933	884.5049326	12161499.22	4508.806862	76325743.97	6.28	HHDT
Los Angeles (MD)	2023	HHDT	Aggregate	Aggregate	Diesel	1388.842766	76090295.18	12123.22274	12123222.74		76090295.18			
Los Angeles (MD)	2023	HHDT	Aggregate	Aggregate	Electricity	1.133707991	31566.83249	0	0		31566.83249			
Los Angeles (MD)	2023	HHDT	Aggregate	Aggregate	Natural Gas	7.396021487	199373.1438	37.39197736	37391.97736		199373.1438			
Los Angeles (MD)	2023	LDA	Aggregate	Aggregate	Gasoline	77831.01529	1367553491	46773.5211	46773521.1	47465249.84	1367553491	1439148101	30.32	LDA
Los Angeles (MD)	2023	LDA	Aggregate	Aggregate	Diesel	309.3821242	4866582.329	109.4115548	109411.5548		4866582.329			
Los Angeles (MD)	2023	LDA	Aggregate	Aggregate	Electricity	1836.882041	32659141.32	0	0		32659141.32			
Los Angeles (MD)	2023	LDA	Aggregate	Aggregate	Plug-in Hybric	1710.245645	34068886.23	582.3171897	582317.1897		34068886.23			
Los Angeles (MD)	2023	LDT1	Aggregate	Aggregate	Gasoline	6699.656628	99293586.93	4084.01465	4084014.65	4086601.699	99293586.93	99491742.37	24.35	LDT1
Los Angeles (MD)	2023	LDT1	Aggregate	Aggregate	Diesel	4.310091994	32086.85294	1.271378497	1271.378497		32086.85294			
Los Angeles (MD)	2023	LDT1	Aggregate	Aggregate	Electricity	5.051703982	80592.74404	0	0		80592.74404			
Los Angeles (MD)	2023	LDT1	Aggregate	Aggregate	Plug-in Hybric	3.937144493	85475.84192	1.315670452	1315.670452		85475.84192			
Los Angeles (MD)	2023	LDT2	Aggregate	Aggregate	Gasoline	24879.69462	426203880	18140.26387	18140263.87	18223480.09	426203880	431673837.7	23.69	LDT2
Los Angeles (MD)	2023	LDT2	Aggregate	Aggregate	Diesel	64.08799548	1230442.538	36.01728636	36017.28636		1230442.538			
Los Angeles (MD)	2023	LDT2	Aggregate	Aggregate	Electricity	92.90357073	1284529.545	0	0		1284529.545			
Los Angeles (MD)	2023	LDT2	Aggregate	Aggregate	Plug-in Hybric	139.5168318	2954985.614	47.19893112	47198.93112		2954985.614			
Los Angeles (MD)	2023	LHDT1	Aggregate	Aggregate	Gasoline	2716.940826	32779862.8	2541.386294	2541386.294	3933040.104	32779862.8	62478134.73	15.89	LHDT1
Los Angeles (MD)	2023	LHDT1	Aggregate	Aggregate	Diesel	2368.443057	29698271.93	1391.653811	1391653.811		29698271.93			
Los Angeles (MD)	2023	LHDT2	Aggregate	Aggregate	Gasoline	355.149447	4414956.67	369.8266526	369826.6526	1128752.478	4414956.67	17794964.06	15.77	LHDT2
Los Angeles (MD)	2023	LHDT2	Aggregate	Aggregate	Diesel	1034.571432	13380007.39	758.9258249	758925.8249		13380007.39			
Los Angeles (MD)	2023	MCY	Aggregate	Aggregate	Gasoline	4069.208062	8244639.292	198.6261695	198626.1695	198626.1695	8244639.292	8244639.292	41.51	MCY
Los Angeles (MD)	2023	MDV	Aggregate	Aggregate	Gasoline	21501.38274	339321274.7	17814.9435	17814943.5	18086147.86	339321274.7	348499187.6	19.27	MDV
Los Angeles (MD)	2023	MDV	Aggregate	Aggregate	Diesel	347.4837995	5814447.798	237.9299449	237929.9449		5814447.798			
Los Angeles (MD)	2023	MDV	Aggregate	Aggregate	Electricity	100.8416964	1391761.677	0	0		1391761.677			
Los Angeles (MD)	2023	MDV	Aggregate	Aggregate	Plug-in Hybric		1971703.374	33.27441418	33274.41418		1971703.374			
Los Angeles (MD)	2023	MH	Aggregate	Aggregate	Gasoline	922.290524	2705336.776	544.6151906	544615.1906	629161.9483	2705336.776	3582969.439	5.69	MH
Los Angeles (MD)	2023	MH	Aggregate	Aggregate	Diesel	295.7437113	877632.6632	84.54675769	84546.75769		877632.6632			
Los Angeles (MD)	2023	MHDT	Aggregate	Aggregate	Gasoline	155.5171165	5023143.803	952.1511205	952151.1205	3786831.796	5023143.803	31492826.43	8.32	MHDT
Los Angeles (MD)	2023	MHDT	Aggregate	Aggregate	Diesel	1630.036725	26311977.74	2818.118454	2818118.454		26311977.74			
Los Angeles (MD)	2023	MHDT	Aggregate	Aggregate	Electricity	0.690342951	6186.572194	0	0		6186.572194			
Los Angeles (MD)	2023	MHDT	Aggregate	Aggregate		9.048539573	151518.3127	16.56222193	16562.22193		151518.3127			
Los Angeles (MD)	2023	OBUS	Aggregate	Aggregate	Gasoline	53.68179578	1360121.443	267.6644659	267664.4659	412266.3886	1360121.443	2366082.056	5.74	OBUS
Los Angeles (MD)	2023	OBUS	Aggregate	Aggregate	Diesel	43.22302745	1005960.613	144.6019227	144601.9227		1005960.613			
Los Angeles (MD)	2023	SBUS	Aggregate	Aggregate	Gasoline	52.35204512	1669346.778	177.6636158	177663.6158	586731.1468	1669346.778	4583322.345	7.81	SBUS
Los Angeles (MD)	2023	SBUS	Aggregate	Aggregate	Diesel	368.0877483	2698353.787	357.406974	357406.974		2698353.787			
Los Angeles (MD)	2023	SBUS	Aggregate	Aggregate	Electricity	0.242645698	921.9212995	0	0		921.9212995			
Los Angeles (MD)	2023	SBUS	Aggregate	Aggregate		26.53314038	214699.8593	51.66055698	51660.55698	706477 466	214699.8593	2000001 001	F 40	LIDLIG
Los Angeles (MD)	2023	UBUS	Aggregate	Aggregate	Diesel	35.32729857	1938440.162	313.8484801	313848.4801	736177.496	1938440.162	3999001.904	5.43	UBUS
Los Angeles (MD)	2023	UBUS	Aggregate	Aggregate	Electricity	32.29924441	793065.5534	0	0		793065.5534			
Los Angeles (MD)	2023	UBUS	Aggregate	Aggregate	Natural Gas	27.27247845	1267496.189	422.3290159	422329.0159		1267496.189			

Source: EMFAC2021 (v1.0.2) Emissions Inventory

Region Type: Sub-Area Region: Los Angeles (MD) Calendar Year: 2024 Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/year for CVMT and EVMT, trips/year for Trips, kWh/year for Energy Consumption, tons/year for Emissions, 1000 gallons/year for Fuel Consumption

Region	CalYr	VehClass	MdlYr	Speed	Fuel	Population	VMT	Fuel_Consumption	Fuel_Consumption	Total Fuel	VMT	Total VMT	Miles per Gallon	Vehicle Class
Los Angeles (MD)	2024	HHDT	Aggregate	Aggregate	Gasoline	0.032085868	5715.464832	1.115821054	1115.821054	12193054.04	5715.464832	77725737.22	6.37	HHDT
Los Angeles (MD)	2024	HHDT	Aggregate	Aggregate	Diesel	1430.542859	77357289.41	12157.84747	12157847.47		77357289.41			
Los Angeles (MD)	2024	HHDT	Aggregate	Aggregate	Electricity	4.140120695	181913.4144	0	0		181913.4144			
Los Angeles (MD)	2024	HHDT	Aggregate	Aggregate	Natural Gas	7.138055354	180818.9283	34.0907472	34090.7472		180818.9283			
Los Angeles (MD)	2024	LDA	Aggregate	Aggregate	Gasoline	76762.27094	1370444417	46168.07368	46168073.68	46904869.28	1370444417	1455837772	31.04	LDA
Los Angeles (MD)	2024	LDA	Aggregate	Aggregate	Diesel	290.1711953	4617888.183	103.12303	103123.03		4617888.183			
Los Angeles (MD)	2024	LDA	Aggregate	Aggregate	Electricity	2322.395161	43120412.83	0	0		43120412.83			
Los Angeles (MD)	2024	LDA	Aggregate	Aggregate	Plug-in Hybric	1867.600616	37655054.29	633.6725732	633672.5732		37655054.29			
Los Angeles (MD)	2024	LDT1	Aggregate	Aggregate	Gasoline	6423.848955	96891465.94	3931.716294	3931716.294	3934865.78	96891465.94	97178162.67	24.70	LDT1
Los Angeles (MD)	2024	LDT1	Aggregate	Aggregate	Diesel	3.917566383	28971.94241	1.147885706	1147.885706		28971.94241			
Los Angeles (MD)	2024	LDT1	Aggregate	Aggregate	Electricity	7.053496852	124268.3624	0	0		124268.3624			
Los Angeles (MD)	2024	LDT1	Aggregate	Aggregate	Plug-in Hybric		133456.4249	2.001599886	2001.599886		133456.4249			
Los Angeles (MD)	2024	LDT2	Aggregate	Aggregate	Gasoline	24686.62589	432891064.6	17960.90211	17960902.11	18056031.59	432891064.6	439737439.5	24.35	LDT2
Los Angeles (MD)	2024	LDT2	Aggregate	Aggregate	Diesel	67.34472491	1313119.279	37.69421938	37694.21938		1313119.279			
Los Angeles (MD)	2024	LDT2	Aggregate	Aggregate	Electricity	133.657363	1859808.641	0	0		1859808.641			
Los Angeles (MD)	2024	LDT2	Aggregate	Aggregate	Plug-in Hybric		3673446.996	57.43525713	57435.25713		3673446.996			
Los Angeles (MD)	2024	LHDT1	Aggregate	Aggregate	Gasoline	2610.293657	32373142.72	2448.912959	2448912.959	3822620.275	32373142.72	61907258.99	16.19	LHDT1
Los Angeles (MD)	2024	LHDT1	Aggregate	Aggregate	Diesel	2313.838197	29357150.86	1373.707315	1373707.315		29357150.86			
Los Angeles (MD)	2024	LHDT1	Aggregate	Aggregate	Electricity	6.56063809	176965.4223	0	0		176965.4223			
Los Angeles (MD)	2024	LHDT2	Aggregate	Aggregate	Gasoline	347.4204171	4399535.41	361.8220516	361822.0516	1114439.106	4399535.41	17750585.52	15.93	LHDT2
Los Angeles (MD)	2024	LHDT2	Aggregate	Aggregate	Diesel	1022.085811	13307651.93	752.6170539	752617.0539		13307651.93			
Los Angeles (MD)	2024	LHDT2	Aggregate	Aggregate	Electricity	1.698098295	43398.18272	0	0		43398.18272			
Los Angeles (MD)	2024	MCY	Aggregate	Aggregate	Gasoline	3991.966337	8144515.326	195.4480874	195448.0874	195448.0874	8144515.326	8144515.326	41.67	MCY
Los Angeles (MD)	2024	MDV	Aggregate	Aggregate	Gasoline	20760.81678	334411994	17219.52618	17219526.18	17488157.1	334411994	344540002.3	19.70	MDV
Los Angeles (MD)	2024	MDV	Aggregate	Aggregate	Diesel	337.0807724	5651808.555	228.7347928	228734.7928		5651808.555			
Los Angeles (MD)	2024	MDV	Aggregate	Aggregate	Electricity	146.5459136	2036271.066	0	0		2036271.066			
Los Angeles (MD)	2024	MDV	Aggregate	Aggregate	Plug-in Hybric		2439928.689	39.89612487	39896.12487		2439928.689			
Los Angeles (MD)	2024	MH	Aggregate	Aggregate	Gasoline	855.8079044	2527155.876	509.3066994	509306.6994	592617.6596	2527155.876	3391229.176	5.72	МН
Los Angeles (MD)	2024	MH	Aggregate	Aggregate	Diesel	290.1685566	864073.2998	83.31096021	83310.96021		864073.2998			
Los Angeles (MD)	2024	MHDT	Aggregate	Aggregate	Gasoline	151.3994632	5098967.631	953.0815844	953081.5844	3809919.41	5098967.631	31967035.78	8.39	MHDT
Los Angeles (MD)	2024	MHDT	Aggregate	Aggregate	Diesel	1658.118471	26617256.99	2840.436219	2840436.219		26617256.99			
Los Angeles (MD)	2024	MHDT	Aggregate	Aggregate	Electricity	4.41255181	100936.3395	0	0		100936.3395			
Los Angeles (MD)	2024	MHDT	Aggregate	Aggregate			149874.8225	16.40160643	16401.60643		149874.8225			
Los Angeles (MD)	2024	OBUS	Aggregate	Aggregate	Gasoline	51.71121691	1307025.027	255.3859786	255385.9786	399809.4097	1307025.027	2321123.88	5.81	OBUS
Los Angeles (MD)	2024	OBUS	Aggregate	Aggregate	Diesel	43.67445244	1008493.261	144.4234311	144423.4311		1008493.261			
Los Angeles (MD)	2024	OBUS	Aggregate	Aggregate	Electricity	0.100730445	5605.592275	0	0		5605.592275			
Los Angeles (MD)	2024	SBUS	Aggregate	Aggregate	Gasoline	51.92998089	1688942.961	179.0421103	179042.1103	586008.0168	1688942.961	4604715.133	7.86	SBUS
Los Angeles (MD)	2024	SBUS	Aggregate	Aggregate	Diesel	366.1891716	2681403.788	353.4409476	353440.9476		2681403.788			
Los Angeles (MD)	2024	SBUS	Aggregate	Aggregate	Electricity	1.099559974	9851.661776	0	0		9851.661776			
Los Angeles (MD)	2024	SBUS	Aggregate	Aggregate		27.96144975	224516.7232	53.52495889	53524.95889	775007 575	224516.7232	4007000 5	F 47	
Los Angeles (MD)	2024	UBUS	Aggregate	Aggregate	Diesel	29.27119024	1637317.334	250.0646711	250064.6711	775027.6798	1637317.334	4007089.92	5.17	UBUS
Los Angeles (MD)	2024	UBUS	Aggregate	Aggregate	Electricity	32.29924441	793065.5534	0	0		793065.5534			
Los Angeles (MD)	2024	UBUS	Aggregate	Aggregate			1576707.032	524.9630087	524963.0087		1576707.032			
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Electricity	0.120004951	6004.935081	0	0		6004.935081			
Riverside (SC)	2024	UBUS	Aggregate	Aggregate	Natural Gas	252.109466	10160620.35	2540.477927	2540477.927		10160620.35			

This page intentionally left blank

