

Air Quality Assessment
Redlands Used Automobile Sales and Service Facility
Project
City of Redlands, California



Expect More. Experience Better.

Prepared by:

Kimley-Horn and Associates, Inc.
1100 W Town and Country Road, Suite 700
Orange, California 92868
Contact: Ms. Elena Ajdari
714.780.2551

May 2023

TABLE OF CONTENTS

1 INTRODUCTION 1

 1.1 Project Location and Setting 1

 1.2 Project Description 1

2 ENVIRONMENTAL SETTING 5

 2.1 Climate and Meteorology 5

 2.2 Air Pollutants of Concern 6

 2.3 Sensitive Receptors 9

3 REGULATORY SETTING 10

 3.1 Federal 10

 3.2 State of California 10

 3.3 Regional 12

 3.4 Local 15

4 SIGNIFICANCE CRITERIA AND METHODOLOGY 17

 4.1 Air Quality Thresholds 17

 4.2 Methodology 18

5 POTENTIAL IMPACTS AND MITIGATION 20

 5.1 Air Quality Analysis 20

6 REFERENCES 31

TABLES

Table 1: Air Contaminants and Associated Public Health Concerns 6

Table 2: Ambient Air Quality Data 8

Table 3: Sensitive Receptors 9

Table 4: State and Federal Ambient Air Quality Standards 11

Table 5: South Coast Air Basin Attainment Status 13

Table 6: South Coast Air Quality Management District Emissions Thresholds 17

Table 7: Local Significance Thresholds for Construction/Operations 18

Table 8: Construction-Related Emissions 21

Table 9: Operational Emissions 22

Table 10: Equipment-Specific Grading Rates 26

Table 11: Localized Significance of Construction Emissions 26

Table 12: Localized Significance of Operational Emissions 27

EXHIBITS

Exhibit 1: Regional Vicinity Map 2

Exhibit 2: Site Vicinity Map 3

Exhibit 3: Conceptual Site Plan 4

APPENDICES

Appendix A: Air Quality Modeling Data

LIST OF ABBREVIATED TERMS

AQMP	air quality management plan
AB	Assembly Bill
ADT	average daily traffic
CAPCOA	California Air Pollution Control Officers Association
CARB	California Air Resources Board
CAAQS	California Ambient Air Quality Standards
CCAA	California Clean Air Act
CalEEMod	California Emissions Estimator Model
CEQA	California Environmental Quality Act
CO	carbon monoxide
cy	cubic yards
DPM	diesel particulate matter
FCAA	Federal Clean Air Act
H ₂ S	hydrogen sulfide
Pb	lead
LOR	Laws, Ordinances, and Regulations
LST	local significance threshold
µg/m ³	micrograms per cubic meter
mg/m ³	milligrams per cubic meter
NAAQS	National Ambient Air Quality Standards
NO ₂	nitrogen dioxide
NO _x	nitrogen oxide
O ₃	ozone
PM ₁₀	particulate matter less than 10 microns in diameter
PM _{2.5}	particulate matter less than 2.5 microns in diameter
ppm	parts per million
ROG	reactive organic gases
RTP/SCS	Regional Transportation Plan/Sustainable Communities Strategy
SB	Senate Bill
SRA	source receptor area
SCAB	South Coast Air Basin
SCAQMD	South Coast Air Quality Management District
SCAG	Southern California Association of Governments
SO ₄₋₂	sulfates
SO ₂	sulfur dioxide
TAC	toxic air contaminant
U.S. EPA	United States Environmental Protection Agency
C ₂ H ₃ Cl	vinyl chloride
VOC	volatile organic compound

1 INTRODUCTION

This report documents the results of an Air Quality Assessment completed for the Redlands Used Automobile Sales and Service Facility Project (“Project” or “Proposed Project”). The purpose of this Air Quality Assessment is to evaluate the potential construction and operational emissions associated with the Project and determine the level of impact the Project would have on the environment.

1.1 Project Location

The Project site is located northeast of the State Route 210 (SR-210) and Interstate 10 (I-10) interchange in the City of Redlands (City), California; refer to [Exhibit 1: Regional Vicinity Map](#). The 18.56-acre Project site is specifically located directly west of the New York Street and W Brockton Avenue intersection and is comprised of Assessor’s Parcel Numbers (APNs) 0169-011-38 and -39; refer to [Exhibit 2: Site Vicinity Map](#). The Project site is generally surrounded by commercial uses. The site is bordered by a Home Depot store to the north, a surface parking lot and vacant land to the east, a Toyota dealership to the south, and the I-10/SR-210 interchange to the west; see [Exhibit 2](#).

1.2 Project Description

The Project proposes the development of a Used Automobile Sales and Service Facility (49,491 square-foot) on a 18.56 acre parcel. The pre-owned automobiles will be sold to both retail and wholesale buyers. The Project will include a sales building, service building, Final Quality Control /auction building, a non-public carwash, private fuel tank/dispenser, automobile sales display area (retail), vehicle staging areas (reconditions, sales, inspection by wholesale auction buyers and pick-up/drop-off), public parking lots, driveways and associated landscaped areas. The parking area would be located on the eastern and southern side of the site. In addition to passenger vehicle parking, four car-carrier loading spaces would be provided in the southwestern portion of the lot. A paved and striped area known as the vehicle sales display area would be located along the northeast portion of the property and surrounded by a low guardrail system for security purposes. This sales display area is facility’s “outdoor showroom” for vehicles available for retail purchase; refer to [Exhibit 3: Conceptual site Plan](#).¹

Store management will set operating hours closer to the opening date; however, the showroom (retail sales) areas are typically open to the public Monday through Saturday from 9:00 a.m. to 9:00 p.m. with more limited hours on Sundays, if permitted by local law. Associates will be present at the store several hours before and after the public operating hours. Service operations will be up to 24 hours a day, 7 days a week. Please note that this facility will support facility’s operations only and will not be open to the general public. Landscaping will be incorporated into the public parking lot, around the perimeter of the site. Landscaping will include deciduous trees and shrubs, evergreen shrubs, sod, wood mulch, and rock mulch. All landscaping will be designed to meet the City’s Water Efficient Landscape requirements.

The General Plan land use designation for the Project site is Commercial/Industrial and the zoning designation is General Commercial (EV/CG). The Project’s proposed commercial uses are permitted within the existing land use designation and zoning classification. Construction is anticipated to occur over an approximately 18-month period beginning in 2023.

¹ It should be noted that there is vacant land in the northeastern portion of the Project site that is not planned for development as part of the proposed Project. This area is available for future parking needs and potential for vehicle staging expansion; however, this is not a component of the proposed Project and therefore is not included in this technical report.

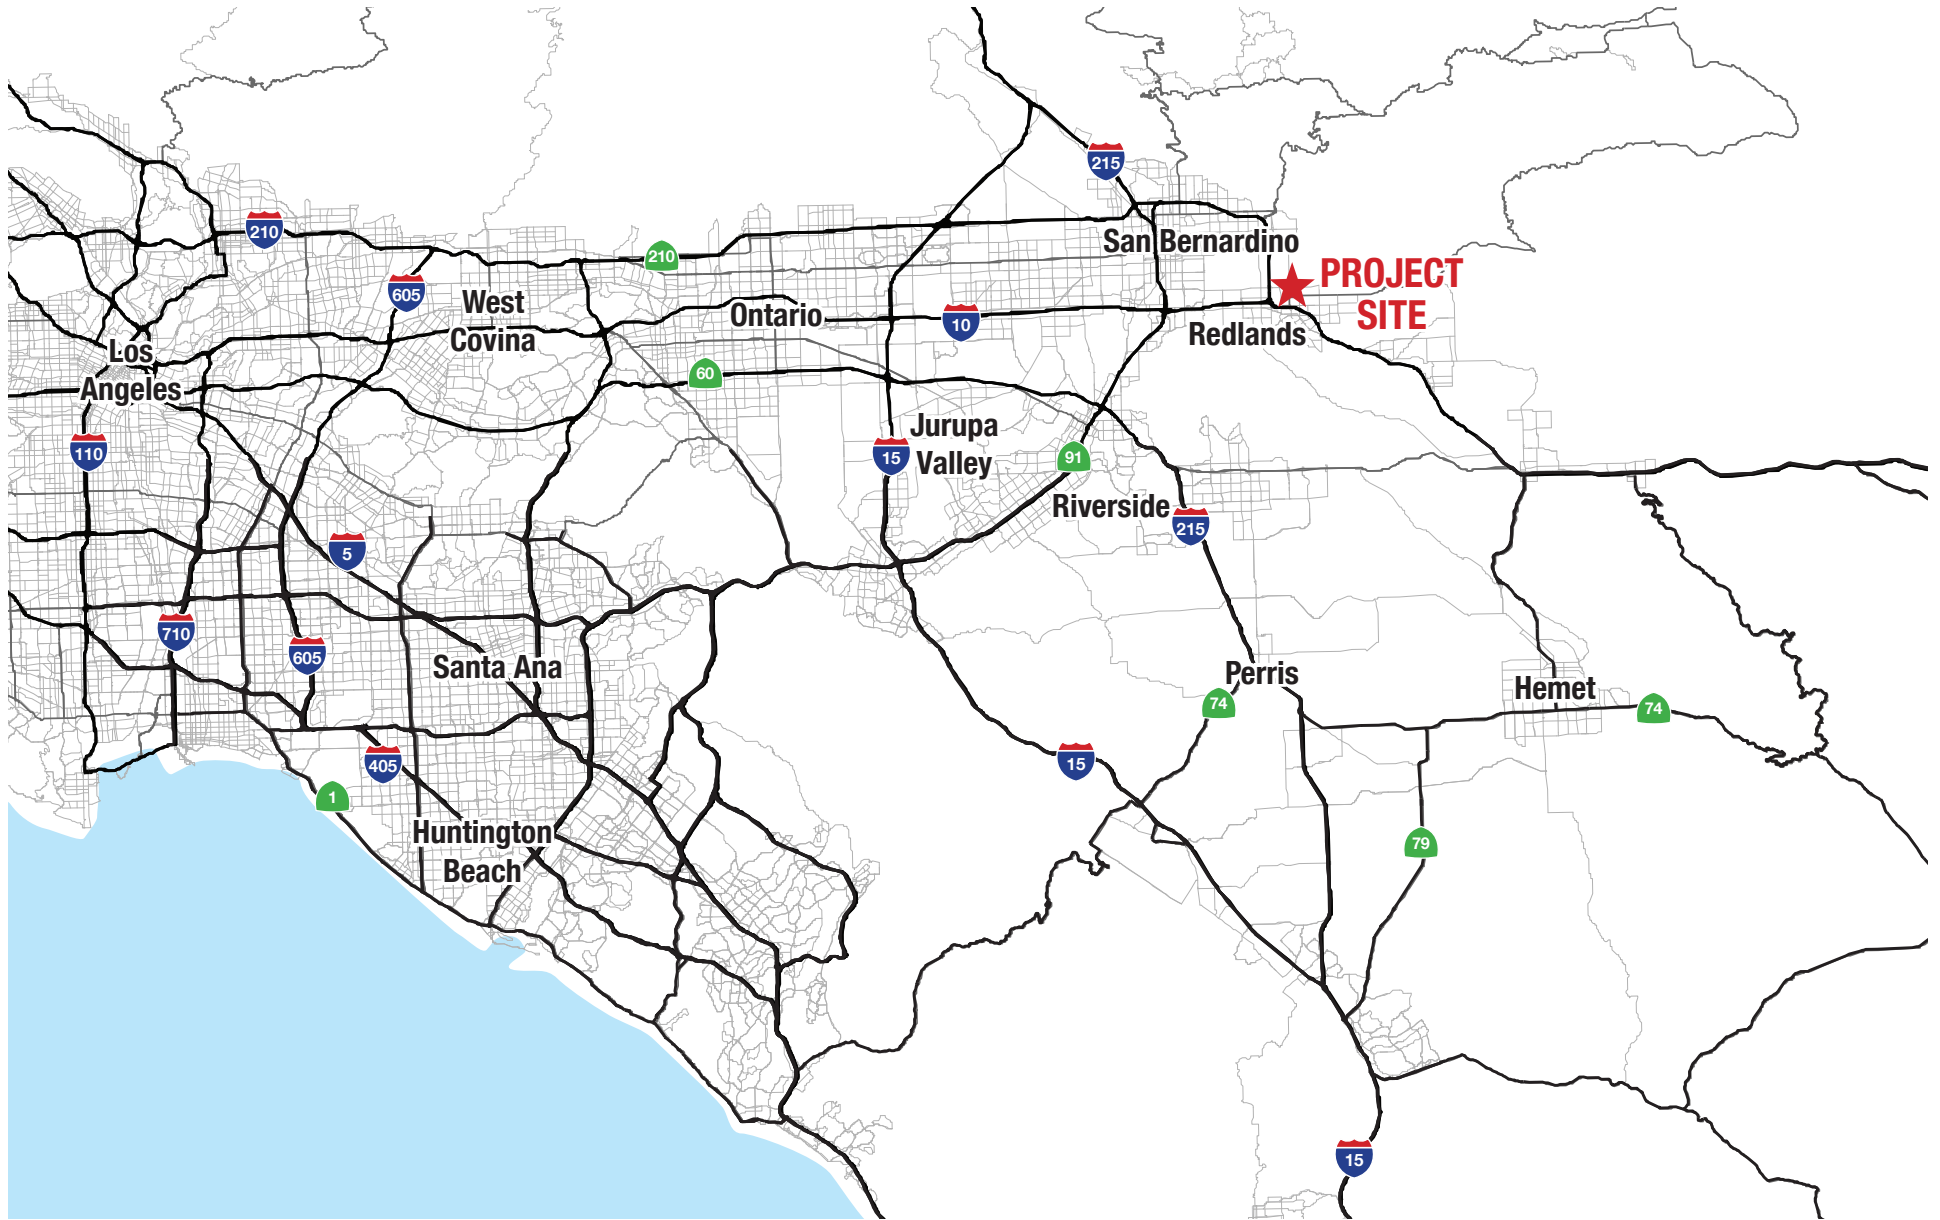



EXHIBIT 1: Regional Vicinity Map
 Redlands Used Automobile Sales and Service Facility Project
 City of Redlands





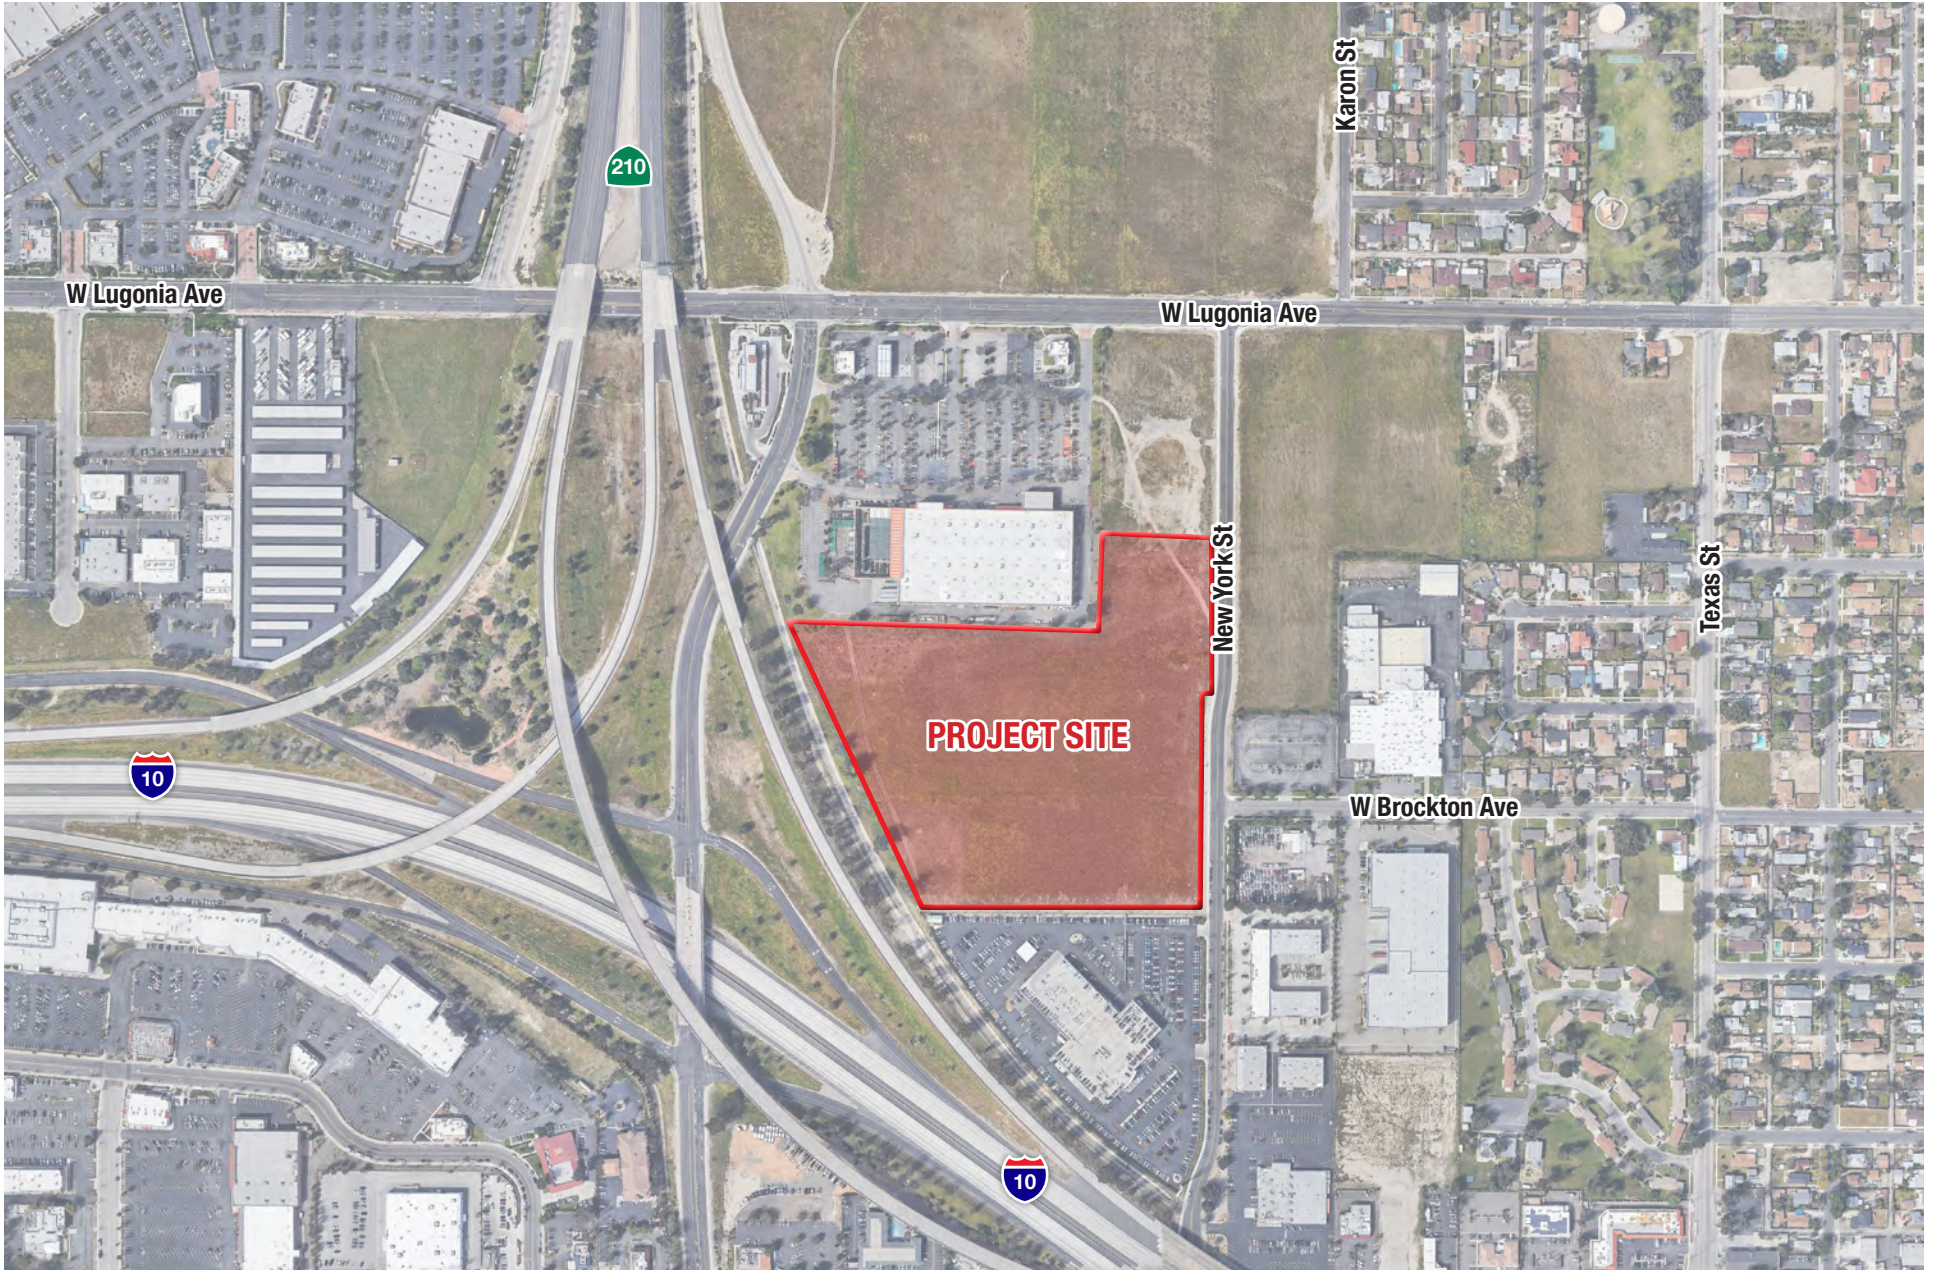


EXHIBIT 2: Site Vicinity Map
Redlands Used Automobile Sales and Service Facility Project
City of Redlands



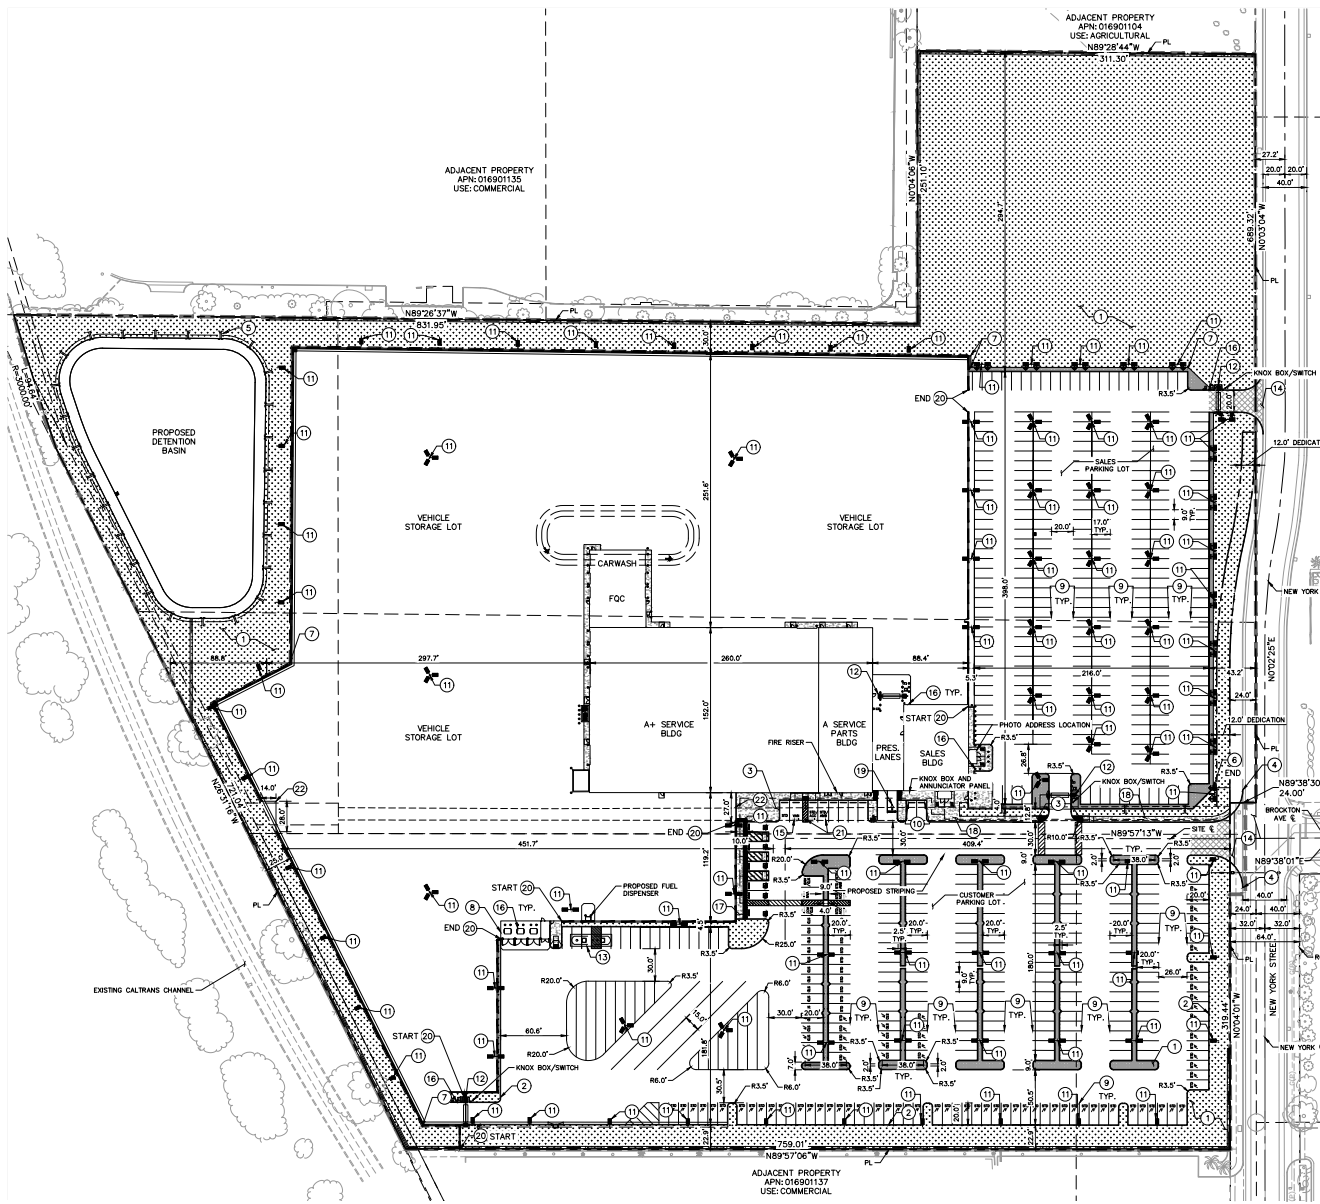

- LEGEND:**
- CENTER LINE
 - PROJECT PROPERTY LINE / RIGHT-OF-WAY
 - - - DIVIDING PARCEL LINE LINE
 - - - EASEMENT LINE / SETBACK LINE
 - - - APPROXIMATE LIMIT OF WORK LINE

- LANDSCAPE/PLANTER AREA
- DETECTABLE WARNING SYSTEM
- GRAVEL AREA
- CONCRETE AREA
- ACCESSIBLE ROUTE (LOCATION PURPOSES ONLY, DO NOT PAINT)
- ACCESSIBLE PARKING SPACE
- SITE LIGHTING
- STD STANDARD EV STALL
- STD/F STANDARD EV/FUTURE STALL


CONSTRUCTION NOTES:

1. INSTALL LANDSCAPE/PLANTER AREA
2. CONSTRUCT CONCRETE CURB.
3. CONSTRUCT ACCESSIBLE RAMP WITH DETECTABLE WARNING PER DETAIL 8, SHEET C6.3.
4. JOIN EXISTING CURB, CURB & GUTTER, SIDEWALK.
5. INSTALL WROUGHT IRON FENCE FOR SECURITY SCREENING AROUND BASIN.
6. INSTALL GUARD RAIL PER DETAIL 18, SHEET C6.2.
7. INSTALL GUARD RAIL CORNER PER DETAIL 35, SHEET C6.2.
8. INSTALL DUMPSTER ENCLOSURE AND TIRE STORAGE PER DETAIL 1, SHEET C6.4.
9. CONSTRUCT STANDARD 90° PARKING STALL STRIPING.
10. INSTALL WHEELSTOP PER DETAIL 25, SHEET C6.3.
11. INSTALL SITE LIGHTING.
12. INSTALL DROP BEAM GATE.
13. INSTALL UNDERGROUND TANK.
14. CONSTRUCT NEW COMMERCIAL DRIVEWAY APPROACH.
15. CONSTRUCT ACCESSIBLE PARKING STALL PER DETAIL 9, SHEET C6.3.
16. INSTALL BOLLARD PER DETAIL 22, SHEET C6.1.
17. CONSTRUCT SIDEWALK PER DETAIL 10, SHEET C6.3.
18. CONSTRUCT SIDEWALK WITH CURB PER DETAIL 18, SHEET C6.3.
19. INSTALL DIRECTIONAL SIGNAGE PER DETAIL 13, SHEET C6.3.
20. INSTALL CMU WALL. SEE TYPICAL SECTIONS ON SHEETS C4.1 AND C4.2 FOR HEIGHT, MATERIAL, THICKNESS.
21. INSTALL EVCS ACCESSIBLE STALLS PER DETAIL 9, SHEET C6.3.
22. CONSTRUCT GBRALTAR 0-6331 G-FORCE M30 P1 POST AND BEAM SYSTEM OVER SANITARY SEWER EASEMENT. SIZE PER PLAN.

GENERAL NOTES

1. TOTAL CUSTOMER/EMPLOYEE PARKING SPACES: REQUIRED = 83 SPACES PER JURISDICTION PROVIDED = 304 SPACES
2. PARKING SPACE SIZE: REQUIREMENT (PER JURISDICTION) = 9' X 19' PROVIDED = 9' X 20'
3. PARCEL I.D. NO. = 0169-011-38 & 0169-011-39 ST. REDLAND, CA 92374
4. SITE ZONING = LIGHT INDUSTRIAL
5. SITE ADDRESS = WEST BROOKTON AVE. & NEW YORK ST. REDLAND, CA
6. TOTAL SITE ACREAGE = 18.56 ACRES.
7. TOTAL DISTURBED ACREAGE = 16.41 ACRES.
8. AREA BREAKDOWN: BUILDING = 1.24 AC = 6.7 % PAVEMENT/IMPERVIOUS = 11.92 AC = 65.2 % LANDSCAPE/GRASSED AREA = 5.40 AC = 28.1 % TOTAL = 18.56 AC
9. SITE IS NOT LOCATED IN A FLOOD PLAIN AS PER FIRM MAP 06071C8704H.

EXHIBIT 3: Conceptual Site Plan
 Redlands Used Automobile Sales and Service Facility Project
 City of Redlands



2 ENVIRONMENTAL SETTING

2.1 Climate and Meteorology

The California Air Resources Board (CARB) divides the State into 15 air basins that share similar meteorological and topographical features. The Project is located within the South Coast Air Basin (SCAB), which includes the non-desert portions of Los Angeles, Riverside, and San Bernardino counties, as well as all of Orange County. The SCAB is on a coastal plain with connecting broad valleys and low hills, bound by the Pacific Ocean on the southwest and high mountains forming the remainder of the perimeter². Air quality in this area is determined by natural factors such as topography, meteorology, and climate, in addition to the presence of existing air pollution sources and ambient conditions. These factors along with applicable regulations are discussed below.

The SCAB is part of a semi-permanent high-pressure zone in the eastern Pacific. As a result, the climate is mild and tempered by cool sea breezes. This usually mild weather pattern is occasionally interrupted by periods of extreme heat, winter storms, and Santa Ana winds. The annual average temperature throughout the 6,645-square-mile SCAB ranges from low 60 to high 80 degrees Fahrenheit with little variance. With more oceanic influence, coastal areas show less variability in annual minimum and maximum temperatures than inland areas.

Contrasting the steady pattern of temperature, rainfall is seasonally and annually highly variable. Almost all annual rainfall occurs between the months of November and April. Summer rainfall is reduced to widely scattered thundershowers near the coast, with slightly heavier activity in the east and over the mountains.

Although the SCAB has a semiarid climate, the air closer to the Earth's surface is typically moist because of the presence of a shallow marine layer. Except for occasional periods when dry, continental air is brought into the SCAB by offshore winds, the "ocean effect" is dominant. Periods of heavy fog are frequent and low clouds known as high fog are characteristic climatic features, especially along the coast. Annual average humidity is 70 percent at the coast and 57 percent in the eastern portions of the SCAB.

Wind patterns across the SCAB are characterized by westerly or southwesterly on-shore winds during the day and easterly or northeasterly breezes at night. Wind speed is typically higher during the dry summer months than during the rainy winter. Between periods of wind, air stagnation may occur in both the morning and evening hours. Air stagnation is one of the critical determinants of air quality conditions on any given day. During winter and fall, surface high-pressure systems over the SCAB, combined with other meteorological conditions, result in very strong, downslope Santa Ana winds. These winds normally continue for a few days before predominant meteorological conditions are reestablished.

The mountain ranges to the east affect the diffusion of pollutants by inhibiting the eastward transport of pollutants. Air quality in the SCAB generally ranges from fair to poor and is similar to air quality in most of coastal Southern California. The entire region experiences heavy concentrations of air pollutants during prolonged periods of stable atmospheric conditions.

In addition to the characteristic wind patterns that affect the rate and orientation of horizontal pollutant transport, two distinct types of temperature inversions control the vertical depth through which air pollutants are mixed. These inversions are the marine inversion and the radiation inversion. The height of

² South Coast Air Quality Management District, *CEQA Air Quality Handbook*, 1993.

the base of the inversion at any given time is called the “mixing height.” The combination of winds and inversions is a critical determinant leading to highly degraded air quality for the SCAB in the summer and generally good air quality in the winter.

2.2 Air Pollutants of Concern

The air pollutants emitted into the ambient air by stationary and mobile sources are regulated by State and federal laws. These regulated air pollutants are known as “criteria air pollutants” and are categorized into primary and secondary pollutants.

Primary air pollutants are emitted directly from sources. Carbon monoxide (CO), reactive organic gases (ROG), nitrogen oxide (NO_x), sulfur dioxide (SO₂), coarse particulate matter (PM₁₀), fine particulate matter (PM_{2.5}), and lead are primary air pollutants. Of these, CO, NO_x, SO₂, PM₁₀, and PM_{2.5} are primary criteria pollutants. ROG and NO_x are criteria pollutant precursors and form secondary criteria pollutants through chemical and photochemical reactions in the atmosphere. For example, the criteria pollutant ozone (O₃) is formed by a chemical reaction between ROG and NO_x in the presence of sunlight. O₃ and nitrogen dioxide (NO₂) are the principal secondary pollutants. Sources and health effects commonly associated with criteria pollutants are summarized in [Table 1: Air Contaminants and Associated Public Health Concerns](#).

Pollutant	Major Man-Made Sources	Human Health Effects
Particulate Matter (PM ₁₀ and PM _{2.5})	Power plants, steel mills, chemical plants, unpaved roads and parking lots, wood-burning stoves and fireplaces, automobiles and others.	Increased respiratory symptoms, such as irritation of the airways, coughing, or difficulty breathing; asthma; chronic bronchitis; irregular heartbeat; nonfatal heart attacks; and premature death in people with heart or lung disease. Impairs visibility.
Ozone (O ₃)	Formed by a chemical reaction between reactive organic gases/volatile organic compounds (ROG or VOC) ¹ and nitrogen oxides (NO _x) in the presence of sunlight. Motor vehicle exhaust industrial emissions, gasoline storage and transport, solvents, paints and landfills.	Irritates and causes inflammation of the mucous membranes and lung airways; causes wheezing, coughing, and pain when inhaling deeply; decreases lung capacity; aggravates lung and heart problems. Damages plants; reduces crop yield.
Sulfur Dioxide (SO ₂)	A colorless gas formed when fuel containing sulfur is burned and when gasoline is extracted from oil. Examples are petroleum refineries, cement manufacturing, metal processing facilities, locomotives, and ships.	Respiratory irritant. Aggravates lung and heart problems. In the presence of moisture and oxygen, sulfur dioxide converts to sulfuric acid which can damage marble, iron and steel. Damages crops and natural vegetation. Impairs visibility. Precursor to acid rain.
Carbon Monoxide (CO)	An odorless, colorless gas formed when carbon in fuel is not burned completely; a component of motor vehicle exhaust.	Reduces the ability of blood to deliver oxygen to vital tissues, affecting the cardiovascular and nervous system. Impairs vision, causes dizziness, and can lead to unconsciousness or death.
Nitrogen Dioxide (NO ₂)	A reddish-brown gas formed during fuel combustion for motor vehicles and industrial sources. Sources include motor vehicles, electric utilities, and other sources that burn fuel.	Respiratory irritant; aggravates lung and heart problems. Precursor to O ₃ . Contributes to global warming and nutrient overloading which deteriorates water quality. Causes brown discoloration of the atmosphere.
Lead (Pb)	Lead is a metal found naturally in the environment as well as in manufactured	Exposure to lead occurs mainly through inhalation of air and ingestion of lead in food,

Pollutant	Major Man-Made Sources	Human Health Effects
	products. The major sources of lead emissions have historically been motor vehicles (such as cars and trucks) and industrial sources. Due to the phase out of leaded gasoline, metals processing is the major source of lead emissions to the air today. The highest levels of lead in air are generally found near lead smelters. Other stationary sources are waste incinerators, utilities, and lead-acid battery manufacturers.	water, soil, or dust. It accumulates in the blood, bones, and soft tissues and can adversely affect the kidneys, liver, nervous system, and other organs. Excessive exposure to lead may cause neurological impairments such as seizures, mental retardation, and behavioral disorders. Even at low doses, lead exposure is associated with damage to the nervous systems of fetuses and young children, resulting in learning deficits and lowered IQ.
<p>Notes:</p> <p>1. Volatile Organic Compounds (VOCs or Reactive Organic Gases [ROG]) are hydrocarbons/organic gases that are formed solely of hydrogen and carbon. There are several subsets of organic gases including ROGs and VOCs. Both ROGs and VOCs are emitted from the incomplete combustion of hydrocarbons or other carbon-based fuels. The major sources of hydrocarbons are combustion engine exhaust, oil refineries, and oil-fueled power plants; other common sources are petroleum fuels, solvents, dry cleaning solutions, and paint (via evaporation).</p>		
<p>Source: California Air Pollution Control Officers Association (CAPCOA), <i>Health Effects</i>, http://www.capcoa.org/health-effects/, accessed May 2023.</p>		

Toxic Air Contaminants

Toxic air contaminants (TACs) are airborne substances that can cause short-term (acute) or long-term (i.e. chronic, carcinogenic or cancer causing) adverse human health effects (i.e. injury or illness). TACs include both organic and inorganic chemical substances. They may be emitted from a variety of common sources including gasoline stations, automobiles, dry cleaners, industrial operations, and painting operations. The current California list of TACs includes more than 200 compounds, including particulate emissions from diesel-fueled engines.

CARB identified diesel particulate matter (DPM) as a toxic air contaminant. DPM differs from other TACs in that it is not a single substance but rather a complex mixture of hundreds of substances. Diesel exhaust is a complex mixture of particles and gases produced when an engine burns diesel fuel. DPM is a concern because it causes lung cancer; many compounds found in diesel exhaust are carcinogenic. DPM includes the particle-phase constituents in diesel exhaust. The chemical composition and particle sizes of DPM vary between different engine types (heavy-duty, light-duty), engine operating conditions (idle, accelerate, decelerate), fuel formulations (high/low sulfur fuel), and the year of the engine. Some short-term (acute) effects of diesel exhaust include eye, nose, throat, and lung irritation, and diesel exhaust can cause coughs, headaches, light-headedness, and nausea. DPM poses the greatest health risk among the TACs. Almost all diesel exhaust particle mass is 10 microns or less in diameter. Due to their extremely small size, these particles can be inhaled and eventually trapped in the bronchial and alveolar regions of the lung.

Ambient Air Quality

CARB monitors ambient air quality at approximately 250 air monitoring stations across the State. These stations usually measure pollutant concentrations ten feet above ground level; therefore, air quality is often referred to in terms of ground-level concentrations. Existing levels of ambient air quality levels, historical trends, and projections near the Project are documented by measurements made by the South Coast Air Quality Management District (SCAQMD), the air pollution regulatory agency in the SCAB that maintains air quality monitoring stations which process ambient air quality measurements.

Pollutants of concern in the SCAB include O₃, PM₁₀, and PM_{2.5}. The closest air monitoring station to the Project that monitors ambient concentrations of these pollutants is the Redlands-Dearborn Monitoring Station (located approximately 2.75 miles to the east of the Project site). Local air quality data from 2019 to 2021 are provided in [Table 2: Ambient Air Quality Data](#), which lists the monitored maximum concentrations and number of exceedances of State or federal air quality standards for each year.

Table 2: Ambient Air Quality Data			
Criteria Pollutant	2019	2020	2021
Ozone (O₃)¹			
1-hour Maximum Concentration (ppm)	0.137	0.173	0.145
8-hour Maximum Concentration (ppm)	0.117	0.136	0.119
<i>Number of Days Standard Exceeded</i>			
CAAQS 1-hour (>0.09 ppm)	73	104	74
NAAQS 8-hour (>0.070 ppm)	109	141	114
Carbon Monoxide (CO)			
1-hour Maximum Concentration (ppm)	2.749	1.008	2.847
<i>Number of Days Standard Exceeded</i>			
NAAQS 1-hour (>35 ppm)	0	0	0
CAAQS 1-hour (>20 ppm)	0	0	0
Nitrogen Dioxide (NO₂)²			
1-hour Maximum Concentration (ppm)	0.0593	0.054	0.0563
<i>Number of Days Standard Exceeded</i>			
NAAQS 1-hour (>0.100 ppm)	0	0	0
CAAQS 1-hour (>0.18 ppm)	0	0	0
Particulate Matter Less Than 10 Microns (PM₁₀)¹			
National 24-hour Maximum Concentration	44.9	87.7	44.2
State 24-hour Maximum Concentration	42.4	82.9	41.8
State Annual Average Concentration (CAAQS=20 µg/m ³)	—	—	—
<i>Number of Days Standard Exceeded</i>			
NAAQS 24-hour (>150 µg/m ³)	0	0	0
CAAQS 24-hour (>50 µg/m ³)	0	2	0
Particulate Matter Less Than 2.5 Microns (PM_{2.5})²			
National 24-hour Maximum Concentration	60.5	56.6	57.9
State 24-hour Maximum Concentration	60.5	56.6	57.9
<i>Number of Days Standard Exceeded</i>			
NAAQS 24-hour (>35 µg/m ³)	1	2	1
NAAQS = National Ambient Air Quality Standards; CAAQS = California Ambient Air Quality Standards; ppm = parts per million. µg/m ³ = micrograms per cubic meter; — = not measured			
Notes:			
1. Measurements taken at the Redlands-Dearborn Monitoring Station at 500 N. Dearborn, Redlands CA 92374 (CARB# 36204)			
2. Measurements taken at the San Bernardino-4th Street Monitoring Station at 24302 E. 4th St, San Bernardino CA 92410 (CARB# 36203)			
Source: All pollutant measurements are from the CARB Aerometric Data Analysis and Management system database (https://www.arb.ca.gov/adam) except for CO, which were retrieved from the CARB Air Quality and Meteorological Information System (https://www.arb.ca.gov/aqmis2/aqdselect.php).			

2.3 Sensitive Receptors

Sensitive populations are more susceptible to the effects of air pollution than is the general population. Sensitive receptors that are in proximity to localized sources of toxics are of particular concern. Land uses considered sensitive receptors include residences, schools, playgrounds, childcare centers, long-term health care facilities, rehabilitation centers, convalescent centers, and retirement homes. The Project site is mainly surrounded by commercial land uses to the north, east, and south, and vacant land and the I-10 and SR-210 freeways to the west. Sensitive land uses nearest to the Project site are shown in Table 3: Sensitive Receptors.

Receptor Description	Distance and Direction from the Project Site
Single-family Residences	657 feet to the east
Single-family Residences	740 feet to the northeast

Source: Google Earth, 2023.

3 REGULATORY SETTING

3.1 Federal

Federal Clean Air Act

Air quality is federally protected by the Federal Clean Air Act (FCAA) and its amendments. Under the FCAA, the United States Environmental Protection Agency (U.S. EPA) developed the primary and secondary National Ambient Air Quality Standards (NAAQS) for the criteria air pollutants including O₃, NO₂, CO, SO₂, PM₁₀, PM_{2.5}, and lead. Proposed projects in or near nonattainment areas could be subject to more stringent air-permitting requirements. The FCAA requires each state to prepare a State Implementation Plan to demonstrate how it will attain the NAAQS within the federally imposed deadlines.

The U.S. EPA can withhold certain transportation funds from states that fail to comply with the planning requirements of the FCAA. If a state fails to correct these planning deficiencies within two years of federal notification, the U.S. EPA is required to develop a federal implementation plan for the identified nonattainment area or areas. The provisions of 40 Code of Federal Regulations Parts 51 and 93 apply in all nonattainment and maintenance areas for transportation-related criteria pollutants for which the area is designated nonattainment or has a maintenance plan. The U.S. EPA has designated enforcement of air pollution control regulations to the individual states. Applicable NAAQS standards are summarized in [Table 4: State and National Ambient Air Quality Standards](#).

3.2 State of California

California Air Resources Board

CARB administers the air quality policy in California. The California Ambient Air Quality Standards (CAAQS) were established in 1969 pursuant to the Mulford-Carrell Act. These standards, included with the NAAQS are shown in [Table 4](#), are generally more stringent and apply to more pollutants than the NAAQS. In addition to the criteria pollutants, CAAQS have been established for visibility reducing particulates, hydrogen sulfide, and sulfates.

The California Clean Air Act (CCAA), which was approved in 1988, requires that each local air district prepare and maintain an Air Quality Management Plan (AQMP) to achieve compliance with CAAQS. These AQMPs also serve as the basis for the preparation of the State Implementation Plan for meeting federal clean air standards for the State of California. Like the U.S. EPA, CARB also designates areas within California as either attainment or nonattainment for each criteria pollutant based on whether the CAAQS have been achieved. Under the CCAA, areas are designated as nonattainment for a pollutant if air quality data shows that a State standard for the pollutant was violated at least once during the previous three calendar years. Exceedances that are affected by highly irregular or infrequent events such as wildfires, volcanoes, etc. are not considered violations of a State standard, and are not used as a basis for designating areas as nonattainment. The applicable State standards are summarized in [Table 4](#).

Table 4: State and Federal Ambient Air Quality Standards			
Pollutant	Averaging Time	State Standards¹	National Standards²
Ozone (O ₃) ^{2, 5, 7}	8 Hour	0.070 ppm (137 µg/m ³)	0.070 ppm
	1 Hour	0.09 ppm (180 µg/m ³)	NA
Carbon Monoxide (CO)	8 Hour	9.0 ppm (10 mg/m ³)	9 ppm (10 mg/m ³)
	1 Hour	20 ppm (23 mg/m ³)	35 ppm (40 mg/m ³)
Nitrogen Dioxide (NO ₂)	1 Hour	0.18 ppm (339 µg/m ³)	0.10 ppm ¹¹
	Annual Arithmetic Mean	0.030 ppm (57 µg/m ³)	0.053 ppm (100 µg/m ³)
Sulfur Dioxide (SO ₂) ⁸	24 Hour	0.04 ppm (105 µg/m ³)	0.14 ppm (365 µg/m ³)
	1 Hour	0.25 ppm (655 µg/m ³)	0.075 ppm (196 µg/m ³)
	Annual Arithmetic Mean	NA	0.03 ppm (80 µg/m ³)
Particulate Matter (PM ₁₀) ^{1, 3, 6}	24-Hour	50 µg/m ³	150 µg/m ³
	Annual Arithmetic Mean	20 µg/m ³	NA
Fine Particulate Matter (PM _{2.5}) ^{3, 4, 6, 9}	24-Hour	NA	35 µg/m ³
	Annual Arithmetic Mean	12 µg/m ³	12 µg/m ³
Sulfates (SO ₄₋₂)	24 Hour	25 µg/m ³	NA
Lead (Pb) ^{10, 11}	30-Day Average	1.5 µg/m ³	NA
	Calendar Quarter	NA	1.5 µg/m ³
	Rolling 3-Month Average	NA	0.15 µg/m ³
Hydrogen Sulfide (H ₂ S)	1 Hour	0.03 ppm (42 µg/m ³)	NA
Vinyl Chloride (C ₂ H ₃ Cl) ¹⁰	24 Hour	0.01 ppm (26 µg/m ³)	NA
Notes:			
ppm = parts per million; µg/m ³ = micrograms per cubic meter; mg/m ³ = milligrams per cubic meter; – = no information available.			
1. California standards for O ₃ , carbon monoxide (except Lake Tahoe), sulfur dioxide (1-hour and 24-hour), nitrogen dioxide, suspended particulate matter - PM ₁₀ , and visibility reducing particles are values that are not to be exceeded. The standards for sulfates, Lake Tahoe carbon monoxide, lead, hydrogen sulfide, and vinyl chloride are not to be equaled or exceeded. If the standard is for a 1-hour, 8-hour or 24-hour average (i.e., all standards except for lead and the PM ₁₀ annual standard), then some measurements may be excluded. Measurements are excluded that CARB determines would occur less than once per year on the average. The Lake Tahoe carbon monoxide standard is 6.0 ppm, a level one-half the national standard and two-thirds the State standard.			
2. National standards shown are the "primary standards" designed to protect public health. National standards other than for O ₃ , particulates and those based on annual averages are not to be exceeded more than once a year. The 1-hour O ₃ standard is attained if, during the most recent three-year period, the average number of days per year with maximum hourly concentrations above the standard is equal to or less than one. The 8-hour O ₃ standard is attained when the 3-year average of the 4 th highest daily concentrations is 0.070 ppm or less. The 24-hour PM ₁₀ standard is attained when the 3-year average of the 99 th percentile of monitored concentrations is less than 150 µg/m ³ . The 24-hour PM _{2.5} standard is attained when the 3-year average of 98 th percentiles is less than 35 µg/m ³ .			
3. Except for the national particulate standards, annual standards are met if the annual average falls below the standard at every site. The national annual particulate standard for PM ₁₀ is met if the 3-year average falls below the standard at every site. The annual PM _{2.5} standard is met if the 3-year average of annual averages spatially-averaged across officially designed clusters of sites falls below the standard.			
NAAQS are set by the U.S. EPA at levels determined to be protective of public health with an adequate margin of safety.			
4. On October 1, 2015, the national 8-hour O ₃ primary and secondary standards were lowered from 0.075 to 0.070 ppm. An area will meet the standard if the fourth-highest maximum daily 8-hour O ₃ concentration per year, averaged over three years, is equal to or less than 0.070 ppm. U.S. EPA will make recommendations on attainment designations by October 1, 2016, and issue final designations October 1, 2017. Nonattainment areas will have until 2020 to late 2037 to meet the health standard, with attainment dates varying based on the O ₃ level in the area.			
5. The national 1-hour O ₃ standard was revoked by the U.S. EPA on June 15, 2005.			
6. In June 2002, CARB established new annual standards for PM _{2.5} and PM ₁₀ .			
7. The 8-hour California O ₃ standard was approved by the CARB on April 28, 2005 and became effective on May 17, 2006.			
8. On June 2, 2010, the U.S. EPA established a new 1-hour SO ₂ standard, effective August 23, 2010, which is based on the 3-year average of the annual 99 th percentile of 1-hour daily maximum concentrations. The existing 0.030 ppm annual and 0.14 ppm 24-hour SO ₂ NAAQS however must continue to be used until one year following U.S. EPA initial designations of the new 1-hour SO ₂ NAAQS.			
9. In December 2012, U.S. EPA strengthened the annual PM _{2.5} NAAQS from 15.0 to 12.0 µg/m ³ . In December 2014, the U.S. EPA issued final area designations for the 2012 primary annual PM _{2.5} NAAQS. Areas designated "unclassifiable/attainment" must continue to take steps to prevent their air quality from deteriorating to unhealthy levels. The effective date of this standard is April 15, 2015.			
10. CARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure below which there are no adverse health effects determined.			
11. National lead standards, rolling 3-month average: final rule signed October 15, 2008. Final designations effective December 31, 2011.			
Source: South Coast Air Quality Management District, 2022 Air Quality Management Plan, 2022; California Air Resources Board, Ambient Air Quality Standards, May 6, 2016.			

3.3 Regional

South Coast Air Quality Management District

The SCAQMD is the air pollution control agency for Orange County and the urban portions of Los Angeles, Riverside, and San Bernardino Counties. The agency's primary responsibility is ensuring that the CAAQS and NAAQS are attained and maintained in the SCAB. The SCAQMD is also responsible for adopting and enforcing rules and regulations concerning air pollutant sources, issuing permits for stationary sources of air pollutants, inspecting stationary sources of air pollutants, responding to citizen complaints, monitoring ambient air quality and meteorological conditions, awarding grants to reduce motor vehicle emissions, conducting public education campaigns, and many other activities. All projects are subject to SCAQMD rules and regulations in effect at the time of construction.

The SCAQMD is also the lead agency in charge of developing the AQMP, with input from the Southern California Association of Governments (SCAG) and CARB. The AQMP is a comprehensive plan that includes control strategies for stationary and area sources, as well as for on-road and off-road mobile sources. SCAG has the primary responsibility for providing future growth projections and the development and implementation of transportation control measures. CARB, in coordination with federal agencies, provides the control element for mobile sources.

The 2016 AQMP was adopted by the SCAQMD Governing Board on March 3, 2017. The purpose of the 2016 AQMP is to set forth a comprehensive and integrated program that would lead the SCAB into compliance with the federal 24-hour PM_{2.5} air quality standard, and to provide an update to the SCAQMD's commitments towards meeting the federal 8-hour O₃ NAAQS. Specifically, the 2016 AQMP covers the following federal standards: 1979 1-hour O₃ NAAQS, 1997 8-hour O₃ NAAQS, 2006 24-hour PM_{2.5} NAAQS, 2008 8-hour O₃ NAAQS, and the 2012 annual PM_{2.5} NAAQS.

On October 1, 2015, the U.S. EPA strengthened the NAAQS for ground-level O₃. The 2022 AQMP, adopted by the SCAQMD Governing Board on December 2, 2022, was developed to address the requirements for meeting the 2015 8-hour O₃ standard. The 2022 AQMP builds upon measures already in place from previous AQMPs. It also includes a variety of additional strategies such as regulation, accelerated deployment of available cleaner technologies (e.g., zero emissions technologies, when cost-effective and feasible, and low NO_x technologies in other applications), best management practices, co-benefits from existing programs (e.g., climate and energy efficiency), incentives, and other FCAA measures to achieve the 2015 8-hour ozone standard. The 2022 AQMP incorporates the latest scientific and technological information and planning assumptions, including the *2020-2045 Regional Transportation Plan/Sustainable Communities Strategy* (RTP/SCS) and updated emission inventory methodologies for various source categories. The 2022 AQMP requires CARB's adoption before submittal for the U.S. U.S. EPA's final approval, which is expected to occur sometime in 2023.

The SCAQMD has published the *CEQA Air Quality Handbook* (approved by the SCAQMD Governing Board in 1993 and augmented with guidance for Local Significance Thresholds [LSTs] in 2008). The SCAQMD guidance helps local government agencies and consultants to develop environmental documents required by CEQA and provides identification of suggested thresholds of significance for criteria pollutants for both construction and operation (see discussion of thresholds below). With the help of the *CEQA Air Quality Handbook* and associated guidance, local land use planners and consultants are able to analyze and document how proposed and existing projects affect air quality in order to meet the requirements of the CEQA review process. The SCAQMD periodically provides supplemental guidance and updates to the handbook on their website.

SCAG is the regional planning agency for Los Angeles, Orange, Ventura, Riverside, San Bernardino, and Imperial counties and serves as a forum for regional issues relating to transportation, the economy, community development, and the environment. Under federal law, SCAG is designated as a Metropolitan Planning Organization and under State law as a Regional Transportation Planning Agency and a Council of Governments.

The State and federal attainment status designations for the SCAB are summarized in [Table 5: South Coast Air Basin Attainment Status](#). The SCAB is currently designated as a nonattainment area for O₃, PM₁₀, and PM_{2.5} CAAQS, as well as the 8-hour O₃ and PM_{2.5} NAAQS. The SCAB is designated as attainment or unclassified for the remaining CAAQS and NAAQS.

Pollutant	State	Federal
Ozone (O ₃) (1 Hour Standard)	Non-Attainment	Non-Attainment (Extreme)
Ozone (O ₃) (8 Hour Standard)	Non-Attainment	Non-Attainment (Extreme)
Particulate Matter (PM _{2.5}) (24 Hour Standard)	–	Non-Attainment (Serious)
Particulate Matter (PM _{2.5}) (Annual Standard)	Non-Attainment	Non-Attainment (Moderate)
Particulate Matter (PM ₁₀) (24 Hour Standard)	Non-Attainment	Attainment (Maintenance)
Particulate Matter (PM ₁₀) (Annual Standard)	Non-Attainment	–
Carbon Monoxide (CO) (1 Hour Standard)	Attainment	Attainment (Maintenance)
Carbon Monoxide (CO) (8 Hour Standard)	Attainment	Attainment (Maintenance)
Nitrogen Dioxide (NO ₂) (1 Hour Standard)	Attainment	Unclassifiable/Attainment
Nitrogen Dioxide (NO ₂) (Annual Standard)	Attainment	Attainment (Maintenance)
Sulfur Dioxide (SO ₂) (1 Hour Standard)	Attainment	Unclassifiable/Attainment
Sulfur Dioxide (SO ₂) (24 Hour Standard)	Attainment	–
Lead (Pb) (30 Day Standard)	–	Unclassifiable/Attainment
Lead (Pb) (3 Month Standard)	Attainment	–
Sulfates (SO ₄₋₂) (24 Hour Standard)	Attainment	–
Hydrogen Sulfide (H ₂ S) (1 Hour Standard)	Unclassified	–

Source: South Coast Air Quality Management District, *Air Quality Management Plan*, 2022; United States Environmental Protection Agency, *Nonattainment Areas for Criteria Pollutants (Green Book)*, 2022.

The following is a list of SCAQMD rules that are required of construction activities associated with the Project:

- **Rule 402 (Nuisance)** – This rule prohibits the discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health, or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property. This rule does not apply to odors emanating from agricultural operations necessary for the growing of crops or the raising of fowl or animals.
- **Rule 403 (Fugitive Dust)** – This rule requires fugitive dust sources to implement best available control measures for all sources, and all forms of visible particulate matter are prohibited from crossing any property line. This rule is intended to reduce PM₁₀ emissions from any transportation, handling, construction, or storage activity that has the potential to generate fugitive dust. PM₁₀ suppression techniques are summarized below.
 - a) Portions of a construction site to remain inactive longer than a period of three months will be seeded and watered until grass cover is grown or otherwise stabilized.
 - b) All on-site roads will be paved as soon as feasible or watered periodically or chemically stabilized.
 - c) All material transported off site will be either sufficiently watered or securely covered to prevent excessive amounts of dust.
 - d) The area disturbed by clearing, grading, earthmoving, or excavation operations will be minimized at all times.
 - e) Where vehicles leave a construction site and enter adjacent public streets, the streets will be swept daily or washed down at the end of the work day to remove soil tracked onto the paved surface.
- **Rule 445 (Wood Burning)** – This rule prohibits permanently installed wood-burning devices into any new development. A wood-burning device means any fireplace, wood burning heater, or pellet-fueled wood heater, or any similarly enclosed, permanently installed, indoor or outdoor device burning any solid fuel for aesthetic or space-heating purposes, which has a heat input of less than one million British thermal units per hour.
- **Rule 1113 (Architectural Coatings)** – This rule requires manufacturers, distributors, and end users of architectural and industrial maintenance coatings to reduce ROG emissions from the use of these coatings, primarily by placing limits on the ROG content of various coating categories.
- **Rule 1403 (Asbestos Emissions from Demolition/Renovation Activities)** – This rule requires owners and operators or any demolition or renovation activity and the associated disturbance of asbestos-containing materials, any asbestos storage facility, or any active waste disposal site to implement work practice requirements to limit asbestos emissions from building demolition and renovation activities, including the removal and associated disturbance of asbestos-containing materials.

3.4 Local

City of Redlands General Plan

Chapter 7, Healthy Community, of the City of Redlands General Plan (Redlands General Plan) identifies the following principles and actions related to air quality.

Principles

- 7-P.44 Protect air quality within the city and support efforts for enhanced regional air quality
- 7-P.45 Aim for a diverse and efficiently-operated ground transportation system that generates the minimum amount of pollutants feasible.
- 7-P.46 Increase average vehicle ridership during peak commute hours as a way of reducing vehicle miles traveled and peak period auto travel.
- 7-P.47 Cooperate in efforts to expand bus, rail, and other forms of mass transit in the portion of the South Coast Air Basin within San Bernardino County.
- 7-P.48 Involve environmental groups, the business community, and the general public in the formulation and implementation of programs that enhance air quality in the city and the region.
- 7-P.49 Protect sensitive receptors from exposure to hazardous concentrations of air pollutants.

Actions

- 7-A.144 To the extent practicable and feasible, maintain a system of air quality alerts (such as through the City website, internet, e-mail to City employees, and other tools) based on South Coast Air Quality Management District forecasts. Consider providing incentives to City employees to use alternative transportation modes during alert days.
- 7-A.145 Provide, whenever possible, incentives for carpooling, flex time, shortened work weeks, telecommuting, and other means of reducing vehicular miles traveled.
- 7-A.146 Promote expansion of all forms of mass transit to the urbanized portions of San Bernardino, Orange, Los Angeles, and Riverside counties. Support public transit providers in efforts to increase funding for transit improvements to supplement other means of travel.
- 7-A.147 Cooperate with the ongoing efforts of the U.S. Environmental Protection Agency, the South Coast Air Quality Management District, and the State of California Air Resources Board in improving air quality in the regional air basin.
- 7-A.148 Develop requirements for retrofitting existing residential buildings within the 500-foot AQMD buffer along the freeway to abate air pollution, and limitations on new residential developments within the buffer.
- 7-A.149 Ensure that construction and grading projects minimize short-term impacts to air quality:
 - a. Require grading projects to provide a stormwater pollution prevention plan (SWPPP) in compliance with City requirements, which include standards for best management

practices (BMPs) that control pollutants from dust generated by construction activities and those related to vehicle and equipment cleaning, fueling, and maintenance;

- b. Require grading projects to undertake measures to minimize mono-nitrogen oxides (NOx) emissions from vehicle and equipment operations; and
 - c. Monitor all construction to ensure that proper steps are implemented.
- 7-A.150 Establish and implement a Transportation Demand Management (TDM) Program.
- 7-A.152 Enforce regulations to prevent trucks from excessive idling in residential areas.
- 7-A.153 Require applicants for sensitive land uses (e.g., residences, schools, daycare centers, playgrounds, and medical facilities) to site development and/or incorporate design features (e.g., pollution prevention, pollution reduction, barriers, landscaping, ventilation systems, or other measures) to minimize the potential impacts of air pollution on sensitive receptors.
- 7-A.154 Require applicants for sensitive land uses within a Proposition 65 warning contour to conduct a health risk assessment and mitigate any health impacts to a less than significant level.

4 SIGNIFICANCE CRITERIA AND METHODOLOGY

4.1 Air Quality Thresholds

Based upon the criteria derived from State CEQA Guidelines Appendix G, a Project normally would have a significant effect on the environment if it would:

- Conflict with or obstruct implementation of the applicable air quality plan.
- Result in a cumulatively considerable net increase of any criteria pollutant for which the Project region is in nonattainment under an applicable State or federal ambient air quality standard.
- Expose sensitive receptors to substantial pollutant concentrations.
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

SCAQMD Thresholds

The significance criteria established by SCAQMD may be relied upon to make the above determinations. According to the SCAQMD, an air quality impact is considered significant if a project would violate any ambient air quality standard, contribute substantially to an existing or projected air quality violation, or expose sensitive receptors to substantial pollutant concentrations. The SCAQMD has established thresholds of significance for air quality during construction and operational activities of land use development projects, as shown in [Table 6: South Coast Air Quality Management District Emissions Thresholds](#).

Criteria Air Pollutants and Precursors	Maximum Pounds Per Day	
	Construction-Related	Operational-Related
Reactive Organic Gases (ROG)	75	55
Carbon Monoxide (CO)	550	550
Nitrogen Oxides (NO _x)	100	55
Sulfur Oxides (SO _x)	150	150
Coarse Particulates (PM ₁₀)	150	150
Fine Particulates (PM _{2.5})	55	55

Source: South Coast Air Quality Management District, *South Coast AQMD Air Quality Significance Thresholds*.

Localized Carbon Monoxide

In addition to the daily thresholds listed above, the Project would also be subject to the CAAQS and NAAQS. These are addressed through an analysis of localized CO impacts. The significance of localized impacts depends on whether ambient CO levels near the project site are above the CAAQS and NAAQS (the more stringent California CO CAAQS are 20 ppm for 1-hour and 9 ppm for 8-hour). The SCAB has been designated as attainment under the 1-hour and 8-hour CAAQS.

Localized Significance Thresholds (LSTs)

In addition to the CO hotspot analysis, the SCAQMD developed LSTs for emissions of NO₂, CO, PM₁₀, and PM_{2.5} generated at new development sites (off-site mobile source emissions are not included in the LST analysis). LSTs represent the maximum emissions that can be generated by a project without expecting to cause or substantially contribute to an exceedance of the most stringent CAAQS or NAAQS. LSTs are based on the ambient concentrations of that pollutant within the project source receptor area (SRA), as demarcated by the SCAQMD, and the distance to the nearest sensitive receptor. The City of Redlands is located within SCAQMD SRA 35. [Table 7: Local Significance Thresholds for Construction/Operations](#) shows the LSTs for a 1-acre, 2-acre, 4-acre (interpolated), and 5-acre project in SRA 35. Because the nearest sensitive receptors are 657 feet (200 meters) to the east of the Project site, the thresholds for distances of 200 meters are listed below. LSTs at 200 meters for all acreage categories are provided in [Table 7](#) for informational purposes. [Table 7](#) shows that the LSTs increase as acreages increase.

Project Size	Maximum Pounds Per Day ¹			
	NO _x	CO	PM ₁₀	PM _{2.5}
1 Acre	334/334	5,351/5,351	82/20	26/7
2 Acres	377/377	6,375/6,375	90/22	30/8
4 Acres	450/450	8,154/8,154	105/26	37/9
5 Acres	486/486	9,044/9,044	113/28	40/10

NO_x = Nitrogen Oxides; CO = Carbon Monoxide; PM₁₀ = Particulate Matter 10 microns in diameter or less; PM_{2.5} = Particulate Matter 2.5 microns in diameter or less

Notes:
1. Thresholds interpolated based on a distance of 200 meters.

Source: South Coast Air Quality Management District, *Localized Significance Threshold Methodology*, July 2008.

4.2 Methodology

This air quality impact analysis considers the Project's construction and operational impacts. Where criteria air pollutant quantification was required, emissions were modeled using the California Emissions Estimator Model (CalEEMod). CalEEMod is a statewide land use emissions computer model designed to quantify potential criteria pollutant emissions associated with both construction and operations from a variety of land use projects. Air quality impacts were assessed according to methodologies recommended by CARB and the SCAQMD.

Construction

Project-related construction equipment, trucks, worker vehicles, and ground-disturbing activities would generate emissions of criteria air pollutants and precursors. Daily regional construction emissions are estimated by assuming construction occurs at the earliest feasible date (i.e., a conservative estimate of construction activities) and applying off-road, fugitive dust, and on-road emissions factors in CalEEMod.

Operations

Project operations would result in emissions of area sources (consumer products, architectural coating, and landscape equipment), energy sources (natural gas usage), mobile sources (motor vehicles from Project generated vehicle trips), and stationary sources (generators). Project-generated increases in operational emissions would be predominantly associated with motor vehicle use. The increase of traffic over existing conditions as a result of the Project was obtained from the *Scoping Letter Agreement for*

Traffic Study for the Proposed Used Automobile Sales and Service Facility Project in the City of Redlands prepared by Kimley-Horn (May 2023) (Traffic Scoping Agreement). Other operational emissions from area, energy, and stationary sources were quantified in CalEEMod based on land use activity data.

As discussed above, the SCAQMD provides significance thresholds for emissions associated with proposed Project construction and operations. The proposed Project's construction and operational emissions are compared to the daily criteria pollutant emissions significance thresholds in order to determine the significance of the Project's impact on regional air quality.

Localized Significance Thresholds

The localized effects from the Project's on-site emissions were evaluated in accordance with the SCAQMD's LST methodology, which uses on-site mass emissions rate look-up tables and Project-specific modeling. LSTs represent the maximum emissions from a project that are not expected to cause or contribute to an exceedance of the most stringent applicable federal or State ambient air quality standards and are developed based on the ambient concentrations of that pollutant for each source receptor area and distance to the nearest sensitive receptor.

Cumulative Emissions

The SCAQMD's 2022 AQMP was prepared to accommodate growth, meet State and federal air quality standards, and minimize the fiscal impact that pollution control measures have on the local economy. According to the SCAQMD CEQA Air Quality Handbook, project-related emissions that fall below the established construction and operational thresholds should be considered less than significant unless there is pertinent information to the contrary. Conversely, projects that exceed these emission thresholds would be considered to have potentially significant cumulative impacts.

5 POTENTIAL IMPACTS AND MITIGATION

5.1 Air Quality Analysis

Threshold 5.1 Would the Project conflict with or obstruct implementation of the applicable air quality plan?

As part of its enforcement responsibilities, the EPA requires each state with nonattainment areas to prepare and submit a State Implementation Plan that demonstrates the means to attain the federal standards. The State Implementation Plan must integrate federal, state, and local plan components and regulations to identify specific measures to reduce pollution in nonattainment areas, using a combination of performance standards and market-based programs. Similarly, under State law, the CCAA requires an air quality attainment plan to be prepared for areas designated as nonattainment regarding the state and federal ambient air quality standards. Air quality attainment plans outline emissions limits and control measures to achieve and maintain these standards by the earliest practical date.

The Project is located within the SCAB, which is under the jurisdiction of the SCAQMD. The SCAQMD is required, pursuant to the FCAA, to reduce emissions of criteria pollutants for which the SCAB is in nonattainment. To reduce such emissions, the SCAQMD drafted the 2016 and 2022 AQMPs (AQMPs). The AQMPs establish a program of rules and regulations directed at reducing air pollutant emissions and achieving California Ambient Air Quality Standards (CAAQS) and National Ambient Air Quality Standards (NAAQS). The AQMPs are a regional and multi-agency effort including the SCAQMD, the CARB, the SCAG, and the EPA. The pollutant control strategies in the AQMPs are based on the latest scientific and technical information and planning assumptions, including SCAG's Connect SoCal 2020-2045 RTP/SCS, updated emission inventory methodologies for various source categories, and SCAG's latest growth forecasts. SCAG's latest growth forecasts were defined in consultation with local governments and with reference to local general plans. The Project is subject to the AQMPs.

Criteria for determining consistency with the AQMPs are defined by the following indicators:

- **Consistency Criterion No. 1:** The Project will not result in an increase in the frequency or severity of existing air quality violations, or cause or contribute to new violations, or delay the timely attainment of air quality standards or the interim emissions reductions specified in the AQMPs.
- **Consistency Criterion No. 2:** The Project will not exceed the assumptions in the AQMPs or increments based on the years of the Project build-out phase.

According to the SCAQMD's *CEQA Air Quality Handbook*, the purpose of the consistency finding is to determine if a project is inconsistent with the assumptions and objectives of the regional air quality plans, and thus if it would interfere with the region's ability to comply with CAAQS and NAAQS.

The violations to which Consistency Criterion No. 1 refers are CAAQS and NAAQS. As shown in [Table 8](#), [Table 9](#), [Table 11](#), and [Table 12](#) below, the Project would not exceed the construction standards, operational standards, or localized significance thresholds. Therefore, the Project would not contribute to an existing air quality violation. Thus, the Project would be consistent with the first criterion.

Concerning Consistency Criterion No. 2, the AQMPs contain air pollutant reduction strategies based on SCAG's latest growth forecasts, and SCAG's growth forecasts were defined in consultation with local governments and with reference to local general plans. The General Plan land use designation for the Project site is Commercial/Industrial and the zoning designation is General Commercial (EV/CG). The Project is consistent with the City's General Plan land use designation and the zoning. As such, the Project

would not result in substantial unplanned growth or unaccounted for growth in the General Plan used by the SCAQMD to develop the AQMPs. Thus, a less than significant impact would occur, as the Project is also consistent with the second criterion.

Mitigation Measures: No mitigation is required.

Level of Significance: Less than significant impact.

Threshold 5.2 Would the Project result in a cumulatively considerable net increase of any criteria pollutant for which the Project region is non-attainment under an applicable state or federal ambient air quality standard?

Construction Emissions

Construction associated with the Project would generate short-term emissions of criteria air pollutants. The criteria pollutants of primary concern within the Project area include O₃-precursor pollutants (i.e., ROG and NO_x) and PM₁₀ and PM_{2.5}. Construction-generated emissions are short term and of temporary duration, lasting only as long as construction activities occur, but would be considered a significant air quality impact if the volume of pollutants generated exceeds the SCAQMD’s thresholds of significance.

Construction results in the temporary generation of emissions resulting from site grading, road paving, motor vehicle exhaust associated with construction equipment and worker trips, and the movement of construction equipment, especially on unpaved surfaces. Emissions of airborne particulate matter are largely dependent on the amount of ground disturbance associated with site preparation activities as well as weather conditions and the appropriate application of water.

Construction of the Project is anticipated to occur over an approximately 18-month period beginning in 2023 and ending by 2025. Construction-generated emissions associated with the Project were calculated using the CARB-approved CalEEMod computer program, which is designed to model emissions for land use development projects, based on typical construction requirements. See [Appendix A: Air Quality Modeling Data](#) for more information regarding the construction assumptions used in this analysis. Predicted maximum daily construction-generated emissions for the Project are summarized in [Table 8: Construction-Related Emissions](#).

Table 8: Construction-Related Emissions						
Construction Year	Pollutant (Maximum Pounds per Day)					
	Reactive Organic Gases (ROG)	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Sulfur Dioxide (SO ₂)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
2023	4.04	39.84	37.09	0.06	9.70	5.65
2024	6.55	11.65	14.75	0.03	0.80	0.54
<i>SCAQMD Threshold</i>	<i>75</i>	<i>100</i>	<i>550</i>	<i>150</i>	<i>55</i>	<i>150</i>
Exceed SCAQMD Threshold?	No	No	No	No	No	No
Notes: SCAQMD Rule 403 Fugitive Dust applied. The Rule 403 reduction/credits include the following: properly maintain mobile and other construction equipment; replace ground cover in disturbed areas quickly; water exposed surfaces three times daily; cover stockpiles with tarps; water all haul roads twice daily; and limit speeds on unpaved roads to 15 miles per hour. Reductions percentages from the SCAQMD CEQA Handbook (Tables XI-A through XI-E) were applied. Refer to Appendix A for Model Data Outputs.						
Source: CalEEMod version 2022.1. Refer to Appendix A: Air Quality Monitoring Data for model outputs.						

Fugitive dust emissions may have a temporary impact on local air quality. In addition, fugitive dust may be a nuisance to those living and working in the Project vicinity. Uncontrolled dust from construction can become a nuisance and potential health hazard to those living and working nearby. SCAQMD Rules 402 and 403 (prohibition of nuisances, watering of inactive and perimeter areas, track out requirements, etc.), are applicable to the Project and were applied in CalEEMod to minimize fugitive dust emissions. [Table 8](#) shows that all criteria pollutant emissions would remain below their respective thresholds. While impacts would be considered less than significant, the Project would be subject to SCAQMD Rules for reducing fugitive dust, described in the Regulatory Framework subsection above.

Operational Emissions

The Project's operational emissions would be associated with area sources (e.g., landscape maintenance equipment, architectural coatings, off-road equipment, etc.), energy sources, and mobile sources (i.e., motor vehicle use). Primary sources of operational criteria pollutants are from motor vehicle use and area sources. Long-term operational emissions attributable to the Project are summarized in [Table 9: Operational Emissions](#). The operational emissions sources are described below.

Source	Pollutant (Maximum Pounds per Day)					
	Reactive Organic Gases (ROG)	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Sulfur Dioxide (SO ₂)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
Area Source Emissions	1.70	0.02	2.35	0.00	0.00	0.00
Energy Emissions	0.03	0.57	0.48	0.00	0.04	0.04
Mobile Emissions	3.04	3.44	30.60	0.08	6.48	1.68
Stationary Source Emissions - Generator	1.69	4.71	4.30	0.01	0.25	0.25
Total Emissions	6.46	8.74	37.73	0.09	6.77	1.97
<i>SCAQMD Threshold</i>	<i>55</i>	<i>55</i>	<i>550</i>	<i>150</i>	<i>150</i>	<i>55</i>
Exceeds Threshold?	No	No	No	No	No	No

Source: CalEEMod version 2022.1. Refer to [Appendix A: Air Quality Monitoring Data](#) for model outputs.

- **Area Source Emissions.** Area source emissions would be generated due to on-site equipment, architectural coating, and landscaping that were previously not present on the site.
- **Energy Source Emissions.** Energy source emissions would be generated due to electricity and natural gas usage associated with the Project. Primary uses of electricity and natural gas by the Project would be for space heating and cooling, water heating, ventilation, lighting, appliances, and electronics.
- **Mobile Source.** Mobile sources are emissions from motor vehicles, including tailpipe and evaporative emissions. Depending upon the pollutant being discussed, the potential air quality impact may be of either regional or local concern. For example, ROG, NO_x, PM₁₀, and PM_{2.5} are all pollutants of regional concern. NO_x and ROG react with sunlight to form O₃, known as photochemical smog. Additionally, wind currents readily transport PM₁₀ and PM_{2.5}. However, CO tends to be a localized pollutant, dispersing rapidly at the source.

Project-generated vehicle emissions are based on the trip generation within the Project's Traffic Scoping Agreement and incorporated into CalEEMod as recommended by the SCAQMD. Per the Traffic Scoping Agreement, the Project would generate a maximum of 715 daily trips.

As shown in [Table 9](#), the Project's net operational emissions would not exceed SCAQMD thresholds for any criteria air pollutants. Therefore, long-term operational emissions would result in a less than significant impact.

Cumulative Short-Term Emissions

The SCAB is designated nonattainment for O₃, PM₁₀, and PM_{2.5} for the CAAQS and nonattainment for O₃ and PM_{2.5} for the NAAQS. Appendix D of the SCAQMD *White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution* (2003) notes that projects that result in emissions that do not exceed the project specific SCAQMD regional thresholds of significance should result in a less than significant impact on a cumulative basis unless there is other pertinent information to the contrary. The mass-based regional significance thresholds published by the SCAQMD are designed to ensure compliance with both NAAQS and CAAQS and are based on an inventory of projected emissions in the SCAB. Therefore, if a project is estimated to result in emissions that do not exceed the thresholds, the project's contribution to the cumulative air quality impact in the SCAB would not be cumulatively considerable. As shown in [Table 8](#) above, Project construction-related emissions by themselves would not exceed the SCAQMD significance thresholds for criteria pollutants. Therefore, the Project would not generate a cumulatively considerable contribution to air pollutant emissions during construction.

The SCAQMD has developed strategies to reduce criteria pollutant emissions outlined in the AQMPs pursuant to the FCAA mandates. The analysis assumed fugitive dust controls would be utilized during construction, including frequent water applications. SCAQMD rules, mandates, and compliance with adopted emissions control measures would also be imposed on construction projects throughout the SCAB, which would include related projects. Compliance with SCAQMD rules and regulations would further reduce Project construction-related emissions. Therefore, Project-related construction emissions, combined with those from other projects in the area, would not substantially deteriorate local air quality. The Project's construction-related emissions would not result in a cumulatively considerable contribution to significant cumulative air quality.

Cumulative Long-Term Impacts

The SCAQMD has not established separate significance thresholds for cumulative operational emissions. The nature of air emissions is largely a cumulative impact. As a result, no single project is sufficient in size to, by itself, result in nonattainment of ambient air quality standards. Instead, individual project emissions contribute to existing cumulatively significant adverse air quality impacts. The SCAQMD developed the operational thresholds of significance based on the level above which individual project emissions would result in a cumulatively considerable contribution to the SCAB's existing air quality conditions. Therefore, a project that exceeds the SCAQMD operational thresholds would also be a cumulatively considerable contribution to a significant cumulative impact.

As shown in [Table 9](#), the Project's net operational emissions would not exceed SCAQMD thresholds. As a result, operational emissions associated with the Project would not result in a cumulatively considerable contribution to significant cumulative air quality impacts. Additionally, adherence to SCAQMD rules and regulations would alleviate potential impacts related to cumulative conditions on a project-by-project basis. Project operations would not contribute a cumulatively considerable net increase of any nonattainment criteria pollutant.

Laws, Ordinances, and Regulations:

Laws, Ordinances, and Regulations (LOR) are existing requirements that are based on local, state, or federal regulations or laws that are frequently required independently of CEQA review. Typical LORs include compliance with the provisions of the Building Code, SCAQMD Rules, etc. The City may impose additional conditions during the approval process, as appropriate. Because LORs are neither Project specific nor a result of development of the Project, they are not considered to be either Project Design Features or Mitigation Measures.

- LOR AQ-1** Prior to the issuance of grading permits, the City Engineer shall confirm that the Grading Plan, Building Plans and Specifications require all construction contractors to comply with South Coast Air Quality Management District's (SCAQMD's) Rules 402 and 403 to minimize construction emissions of dust and particulates. The measures include, but are not limited to, the following:
- Portions of a construction site to remain inactive longer than a period of three months will be seeded and watered until grass cover is grown or otherwise stabilized.
 - All on-site roads will be paved as soon as feasible or watered periodically or chemically stabilized.
 - All material transported off site will be either sufficiently watered or securely covered to prevent excessive amounts of dust.
 - The area disturbed by clearing, grading, earthmoving, or excavation operations will be minimized at all times.
 - Where vehicles leave a construction site and enter adjacent public streets, the streets will be swept daily or washed down at the end of the work day to remove soil tracked onto the paved surface.
- SCAQ-2** Pursuant to SCAQMD Rule 1113, the Project Applicant shall require by contract specifications that the interior and exterior architectural coatings products used would have a volatile organic compound rating of 50 grams per liter or less.
- LOR AQ-3** Require diesel powered construction equipment to turn off when not in use per Title 13 of the California Code of Regulations, Section 2449.
- LOR AQ-4** Install water-efficient irrigation systems and devices, such as soil moisture-based irrigation controls and sensors for landscaping according to the City's Water Efficient Landscape requirements (Chapter 15.54 of the City's Municipal Code).
- LOR AQ-5** The Project shall be designed in accordance with the applicable Title 24 Energy Efficiency Standards for Nonresidential Buildings (California Code of Regulations [CCR], Title 24, Part 6). These standards are updated, nominally every three years, to incorporate improved energy efficiency technologies and methods. The Building Official, or designee shall ensure compliance prior to the issuance of each building permit. The Title 24 Energy Efficiency Standards (Section 110.10(b)1) require all buildings to be designed to have a total area of at least 15 percent (after subtracting any skylights) "solar ready" zone on the roof top that will structurally accommodate later installation of rooftop solar panels. The installation of the solar panels is specific to the end use and will be determined at the

time the specific projects are developed. If future building operators pursue providing rooftop solar panels, they will submit plans for solar panels prior to occupancy.

LOR AQ-6 The Project shall be designed in accordance with the applicable California Green Building Standards (CALGreen) Code (24 CCR, Part 11). The Building Official, or designee shall ensure compliance prior to the issuance of each building permit. These requirements include, but are not limited to:

- Design buildings to be water-efficient. Install water-efficient fixtures in accordance with Section 4.303 (residential) and Section 5.303 (nonresidential) of the California Green Building Standards Code Part 11.
- Recycle and/or salvage for reuse a minimum of 65 percent of the nonhazardous construction and demolition waste in accordance with Section 4.408.1 (residential) and Section 5.408.1 (nonresidential) of the California Green Building Standards Code Part 11.
- Provide storage areas for recyclables and green waste and adequate recycling containers located in readily accessible areas in accordance with Section 4.410 (residential) and Section 5.410 (nonresidential) of the California Green Building Standards Code Part 11.
- Provide designated parking for any combination of low-emitting, fuel efficient and carpool/van pool vehicles. At least eight percent of the total parking spaces are required to be designated in accordance with Section 5.106.5.2 (nonresidential), Designated Parking for Clean Air Vehicles, of the California Green Building Standards Code Part 11.
- To facilitate future installation of electric vehicle supply equipment (EVSE), nonresidential construction shall comply with Section 5.106.5.3 (nonresidential electric vehicle charging) of the California Green Building Standards Code Part 11.

Mitigation Measures: No mitigation is required.

Level of Significance: Less than significant impact.

Threshold 5.3 Would the Project expose sensitive receptors to substantial pollutant concentrations?

Localized Construction Significance Analysis

The nearest sensitive receptor is the single-family residences located 657 feet (200 meters) to the east of the Project site. To identify impacts to sensitive receptors, the SCAQMD recommends addressing LSTs for construction. LSTs were developed in response to SCAQMD Governing Boards' Environmental Justice Enhancement Initiative (I-4). The SCAQMD provided the *Final Localized Significance Threshold Methodology* (dated June 2003 [revised 2008]) for guidance. The LST methodology assists lead agencies in analyzing localized impacts associated with Project-specific emissions.

Since CalEEMod calculates construction emissions based on the number of equipment hours and the maximum daily soil disturbance activity possible for each piece of equipment, Table 10: Equipment-Specific Grading Rates, is used to determine the maximum daily disturbed acreage for comparison to LSTs. The appropriate SRA for the localized significance thresholds is the East San Bernardino Valley (SRA 35)

since this area includes the Project. LSTs apply to CO, NO₂, PM₁₀, and PM_{2.5}. The SCAQMD produced look-up tables for projects that disturb areas less than or equal to 5 acres in size. Project construction is anticipated to disturb a maximum of 4 acres in a single day during the grading phase. As the LST guidance provides thresholds for projects disturbing 1-, 2-, and 5-acres in size and the thresholds increase with size of the site, the LSTs for a 4-acre threshold were interpolated and utilized for this analysis.

Construction Phase	Equipment Type	Equipment Quantity	Acres Graded per 8-Hour Day	Operating Hours per Day	Acres Graded per Day
Grading	Tractors	2	0.5	8	1
	Graders	1	0.5	8	0.5
	Dozers	1	0.5	8	0.5
	Scrapers	2	1	8	2
Total Acres Graded per Day					4

Source: CalEEMod version 2022.1. Refer to [Appendix A: Air Quality Monitoring Data](#) for model outputs.

The SCAQMD’s methodology states that “off-site mobile emissions from the Project should not be included in the emissions compared to LSTs.” Therefore, only emissions included in the CalEEMod “on-site” emissions outputs were considered. The nearest sensitive receptors are single-family residences located 657 feet (200 meters) east of the Project. LST thresholds are provided for distances to sensitive receptors of 25, 50, 100, 200, and 500 meters. Therefore, LSTs for 200 meters were utilized in this analysis. [Table 11: Localized Significance of Construction Emissions](#), shows the results of localized emissions during construction. This table represents the worst-case scenario and are based on peak earthwork volumes anticipated. As shown, localized Project construction emissions would not exceed SCAQMD thresholds. Impacts would be less than significant in this regard.

Construction Activity	Pollutant (Maximum Pounds per Day)			
	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
Site Preparation (2023)	39.74	35.47	9.47	5.60
Grading (2023)	37.30	31.41	5.18	2.89
Building Construction (2023)	11.81	13.17	0.55	0.51
Building Construction (2024)	11.22	13.12	0.50	0.46
Paving (2024)	7.81	10.03	0.39	0.36
Architectural Coating (2024)	0.91	1.15	0.03	0.03
<i>SCAQMD Localized Screening Threshold (adjusted for 4 acres at 200 meters)</i>	<i>450</i>	<i>8,154</i>	<i>105</i>	<i>37</i>
Exceed SCAQMD Threshold?	No	No	No	No

Source: CalEEMod version 2022.1. Refer to [Appendix A: Air Quality Monitoring Data](#) for model outputs.

Localized Operational Significance Analysis

According to the SCAQMD LST methodology, LSTs would apply to the operational phase of a project only if it includes stationary sources or attracts mobile sources that may spend long periods queuing and idling at the site (e.g., warehouse or transfer facilities). Since the Project is an automobile sales and service facility, the operational phase LST protocol is conservatively applied to both the area source and mobile source emissions. As the nearest receptor is located approximately 657 feet (200 meters) from the Project site, LSTs for 200 meters for SRA 35 were used in this analysis. Although the Project site is approximately 18.56 acres, the 5-acre LST threshold was conservatively assumed for the Project, as the LSTs increase with the size of the site. Therefore, the 5-acre LSTs are conservative for evaluation of a 18.56-acre site.

The LST analysis only includes on-site sources. However, the CalEEMod model outputs do not separate on- and off-site emissions for mobile sources. For a worst-case scenario assessment, the emissions shown in [Table 12: Localized Significance of Operational Emissions](#), conservatively include all on-site Project-related stationary sources and 10 percent of the Project-related new mobile sources, since a portion of mobile sources could include automobiles idling on-site. [Table 12](#) shows that the maximum daily emissions of these pollutants during operations would not result in significant concentrations of pollutants at nearby sensitive receptors. Therefore, significant impacts would not occur concerning LSTs during operational activities.

Activity	Pollutant (Maximum Pounds per Day)			
	Nitrogen Oxide (NO _x)	Carbon Monoxide (CO)	Coarse Particulate Matter (PM ₁₀)	Fine Particulate Matter (PM _{2.5})
On-Site and Mobile Source Emissions ¹	5.64	10.19	0.94	0.46
SCAQMD Localized Screening Threshold (Adjusted for 5 acres at 200 meters)	486	9,044	28	10
Exceed SCAQMD Threshold?	No	No	No	No
Notes:				
1. Conservatively assumes 10 percent of mobile emissions are on-site.				
Source: CalEEMod version 2022.1. Refer to Appendix A: Air Quality Monitoring Data for model outputs.				

Criteria Pollutant Health Impacts

On December 24, 2018, the California Supreme Court issued an opinion identifying the need to provide sufficient information connecting a project's air emissions to health impacts or explain why such information could not be ascertained (*Sierra Club v. County of Fresno* [Friant Ranch, L.P.] [2018] Cal.5th, Case No. S219783). The SCAQMD has set its CEQA significance thresholds based on the FCAA, which defines a major stationary source (in extreme ozone nonattainment areas such as the SCAB) as emitting 10 tons per year. The thresholds correlate with the trigger levels for the federal New Source Review (NSR) Program and SCAQMD Rule 1303 for new or modified sources. The NSR Program³ was created by the FCAA to ensure that stationary sources of air pollution are constructed or modified in a manner that is consistent with attainment of health-based NAAQS. The NAAQS establish the levels of air quality necessary, with an adequate margin of safety, to protect the public health. Therefore, projects that do not exceed the SCAQMD's LSTs and mass emissions thresholds would not violate any air quality standards or contribute substantially to an existing or projected air quality violation and no criteria pollutant health

³ Code of Federal Regulation (CFR) [i.e., PSD (40 CFR 52.21, 40 CFR 51.166, 40 CFR 51.165 (b)), Non-attainment NSR (40 CFR 52.24, 40 CFR 51.165, 40 CFR part 51, Appendix S)]

impacts would occur. NO_x and ROG are precursor emissions that form ozone in the atmosphere in the presence of sunlight where the pollutants undergo complex chemical reactions. It takes time and the influence of meteorological conditions for these reactions to occur, so ozone may be formed at a distance downwind from the sources. Breathing ground-level ozone can result in health effects that include: reduced lung function, inflammation of airways, throat irritation, pain, burning, or discomfort in the chest when taking a deep breath, chest tightness, wheezing, or shortness of breath. In addition to these effects, evidence from observational studies strongly indicates that higher daily ozone concentrations are associated with increased asthma attacks, increased hospital admissions, increased daily mortality, and other markers of morbidity. The consistency and coherence of the evidence for effects upon asthmatics suggests that ozone can make asthma symptoms worse and can increase sensitivity to asthma triggers.

According to the SCAQMD AQMPs, ozone, NO_x, and ROG have been decreasing in the SCAB since 1975 and are projected to continue to decrease in the future. Although vehicle miles traveled in the SCAB continue to increase, NO_x and ROG levels are decreasing because of the mandated controls on motor vehicles and the replacement of older polluting vehicles with lower-emitting vehicles. NO_x emissions from electric utilities have also decreased due to the use of cleaner fuels and renewable energy. The 2022 AQMP demonstrates how the SCAQMD's control strategy to meet the 8-hour O₃ standard in 2037. In addition, since NO_x emissions also lead to the formation of PM_{2.5}, the NO_x reductions needed to meet the O₃ standards will likewise lead to improvement of PM_{2.5} levels and attainment of PM_{2.5} standards. The SCAQMD's air quality modeling demonstrates that NO_x reductions prove to be much more effective in reducing ozone levels and will also lead to significant improvement in PM_{2.5} concentrations. NO_x-emitting stationary sources regulated by the SCAQMD include Regional Clean Air Incentives Market (RECLAIM) facilities (e.g., refineries, power plants, etc.), natural gas combustion equipment (e.g., boilers, heaters, engines, burners, flares) and other combustion sources that burn wood or propane. The AQMPs identify robust NO_x reductions from new regulations on RECLAIM facilities, non-refinery flares, commercial cooking, and residential and commercial appliances. Such combustion sources are already heavily regulated with the lowest NO_x emissions levels achievable but there are opportunities to require and accelerate replacement with cleaner zero-emission alternatives, such as residential and commercial furnaces, pool heaters, and backup power equipment. The AQMD plans to achieve such replacements through a combination of regulations and incentives. Technology-forcing regulations can drive development and commercialization of clean technologies, with future year requirements for new or existing equipment. Incentives can then accelerate deployment and enhance public acceptability of new technologies.

As previously discussed, Project emissions would be less than significant and would not exceed SCAQMD thresholds (refer to [Table 8](#) and [Table 9](#)). Localized effects of on-site Project emissions on nearby sensitive receptors were also found to be less than significant (refer to [Table 11](#) and [Table 12](#)). The LSTs represent the maximum emissions from a project that are not expected to cause or contribute to an exceedance of the most stringent applicable CAAQS or NAAQS. The LSTs were developed by the SCAQMD based on the ambient concentrations of that pollutant for each SRA and distance to the nearest sensitive receptor. The CAAQS and NAAQS establish the levels of air quality necessary, with an adequate margin of safety, to protect public health, including protecting the health of sensitive populations. Information on health impacts related to exposure to ozone and particulate matter emissions published by the U.S. EPA and CARB have been summarized above and discussed in the Regulatory Framework section. As shown above, Project-related emissions would not exceed the regional thresholds or the LSTs, and therefore would not exceed the ambient air quality standards or cause an increase in the frequency or severity of existing violations of air quality standards. Therefore, the Project would not expose sensitive receptors to criteria pollutant levels in excess of the health-based ambient air quality standards.

Carbon Monoxide Hotspots

An analysis of CO “hot spots” is needed to determine whether the change in the level of service of an intersection resulting from the Project would have the potential to result in exceedances of the CAAQS or NAAQS. It has long been recognized that CO exceedances are caused by vehicular emissions, primarily when vehicles are idling at intersections. Vehicle emissions standards have become increasingly stringent in the last 20 years. With the turnover of older vehicles, introduction of cleaner fuels, and implementation of control technology on industrial facilities, CO concentrations have steadily declined. Accordingly, with the steadily decreasing CO emissions from vehicles, even very busy intersections do not result in exceedances of the CO standard.

The SCAB was re-designated as attainment for CO in 2007 and is no longer addressed in the SCAQMD’s AQMP. The 2003 AQMP is the most recent version that addresses CO concentrations. As part of the SCAQMD *CO Hotspot Analysis*, the Wilshire Boulevard/Veteran Avenue intersection, one of the most congested intersections in Southern California with an average daily traffic (ADT) volume of approximately 100,000 vehicles per day, was modeled for CO concentrations. This modeling effort identified a CO concentration high of 4.6 ppm, which is well below the 35-ppm NAAQS. The Project considered herein would not produce the volume of traffic required to generate a CO hot spot in the context of SCAQMD’s *CO Hotspot Analysis*. As CO hotspots were not experienced at the Wilshire Boulevard/Veteran Avenue intersection even though it accommodates 100,000 vehicles daily, it can be reasonably inferred that CO hotspots would not be experienced at any Project area intersections resulting from 715 additional vehicle trips attributable to the Project. Therefore, impacts would be less than significant.

Mitigation Measures: No mitigation is required.

Level of Significance: Less than significant impact.

Threshold 5.4 Would the Project result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

Construction

Odors that could be generated by construction activities are required to follow SCAQMD Rule 402 to prevent odor nuisances on sensitive land uses. SCAQMD Rule 402, Nuisance, states:

A person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.

Construction equipment emissions, such as diesel exhaust, and volatile organic compounds from architectural coatings and paving activities, may generate odors. However, these odors would be temporary, are not expected to affect a substantial number of people and would disperse rapidly. Therefore, Project construction activities would not result in objectionable odors that would adversely affect a substantial number of people and impacts would be less than significant.

Operations

The SCAQMD *CEQA Air Quality Handbook* identifies certain land uses as sources of odors. These land uses include agriculture (farming and livestock), wastewater treatment plants, food processing plants, chemical plants, composting facilities, refineries, landfills, dairies, and fiberglass molding. The Project would not include any of the land uses that have been identified by the SCAQMD as odor sources. Therefore, Project operations would not result in odors that would adversely affect people.

Mitigation Measures: No mitigation is required.

Level of Significance: No impact.

6 REFERENCES

1. California Air Pollution Control Officers Association (CAPCOA), *Health Effects*, 2018.
2. California Air Pollution Control Officers Association (CAPCOA), *Health Risk Assessments for Proposed Land Use Projects*, 2009.
3. California Air Resources Board, *Aerometric Data Analysis and Measurement System (ADAM) Top Four Summaries from 2019 to 2021*, 2022.
4. California Air Resources Board, *Air Quality and Land Use Handbook: A Community Health Perspective*, 2005.
5. California Air Resources Board, *Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-Fueled Engines and Vehicles*, 2000.
6. City of Redlands, *General Plan 2035*, 2018.
7. City of Redlands, *Redlands Municipal Code*, current through Ord. 2953, January 17, 2023.
8. Kimley-Horn, *Scoping Letter Agreement for Traffic Study for the Proposed Used Automobile Sales and Service Facility Project in the City of Redlands*, May 2023.
9. South Coast Air Quality Management District, *2016 Air Quality Management Plan*, March 2017.
10. South Coast Air Quality Management District, *2022 Air Quality Management Plan*, December 2022.
- 11.
12. South Coast Air Quality Management District, *CEQA Air Quality Handbook*, 1993.
13. South Coast Air Quality Management District, *Localized Significance Threshold Methodology*, 2008.
14. South Coast Air Quality Management District, *High-Cube Warehouse Vehicle Trip Generation Analysis*, 2016.
15. South Coast Air Quality Management District, *South Coast AQMD Air Quality Significance Thresholds*, April 2019.
16. United States Environmental Protection Agency, *National Ambient Air Quality Standards Table*, 2016.
17. United States Environmental Protection Agency, *Nonattainment Areas for Criteria Pollutants*, 2019.
18. United States Environmental Protection Agency, *Policy Assessment for the Review of the Lead National Ambient Air Quality Standards*, 2013.

Appendix A

Air Quality Modeling Data

Redlands Used Automobile Sales and Service Facility Detailed Report

Table of Contents

1. Basic Project Information
 - 1.1. Basic Project Information
 - 1.2. Land Use Types
 - 1.3. User-Selected Emission Reduction Measures by Emissions Sector
2. Emissions Summary
 - 2.1. Construction Emissions Compared Against Thresholds
 - 2.2. Construction Emissions by Year, Unmitigated
 - 2.4. Operations Emissions Compared Against Thresholds
 - 2.5. Operations Emissions by Sector, Unmitigated
3. Construction Emissions Details
 - 3.1. Site Preparation (2023) - Unmitigated
 - 3.3. Grading (2023) - Unmitigated
 - 3.5. Building Construction (2023) - Unmitigated
 - 3.7. Building Construction (2024) - Unmitigated

3.9. Paving (2024) - Unmitigated

3.11. Architectural Coating (2024) - Unmitigated

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

4.3. Area Emissions by Source

4.3.1. Unmitigated

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

5. Activity Data

5.1. Construction Schedule

5.2. Off-Road Equipment

5.2.1. Unmitigated

5.3. Construction Vehicles

5.3.1. Unmitigated

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

5.5. Architectural Coatings

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

5.6.2. Construction Earthmoving Control Strategies

5.7. Construction Paving

5.8. Construction Electricity Consumption and Emissions Factors

5.9. Operational Mobile Sources

5.9.1. Unmitigated

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

5.10.3. Landscape Equipment

5.11. Operational Energy Consumption

5.11.1. Unmitigated

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

5.13. Operational Waste Generation

5.13.1. Unmitigated

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

5.16.2. Process Boilers

5.17. User Defined

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

5.18.2. Sequestration

5.18.2.1. Unmitigated

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

6.2. Initial Climate Risk Scores

6.3. Adjusted Climate Risk Scores

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

7.2. Healthy Places Index Scores

7.3. Overall Health & Equity Scores

7.4. Health & Equity Measures

7.5. Evaluation Scorecard

7.6. Health & Equity Custom Measures

8. User Changes to Default Data

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	Redlands Used Automobile Sales and Service Facility
Construction Start Date	6/15/2023
Operational Year	2025
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.50
Precipitation (days)	24.0
Location	34.06723082095773, -117.19784045506401
County	San Bernardino-South Coast
City	Redlands
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5399
EDFZ	10
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.21

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description
------------------	------	------	-------------	-----------------------	------------------------	--------------------------------	------------	-------------

General Office Building	11.4	1000sqft	5.66	11,404	235,224	—	—	—
Other Asphalt Surfaces	6.70	Acre	6.70	0.00	0.00	—	—	—
Parking Lot	5.22	Acre	5.22	0.00	0.00	—	—	—
Automobile Care Center	42.6	1000sqft	0.98	42,610	0.00	—	—	—

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.80	6.55	39.8	37.1	0.06	1.81	7.89	9.70	1.66	3.99	5.65	—	7,104	7,104	0.30	0.10	1.86	7,143
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.63	6.55	12.3	14.6	0.03	0.56	0.30	0.86	0.51	0.07	0.59	—	2,911	2,911	0.13	0.07	0.05	2,935
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.18	1.74	9.51	9.31	0.02	0.42	1.09	1.51	0.39	0.49	0.87	—	1,756	1,756	0.08	0.03	0.28	1,766
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.22	0.32	1.74	1.70	< 0.005	0.08	0.20	0.27	0.07	0.09	0.16	—	291	291	0.01	< 0.005	0.05	292

Exceeds (Daily Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	75.0	100	550	150	—	—	150	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Exceeds (Average Daily)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	75.0	100	550	150	—	—	150	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2023	4.80	4.04	39.8	37.1	0.06	1.81	7.89	9.70	1.66	3.99	5.65	—	7,104	7,104	0.30	0.10	1.86	7,143
2024	1.57	6.55	11.6	14.7	0.03	0.50	0.30	0.80	0.46	0.07	0.54	—	2,924	2,924	0.13	0.07	1.77	2,950
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2023	1.63	1.36	12.3	14.6	0.03	0.56	0.30	0.86	0.51	0.07	0.59	—	2,911	2,911	0.13	0.07	0.05	2,935
2024	1.56	6.55	11.7	14.4	0.03	0.50	0.30	0.80	0.46	0.07	0.54	—	2,903	2,903	0.13	0.07	0.05	2,927
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2023	1.18	0.99	9.51	9.31	0.02	0.42	1.09	1.51	0.39	0.49	0.87	—	1,756	1,756	0.08	0.03	0.28	1,766
2024	0.62	1.74	4.51	5.86	0.01	0.20	0.12	0.32	0.19	0.03	0.21	—	1,071	1,071	0.05	0.02	0.27	1,079
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

2023	0.22	0.18	1.74	1.70	< 0.005	0.08	0.20	0.27	0.07	0.09	0.16	—	291	291	0.01	< 0.005	0.05	292
2024	0.11	0.32	0.82	1.07	< 0.005	0.04	0.02	0.06	0.03	0.01	0.04	—	177	177	0.01	< 0.005	0.05	179

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.88	4.77	3.79	33.4	0.08	0.10	6.42	6.52	0.10	1.63	1.73	105	9,221	9,326	11.0	0.38	8,863	18,576
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.25	4.17	4.01	25.7	0.07	0.09	6.42	6.52	0.09	1.63	1.72	105	8,726	8,831	11.0	0.39	8,835	18,057
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.33	4.29	3.58	24.5	0.06	0.09	5.18	5.27	0.09	1.32	1.40	105	7,514	7,619	11.0	0.34	8,844	16,838
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.61	0.78	0.65	4.47	0.01	0.02	0.95	0.96	0.02	0.24	0.26	17.4	1,244	1,261	1.82	0.06	1,464	2,788
Exceeds (Daily Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	55.0	55.0	550	150	—	—	150	—	—	55.0	—	—	—	—	—	—	—
Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
Exceeds (Average Daily)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Threshold	—	55.0	55.0	550	150	—	—	150	—	—	55.0	—	—	—	—	—	—	—

Unmit.	—	No	No	No	No	—	—	No	—	—	No	—	—	—	—	—	—	—
--------	---	----	----	----	----	---	---	----	---	---	----	---	---	---	---	---	---	---

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	3.40	3.04	3.19	30.6	0.08	0.05	6.42	6.48	0.05	1.63	1.68	—	7,699	7,699	0.33	0.34	28.8	7,837
Area	0.42	1.70	0.02	2.35	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	9.66	9.66	< 0.005	< 0.005	—	9.70
Energy	0.06	0.03	0.57	0.48	< 0.005	0.04	—	0.04	0.04	—	0.04	—	1,454	1,454	0.13	0.01	—	1,461
Water	—	—	—	—	—	—	—	—	—	—	—	11.6	58.4	70.0	1.19	0.03	—	108
Waste	—	—	—	—	—	—	—	—	—	—	—	93.4	0.00	93.4	9.34	0.00	—	327
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8,834	8,834
Total	3.88	4.77	3.79	33.4	0.08	0.10	6.42	6.52	0.10	1.63	1.73	105	9,221	9,326	11.0	0.38	8,863	18,576
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	3.18	2.83	3.44	25.3	0.07	0.05	6.42	6.48	0.05	1.63	1.68	—	7,213	7,213	0.35	0.35	0.75	7,327
Area	—	1.31	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.06	0.03	0.57	0.48	< 0.005	0.04	—	0.04	0.04	—	0.04	—	1,454	1,454	0.13	0.01	—	1,461
Water	—	—	—	—	—	—	—	—	—	—	—	11.6	58.4	70.0	1.19	0.03	—	108
Waste	—	—	—	—	—	—	—	—	—	—	—	93.4	0.00	93.4	9.34	0.00	—	327
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8,834	8,834
Total	3.25	4.17	4.01	25.7	0.07	0.09	6.42	6.52	0.09	1.63	1.72	105	8,726	8,831	11.0	0.39	8,835	18,057
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	2.98	2.68	2.99	22.4	0.06	0.04	5.18	5.22	0.04	1.32	1.36	—	5,994	5,994	0.31	0.30	10.2	6,101
Area	0.29	1.57	0.01	1.61	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.62	6.62	< 0.005	< 0.005	—	6.64

Energy	0.06	0.03	0.57	0.48	< 0.005	0.04	—	0.04	0.04	—	0.04	—	1,454	1,454	0.13	0.01	—	1,461
Water	—	—	—	—	—	—	—	—	—	—	—	11.6	58.4	70.0	1.19	0.03	—	108
Waste	—	—	—	—	—	—	—	—	—	—	—	93.4	0.00	93.4	9.34	0.00	—	327
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8,834	8,834
Total	3.33	4.29	3.58	24.5	0.06	0.09	5.18	5.27	0.09	1.32	1.40	105	7,514	7,619	11.0	0.34	8,844	16,838
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.54	0.49	0.55	4.09	0.01	0.01	0.95	0.95	0.01	0.24	0.25	—	992	992	0.05	0.05	1.68	1,010
Area	0.05	0.29	< 0.005	0.29	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.10	1.10	< 0.005	< 0.005	—	1.10
Energy	0.01	0.01	0.10	0.09	< 0.005	0.01	—	0.01	0.01	—	0.01	—	241	241	0.02	< 0.005	—	242
Water	—	—	—	—	—	—	—	—	—	—	—	1.91	9.67	11.6	0.20	< 0.005	—	17.9
Waste	—	—	—	—	—	—	—	—	—	—	—	15.5	0.00	15.5	1.55	0.00	—	54.1
Refrig.	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1,463	1,463
Total	0.61	0.78	0.65	4.47	0.01	0.02	0.95	0.96	0.02	0.24	0.26	17.4	1,244	1,261	1.82	0.06	1,464	2,788

3. Construction Emissions Details

3.1. Site Preparation (2023) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	4.70	3.95	39.7	35.5	0.05	1.81	—	1.81	1.66	—	1.66	—	5,295	5,295	0.21	0.04	—	5,314
Dust From Material Movement	—	—	—	—	—	—	7.67	7.67	—	3.94	3.94	—	—	—	—	—	—	—

Redlands Used Automobile Sales and Service Facility Detailed Report, 12/12/2023

Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.39	0.32	3.27	2.92	< 0.005	0.15	—	0.15	0.14	—	0.14	—	435	435	0.02	< 0.005	—	437	
Dust From Material Movement	—	—	—	—	—	—	0.63	0.63	—	0.32	0.32	—	—	—	—	—	—	—	
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Off-Road Equipment	0.07	0.06	0.60	0.53	< 0.005	0.03	—	0.03	0.02	—	0.02	—	72.1	72.1	< 0.005	< 0.005	—	72.3	
Dust From Material Movement	—	—	—	—	—	—	0.11	0.11	—	0.06	0.06	—	—	—	—	—	—	—	
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
Worker	0.11	0.10	0.09	1.62	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	257	257	0.01	0.01	1.10	261	
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00	
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.11	0.00	0.00	0.02	0.02	0.00	< 0.005	< 0.005	—	19.6	19.6	< 0.005	< 0.005	0.04	19.9
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.25	3.25	< 0.005	< 0.005	0.01	3.30
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.3. Grading (2023) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	4.43	3.72	37.3	31.4	0.06	1.59	—	1.59	1.47	—	1.47	—	6,598	6,598	0.27	0.05	—	6,621
Dust From Material Movement	—	—	—	—	—	—	3.59	3.59	—	1.43	1.43	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.42	0.36	3.58	3.01	0.01	0.15	—	0.15	0.14	—	0.14	—	633	633	0.03	0.01	—	635

Redlands Used Automobile Sales and Service Facility Detailed Report, 12/12/2023

Dust From Material Movement:	—	—	—	—	—	—	0.34	0.34	—	0.14	0.14	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.08	0.07	0.65	0.55	< 0.005	0.03	—	0.03	0.03	—	0.03	—	105	105	< 0.005	< 0.005	—	105
Dust From Material Movement:	—	—	—	—	—	—	0.06	0.06	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.12	0.11	0.11	1.85	0.00	0.00	0.26	0.26	0.00	0.06	0.06	—	294	294	0.01	0.01	1.26	298
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.03	< 0.005	0.27	0.15	< 0.005	< 0.005	0.06	0.06	< 0.005	0.02	0.02	—	212	212	0.02	0.03	0.44	223
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.14	0.00	0.00	0.02	0.02	0.00	0.01	0.01	—	26.2	26.2	< 0.005	< 0.005	0.05	26.5
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	< 0.005	0.03	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	20.4	20.4	< 0.005	< 0.005	0.02	21.4
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	4.33	4.33	< 0.005	< 0.005	0.01	4.40
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Hauling	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	3.37	3.37	< 0.005	< 0.005	< 0.005	3.54
---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---	------	------	---------	---------	---------	------

3.5. Building Construction (2023) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.50	1.26	11.8	13.2	0.02	0.55	—	0.55	0.51	—	0.51	—	2,397	2,397	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.50	1.26	11.8	13.2	0.02	0.55	—	0.55	0.51	—	0.51	—	2,397	2,397	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.32	0.27	2.52	2.81	< 0.005	0.12	—	0.12	0.11	—	0.11	—	511	511	0.02	< 0.005	—	513
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.46	0.51	< 0.005	0.02	—	0.02	0.02	—	0.02	—	84.7	84.7	< 0.005	< 0.005	—	85.0
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.10	0.09	1.60	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	254	254	0.01	0.01	1.09	258
Vendor	0.03	0.01	0.33	0.18	< 0.005	< 0.005	0.08	0.08	< 0.005	0.02	0.02	—	281	281	0.02	0.04	0.77	294
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.11	1.20	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	233	233	0.01	0.01	0.03	236
Vendor	0.03	0.01	0.35	0.18	< 0.005	< 0.005	0.08	0.08	< 0.005	0.02	0.02	—	281	281	0.02	0.04	0.02	294
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.27	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	50.3	50.3	< 0.005	< 0.005	0.10	51.0
Vendor	0.01	< 0.005	0.07	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	< 0.005	0.01	—	59.9	59.9	0.01	0.01	0.07	62.7
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	8.33	8.33	< 0.005	< 0.005	0.02	8.45
Vendor	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	9.91	9.91	< 0.005	< 0.005	0.01	10.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Building Construction (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Redlands Used Automobile Sales and Service Facility Detailed Report, 12/12/2023

Off-Road Equipment	1.44	1.20	11.2	13.1	0.02	0.50	—	0.50	0.46	—	0.46	—	2,398	2,398	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.44	1.20	11.2	13.1	0.02	0.50	—	0.50	0.46	—	0.46	—	2,398	2,398	0.10	0.02	—	2,406
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.36	0.30	2.83	3.31	0.01	0.13	—	0.13	0.12	—	0.12	—	605	605	0.02	< 0.005	—	607
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.07	0.06	0.52	0.60	< 0.005	0.02	—	0.02	0.02	—	0.02	—	100	100	< 0.005	< 0.005	—	101
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.10	0.09	0.08	1.46	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	249	249	0.01	0.01	0.99	253
Vendor	0.03	0.01	0.32	0.17	< 0.005	< 0.005	0.08	0.08	< 0.005	0.02	0.02	—	278	278	0.02	0.04	0.77	291
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.09	0.10	1.10	0.00	0.00	0.23	0.23	0.00	0.05	0.05	—	228	228	0.01	0.01	0.03	231

Vendor	0.03	0.01	0.33	0.17	< 0.005	< 0.005	0.08	0.08	< 0.005	0.02	0.02	—	278	278	0.02	0.04	0.02	291
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.29	0.00	0.00	0.06	0.06	0.00	0.01	0.01	—	58.4	58.4	< 0.005	< 0.005	0.11	59.2
Vendor	0.01	< 0.005	0.08	0.04	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	70.1	70.1	0.01	0.01	0.08	73.4
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	9.67	9.67	< 0.005	< 0.005	0.02	9.80
Vendor	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	< 0.005	—	11.6	11.6	< 0.005	< 0.005	0.01	12.2
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Paving (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.01	0.85	7.81	10.0	0.01	0.39	—	0.39	0.36	—	0.36	—	1,512	1,512	0.06	0.01	—	1,517
Paving	—	0.48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Redlands Used Automobile Sales and Service Facility Detailed Report, 12/12/2023

Off-Road Equipment	0.18	0.15	1.39	1.79	< 0.005	0.07	—	0.07	0.06	—	0.06	—	269	269	0.01	< 0.005	—	270
Paving	—	0.09	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.03	0.25	0.33	< 0.005	0.01	—	0.01	0.01	—	0.01	—	44.6	44.6	< 0.005	< 0.005	—	44.7
Paving	—	0.02	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.09	0.08	0.07	1.27	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	216	216	0.01	0.01	0.86	219
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.02	0.18	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	35.7	35.7	< 0.005	< 0.005	0.07	36.3
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	5.92	5.92	< 0.005	< 0.005	0.01	6.00
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.11. Architectural Coating (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.17	0.14	0.91	1.15	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architect ural Coatings	—	6.40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.17	0.14	0.91	1.15	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architect ural Coatings	—	6.40	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.03	0.02	0.16	0.20	< 0.005	0.01	—	0.01	0.01	—	0.01	—	23.8	23.8	< 0.005	< 0.005	—	23.9
Architect ural Coatings	—	1.14	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Redlands Used Automobile Sales and Service Facility Detailed Report, 12/12/2023

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	< 0.005	0.03	0.04	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	3.94	3.94	< 0.005	< 0.005	—	3.95
Architectural Coatings	—	0.21	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.29	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	49.8	49.8	< 0.005	< 0.005	0.20	50.5
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.02	0.02	0.02	0.22	0.00	0.00	0.05	0.05	0.00	0.01	0.01	—	45.6	45.6	< 0.005	< 0.005	0.01	46.2
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.04	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	8.24	8.24	< 0.005	< 0.005	0.02	8.35
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.36	1.36	< 0.005	< 0.005	< 0.005	1.38
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	1.47	1.32	1.38	13.2	0.03	0.02	2.78	2.80	0.02	0.71	0.73	—	3,327	3,327	0.14	0.15	12.4	3,387
Other Asphalt Surfaces	1.93	1.73	1.81	17.4	0.04	0.03	3.65	3.68	0.03	0.93	0.95	—	4,372	4,372	0.19	0.19	16.3	4,450
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Automobile Care Center	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	3.40	3.04	3.19	30.6	0.08	0.05	6.42	6.48	0.05	1.63	1.68	—	7,699	7,699	0.33	0.34	28.8	7,837
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	1.38	1.22	1.48	10.9	0.03	0.02	2.78	2.80	0.02	0.71	0.73	—	3,117	3,117	0.15	0.15	0.32	3,166
Other Asphalt Surfaces	1.81	1.61	1.95	14.3	0.04	0.03	3.65	3.68	0.03	0.93	0.95	—	4,096	4,096	0.20	0.20	0.42	4,160

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Automobile Care Center	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	3.18	2.83	3.44	25.3	0.07	0.05	6.42	6.48	0.05	1.63	1.68	—	7,213	7,213	0.35	0.35	0.75	7,327
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	0.25	0.22	0.28	2.07	0.01	< 0.005	0.50	0.50	< 0.005	0.13	0.13	—	521	521	0.02	0.03	0.89	531
Other Asphalt Surfaces	0.29	0.27	0.27	2.02	0.01	< 0.005	0.45	0.45	< 0.005	0.11	0.12	—	471	471	0.03	0.02	0.80	480
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Automobile Care Center	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.54	0.49	0.55	4.09	0.01	0.01	0.95	0.95	0.01	0.24	0.25	—	992	992	0.05	0.05	1.68	1,010

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	—	190	190	0.02	< 0.005	—	191

Redlands Used Automobile Sales and Service Facility Detailed Report, 12/12/2023

Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	190	190	0.02	< 0.005	—	191
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	—	388	388	0.04	< 0.005	—	390
Total	—	—	—	—	—	—	—	—	—	—	—	—	769	769	0.07	0.01	—	773
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	—	190	190	0.02	< 0.005	—	191
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	190	190	0.02	< 0.005	—	191
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	—	388	388	0.04	< 0.005	—	390
Total	—	—	—	—	—	—	—	—	—	—	—	—	769	769	0.07	0.01	—	773
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	—	31.5	31.5	< 0.005	< 0.005	—	31.7
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	31.5	31.5	< 0.005	< 0.005	—	31.7

Automob Care Center	—	—	—	—	—	—	—	—	—	—	—	—	64.3	64.3	0.01	< 0.005	—	64.6
Total	—	—	—	—	—	—	—	—	—	—	—	—	127	127	0.01	< 0.005	—	128

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	0.01	< 0.005	0.08	0.07	< 0.005	0.01	—	0.01	0.01	—	0.01	—	100	100	0.01	< 0.005	—	101
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Automob ile Care Center	0.05	0.03	0.49	0.41	< 0.005	0.04	—	0.04	0.04	—	0.04	—	586	586	0.05	< 0.005	—	587
Total	0.06	0.03	0.57	0.48	< 0.005	0.04	—	0.04	0.04	—	0.04	—	686	686	0.06	< 0.005	—	688
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	0.01	< 0.005	0.08	0.07	< 0.005	0.01	—	0.01	0.01	—	0.01	—	100	100	0.01	< 0.005	—	101
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00

Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	0.05	0.03	0.49	0.41	< 0.005	0.04	—	0.04	0.04	—	0.04	—	586	586	0.05	< 0.005	—	587
Total	0.06	0.03	0.57	0.48	< 0.005	0.04	—	0.04	0.04	—	0.04	—	686	686	0.06	< 0.005	—	688
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	< 0.005	< 0.005	0.02	0.01	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	16.6	16.6	< 0.005	< 0.005	—	16.6
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	0.01	< 0.005	0.09	0.08	< 0.005	0.01	—	0.01	0.01	—	0.01	—	97.0	97.0	0.01	< 0.005	—	97.2
Total	0.01	0.01	0.10	0.09	< 0.005	0.01	—	0.01	0.01	—	0.01	—	114	114	0.01	< 0.005	—	114

4.3. Area Emissions by Source

4.3.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	1.20	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Architect Coatings	—	0.11	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.42	0.39	0.02	2.35	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	9.66	9.66	< 0.005	< 0.005	—	9.70
Total	0.42	1.70	0.02	2.35	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	9.66	9.66	< 0.005	< 0.005	—	9.70
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	1.20	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.11	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	1.31	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	0.22	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.02	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.05	0.05	< 0.005	0.29	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.10	1.10	< 0.005	< 0.005	—	1.10
Total	0.05	0.29	< 0.005	0.29	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.10	1.10	< 0.005	< 0.005	—	1.10

4.4. Water Emissions by Land Use

4.4.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Redlands Used Automobile Sales and Service Facility Detailed Report, 12/12/2023

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	3.88	32.3	36.2	0.40	0.01	—	49.2
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	7.68	26.1	33.7	0.79	0.02	—	59.2
Total	—	—	—	—	—	—	—	—	—	—	—	11.6	58.4	70.0	1.19	0.03	—	108
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	3.88	32.3	36.2	0.40	0.01	—	49.2
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	7.68	26.1	33.7	0.79	0.02	—	59.2
Total	—	—	—	—	—	—	—	—	—	—	—	11.6	58.4	70.0	1.19	0.03	—	108
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

General Office Building	—	—	—	—	—	—	—	—	—	—	—	0.64	5.35	6.00	0.07	< 0.005	—	8.14
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	1.27	4.32	5.59	0.13	< 0.005	—	9.80
Total	—	—	—	—	—	—	—	—	—	—	—	1.91	9.67	11.6	0.20	< 0.005	—	17.9

4.5. Waste Emissions by Land Use

4.5.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	5.72	0.00	5.72	0.57	0.00	—	20.0
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	87.7	0.00	87.7	8.77	0.00	—	307

Total	—	—	—	—	—	—	—	—	—	—	—	93.4	0.00	93.4	9.34	0.00	—	327
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	5.72	0.00	5.72	0.57	0.00	—	20.0
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	87.7	0.00	87.7	8.77	0.00	—	307
Total	—	—	—	—	—	—	—	—	—	—	—	93.4	0.00	93.4	9.34	0.00	—	327
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
General Office Building	—	—	—	—	—	—	—	—	—	—	—	0.95	0.00	0.95	0.09	0.00	—	3.31
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	14.5	0.00	14.5	1.45	0.00	—	50.8
Total	—	—	—	—	—	—	—	—	—	—	—	15.5	0.00	15.5	1.55	0.00	—	54.1

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8,834	8,834
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8,834	8,834
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8,834	8,834
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8,834	8,834
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Automobile Care Center	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1,463	1,463
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	1,463	1,463

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Remove	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Site Preparation	Site Preparation	6/15/2023	7/26/2023	5.00	30.0	—
Grading	Grading	7/27/2023	9/13/2023	5.00	35.0	—
Building Construction	Building Construction	9/14/2023	5/8/2024	5.00	170	—
Paving	Paving	5/9/2024	8/7/2024	5.00	65.0	—
Architectural Coating	Architectural Coating	8/8/2024	11/6/2024	5.00	65.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Site Preparation	Rubber Tired Dozers	Diesel	Average	3.00	8.00	367	0.40
Site Preparation	Tractors/Loaders/Backhoes	Diesel	Average	4.00	8.00	84.0	0.37
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41
Grading	Excavators	Diesel	Average	2.00	8.00	36.0	0.38
Grading	Tractors/Loaders/Backhoes	Diesel	Average	2.00	8.00	84.0	0.37
Grading	Scrapers	Diesel	Average	2.00	8.00	423	0.48
Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Building Construction	Forklifts	Diesel	Average	3.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	1.00	8.00	14.0	0.74
Building Construction	Cranes	Diesel	Average	1.00	7.00	367	0.29
Building Construction	Welders	Diesel	Average	1.00	8.00	46.0	0.45
Building Construction	Tractors/Loaders/Backhoes	Diesel	Average	3.00	7.00	84.0	0.37
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	2.00	8.00	89.0	0.36

Paving	Rollers	Diesel	Average	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	1.00	6.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Site Preparation	—	—	—	—
Site Preparation	Worker	17.5	18.5	LDA,LDT1,LDT2
Site Preparation	Vendor	—	10.2	HHDT,MHDT
Site Preparation	Hauling	0.00	20.0	HHDT
Site Preparation	Onsite truck	—	—	HHDT
Grading	—	—	—	—
Grading	Worker	20.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	—	10.2	HHDT,MHDT
Grading	Hauling	2.97	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	17.3	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	8.85	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT

Architectural Coating	—	—	—	—
Architectural Coating	Worker	3.46	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Control Strategies Applied	PM10 Reduction	PM2.5 Reduction
Water unpaved roads twice daily	55%	55%
Limit vehicle speeds on unpaved roads to 25 mph	44%	44%

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	80,700	26,900	35,911

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (cy)	Material Exported (cy)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Site Preparation	—	—	45.0	0.00	—
Grading	830	—	105	0.00	—
Paving	0.00	0.00	0.00	0.00	11.9

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	2	61%	61%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
General Office Building	0.00	0%
Other Asphalt Surfaces	6.70	100%
Parking Lot	5.22	100%
Automobile Care Center	0.00	0%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2023	0.00	349	0.03	< 0.005
2024	0.00	349	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
General Office Building	309	309	309	112,785	3,915	3,915	3,915	1,428,815
Other Asphalt Surfaces	406	406	406	148,190	2,847	5,143	5,143	1,278,583
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Automobile Care Center	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	80,700	26,900	35,911

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
General Office Building	199,021	349	0.0330	0.0040	312,926
Other Asphalt Surfaces	0.00	349	0.0330	0.0040	0.00
Parking Lot	199,188	349	0.0330	0.0040	0.00
Automobile Care Center	406,402	349	0.0330	0.0040	1,827,377

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
General Office Building	2,026,876	3,777,491
Other Asphalt Surfaces	0.00	0.00
Parking Lot	0.00	0.00
Automobile Care Center	4,008,834	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)
General Office Building	10.6	—
Other Asphalt Surfaces	0.00	—
Parking Lot	0.00	—
Automobile Care Center	163	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced
Automobile Care Center	Other commercial A/C and heat pumps	R-410A	2,088	< 0.005	4.00	4.00	18.0
Automobile Care Center	Supermarket refrigeration and condensing units	R-404A	3,922	26.5	16.5	16.5	18.0

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
----------------	-----------	-------------	----------------	---------------	------------	-------------

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
----------------	-----------	----------------	---------------	----------------	------------	-------------

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)
----------------	-----------	--------	--------------------------	------------------------------	------------------------------

5.17. User Defined

Equipment Type	Fuel Type
—	—

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres
--------------------------	----------------------	---------------	-------------

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres
--------------------	---------------	-------------

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)
-----------	--------	------------------------------	------------------------------

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	26.6	annual days of extreme heat
Extreme Precipitation	4.20	annual days with precipitation above 20 mm
Sea Level Rise	0.00	meters of inundation depth
Wildfire	6.46	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (Radke et al., 2017, CEC-500-2017-008), and consider inundation location and depth for the San Francisco Bay, the Sacramento-San Joaquin River Delta and California coast resulting different increments of sea level rise coupled with extreme storm events. Users may select from four scenarios to view the range in potential inundation depth for the grid cell. The four scenarios are: No rise, 0.5 meter, 1.0 meter, 1.41 meters

Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	3	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A

Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	3	1	1	3
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.

The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.

The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	100
AQ-PM	57.1
AQ-DPM	94.0
Drinking Water	60.9
Lead Risk Housing	84.7
Pesticides	40.3
Toxic Releases	42.8
Traffic	80.0
Effect Indicators	—
CleanUp Sites	44.0
Groundwater	71.1
Haz Waste Facilities/Generators	96.4
Impaired Water Bodies	0.00
Solid Waste	0.00
Sensitive Population	—
Asthma	64.2
Cardio-vascular	59.7
Low Birth Weights	72.9
Socioeconomic Factor Indicators	—
Education	80.3
Housing	79.6

Linguistic	64.8
Poverty	92.7
Unemployment	89.9

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	11.09970486
Employed	6.03105351
Median HI	7.930193764
Education	—
Bachelor's or higher	10.07314256
High school enrollment	25.13794431
Preschool enrollment	35.60887976
Transportation	—
Auto Access	29.74464263
Active commuting	30.97651739
Social	—
2-parent households	13.44796612
Voting	11.13820095
Neighborhood	—
Alcohol availability	34.98011036
Park access	81.35506224
Retail density	68.304889
Supermarket access	77.21031695
Tree canopy	16.21968433

Housing	—
Homeownership	20.18478121
Housing habitability	18.91441037
Low-inc homeowner severe housing cost burden	36.50712178
Low-inc renter severe housing cost burden	39.72796099
Uncrowded housing	19.18388297
Health Outcomes	—
Insured adults	23.55960477
Arthritis	26.6
Asthma ER Admissions	47.9
High Blood Pressure	36.7
Cancer (excluding skin)	66.1
Asthma	10.9
Coronary Heart Disease	23.5
Chronic Obstructive Pulmonary Disease	13.3
Diagnosed Diabetes	14.5
Life Expectancy at Birth	10.7
Cognitively Disabled	32.0
Physically Disabled	67.1
Heart Attack ER Admissions	41.6
Mental Health Not Good	12.8
Chronic Kidney Disease	20.1
Obesity	13.4
Pedestrian Injuries	90.2
Physical Health Not Good	12.8
Stroke	17.3
Health Risk Behaviors	—

Binge Drinking	69.8
Current Smoker	13.3
No Leisure Time for Physical Activity	16.7
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	5.3
Elderly	61.3
English Speaking	34.8
Foreign-born	34.1
Outdoor Workers	40.2
Climate Change Adaptive Capacity	—
Impervious Surface Cover	66.1
Traffic Density	74.9
Traffic Access	23.0
Other Indices	—
Hardship	89.7
Other Decision Support	—
2016 Voting	24.0

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	94.0
Healthy Places Index Score for Project Location (b)	8.00
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	Yes
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification
Land Use	Based on the site plan
Construction: Construction Phases	Per project's construction schedule
Construction: Architectural Coatings	SCAQMD Rule 1113
Operations: Vehicle Data	Per project's traffic study
Operations: Architectural Coatings	SCAQMD Rule 1113
Operations: Refrigerants	No individual refrigeration for the office.