

**GEOTECHNICAL ENGINEERING INVESTIGATION
PROPOSED VA COMMUNITY OUTPATIENT FACILITY
KNUDSEN DRIVE NEAR OLIVE DRIVE
BAKERSFIELD, CALIFORNIA**

**PROJECT NO. 022-19021
MAY 6, 2019**

Prepared for:

**MR. STEVE DOCTOR
SASD ENTERPRISES
1895 PACIFIC HIGHWAY
SAN DIEGO, CALIFORNIA 92110**

Prepared by:

**KRAZAN & ASSOCIATES, INC.
GEOTECHNICAL ENGINEERING DIVISION
2205 COY AVENUE
BAKERSFIELD, CALIFORNIA 93307
(661) 837-9200**

May 6, 2019

Project No. 022-19021

Mr. Steve Doctor
SASD Enterprises
4895 Pacific Highway
San Diego, California 92110

**RE: Geotechnical Engineering Investigation
Proposed VA Community Outpatient
Knudsen Drive near Olive Drive
Bakersfield, California**


Dear Mr. Doctor:

In accordance with your request, we have completed a Geotechnical Engineering Investigation for the above-referenced site. The results of our investigation are presented in the attached report.

If you have any questions or if we may be of further assistance, please do not hesitate to contact our office at (661) 837-9200.



Respectfully submitted,
KRAZAN & ASSOCIATES, INC.

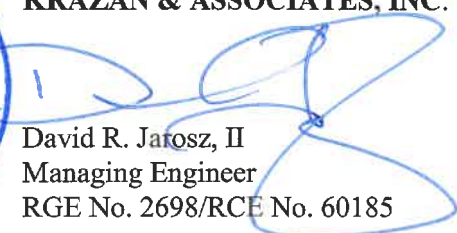
David R. Jarosz, II
Managing Engineer
RGE No. 2698/RCE No. 60185

DRJ:ht

TABLE OF CONTENTS

INTRODUCTION	1
PURPOSE AND SCOPE.....	1
PROPOSED CONSTRUCTION.....	2
SITE LOCATION, SITE HISTORY AND SITE DESCRIPTION.....	2
GEOLOGIC SETTING	3
FIELD AND LABORATORY INVESTIGATIONS.....	3
SOIL PROFILE AND SUBSURFACE CONDITIONS.....	4
GROUNDWATER.....	4
SOIL LIQUEFACTION	5
CONCLUSIONS AND RECOMMENDATIONS.....	6
Administrative Summary	6
Groundwater Influence on Structures/Construction	7
Site Preparation	7
Engineered Fill.....	9
Drainage and Landscaping.....	10
Utility Trench Backfill	10
Foundations - Conventional	10
Floor Slabs and Exterior Flatwork.....	11
Lateral Earth Pressures and Retaining Walls.....	12
R-Value Test Results and Pavement Design.....	12
Seismic Parameters – 2016 CBC	14
Soil Cement Reactivity	15
Compacted Material Acceptance	15
Testing and Inspection	15
LIMITATIONS.....	16
SITE PLAN	18
LOGS OF BORINGS (1 TO 7).....	Appendix A
GENERAL EARTHWORK SPECIFICATIONS	Appendix B
GENERAL PAVING SPECIFICATIONS.....	Appendix C

May 6, 2019

Project No. 022-19021

**GEOTECHNICAL ENGINEERING INVESTIGATION
PROPOSED VA COMMUNITY OUTPATIENT FACILITY
KNUDSEN DRIVE NEAR OLIVE DRIVE
BAKERSFIELD, CALIFORNIA**

INTRODUCTION

This report presents the results of our Geotechnical Engineering Investigation for the proposed VA Community Outpatient Clinic to be located just east of Knudsen Drive and 260 feet south of Olive Drive in Bakersfield, California. Discussions regarding site conditions are presented herein, together with conclusions and recommendations pertaining to site preparation, Engineered Fill, utility trench backfill, drainage and landscaping, foundations, concrete floor slabs and exterior flatwork, retaining walls, soil cement reactivity, and pavement design.

A site plan showing the approximate boring locations is presented following the text of this report. A description of the field investigation, boring logs, and the boring log legend are presented in Appendix A. Appendix A also contains a description of the laboratory-testing phase of this study, along with the laboratory test results. Appendices B and C contain guides to earthwork and pavement specifications. When conflicts in the text of the report occur with the general specifications in the appendices, the recommendations in the text of the report have precedence.

PURPOSE AND SCOPE

This investigation was conducted to evaluate the soil and groundwater conditions at the site, to make geotechnical engineering recommendations for use in design of specific construction elements, and to provide criteria for site preparation and Engineered Fill construction.

Our scope of services was outlined in our proposal dated October 12, 2018 (KA Proposal No. P646-18) and included the following:

- A site reconnaissance by a member of our engineering staff to evaluate the surface conditions at the project site.
- A field investigation consisting of drilling 7 borings to depths ranging from approximately 15 to 50 feet for evaluation of the subsurface conditions at the project site.
- Performing laboratory tests on representative soil samples obtained from the borings to evaluate the physical and index properties of the subsurface soils.

-
- Evaluation of the data obtained from the investigation and an engineering analysis to provide recommendations for use in the project design and preparation of construction specifications.
 - Preparation of this report summarizing the results, conclusions, recommendations, and findings of our investigation.

PROPOSED CONSTRUCTION

We understand that design of the proposed development is currently underway; structural load information and other final details pertaining to the structures are unavailable. On a preliminary basis, it is understood that development will include the construction of a new VA Community Outpatient Facility. It is anticipated the building will be a single- or two-story structure utilizing concrete slab-on-grade construction. Footing loads are anticipated to be light to moderate. On-site paved areas and landscaping are also planned for the development of the project.

In the event, these structural or grading details are inconsistent with the final design criteria, the Soils Engineer should be notified so that we may update this writing as applicable.

SITE LOCATION, SITE HISTORY AND SITE DESCRIPTION

The site is roughly rectangular in shape and encompasses approximately 7 acres. The site is located approximately 260 feet south of Olive Drive, just east of Knudsen Drive in Bakersfield, California. Commercial developments are located north and west of the site. The remainder of the site is predominately surrounded by vacant land.

Site history was obtained by reviewing historical aerial photographs taken in 1994, 2005, 2008 and 2018. Review of the 1994 aerial photograph indicates that the project site was predominately utilized as irrigated agricultural land and vacant land. Commercial developments were located north and west of the site. The remainder of the site was predominately surrounded by vacant land.

Review of the 2005 aerial photograph indicates that the site predominately consisted of vacant land. Several trees were located along the northern and western edges of the site. Additional commercial developments had been constructed north and west of the site.

Review of the 2008 aerial photograph indicates that the project site predominately consisted of vacant land with a drainage basin constructed in the southwestern portion of the site.

Review of the 2018 aerial photograph indicates that the project site conditions appeared to be relatively similar to that noted in the 2008 aerial photograph.

Presently, the site predominately consists of vacant land. The drainage basin noted in the previous aerial photographs is still present in the southwestern portion of the site. The site is covered by a sparse to moderate weed growth and the surface soils have a loose consistency. With the exception of the basin, the site is relatively level with no major changes in grade.

GEOLOGIC SETTING

Geologically, the property is situated on the eastern flank, near the south end of the Great Valley Geomorphic Province. This province is a large northwesterly trending geosyncline or structural trough between the Coast Ranges and the Sierra Nevada Mountains. Erosion from both of these mountain systems has resulted in the deposition of immense thickness of sediments in the Valley floor. Heavily-laden streams from the Sierra Nevada have built very prominent alluvial fans along the margins of the San Joaquin Valley. This has resulted in a rather flat topography in the vicinity of the project site. The site is composed of alluvial deposits which are mostly cohesionless sands and silts.

The south end of the San Joaquin Valley is surrounded on all sides, excluding the north, by active fault systems (San Andreas, White Wolf-Breckenridge-Kern Canyon, and Garlock Faults). Numerous smaller faults exist within the valley floor.

There is on-going seismic activity in the Kern County area, with the most noticeable earthquake being the July 21, 1952 Kern County Earthquake. The initial shock was 7.7 magnitude shake with the epicenter near Wheeler Ridge, about 22 miles from Bakersfield. Vertical displacements of as much as 3 feet occurred at the fault line. Estimated average value of the maximum bedrock accelerations from the 1952 event are about 0.25 gravity at the project site.

The closest known faults to the property are subsurface faults located at the Fruitvale Oil Field. These faults cut the older sediments and, although numerous, are not thought to be active in the last 2 million years.

No evidence was observed that indicated surface faulting has occurred across the property during the Holocene time. Faults not yet identified, however, may exist. The site is not located within an Earthquake Fault Zone (special studies zone).

FIELD AND LABORATORY INVESTIGATIONS

Subsurface soil conditions were explored by drilling 7 borings to depths ranging from approximately 15 to 50 feet below existing site grade, using a truck-mounted drill rig. In addition, 9 bulk subgrade samples were obtained from the site for laboratory R-value testing. The approximate boring and bulk sample locations are shown on the site plan. During drilling operations, penetration tests were performed at regular intervals to evaluate the soil consistency and to obtain information regarding the engineering properties of the subsoils. Soil samples were retained for laboratory testing. The soils encountered were continuously examined and visually classified in accordance with the Unified Soil Classification System. A more detailed description of the field investigation is presented in Appendix A.

Laboratory tests were performed on selected soil samples to evaluate their physical characteristics and engineering properties. The laboratory-testing program was formulated with emphasis on the evaluation of natural moisture, density, gradation, shear strength, consolidation potential, R-value, and moisture-density relationships of the materials encountered. In addition, chemical tests were performed to

evaluate the soil-cement reactivity. Details of the laboratory test program and results of the laboratory tests are summarized in Appendix A. This information, along with the field observations, was used to prepare the final boring logs in Appendix A.

SOIL PROFILE AND SUBSURFACE CONDITIONS

Based on our findings, the subsurface conditions encountered appear typical of those found in the geologic region of the site. In general, the upper soils consisted of approximately 6 to 12 inches of very loose silty sand. These soils are disturbed, have low strength characteristics and are highly compressible when saturated.

Along the edges of the site and within portions of the site, approximately 1 to 2 feet of fill material was encountered. The fill material predominately consisted of silty sand. The thickness and extent of fill material was determined based on limited test borings and visual observation. Thicker fill may be present at the site. Limited testing was performed on the fill soils during the time of our field and laboratory investigation. Preliminary testing on the fill material suggests that the fill soils have varying strength characteristics ranging from loosely placed to compacted.

Below the loose surface soils and fill material, approximately 2 to 3 feet of loose to dense silty sand or sandy silt were encountered. Some of these soils contained traces of clay. Field and laboratory tests suggest that these soils are moderately strong and slightly compressible. Penetration resistance ranged from 20 to 45 blows per foot. Dry densities ranged from 98 to 115 pcf. Representative soil samples consolidated approximately 2 and 3½ percent under a 2 ksf load when saturated. A representative soil sample had an angle of internal friction 38 degrees.

Below approximately 3 to 5 feet, layers of predominately loose to dense silty sand, silty sand/sandy silt, sand or silty sand/sand were encountered. Some of these soils contained traces of gravel. Field and laboratory tests suggest that these soils are moderately strong and slightly compressible. Penetration resistance ranged from 14 to 49 blows per foot. Dry densities ranged from 97 to 112 pcf. Representative soil samples contained approximately 4 to 50 percent fines. These soils had similar strength characteristics as the upper soils and extended to the termination depth of our borings.

For additional information about the soils encountered, please refer to the logs of borings in Appendix A.

GROUNDWATER

Test boring locations were checked for the presence of groundwater during and immediately following the drilling operations. Free groundwater was not encountered within a depth of 50 feet during our exploratory drilling. However, information obtained from the State of California Department of Water Resources indicates that historically groundwater has been as shallow as 29 feet within the project site vicinity.

It should be recognized that water table elevations may fluctuate with time, being dependent upon seasonal precipitation, irrigation, land use, and climatic conditions, as well as other factors. Therefore, water level observations at the time of the field investigation may vary from those encountered during the construction phase of the project. The evaluation of such factors is beyond the scope of this report.

SOIL LIQUEFACTION

Soil liquefaction is a state of soil particle suspension, caused by a complete loss of strength when the effective stress drops to zero. Liquefaction normally occurs in soils, such as sands, in which the strength is purely frictional. However, liquefaction has occurred in soils other than clean sands. Liquefaction usually occurs under vibratory conditions, such as those induced by seismic events.

To evaluate the liquefaction potential of the site, the following items were evaluated:

- 1) Soil type
- 2) Groundwater depth
- 3) Relative density
- 4) Initial confining pressure
- 5) Intensity and duration of groundshaking

The predominant soils within the project site consist of alternating layers of silty sand, silty sand/sand, silty sand/sandy silt, and sand. Free groundwater was not encountered within a depth of 50 feet below existing site grade during our exploratory drilling. Information obtained from the Department of Water Resources indicated that water wells at the general vicinity had historic groundwater elevations recorded from a period of 1957 to 1992 to be as shallow as 29 feet below site grade.

The potential for soil liquefaction during a seismic event was evaluated using the LIQUEFYPRO computer program (version 5.8h) developed by CivilTech Software. For the analysis, a maximum earthquake magnitude of 6.36 was used. A peak horizontal ground surface acceleration of 0.437g was considered conservative and appropriate for the liquefaction analysis. An estimated high groundwater depth of 29 feet was used for our analysis. The computer analysis indicates that soils above a depth of 29 feet are non-liquefiable due to the absence of groundwater. The soils below a depth of 29 feet have a slight to low potential for liquefaction under seismic shaking due to predominately medium dense silty sand and sand soils and the anticipated low seismicity in the region. The analysis also indicates that the estimated total seismic induced settlement is not anticipated to exceed 1.9 inches. Differential settlement caused by a seismic event is estimated to be less than 1 inch. The anticipated differential settlement is estimated over a horizontal distance of 100 feet.

CONCLUSIONS AND RECOMMENDATIONS

Based on the findings of our field and laboratory investigations, along with previous geotechnical experience in the project area, the following is a summary of our evaluations, conclusions, and recommendations.

Administrative Summary

In brief, the subject site and soil conditions, with the exception of the fill material, potential seismic settlement, and surrounding development, appear to be conducive to the development of the project. Approximately 1 to 2 of fill material was encountered along the edges of the site associated with some previous grading activities. The fill material predominately consisted of silty sand. The thickness and extent of fill material was determined based on limited test borings and visual observation. Thicker fill may be present at the site. Limited testing was performed on the fill soils during the time of our field and laboratory investigations. The limited testing indicates that the fill soils had varying strength characteristics ranging from loosely placed to compacted. Therefore, it is recommended fill soils which have not been properly compacted and certified be excavated and recompacted. The fill material should be moisture-conditioned as necessary and recompacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. Prior to fill placement Krazan & Associates, Inc. should inspect the bottom of the excavation to verify no additional removal will be required.

In order to reduce the potential for differential settlement and provide uniform support for the planned structures, it is recommended that following stripping, fill removal operations, and demolition activities, the upper 12 inches of exposed native subgrade within proposed building areas be excavated, worked until uniform and free from large clods, moisture-conditioned as necessary, and recompacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. In addition, it is recommended that proposed structural elements be supported by a minimum of 12 inches of Engineered Fill. Excavation should extend to a minimum of 5 feet beyond proposed footing lines. The excavation should be backfilled with Engineered Fill, compacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. Prior to fill placement, Krazan & Associates, Inc. should inspect the bottom of the excavation to verify no additional removal will be required.

Based on the soil liquefaction analysis performed within the site, the estimated total seismic-induced settlement is on the order of 1.9 inches. Differential settlement caused by a seismic event is estimated to be less than 1 inch. The anticipated differential settlement is estimated over a horizontal distance of 100 feet. The seismic settlements would develop if liquefaction of the underlying saturated subsoils were to occur during a seismic event. If these potential movements are not tolerable, then mitigation measures are recommended to reduce structural damage due to soil liquefaction. The project Structural Engineer should evaluate the structure's ability to withstand these potential movements associated with soil liquefaction.

Presently, the site consists of vacant land. However, several structures are located within the project site vicinity. In addition, portions of a drainage basin are located within the site. Associated with these developments may be buried structures, such as utility lines and irrigation lines that may extend into the

project site. Demolition activities should include proper removal of any buried structures encountered during construction. Any buried structures or utilities encountered during construction should be properly removed and/or relocated. It is suspected that demolition activities of the existing pavement and related structures will disturb the upper soils. Following demolition activities, the exposed subgrade should be cleaned to firm native ground. The resulting excavation should be backfilled with Engineered Fill, compacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557.

A drainage basin is located in the southwestern portion of the site. If the basin will not be used for the planned development, all deleterious materials and loose soils should be removed from the basin and the resulting excavations should be cleaned to firm native soil, and backfilled with Engineered Fill compacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557.

Sandy soil conditions were encountered at the site. These cohesionless soils have a tendency to cave in trench wall excavations. Shoring or sloping back trench sidewalls may be required within these sandy soils.

After completion of the recommended site preparation, the site should be suitable for shallow footing support. The proposed structure footings may be designed utilizing an allowable bearing pressure of 2,500 psf for dead-plus-live loads. Footings should have a minimum embedment of 18 inches.

Groundwater Influence on Structures/Construction

During our recent field investigation groundwater was not encountered. However, historically groundwater has been encountered at depths as shallow as 29 feet below existing site grade. If groundwater is encountered, our firm should be consulted prior to dewatering the site. Installation of a standpipe piezometer is suggested prior to construction should groundwater levels be a concern.

In addition to the groundwater level if earthwork is performed during or soon after periods of precipitation, the subgrade soils may become saturated, “pump,” or not respond to densification techniques. Typical remedial measures include: discing and aerating the soil during dry weather; mixing the soil with dryer materials; removing and replacing the soil with an approved fill material; or mixing the soil with an approved lime or cement product. Our firm should be consulted prior to implementing remedial measures to observe the unstable subgrade conditions and provide appropriate recommendations.

Site Preparation

General site clearing should include removal of vegetation; asphalt; debris; existing utilities; structures including foundations; basement walls and floors; existing stockpiled soil; trees and associated root systems; rubble; rubbish; and any loose and/or saturated materials. Site stripping should extend to a minimum depth of 2 to 4 inches, or until all organics in excess of 3 percent by volume are removed. Deeper stripping may be required in localized areas. These materials will not be suitable for use as Engineered Fill. However, stripped topsoil may be stockpiled and reused in landscape or non-structural areas.

Approximately 1 to 2 feet of fill material was encountered within portions of the site associated with some previous grading activities. The fill material predominately consisted of silty sand. The thickness and extent of fill material was determined based on limited test borings and visual observation. Thicker fill may be present at the site. Limited testing was performed on the fill soils during the time of our field and laboratory investigations. The limited testing indicates that the fill soils had varying strength characteristics ranging from loosely placed to compacted. Therefore, it is recommended fill soils which have not been properly compacted and certified be excavated and recompacted. The fill material should be moisture-conditioned as necessary and recompacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. Prior to fill placement Krazan & Associates, Inc. should inspect the bottom of the excavation to verify no additional removal will be required.

The site is surrounded by existing developments and former agricultural land. Associated with these developments may be buried structures, such as utility lines that extend into the project site. Demolition activities should include proper removal of any buried structures. Any surface or buried structures including utilities encountered during construction should be properly removed and/or relocated. The resulting excavations should be cleaned to firm native ground and backfilled with Engineered Fill, compacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. Excavations, depressions, or soft and pliant areas extending below planned finish subgrade level should be cleaned to firm undisturbed soil, and backfilled with Engineered Fill. In general, any septic tanks, debris pits, cesspools, or similar structures should be entirely removed. Concrete footings should be removed to an equivalent depth of at least 3 feet below proposed footing elevations or as recommended by the Soils Engineer. Any other buried structures should be removed in accordance with the recommendations of the Soils Engineer. The resulting excavations should be backfilled with Engineered Fill.

A drainage basin is located in the southwestern portion of the site. If the basin will not be used for the planned development, all deleterious materials and loose soils should be removed from the basin and the resulting excavations should be cleaned to firm native soil, and backfilled with Engineered Fill compacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557.

Following stripping, fill removal operations and demolition activities, the exposed subgrade in exterior flatwork and pavement areas should be excavated/scarified to a depth of at least 12 inches, worked until uniform and free from large clods, moisture-conditioned as necessary and recompacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. Limits of recompaction should extend 2 feet beyond the edge of pavements or sidewalks. Prior to backfilling, the exposed subgrade should be proof-rolled and observed by Krazan & Associates, Inc. to verify stability. This compaction effort should stabilize the surface soils and locate any unsuitable or pliant areas not found during our field investigation.

In order to reduce the potential for differential settlement and provide uniform support for the planned structure, it is recommended that following stripping, fill removal operations, and demolition activities, the upper 12 inches of the exposed subgrade within the proposed building areas be excavated, worked until uniform and free from large clods, moisture-conditioned as necessary, and compacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. In addition, it is

recommended that proposed structural elements be supported by a minimum of 12 inches of Engineered Fill. Over-excavation should extend to a minimum of 5 feet beyond proposed footing lines. The excavation should be backfilled with Engineered Fill, compacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. Prior to fill placement, Krazan & Associates, Inc. should inspect the bottom of the excavation to verify no additional removal will be required.

The upper soils, during wet winter months, become very moist due to the absorptive characteristics of the soil. Earthwork operations performed during winter months may encounter very moist unstable soils, which may require removal to grade a stable building foundation. Project site winterization consisting of placement of aggregate base and protecting exposed soils during the construction phase should be performed.

A representative of our firm should be present during all site clearing and grading operations to test and observe earthwork construction. This testing and observation is an integral part of our service as acceptance of earthwork construction is dependent upon compaction of the material and the stability of the material. The Soils Engineer may reject any material that does not meet compaction and stability requirements. Further recommendations of this report are predicated upon the assumption that earthwork construction will conform to recommendations set forth in this section and the Engineered Fill section.

Engineered Fill

The upper on-site native soils and fill material predominately consist of silty sand, silty sand/sandy silt and sand. These soils will be suitable for reuse as Engineered Fill, provided they are cleansed of excessive organics and debris.

The preferred materials specified for Engineered Fill are suitable for most applications with the exception of exposure to erosion. Project site winterization and protection of exposed soils during the construction phase should be the sole responsibility of the Contractor, since he has complete control of the project site at that time.

Imported Fill material should be predominately non-expansive granular material with a plasticity index less than 10 and a UBC Expansion Index less than 15. Imported Fill should be free from rocks and clods greater than 4 inches in diameter. All Imported Fill material should be submitted to the Soils Engineer for approval at least 48 hours prior to delivery at the site.

Fill soils should be placed in lifts approximately 6 inches thick, moisture-conditioned as necessary, and compacted to achieve at least 90 percent maximum density based on ASTM Test Method D1557. Additional lifts should not be placed if the previous lift did not meet the required dry density or if soil conditions are not stable.

Drainage and Landscaping

The ground surface should slope away from building pad and pavement areas toward appropriate drop inlets or other surface drainage devices. In accordance with Section 1804 of the 2016 California Building Code, it is recommended that the ground surface adjacent to foundations be sloped a minimum of 5 percent for a minimum distance of 10 feet away from structures, or to an approved alternative means of drainage conveyance. Swales used for conveyance of drainage and located within 10 feet of foundations should be sloped a minimum of 2 percent. Impervious surfaces, such as pavement and exterior concrete flatwork, within 10 feet of building foundations should be sloped a minimum of 1 percent away from the structure. Drainage gradients should be maintained to carry all surface water to collection facilities and off-site. These grades should be maintained for the life of the project.

Utility Trench Backfill

Utility trenches should be excavated according to accepted engineering practices following OSHA (Occupational Safety and Health Administration) standards by a Contractor experienced in such work. The responsibility for the safety of open trenches should be borne by the Contractor. Traffic and vibration adjacent to trench walls should be reduced; cyclic wetting and drying of excavation side slopes should be avoided. Depending upon the location and depth of some utility trenches, groundwater flow into open excavations could be experienced, especially during or shortly following periods of precipitation.

Sandy soil conditions were encountered at the site. These cohesionless soils have a tendency to cave in trench wall excavations. Shoring or sloping back trench sidewalls may be required within these sandy soils.

Utility trench backfill placed in or adjacent to buildings and exterior slabs should be compacted to at least 90 percent of maximum density based on ASTM Test Method D1557. The utility trench backfill placed in pavement areas should be compacted to at least 90 percent of maximum density based on ASTM Test Method D1557. Pipe bedding should be in accordance with pipe manufacturer's recommendations.

The Contractor is responsible for removing all water-sensitive soils from the trench regardless of the backfill location and compaction requirements. The Contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction.

Foundations - Conventional

After completion of the recommended site preparation, the site should be suitable for shallow footing support. The proposed structures may be supported on a shallow foundation system bearing on a minimum of 12 inches of Engineered Fill. Spread and continuous footings supported on a minimum of 12 inches of Engineered Fill can be designed for the following maximum allowable soil bearing pressures:

Load	Allowable Loading
Dead Load Only	1,875 psf
Dead-Plus-Live Load	2,500 psf
Total Load, including wind or seismic loads	3,325 psf

The footings should have a minimum embedment depth of 18 inches below pad subgrade (soil grade) or adjacent exterior grade, whichever is lower. Footings should have a minimum width of 12 inches, regardless of load.

The total settlement caused by static loads is not expected to exceed $\frac{3}{4}$ inch. Differential settlement associated with static loads should be less than $\frac{3}{8}$ inch. Most of the movement is expected to occur during construction as the loads are applied. However, additional post-construction movement may occur if the foundation soils are flooded or saturated.

Based on the soil liquefaction analysis performed within the site, the estimated total seismic-induced settlement is not anticipated to exceed 1.9 inches. Differential settlement caused by a seismic event is estimated to be less than 1 inch. The anticipated differential settlement is estimated over a horizontal distance of 100 feet. The seismic settlements would develop if liquefaction of the underlying saturated subsoils were to occur during a seismic event.

Resistance to lateral footing displacement can be computed using an allowable friction factor of 0.4 acting between the base of foundations and the supporting subgrade. Lateral resistance for footings can alternatively be developed using an equivalent fluid passive pressure of 350 pounds per cubic foot acting against the appropriate vertical footing faces. The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance. A $\frac{1}{3}$ increase in the above value may be used for short duration, wind, or seismic loads.

Floor Slabs and Exterior Flatwork

In areas where moisture-sensitive floor coverings will be included, concrete slab-on-grade floors should be underlain by a water vapor retarder. The water vapor retarder should be installed in accordance with accepted engineering practice. The water vapor retarder should consist of a vapor retarder sheeting underlain by a minimum of 3 inches of compacted, clean, gravel of $\frac{3}{4}$ -inch maximum size. To aid in concrete curing an optional 2 to 4 inches of granular fill may be placed on top of the vapor retarder. The granular fill should consist of damp clean sand with at least 10 to 30 percent of the sand passing the 100 sieve. The sand should be free of clay, silt, or organic material. Rock dust which is manufactured sand from rock crushing operations is typically suitable for the granular fill. This granular fill material should be compacted.

The exterior floors should be poured separately in order to act independently of the walls and foundation system. All fills required to bring the building pads to grade should be Engineered Fills.

Moisture within the structure may be derived from water vapors, which were transformed from the moisture within the soils. This moisture vapor can travel through the vapor membrane and penetrate the slab-on-grade. This moisture vapor penetration can affect floor coverings and produce mold and mildew in the structure. To reduce moisture vapor intrusion, it is recommended that a vapor retarder be installed. It is recommended that the utility trenches within the structure be compacted, as specified in our report, to reduce the transmission of moisture through the utility trench backfill. Special attention to the immediate drainage and irrigation around the building is recommended. Positive drainage should be established away from the structure and should be maintained throughout the life of the structure. Ponding of water should not be allowed adjacent to the structure. Over-irrigation within landscaped areas adjacent to the structure should not be performed. In addition, ventilation of the structure (i.e. ventilation fans) is recommended to reduce the accumulation of interior moisture.

Lateral Earth Pressures and Retaining Walls

Walls retaining horizontal backfill and capable of deflecting a minimum of 0.1 percent of its height at the top may be designed using an equivalent fluid active pressure of 31 pounds per square foot per foot of depth. Walls that are incapable of this deflection or walls that are fully constrained against deflection may be designed for an equivalent fluid at-rest pressure of 52 pounds per square foot per foot per depth. Expansive soils should not be used for backfill against walls. The wedge of non-expansive backfill material should extend from the bottom of each retaining wall outward and upward at a slope of 2:1 (horizontal to vertical) or flatter. The stated lateral earth pressures do not include the effects of hydrostatic water pressures generated by infiltrating surface water that may accumulate behind the retaining walls; or loads imposed by construction equipment, foundations, or roadways. All of the above earth pressures are unfactored and are, therefore, not inclusive of factors of safety.

During grading and backfilling operations adjacent to any walls, heavy equipment should not be allowed to operate within a lateral distance of 5 feet from the wall or within a lateral distance equal to the wall height, whichever is greater, to avoid developing excessive lateral pressures. Within this zone, only hand operated equipment ("whackers," vibratory plates, or pneumatic compactors) should be used to compact the backfill soils.

R-Value Test Results and Pavement Design

Nine subgrade soil samples were obtained from the project site for R-value testing at the locations shown on the attached site plan. The samples were tested in accordance with the State of California Materials Manual Test Designation 301. Results of the tests are as follows:

Sample	Depth	Description	R-Value at Equilibrium
1	12-24"	Silty Sand (SM)	58
2	12-24"	Silty Sand (SM)	56
3	12-24"	Silty Sand/Sandy Silt (SM/ML)	37
4	12-24"	Silty Sand/Sandy Silt (SM/ML)	39

5	12-24"	Silty Sand (SM)	59
6	12-24"	Silty Sand/Sand (SM/SP)	59
7	12-24"	Silty Sand (SM)	59
8	12-24"	Silty Sand (SM)	58
9	12-24"	Silty Sand/Sandy Silt (SM/ML)	38

The test results are moderate and indicate fair to good subgrade support characteristics under dynamic traffic loads. The following table shows the recommended pavement sections for various traffic indices based on an R-value of 56.

Traffic Index	Asphaltic Concrete	Class II Aggregate Base*	Compacted Subgrade**
4.0	2.0"	4.0"	12.0"
4.5	2.5"	4.0"	12.0"
5.0	2.5"	4.0"	12.0"
5.5	3.0"	4.0"	12.0"
6.0	3.0"	4.0"	12.0"
6.5	3.5"	4.0"	12.0"
7.0	4.0"	4.0"	12.0"
7.5	4.0"	4.0"	12.0"

* 95% compaction based on ASTM Test Method D1557 or CAL 216

** 90% compaction based on ASTM Test Method D1557 or CAL 216

The following table shows the recommended pavement sections for various traffic indices based on an R-value of 37.

Traffic Index	Asphaltic Concrete	Class II Aggregate Base*	Class III Aggregate Subbase*	Compacted Subgrade**
4.0"	2.0"	4.0"	--	12.0"
4.0"	2.0"	4.5"	2.0"	12.0"
4.5"	2.5"	4.0"	--	12.0"
4.5"	2.5"	4.0"	2.0"	12.0"
5.0"	2.5"	5.0"	--	12.0"
5.0"	2.5"	5.0"	2.0"	12.0"
5.5"	3.0"	5.0"	--	12.0"
5.5"	3.0"	5.0"	2.0"	12.0"
6.0"	3.0"	7.0"	--	12.0"
6.0"	3.0"	6.5"	2.0"	12.0"

6.5"	3.5"	7.0"	--	12.0"
6.5"	3.5"	6.0"	2.0"	12.0"
7.0"	4.0"	7.5"	--	12.0"
7.0"	4.0"	6.5"	2.0"	12.0"
7.5"	4.0"	9.0"	--	12.0"
7.5"	4.0"	7.5"	2.0"	12.0"

* 95% compaction based on ASTM Test Method D1557 or CAL 216

** 90% compaction based on ASTM Test Method D1557 or CAL 216

If traffic indices are not available, an estimated (typical value) index of 4.5 may be used for light automobile traffic, and an index of 7.0 may be used for light truck traffic.

The following recommendations are for light-duty and heavy-duty Portland Cement Concrete Pavement Sections based on the design procedures developed by the Portland Cement Association.

**PORTLAND CEMENT PAVEMENT
LIGHT DUTY**

Traffic Index	Portland Cement Concrete***	Class II Aggregate Base*	Compacted Subgrade**
4.5	5.0"	--	12.0"

HEAVY DUTY

Traffic Index	Portland Cement Concrete***	Class II Aggregate Base*	Compacted Subgrade**
7.0	7.0"	--	12.0"

* 95% compaction based on ASTM Test Method D1557 or CAL 216

** 90% compaction based on ASTM Test Method D1557 or CAL 216

***Minimum compressive strength of 3000 psi

It is recommended that any uncertified fill material encountered within pavement areas be removed and/or recompacted. The fill materials should be moisture-conditioned to near optimum moisture and recompacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557. As an alternative, the Owner may elect not to recompact the existing fill within paved areas. However, the Owner should be aware that the paved areas may settle which may require annual maintenance. At a minimum, it is recommended that the upper 12 inches of subgrade soil be moisture-conditioned as necessary and recompacted to a minimum of 90 percent of maximum density based on ASTM Test Method D1557.

Seismic Parameters – 2016 California Building Code

The Site Class per Section 1613 of the 2016 California Building Code (2016 CBC) and Table 20.3-1 of ASCE 7-10 is based upon the site soil conditions. It is our opinion that a Site Class D is most consistent with the subject site soil conditions. For seismic design of the structures based on the seismic provisions of the 2016 CBC, we recommend the following parameters:

Seismic Item	Value	CBC Reference
Site Class	D	Section 1613.3.2
Site Coefficient F_a	1.086	Table 1613.3.3 (1)
S_s	1.035	Section 1613.3.1
S_{MS}	1.124	Section 1613.3.3
S_{DS}	0.749	Section 1613.3.4
Site Coefficient F_v	1.630	Table 1613.3.3 (2)
S_1	0.385	Section 1613.3.1
S_{M1}	0.628	Section 1613.3.3
S_{D1}	0.418	Section 1613.3.4

Soil Cement Reactivity

Excessive sulfate in either the soil or native water may result in an adverse reaction between the cement in concrete (or stucco) and the soil. HUD/FHA and UBC have developed criteria for evaluation of sulfate levels and how they relate to cement reactivity with soil and/or water.

Soil samples were obtained from the site and tested in accordance with State of California Materials Manual Test Designation 417. The sulfate concentrations detected from these soil samples were less than 150 ppm and are below the maximum allowable values established by HUD/FHA and UBC. Therefore, no special design requirements are necessary to compensate for sulfate reactivity with the cement.

Compacted Material Acceptance

Compaction specifications are not the only criteria for acceptance of the site grading or other such activities. However, the compaction test is the most universally recognized test method for assessing the performance of the Grading Contractor. The numerical test results from the compaction test cannot be used to predict the engineering performance of the compacted material. Therefore, the acceptance of compacted materials will also be dependent on the stability of that material. The Soils Engineer has the option of rejecting any compacted material regardless of the degree of compaction if that material is considered to be unstable or if future instability is suspected. A specific example of rejection of fill material passing the required percent compaction is a fill which has been compacted with an in situ moisture content significantly less than optimum moisture. This type of dry fill (brittle fill) is susceptible to future settlement if it becomes saturated or flooded.

Testing and Inspection

A representative of Krazan & Associates, Inc. should be present at the site during the earthwork activities to confirm that actual subsurface conditions are consistent with the exploratory fieldwork. This activity is an integral part of our service, as acceptance of earthwork construction is dependent upon compaction testing and stability of the material. This representative can also verify that the intent

of these recommendations is incorporated into the project design and construction. Krazan & Associates, Inc. will not be responsible for grades or staking, since this is the responsibility of the Prime Contractor.

LIMITATIONS

Soils Engineering is one of the newest divisions of Civil Engineering. This branch of Civil Engineering is constantly improving as new technologies and understanding of earth sciences advance. Although your site was analyzed using the most appropriate and most current techniques and methods, undoubtedly there will be substantial future improvements in this branch of engineering. In addition to advancements in the field of Soils Engineering, physical changes in the site, either due to excavation or fill placement, new agency regulations, or possible changes in the proposed structure after the soils report is completed may require the soils report to be professionally reviewed. In light of this, the Owner should be aware that there is a practical limit to the usefulness of this report without critical review. Although the time limit for this review is strictly arbitrary, it is suggested that 2 years be considered a reasonable time for the usefulness of this report.

Foundation and earthwork construction is characterized by the presence of a calculated risk that soil and groundwater conditions have been fully revealed by the original foundation investigation. This risk is derived from the practical necessity of basing interpretations and design conclusions on limited sampling of the earth. The recommendations made in this report are based on the assumption that soil conditions do not vary significantly from those disclosed during our field investigation. If any variations or undesirable conditions are encountered during construction, the Soils Engineer should be notified so that supplemental recommendations may be made.

The conclusions of this report are based on the information provided regarding the proposed construction. If the proposed construction is relocated or redesigned, the conclusions in this report may not be valid. The Soils Engineer should be notified of any changes so the recommendations may be reviewed and re-evaluated.


This report is a Geotechnical Engineering Investigation with the purpose of evaluating the soil conditions in terms of foundation design. The scope of our services did not include any Environmental Site Assessment for the presence or absence of hazardous and/or toxic materials in the soil, groundwater, or atmosphere; or the presence of wetlands. Any statements, or absence of statements, in this report or on any boring log regarding odors, unusual or suspicious items, or conditions observed, are strictly for descriptive purposes and are not intended to convey engineering judgment regarding potential hazardous and/or toxic assessment.

The geotechnical engineering information presented herein is based upon professional interpretation utilizing standard engineering practices and a degree of conservatism deemed proper for this project. It is not warranted that such information and interpretation cannot be superseded by future geotechnical engineering developments. We emphasize that this report is valid for the project outlined above and should not be used for any other sites.

If you have any questions or if we may be of further assistance, please do not hesitate to contact our office at (661) 837-9200.


Respectfully submitted,
KRAZAN & ASSOCIATES, INC.

Steve Nelson
Project Engineer

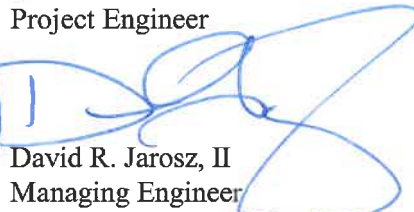

David R. Jarosz, II
Managing Engineer
RGE No. 2698/RCE No. 60185

SN/DRJ:ht

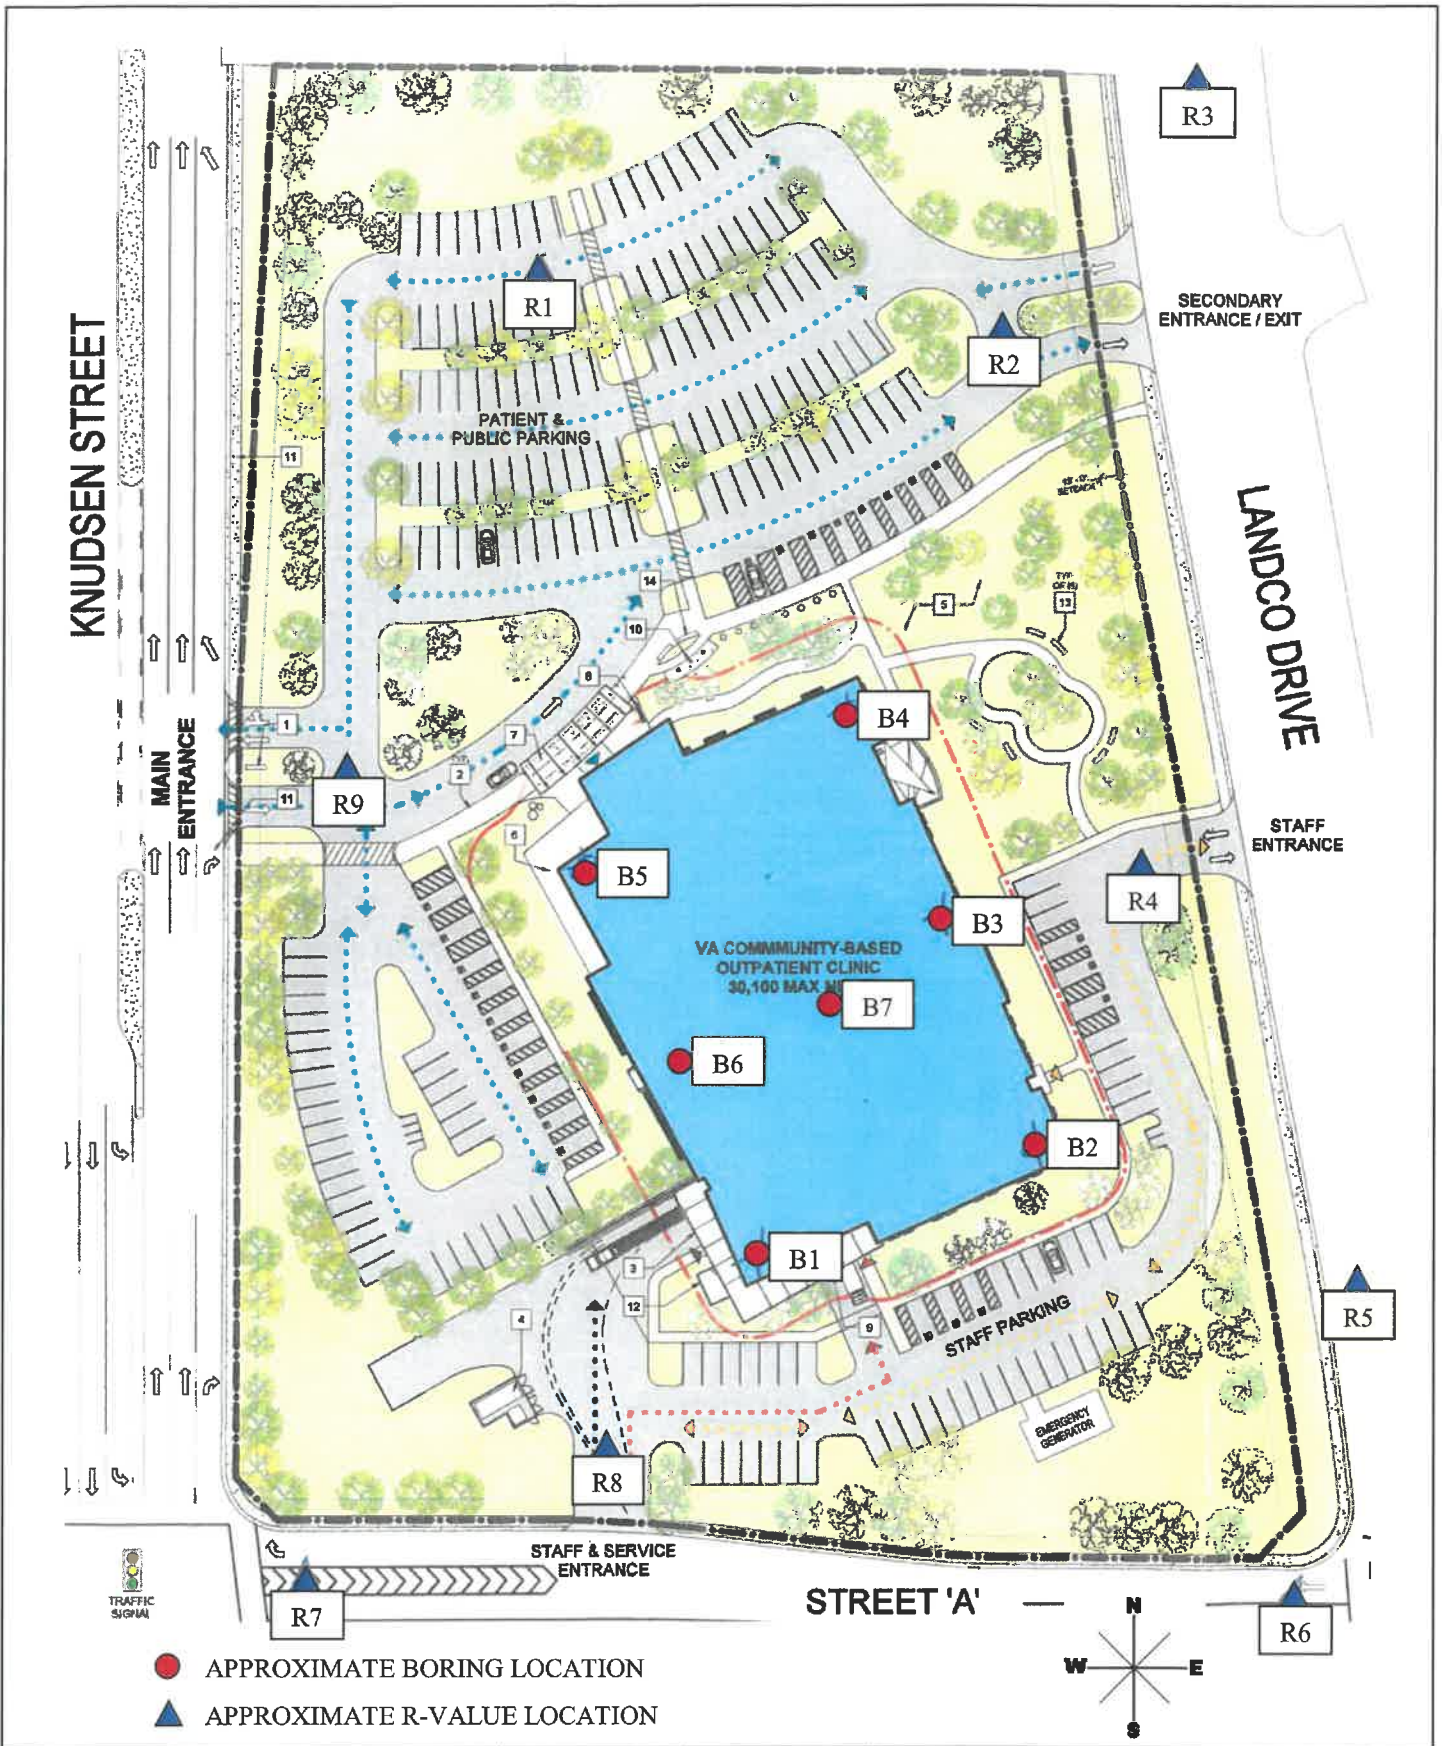

SITE MAP	Scale: NTS	Date: May 2019	
	Drawn by: HT	Approved by: DJ	
VA Community Outpatient Knudsen Drive, South of Olive Drive Bakersfield, California	Project No. 022-19021	Figure No. 1	

APPENDIX A

FIELD AND LABORATORY INVESTIGATIONS

Field Investigation

The field investigation consisted of a surface reconnaissance and a subsurface exploratory program. Seven 4½-inch exploratory borings were advanced. The boring locations are shown on the site plan.

The soils encountered were logged in the field during the exploration and, with supplementary laboratory test data, are described in accordance with the Unified Soil Classification System.

Modified standard penetration tests and standard penetration tests were performed at selected depths. These tests represent the resistance to driving a 2½-inch and 1½-inch diameter split barrel sampler, respectively. The driving energy was provided by a hammer weighing 140 pounds falling 30 inches. Relatively undisturbed soil samples were obtained while performing this test. Bag samples of the disturbed soil were obtained from the auger cuttings. The modified standard penetration tests are identified in the sample type on the boring logs with a full shaded in block. The standard penetration tests are identified in the sample type on the boring logs with half of the block shaded. All samples were returned to our Clovis laboratory for evaluation.
















Laboratory Investigation

The laboratory investigation was programmed to determine the physical and mechanical properties of the foundation soil underlying the site. Test results were used as criteria for determining the engineering suitability of the surface and subsurface materials encountered.

In-situ moisture content, dry density, consolidation, direct shear, and sieve analysis tests were completed for the undisturbed samples representative of the subsurface material. R-value tests were completed for select bag samples obtained from the auger cuttings. These tests, supplemented by visual observation, comprised the basis for our evaluation of the site material.


The logs of the exploratory borings and laboratory determinations are presented in this Appendix.

UNIFIED SOIL CLASSIFICATION SYSTEM

UNIFIED SOIL CLASSIFICATION AND SYMBOL CHART		
COARSE-GRAINED SOILS (more than 50% of material is larger than No. 200 sieve size.)		
Clean Gravels (Less than 5% fines)		
GRAVELS More than 50% of coarse fraction larger than No. 4 sieve size		GW Well-graded gravels, gravel-sand mixtures, little or no fines
		GP Poorly-graded gravels, gravel-sand mixtures, little or no fines
	Gravels with fines (More than 12% fines)	
		GM Silty gravels, gravel-sand-silt mixtures
		GC Clayey gravels, gravel-sand-clay mixtures
Clean Sands (Less than 5% fines)		
SANDS 50% or more of coarse fraction smaller than No. 4 sieve size		SW Well-graded sands, gravelly sands, little or no fines
		SP Poorly graded sands, gravelly sands, little or no fines
	Sands with fines (More than 12% fines)	
		SM Silty sands, sand-silt mixtures
		SC Clayey sands, sand-clay mixtures
FINE-GRAINED SOILS (50% or more of material is smaller than No. 200 sieve size.)		
SILTS AND CLAYS Liquid limit less than 50%		ML Inorganic silts and very fine sands, rock flour, silty of clayey fine sands or clayey silts with slight plasticity
		CL Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays
		OL Organic silts and organic silty clays of low plasticity
SILTS AND CLAYS Liquid limit 50% or greater		MH Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts
		CH Inorganic clays of high plasticity, fat clays
		OH Organic clays of medium to high plasticity, organic silts
HIGHLY ORGANIC SOILS		PT Peat and other highly organic soils

CONSISTENCY CLASSIFICATION	
Description	Blows per Foot
<i>Granular Soils</i>	
Very Loose	< 5
Loose	5 – 15
Medium Dense	16 – 40
Dense	41 – 65
Very Dense	> 65
<i>Cohesive Soils</i>	
Very Soft	< 3
Soft	3 – 5
Firm	6 – 10
Stiff	11 – 20
Very Stiff	21 – 40
Hard	> 40

GRAIN SIZE CLASSIFICATION			
Grain Type	Standard Sieve Size	Grain Size in Millimeters	
Boulders	Above 12 inches	Above 305	
Cobbles	12 to 13 inches	305 to 76.2	
Gravel	3 inches to No. 4	76.2 to 4.76	
	Coarse-grained	3 to ¾ inches	76.2 to 19.1
	Fine-grained	¾ inches to No. 4	19.1 to 4.76
Sand	No. 4 to No. 200	4.76 to 0.074	
	Coarse-grained	No. 4 to No. 10	4.76 to 2.00
	Medium-grained	No. 10 to No. 40	2.00 to 0.042
	Fine-grained	No. 40 to No. 200	0.042 to 0.074
Silt and Clay	Below No. 200	Below 0.074	

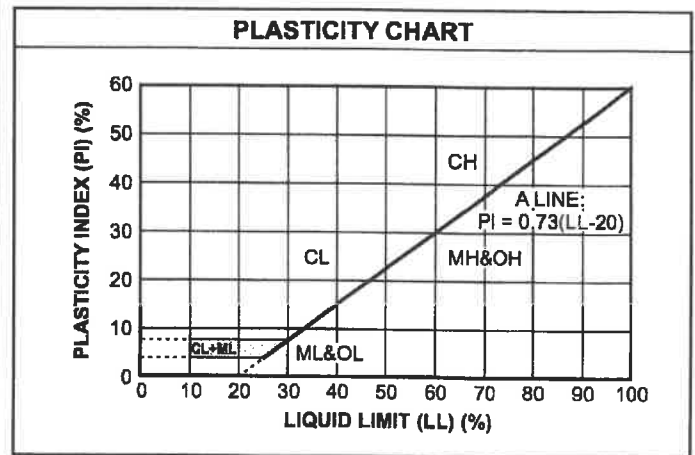

Log of Boring B1

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-1

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water>

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)				
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	Penetration Test			Water Content (%)				
							20	40	60	10	20	30	40	
0		Ground Surface												
0 - 2		SILTY SAND (SM) Very loose, fine- to medium-grained; brown, damp, drills easily Loose below 12 inches												
2 - 8		SANDY SILT (ML) Dense, fine- to medium-grained with trace CLAY and thin lenses of SILTY SAND; brown, damp, drills firmly Medium dense below 5 feet		6.0		45								
8 - 16		SAND (SP) Medium dense, fine- to medium-grained; light brown, damp, drills easily		10.3		27								
16 - 20		SILTY SAND (SM) Medium dense, fine-grained; gray, damp, drills easily		1.0		22								
				9.2		24								

Drill Method: Solid Flight

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 4½ Inches

Driller: Brent Snyder

Elevation: 20 Feet

Sheet: 1 of 1

Log of Boring B2

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-2

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water>

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)					
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	Penetration Test			Water Content (%)					
							20	40	60	10	20	30	40		
Ground Surface															
0		SILTY SAND (SM) Very loose, fine- to medium-grained; brown, damp, drills easily Loose below 12 inches Medium dense with trace CLAY below 2 feet													
2			98.3	5.3		24									
4															
6		SAND (SP) Medium dense, fine- to medium-grained; brown/gray, damp, drills easily	101.6	2.5		19									
8			98.8	2.8		17									
10															
16	End of Borehole														
18															
20															

Drill Method: Solid Flight

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 4½ Inches

Driller: Brent Snyder

Elevation: 15 Feet

Sheet: 1 of 1

Log of Boring B3

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-3

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water>

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)					
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	Penetration Test			Water Content (%)					
							20	40	60	10	20	30	40		
Ground Surface															
0		SILTY SAND (SM) Very loose, fine- to medium-grained; brown, damp, drills easily Loose below 12 inches Medium dense below 2 feet													
2			103.0	1.8		23									
4															
6		With trace CLAY and reddish-brown below 5 feet		3.2		28									
8															
10		SAND (SP) Medium dense, fine- to coarse-grained; light brown, damp, drills easily				16									
12															
14															
16		End of Borehole													
18															
20															

Drill Method: Solid Flight

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 4½ Inches

Driller: Brent Snyder

Elevation: 15 Feet

Sheet: 1 of 1

Log of Boring B4

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-4

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water >

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)								
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	20 40 60			10 20 30 40								
							Ground Surface											
0		SILTY SAND (SM) Very loose, fine- to medium-grained; brown, damp, drills easily Loose below 12 inches Medium dense with trace CLAY below 2 feet	112.5	3.7		28												
2																		
4		SAND (SP) Medium dense, fine- to coarse-grained; reddish-brown, damp, drills easily	101.8	2.8		27												
6																		
8																		
10		Gray below 10 feet		1.2		18												
12																		
14																		
16				1.4		18												
18																		
20																		

Drill Method: Solid Flight

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 4½ Inches

Driller: Brent Snyder

Elevation: 20 Feet

Sheet: 1 of 1

Log of Boring B5

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-5

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water>

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)				
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	Penetration Test			Water Content (%)				
							20	40	60	10	20	30	40	
Ground Surface														
0		SILTY SAND (SM) FILL, fine- to medium-grained; brown, damp, drills easily												
2		SILTY SAND (SM) Medium dense, fine- to medium-grained; brown, damp, drills easily	114.1	1.8		22								
4														
6			101.1	3.5		18								
8		SAND (SP) Medium dense, fine- to medium-grained; brown, damp, drills easily				17								
10														
12														
14														
16	End of Borehole													
18														
20														

Drill Method: Solid Flight

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 4½ Inches

Driller: Brent Snyder

Elevation: 15 Feet

Sheet: 1 of 1

Log of Boring B6

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-6

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water>

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)				
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.								
							20	40	60	10	20	30	40	
0		Ground Surface												
0		SILTY SAND (SM) FILL, fine- to medium-grained; dark brown, damp, drills easily												
2		SILTY SAND (SM) Medium dense, fine- to medium-grained; brown, damp, drills easily	115.1	2.3		23								
4														
6			101.8	4.1		20								
8		SAND (SP) Medium dense, fine- to coarse-grained; gray, damp, drills easily		2.3		17								
10														
12														
14														
16		End of Borehole												
18														
20														

Drill Method: Solid Flight

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 4½ Inches

Driller: Brent Snyder

Elevation: 15 Feet

Sheet: 1 of 1

Log of Boring B7

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-7

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water>

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)				
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	Penetration Test			Water Content (%)				
							20	40	60	10	20	30	40	
0		Ground Surface												
0 - 2		SILTY SAND/SANDY SILT (SM/ML) Very loose, fine- to medium-grained; brown, damp, drills easily Loose below 12 inches Medium dense below 2 feet	99.1	7.2		20								
2 - 4		SILTY SAND (SM) Medium dense, fine- to medium-grained; brown, damp, drills easily	101.3	2.0		17								
4 - 10		SAND (SP) Medium dense, fine- to coarse-grained; light brown, damp, drills easily		0.8		20								
10 - 16		SAND (SP) Medium dense, fine- to coarse-grained; light brown, damp, drills easily	96.6	1.0		17								
16 - 20		SILTY SAND/SAND (SM/SP) Loose, fine- to medium-grained; brown, damp, drills easily												

Drill Method: Hollow Stem

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 6½ Inches

Driller: Brent Snyder

Elevation: 50 Feet

Sheet: 1 of 3

Log of Boring B7

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-7

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water >

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)				
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	Penetration Test			Water Content (%)				
							20	40	60	10	20	30	40	
22			101.1	1.1		15								
26		SILTY SAND (SM) Medium dense, fine- to medium-grained; brown, moist, drills easily	107.1	8.5		27								
30			99.6	8.3		28								
36		SILTY SAND/SAND (SM/SP) Very dense, fine- to coarse-grained with trace GRAVEL; brown, damp, drills easily	104.6	1.2		49								

Drill Method: Hollow Stem

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 6½ Inches

Driller: Brent Snyder

Elevation: 50 Feet

Log of Boring B7

Project: VA Community Outpatient

Project No: 022-19021

Client: SASD Enterprises

Figure No.: A-7

Location: Knudsen Drive, South of Olive Drive, Bakersfield, California

Logged By: Dave Adams

Depth to Water >

Initial: None

At Completion: None

SUBSURFACE PROFILE			SAMPLE				Penetration Test blows/ft			Water Content (%)								
Depth (ft)	Symbol	Description	Dry Density (pcf)	Moisture (%)	Type	Blows/ft.	Penetration Test blows/ft			Water Content (%)								
							20	40	60	10	20	30	40					
42	[Symbol]	With trace COBBLES below 43 feet	112.3	1.1	▲	44												
44		Medium dense below 45 feet																
46			107.3	1.2	▲	23												
48																		
50		End of Borehole																
52																		
54																		
56																		
58																		
60																		

Drill Method: Hollow Stem

Drill Date: 4-11-19

Drill Rig: CME 45B

Krazan and Associates

Hole Size: 6½ Inches


Driller: Brent Snyder

Elevation: 50 Feet

Sheet: 3 of 3


Consolidation Test

Project No	Boring No. & Depth	Date	Soil Classification
022-19021	B3 @ 2-3'	4/22/2019	SM

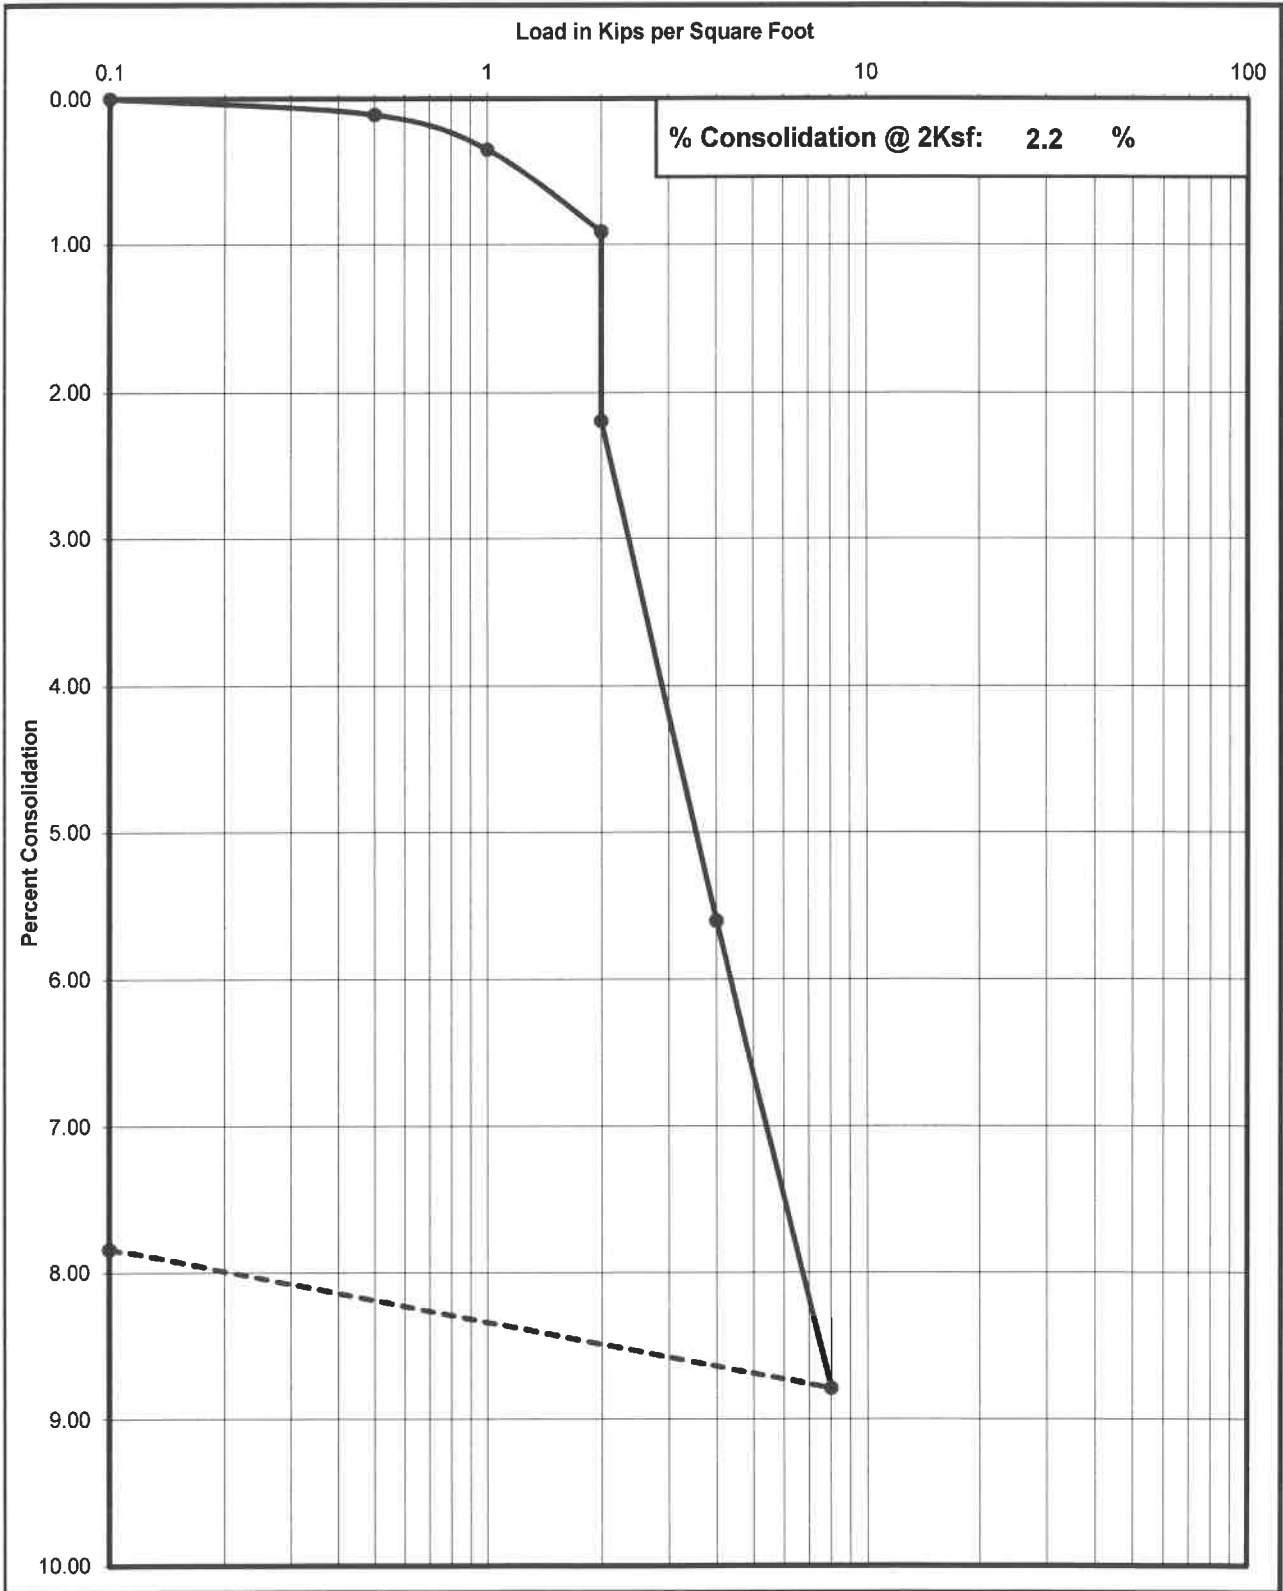


Shear Strength Diagram (Direct Shear)
ASTM D - 3080 / AASHTO T - 236

Project Number	Boring No. & Depth	Soil Type	Date
022-19021	B5 @ 2-3'	SM	4/22/2019

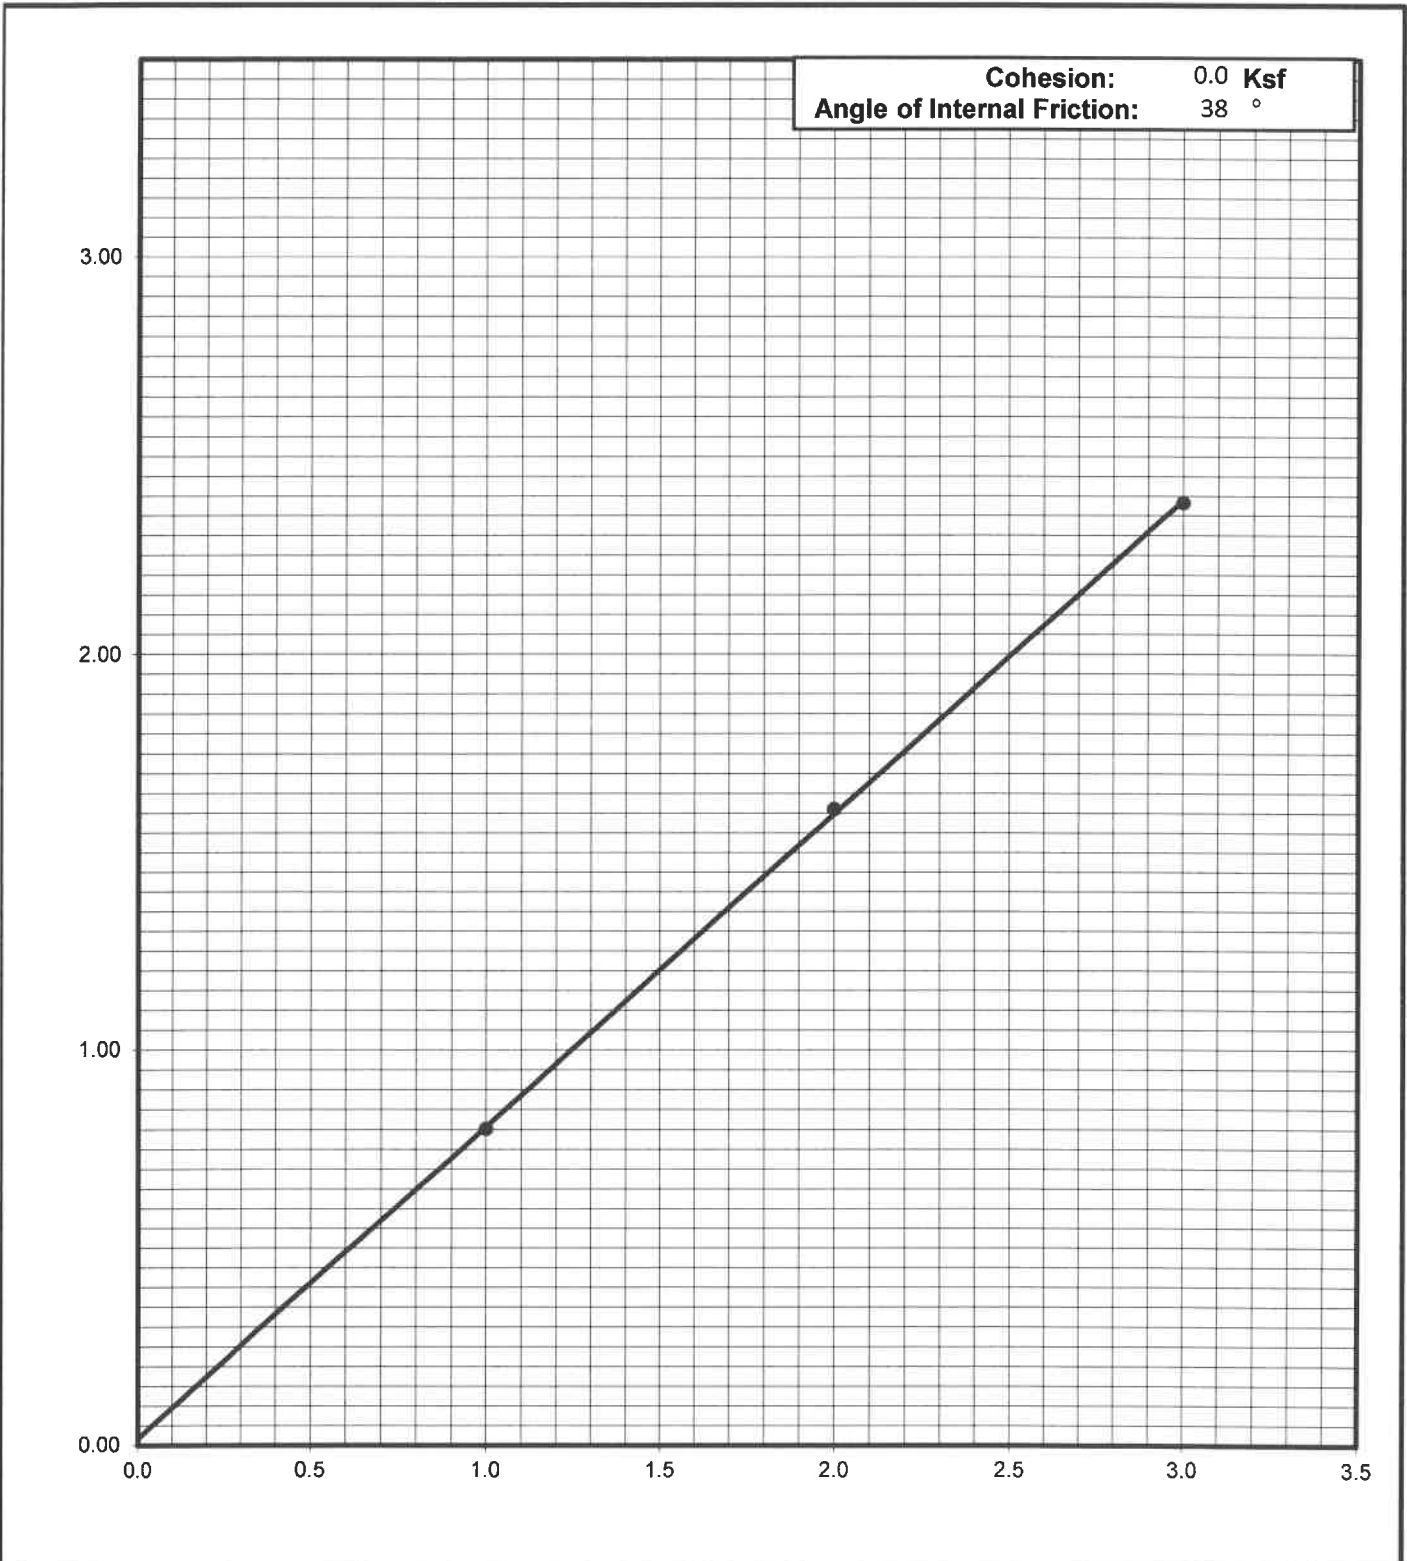

Grain Size Analysis

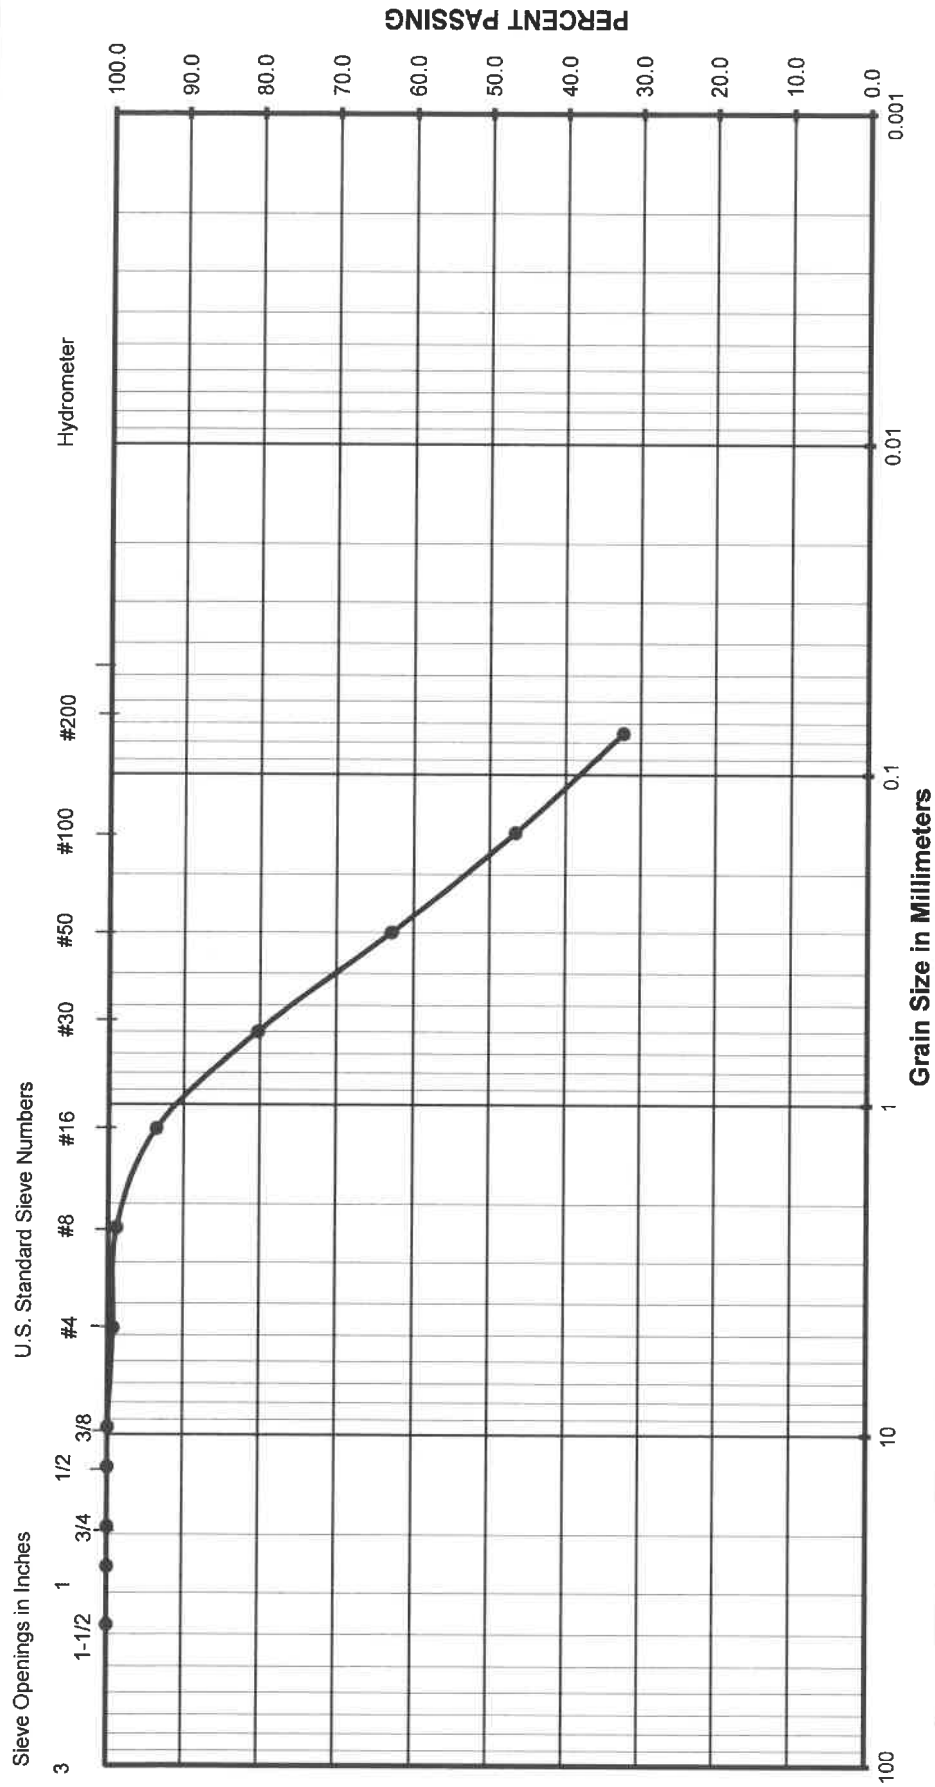


Gravel		Sand		Silt or Clay
Coarse	Fine	Coarse	Medium	Fine

(Unified Soils Classification)

Project Name
 Project Number
 Soil Classification
 Sample Number

VA Community Outpatient
 022-19021
 SM
 B3 @ 2-3'

Grain Size Analysis

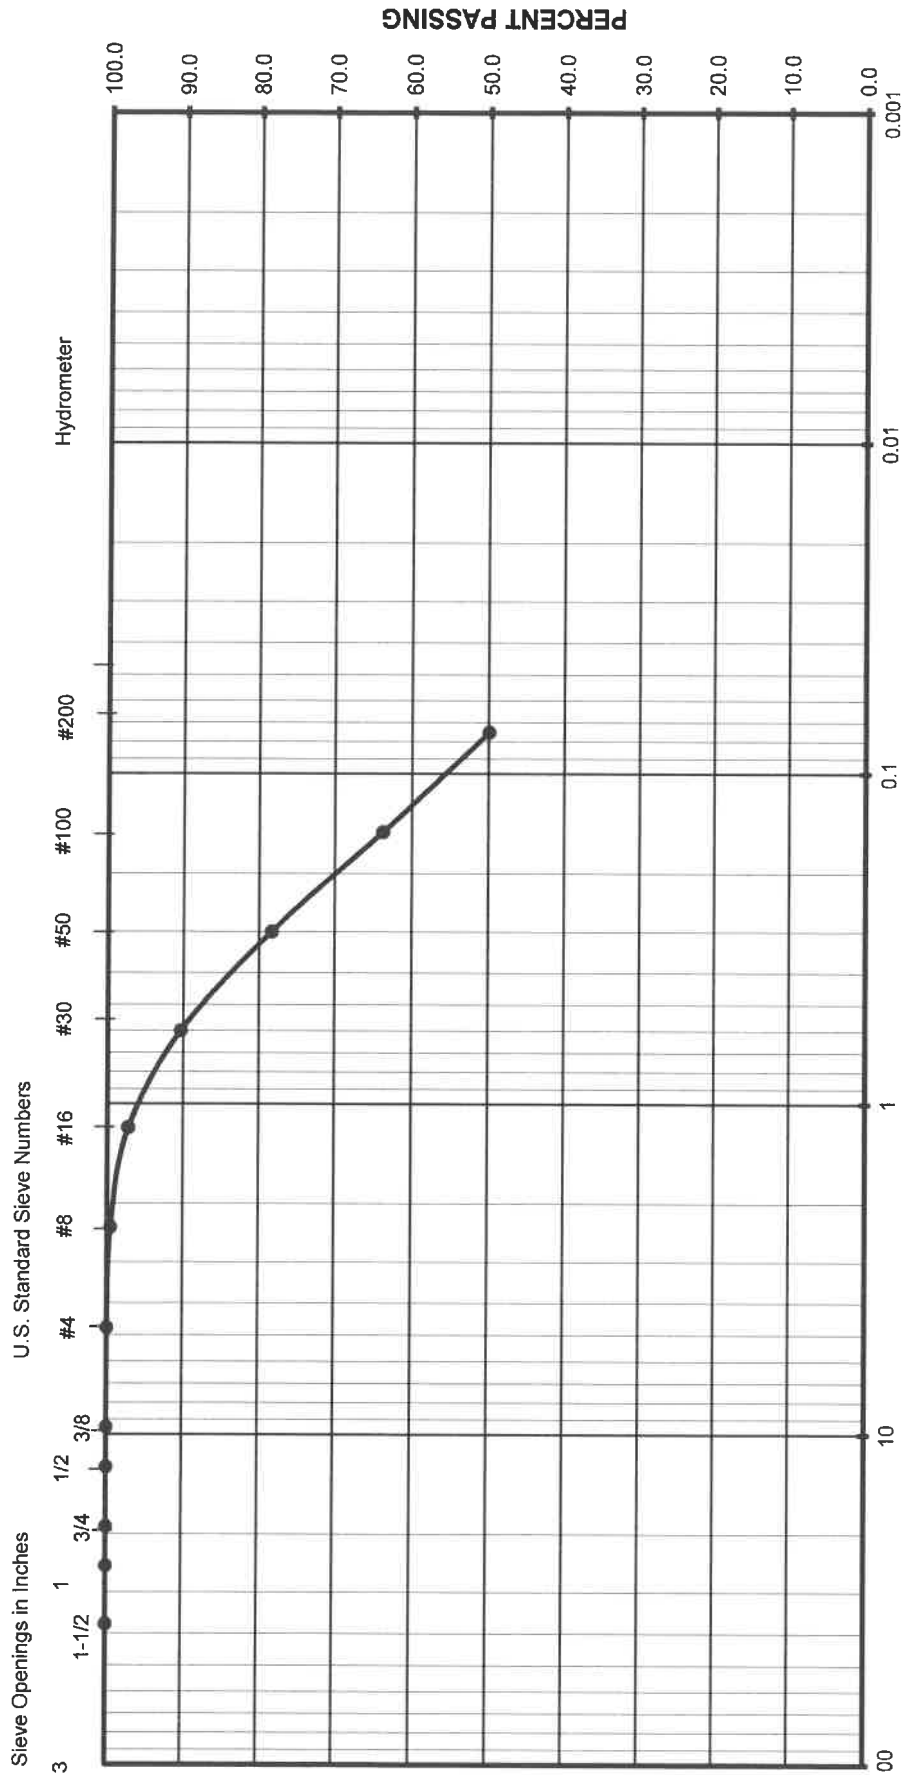

Gravel		Sand		Silt or Clay
Coarse	Fine	Coarse	Medium	Fine

(Unified Soils Classification)

Project Name
 Project Number
 Soil Classification
 Sample Number

VA Community Outpatient
 022-19021
 SM-ML
 B7 @ 2-3'


R - VALUE TEST

ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/26/2019
 Sample Location/Curve Number : RV#1
 Soil Classification : SM

TEST	A	B	C
Percent Moisture @ Compaction, %	10.6	10.1	9.6
Dry Density, lbm/cu.ft.	123.0	124.2	124.8
Exudation Pressure, psi	220	360	520
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	52	62	68

R Value at 300 PSI Exudation Pressure	58
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

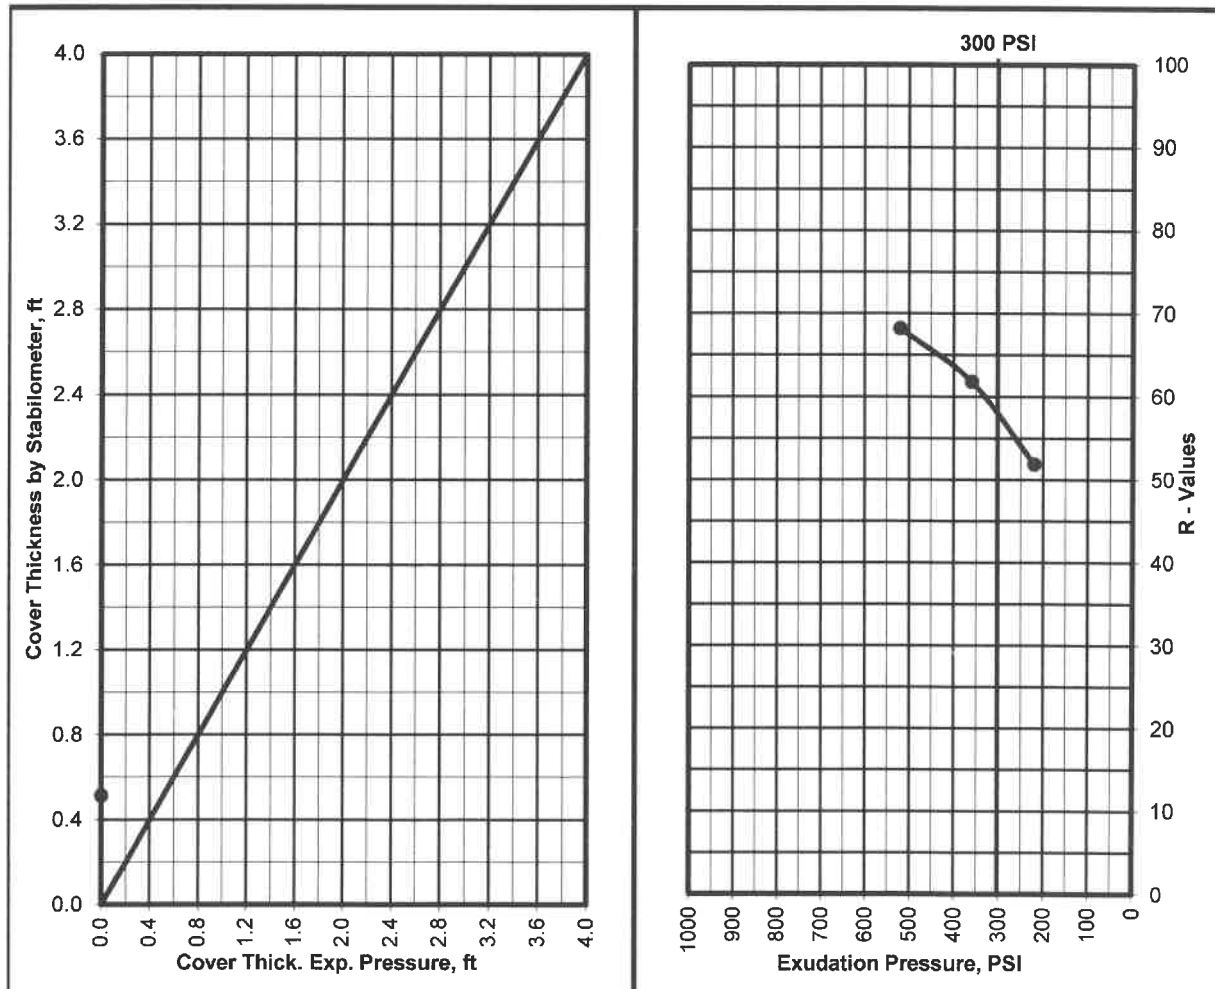


R - VALUE TEST ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/22/2019
 Sample Location/Curve Number : RV#2
 Soil Classification : SM

TEST	A	B	C
Percent Moisture @ Compaction, %	11.0	11.9	11.4
Dry Density, lbm/cu.ft.	124.9	124.6	124.8
Exudation Pressure, psi	570	200	360
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	67	45	60

R Value at 300 PSI Exudation Pressure	56
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

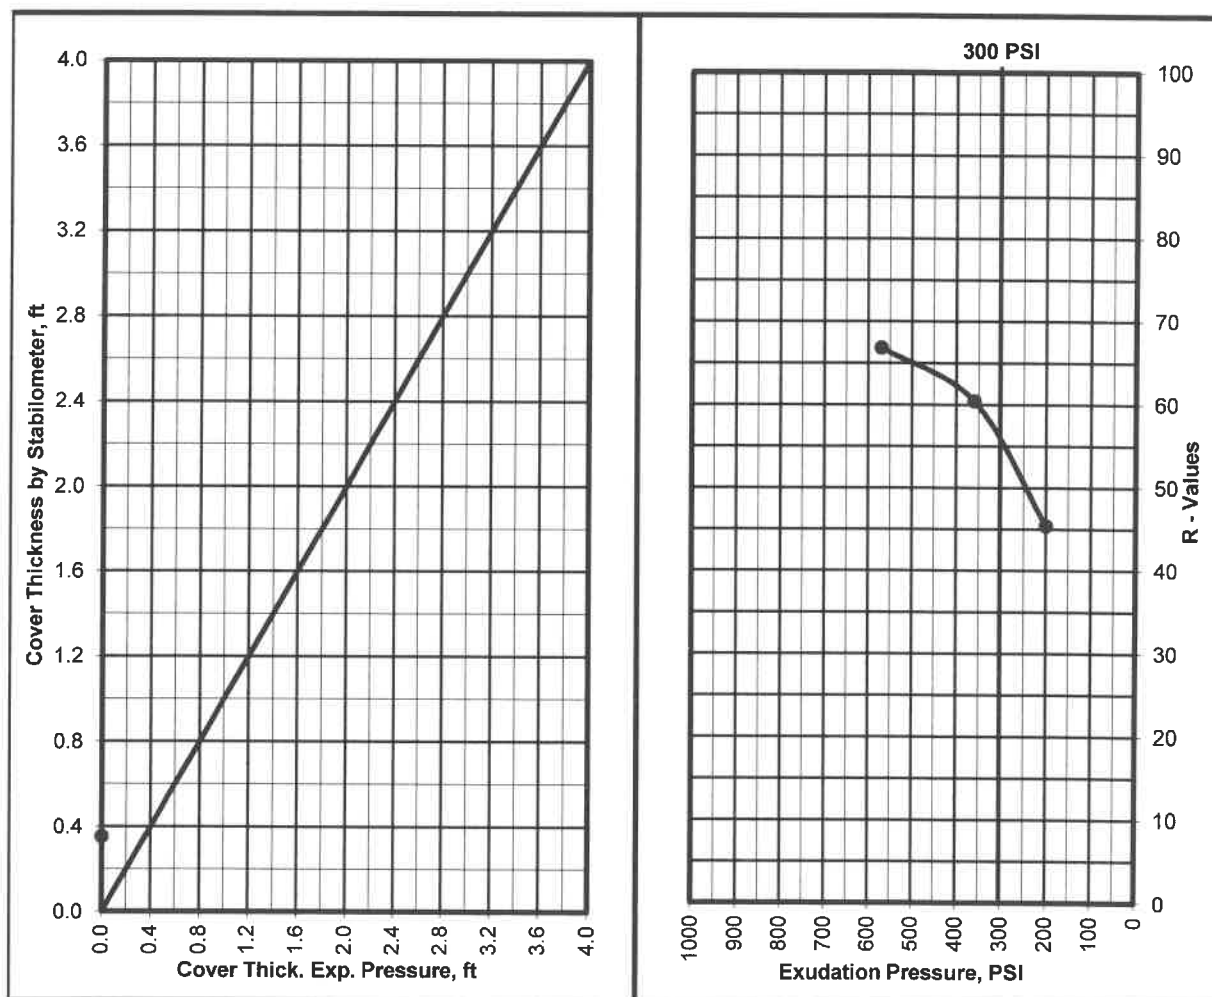


R - VALUE TEST

ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/26/2019
 Sample Location/Curve Number : RV#3
 Soil Classification : SM-ML

TEST	A	B	C
Percent Moisture @ Compaction, %	11.7	12.7	12.2
Dry Density, lbm/cu.ft.	121.5	119.0	120.5
Exudation Pressure, psi	470	140	300
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	41	32	37

R Value at 300 PSI Exudation Pressure	37
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

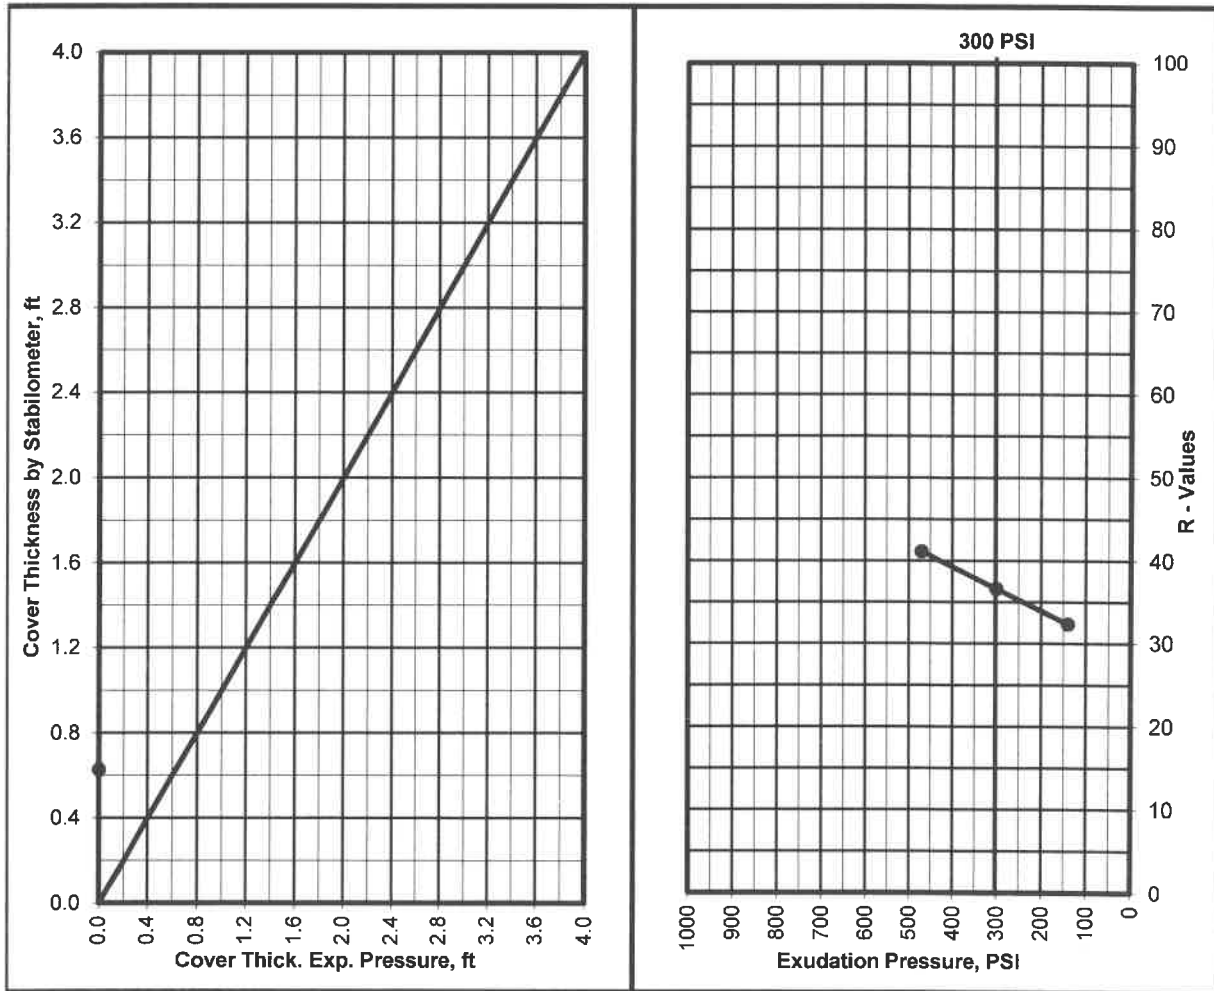


R - VALUE TEST

ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/25/2019
 Sample Location/Curve Number : RV#4
 Soil Classification : SM-ML

TEST	A	B	C
Percent Moisture @ Compaction, %	12.4	13.3	13.8
Dry Density, lbm/cu.ft.	124.7	123.3	122.8
Exudation Pressure, psi	380	210	90
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	41	36	31

R Value at 300 PSI Exudation Pressure	39
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

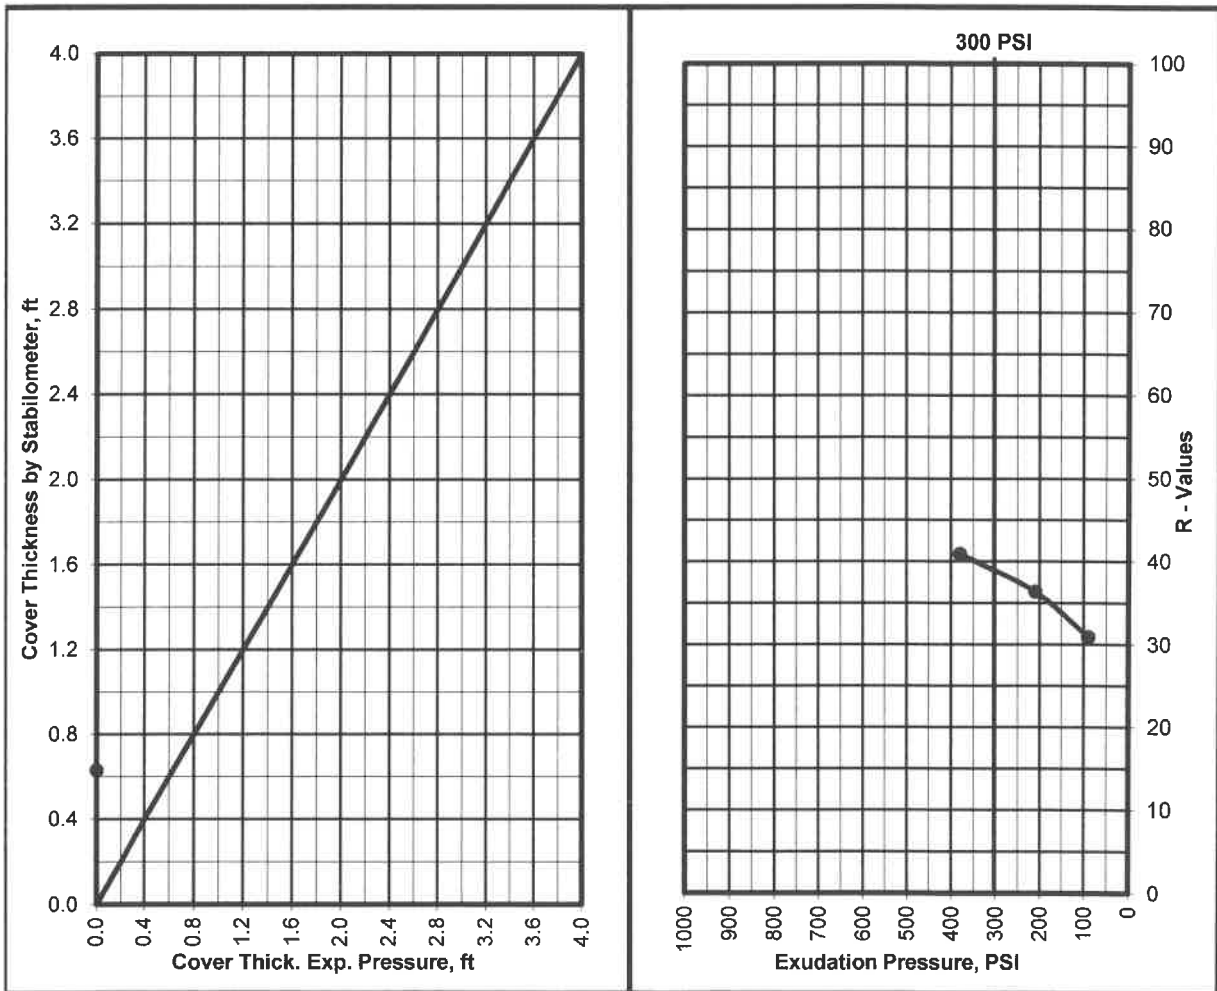


R - VALUE TEST

ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/24/2019
 Sample Location/Curve Number : RV#5
 Soil Classification : SM

TEST	A	B	C
Percent Moisture @ Compaction, %	11.2	12.2	11.7
Dry Density, lbm/cu.ft.	122.5	122.2	122.3
Exudation Pressure, psi	410	120	280
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	64	50	58

R Value at 300 PSI Exudation Pressure	59
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

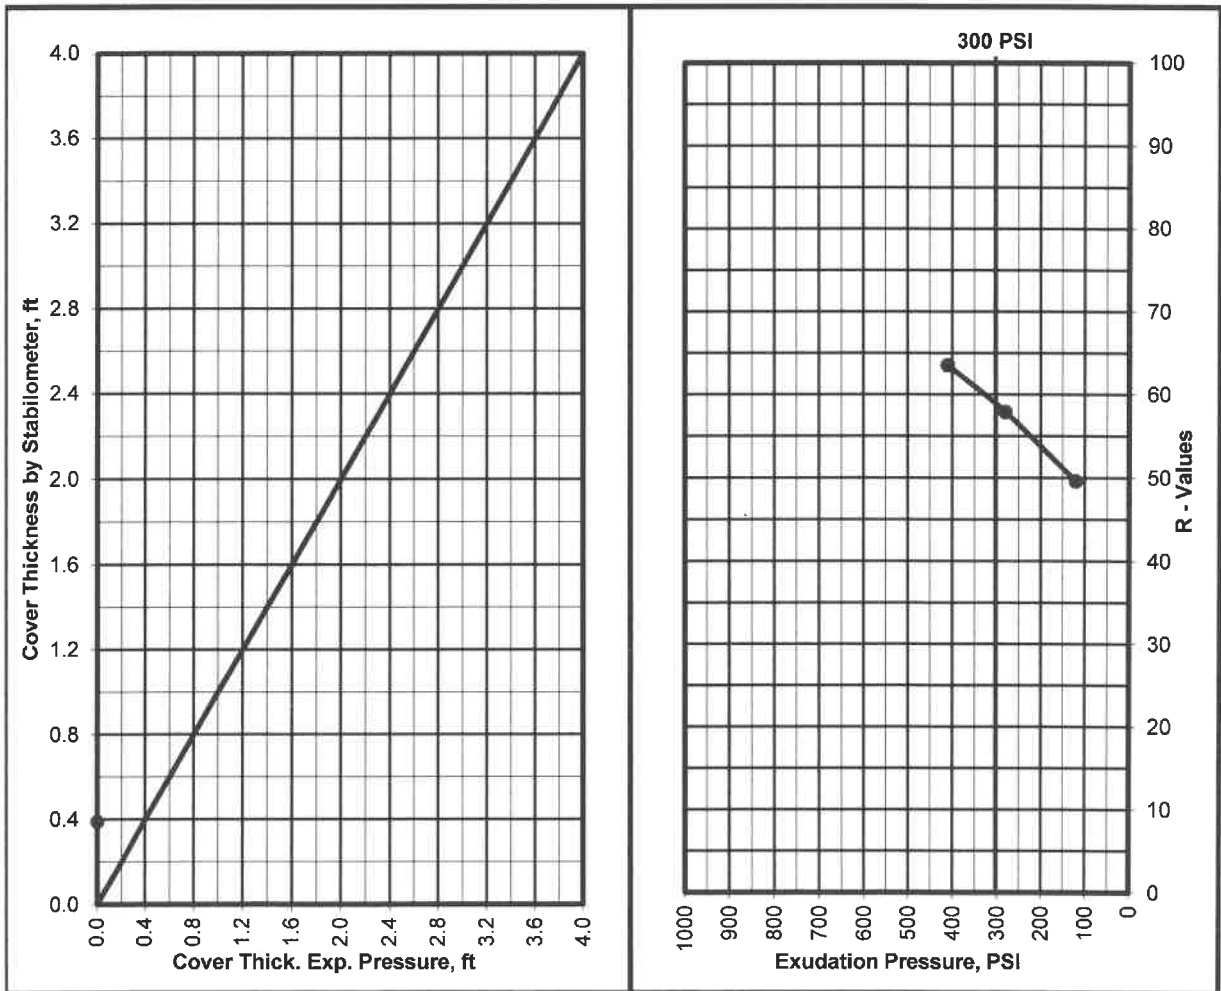


R - VALUE TEST ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/22/2019
 Sample Location/Curve Number : RV#6
 Soil Classification : SP-SM

TEST	A	B	C
Percent Moisture @ Compaction, %	11.7	12.7	12.2
Dry Density, lbm/cu.ft.	120.7	121.1	121.2
Exudation Pressure, psi	470	170	300
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	66	50	59

R Value at 300 PSI Exudation Pressure	59
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

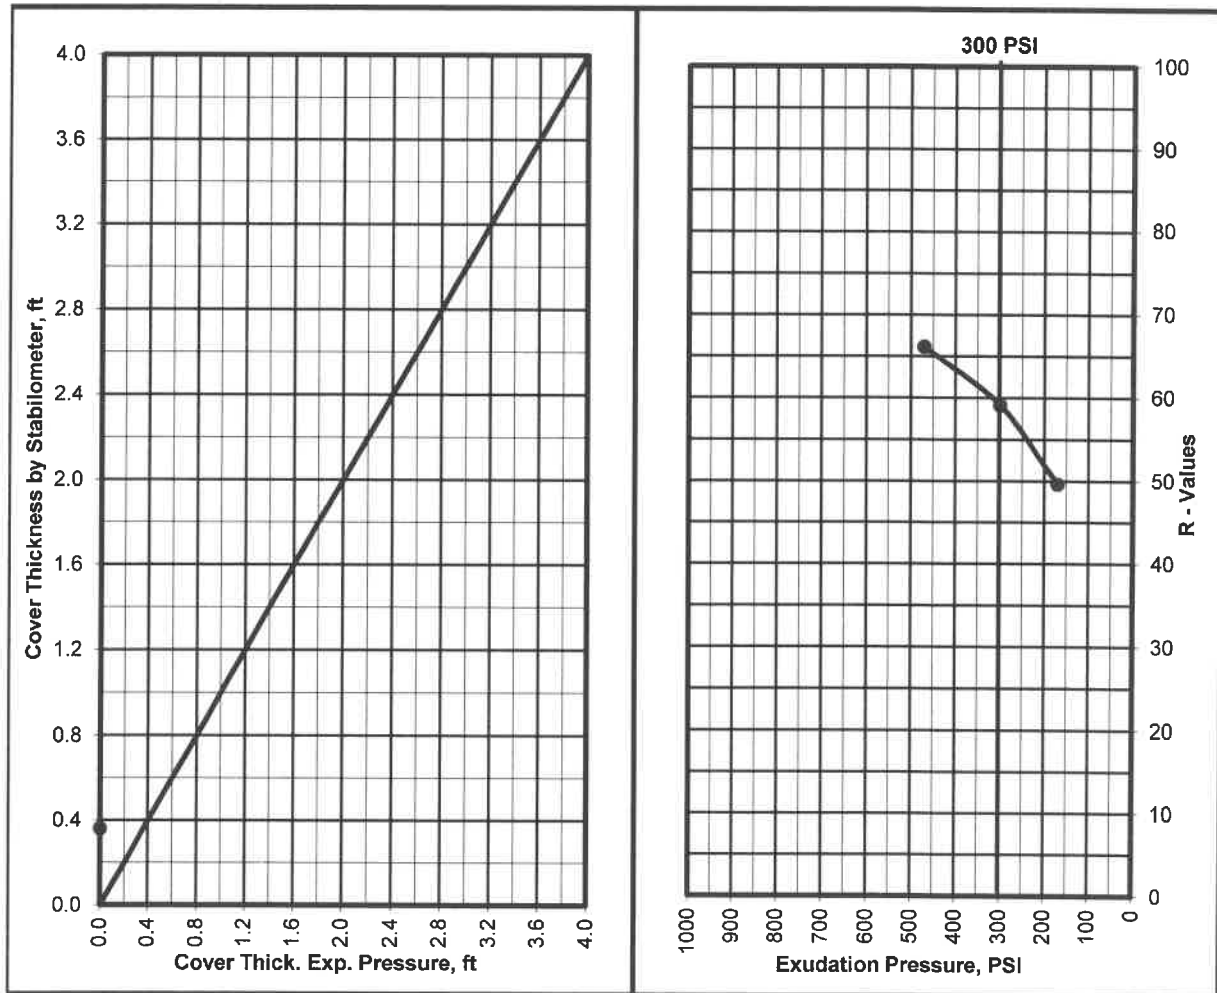


R - VALUE TEST

ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/26/2019
 Sample Location/Curve Number : RV#7
 Soil Classification : SM

TEST	A	B	C
Percent Moisture @ Compaction, %	10.1	11.1	10.6
Dry Density, lbm/cu.ft.	121.3	120.6	120.6
Exudation Pressure, psi	450	110	300
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	64	49	59

R Value at 300 PSI Exudation Pressure	59
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

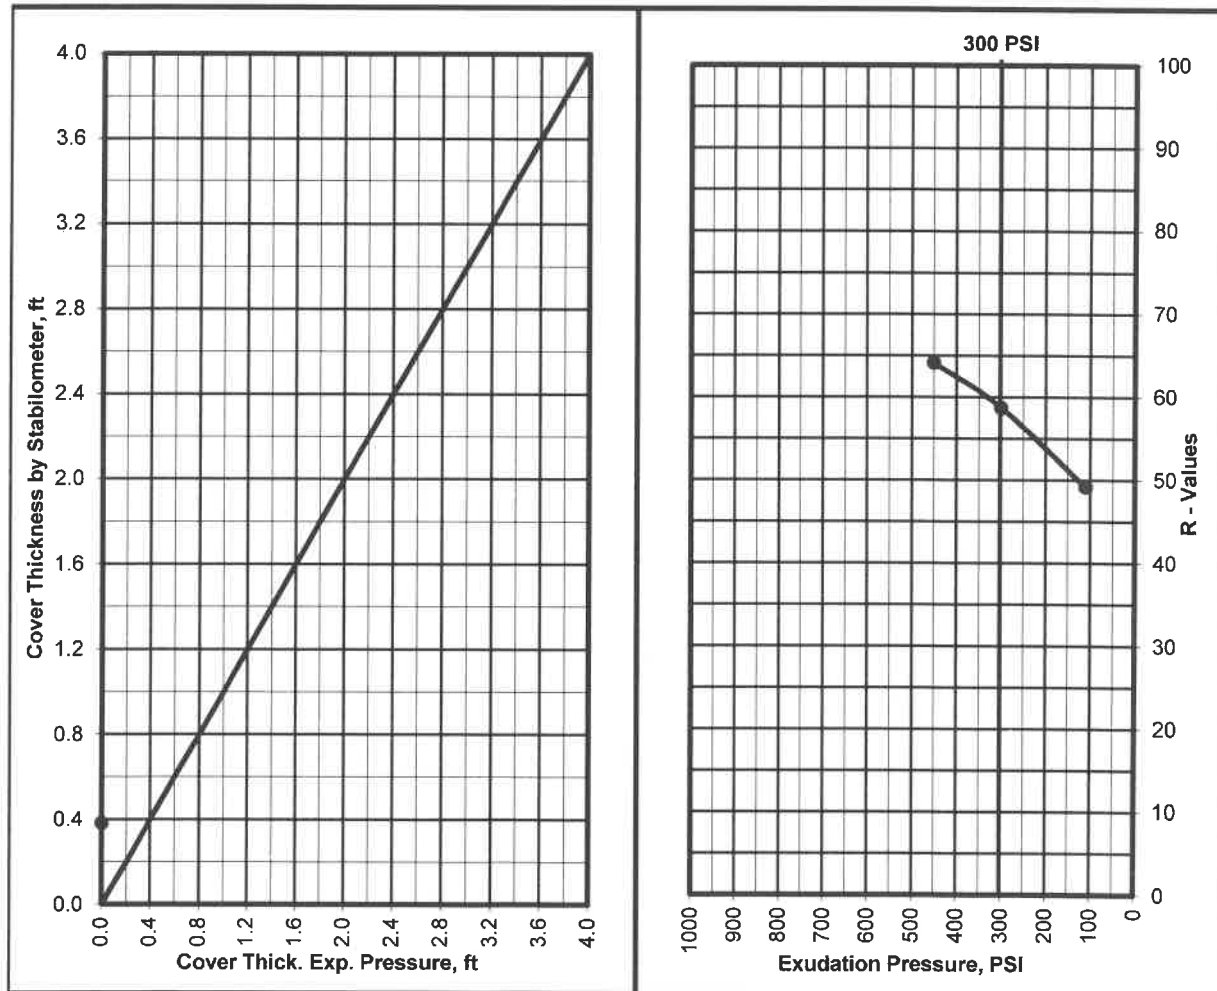


R - VALUE TEST ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/26/2019
 Sample Location/Curve Number : RV#8
 Soil Classification : SM

TEST	A	B	C
Percent Moisture @ Compaction, %	11.5	10.5	10.0
Dry Density, lbm/cu.ft.	121.7	122.7	123.4
Exudation Pressure, psi	220	380	530
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	53	62	67

R Value at 300 PSI Exudation Pressure	58
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

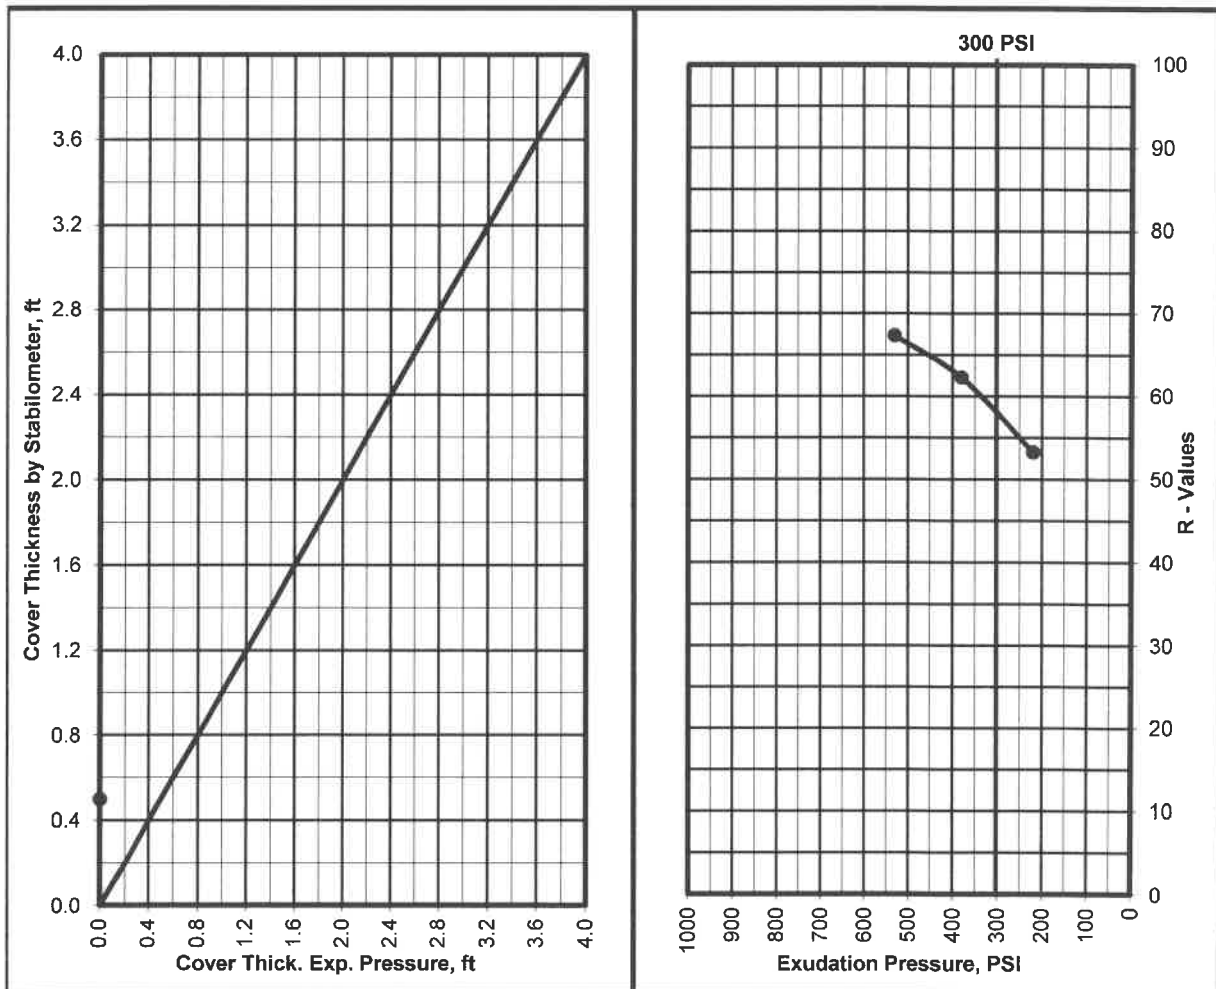


R - VALUE TEST

ASTM D - 2844 / CAL 301

Project Number : 022-19021
 Project Name : VA Community Outpatient
 Date : 4/26/2019
 Sample Location/Curve Number : RV#9
 Soil Classification : SM-ML

TEST	A	B	C
Percent Moisture @ Compaction, %	11.7	12.7	12.2
Dry Density, lbm/cu.ft.	119.9	118.4	119.0
Exudation Pressure, psi	470	160	320
Expansion Pressure, (Dial Reading)	0	0	0
Expansion Pressure, psf	0	0	0
Resistance Value R	42	32	38

R Value at 300 PSI Exudation Pressure	38
R Value by Expansion Pressure (TI =): 5	Expansion Pressure nil

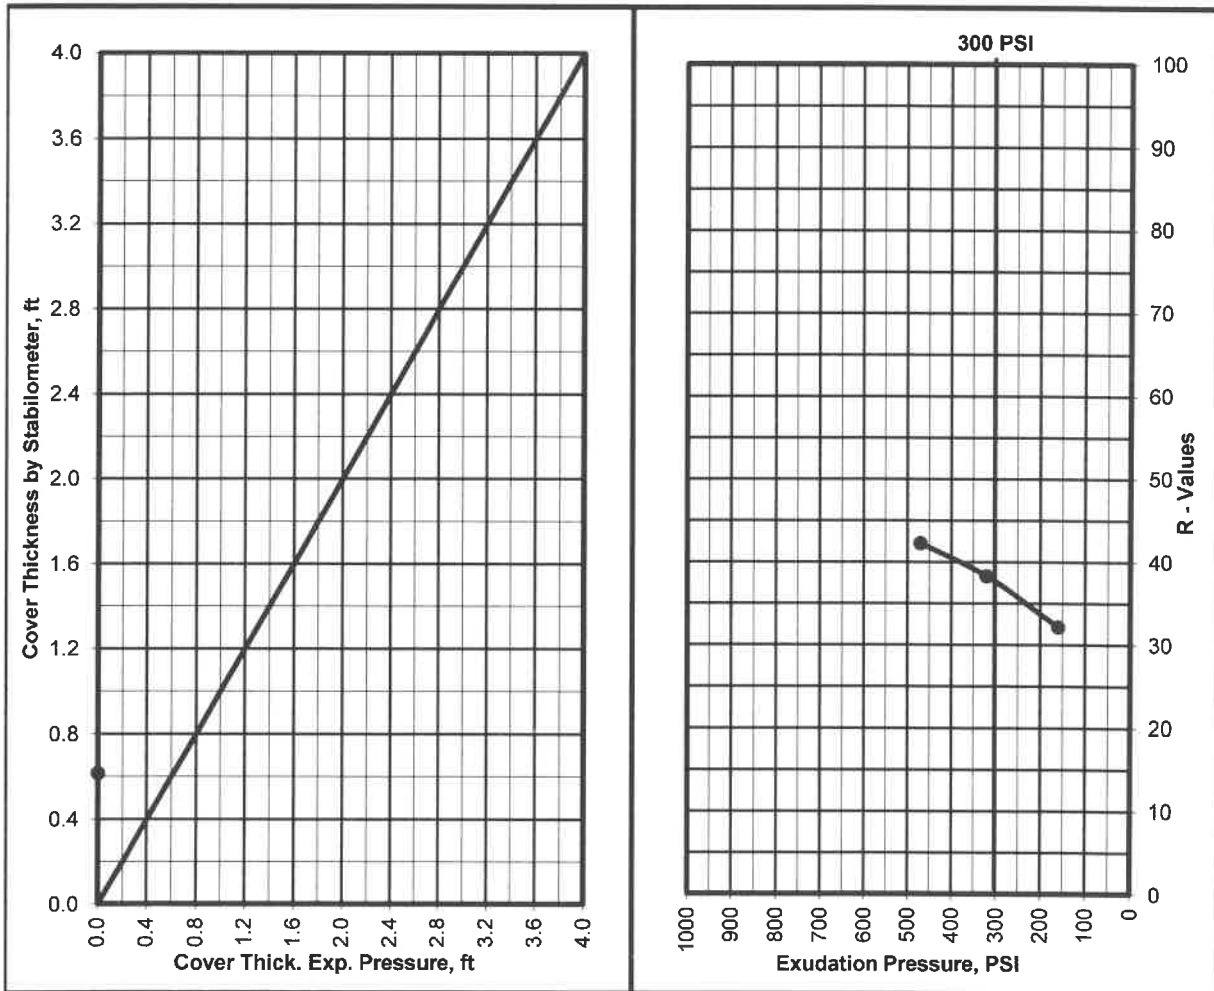

APPENDIX B

EARTHWORK SPECIFICATIONS

GENERAL

When the text of the report conflicts with the general specifications in this appendix, the recommendations in the report have precedence.

SCOPE OF WORK: These specifications and applicable plans pertain to and include all earthwork associated with the site rough grading, including but not limited to the furnishing of all labor, tools, and equipment necessary for site clearing and grubbing, stripping, preparation of foundation materials for receiving fill, excavation, processing, placement and compaction of fill and backfill materials to the lines and grades shown on the project grading plans, and disposal of excess materials.

PERFORMANCE: The Contractor shall be responsible for the satisfactory completion of all earthwork in accordance with the project plans and specifications. This work shall be inspected and tested by a representative of Krazan and Associates, Inc., hereinafter known as the Soils Engineer and/or Testing Agency. Attainment of design grades when achieved shall be certified by the project Civil Engineer. Both the Soils Engineer and the Civil Engineer are the Owner's representatives. If the Contractor should fail to meet the technical or design requirements embodied in this document and on the applicable plans, he shall make the necessary readjustments until all work is deemed satisfactory as determined by both the Soils Engineer and the Civil Engineer. No deviation from these specifications shall be made except upon written approval of the Soils Engineer, Civil Engineer or project Architect.

No earthwork shall be performed without the physical presence or approval of the Soils Engineer. The Contractor shall notify the Soils Engineer at least 2 working days prior to the commencement of any aspect of the site earthwork.

The Contractor agrees that he shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal working hours; and that the Contractor shall defend, indemnify and hold the Owner and the Engineers harmless from any and all liability, real or alleged, in connection with the performance of work on this project, except for liability arising from the sole negligence of the Owner or the Engineers.

TECHNICAL REQUIREMENTS: All compacted materials shall be densified to a density not less than 90 percent relative compaction based on ASTM Test Method D1557 or CAL-216, as specified in the technical portion of the Soil Engineer's report. The location and frequency of field density tests shall be as determined by the Soils Engineer. The results of these tests and compliance with these specifications shall be the basis upon which satisfactory completion of work will be judged by the Soils Engineer.

SOILS AND FOUNDATION CONDITIONS: The Contractor is presumed to have visited the site and to have familiarized himself with existing site conditions and the contents of the data presented in the soil report.

The Contractor shall make his own interpretation of the data contained in said report, and the Contractor shall not be relieved of liability under the Contract documents for any loss sustained as a result of any variance between conditions indicated by or deduced from said report and the actual conditions encountered during the progress of the work.

DUST CONTROL: The work includes dust control as required for the alleviation or prevention of any dust nuisance on or about the site or the borrow area, or off-site if caused by the Contractor's operation either during the performance of the earthwork or resulting from the conditions in which the Contractor leaves the site. The Contractor shall assume all liability, including court costs of codefendants, for all claims related to dust or windblown materials attributable to his work.

SITE PREPARATION

Site preparation shall consist of site clearing and grubbing and the preparations of foundation materials for receiving fill.

CLEARING AND GRUBBING: The Contractor shall accept the site in this present condition and shall demolish and/or remove from the area of designated project earthwork all structures, both surface and subsurface, trees, brush, roots, debris, organic matter, and all other matter determined by the Soils Engineer to be deleterious or otherwise unsuitable. Such materials shall become the property of the Contractor and shall be removed from the site.

Tree root systems in proposed building areas should be removed to a minimum depth of 3 feet and to such an extent which would permit removal of all roots larger than 1 inch. Tree roots removed in parking areas may be limited to the upper 1½ feet of the ground surface. Backfill of tree root excavations should not be permitted until all exposed surfaces have been inspected and the Soils Engineer is present for the proper control of backfill placement and compaction. Burning in areas which are to receive fill materials shall not be permitted.

SUBGRADE PREPARATION: Surfaces to receive Engineered Fill, building or slab loads shall be prepared as outlined above, excavated/scarified to a depth of 12 inches, moisture-conditioned as necessary, and compacted to 90 percent relative compaction.

Loose soil areas, areas of uncertified fill, and/or areas of disturbed soils shall be moisture-conditioned as necessary and recompacted to 90 percent relative compaction. All ruts, hummocks, or other uneven surface features shall be removed by surface grading prior to placement of any fill materials. All areas which are to receive fill materials shall be approved by the Soils Engineer prior to the placement of any of the fill material.

EXCAVATION: All excavation shall be accomplished to the tolerance normally defined by the Civil Engineer as shown on the project grading plans. All over-excavation below the grades specified shall be backfilled at the Contractor's expense and shall be compacted in accordance with the applicable technical requirements.

FILL AND BACKFILL MATERIAL: No material shall be moved or compacted without the presence of the Soils Engineer. Material from the required site excavation may be utilized for construction site fills provided prior approval is given by the Soils Engineer. All materials utilized for constructing site fills shall be free from vegetation or other deleterious matter as determined by the Soils Engineer.

PLACEMENT, SPREADING AND COMPACTION: The placement and spreading of approved fill materials and the processing and compaction of approved fill and native materials shall be the responsibility of the Contractor. However, compaction of fill materials by flooding, ponding, or jetting shall not be permitted unless specifically approved by local code, as well as the Soils Engineer.

Both cut and fill areas shall be surface-compacted to the satisfaction of the Soils Engineer prior to final acceptance.

SEASONAL LIMITS: No fill material shall be placed, spread, or rolled while it is frozen or thawing or during unfavorable wet weather conditions. When the work is interrupted by heavy rains, fill operations shall not be resumed until the Soils Engineer indicates that the moisture content and density of previously placed fill are as specified.

APPENDIX C

PAVEMENT SPECIFICATIONS

1. DEFINITIONS - The term "pavement" shall include asphaltic concrete surfacing, untreated aggregate base, and aggregate subbase. The term "subgrade" is that portion of the area on which surfacing, base, or subbase is to be placed.

The term "Standard Specifications": hereinafter referred to is the 2018 Standard Specifications of the State of California, Department of Transportation, and the "Materials Manual" is the Materials Manual of Testing and Control Procedures, State of California, Department of Public Works, Division of Highways. The term "relative compaction" refers to the field density expressed as a percentage of the maximum laboratory density as defined in the applicable tests outlined in the Materials Manual.

2. SCOPE OF WORK - This portion of the work shall include all labor, materials, tools, and equipment necessary for, and reasonably incidental to the completion of the pavement shown on the plans and as herein specified, except work specifically noted as "Work Not Included."

3. PREPARATION OF THE SUBGRADE - The Contractor shall prepare the surface of the various subgrades receiving subsequent pavement courses to the lines, grades, and dimensions given on the plans. The upper 12 inches of the soil subgrade beneath the pavement section shall be compacted to a minimum relative compaction of 90 percent. The finished subgrades shall be tested and approved by the Soils Engineer prior to the placement of additional pavement courses.

4. UNTREATED AGGREGATE BASE - The aggregate base material shall be spread and compacted on the prepared subgrade in conformity with the lines, grades, and dimensions shown on the plans. The aggregate base material shall conform to the requirements of Section 26 of the Standard Specifications for Class 2 material, 1½ inches maximum size. The aggregate base material shall be spread and compacted in accordance with Section 26 of the Standard Specifications. The aggregate base material shall be spread in layers not exceeding 6 inches and each layer of aggregate material course shall be tested and approved by the Soils Engineer prior to the placement of successive layers. The aggregate base material shall be compacted to a minimum relative compaction of 95 percent.

5. AGGREGATE SUBBASE - The aggregate subbase shall be spread and compacted on the prepared subgrade in conformity with the lines, grades, and dimensions shown on the plans. The aggregate subbase material shall conform to the requirements of Section 25 of the Standard Specifications for Class 2 material. The aggregate subbase material shall be compacted to a minimum relative compaction of 95 percent, and it shall be spread and compacted in accordance with Section 25 of the Standard Specifications. Each layer of aggregate subbase shall be tested and approved by the Soils Engineer prior to the placement of successive layers.

6. ASPHALTIC CONCRETE SURFACING - Asphaltic concrete surfacing shall consist of a mixture of mineral aggregate and paving grade asphalt, mixed at a central mixing plant and spread and compacted on a prepared base in conformity with the lines, grades and dimensions shown on the plans. The viscosity grade of the asphalt shall be PG 64-10. The mineral aggregate shall be Type B, ½ inch maximum size, medium grading and shall conform to the requirements set forth in Section 39. The drying, proportioning and mixing of the materials shall conform to Section 39.

The prime coat, spreading and compacting equipment and spreading and compacting mixture shall conform to the applicable chapters of Section 39, with the exception that no surface course shall be placed when the atmospheric temperature is below 50° F. The surfacing shall be rolled with a combination of steel wheel and pneumatic rollers, as described in Section 39-6. The surface course shall be placed with an approved self-propelled mechanical spreading and finishing machine.

7. FOG SEAL COAT - The fog seal (mixing type asphaltic emulsion) shall conform to and be applied in accordance with the requirements of Section 37.