

December 21, 2021

Project No. 21198-01

Mr. Matthew J. Waken
MW Investment Group, LLC
27702 Crown Valley Parkway, Suite D-4-197
Ladera Ranch, CA 92694


Subject: Preliminary Geotechnical Evaluation and Design Recommendations for Proposed Single-Family and Multi-Family Residential Development, 4665 Lampson Avenue, Los Alamitos, California

In accordance with your request and authorization, LGC Geotechnical, Inc. has performed a preliminary geotechnical evaluation for the proposed single-family and multi-family residential development located at 4665 Lampson Avenue in the City of Los Alamitos, California. The purpose of our study was to evaluate the existing onsite geotechnical conditions and to provide preliminary geotechnical recommendations relative to the proposed residential development.

Should you have any questions regarding this report, please do not hesitate to contact our office. We appreciate this opportunity to be of service.

Respectfully Submitted,

LGC Geotechnical, Inc.

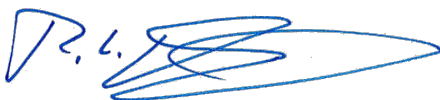

Ryan Douglas, PE, GE 3147
Project Engineer



RLD/BPP/amm

Distribution: (1) Addressee (electronic copy)




TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1.0 INTRODUCTION	1
1.1 Purpose and Scope of Services.....	1
1.2 Project Description.....	1
1.3 Existing Conditions.....	1
1.4 Background	2
1.5 Subsurface Geotechnical Evaluation	4
1.6 Laboratory Testing.....	4
2.0 GEOTECHNICAL CONDITIONS.....	6
2.1 Geologic Geology	6
2.2 Site Specific Geology	6
2.3 Groundwater	6
2.4 Field Infiltration Testing	7
2.5 Seismic Design Criteria	7
2.6 Faulting	9
2.6.1 Liquefaction and Dynamic Settlement.....	9
2.6.2 Liquefaction Surface Effects	10
2.6.3 Lateral Spreading	10
2.7 Static Settlement.....	10
2.8 Expansion Potential	11
3.0 CONCLUSIONS.....	12
4.0 PRELIMINARY RECOMMENDATIONS	13
4.1 Site Earthwork	13
4.1.1 Site Preparation	13
4.1.2 Removal and Recompanction Depths and Limits	14
4.1.3 Temporary Excavations	15
4.1.4 Removal Bottoms and Subgrade Preparation.....	15
4.1.5 Material for Fill	16
4.1.6 Placement and Compaction of Fills	17
4.1.7 Trench and Retaining Wall Backfill and Compaction.....	17
4.1.8 Shrinkage and Subsidence	18
4.2 Preliminary Foundation Recommendations.....	18
4.2.1 Provisional Post-Tensioned Foundation Design Parameters.....	19
4.2.2 Post-Tensioned Foundation Subgrade Preparation and Maintenance	20
4.2.3 Slab Underlayment Guidelines.....	21
4.3 Soil Bearing and Lateral Resistance	22
4.4 Lateral Earth Pressures for Retaining Walls	22
4.5 Soil Corrosivity.....	24
4.6 Control of Surface Water and Drainage Control	24
4.7 Subsurface Water and Infiltration.....	25
4.8 Preliminary Asphalt Concrete Pavement Sections	25

TABLE OF CONTENTS (Cont'd)

4.9	Nonstructural Concrete Flatwork.....	26
4.10	Geotechnical Plan Review.....	27
4.11	Geotechnical Observation and Testing During Construction	27
5.0	LIMITATIONS.....	29

LIST OF ILLUSTRATIONS, TABLES, AND APPENDICES

Figures

- Figure 1 – Site Location Map (Page 3)
- Figure 2 – Geotechnical Exploration Location Map (Rear of Text)
- Figure 3 – Retaining Wall Backfill Detail (Rear of Text)

Tables

- Table 1 – Groundwater Summary (Page 6)
- Table 2 – Summary of Field Infiltration Testing (Page 7)
- Table 3 – Seismic Design Parameters (Page 8)
- Table 4 – Provisional Geotechnical Parameters for Post-Tensioned Foundation Slab Design (Page 20)
- Table 5 – Lateral Earth Pressures – Imported Sandy Soils (Page 23)
- Table 6 – Preliminary Pavement Section Options (Page 26)
- Table 7 – Nonstructural Concrete Flatwork for Low Expansion Potential (Page 27)

Appendices

- Appendix A – References
- Appendix B – Boring and CPT Logs
- Appendix C – Laboratory Test Results
- Appendix D – Infiltration Test Data
- Appendix E – General Earthwork and Grading Specifications

1.0 INTRODUCTION

1.1 Purpose and Scope of Services

This report presents the results of our preliminary geotechnical evaluation for the proposed single-family and multi-family residential development located at 4665 Lampson Avenue in the City of Los Alamitos, California. Refer to the Site Location Map (Figure 1).

The purpose of our study was to provide a preliminary geotechnical evaluation relative to the proposed residential development. As part of our scope of work, we have: 1) reviewed available geotechnical background information including in-house regional geologic maps and published geotechnical literature pertinent to the site (Appendix A); 2) performed a limited subsurface geotechnical evaluation of the site consisting of the excavation of seven small-diameter borings ranging in depth from approximately 5 to 46.5 feet below existing ground surface; 3) performed two field infiltration tests; 4) performed laboratory testing of select soil samples obtained during our subsurface evaluation; and 5) prepared this preliminary geotechnical summary report presenting our findings, preliminary conclusions and recommendations for the development of the proposed residential project.

It should be noted that our evaluation and this report only address geotechnical issues associated with the site and do not address any environmental issues.

1.2 Project Description

Based on the preliminary site plan (KTTY, 2021), the proposed development includes the construction of 102 single-family residential lots and 90 affordable multi-family units. Proposed site improvements include a park and a series of internal streets. Design cuts and fills (not including required remedial grading) are anticipated to be on the order of 1 to 3 feet. The proposed building structures are anticipated to be relatively light-weight at-grade structures with maximum column and wall loads of approximately 30 kips and 2 kips per linear foot, respectively. Please note no grading plans or structural loads were provided to us at the time of this report.

The recommendations given in this report are based upon the estimated structural loading, grading and layout information above. We understand that the project plans are currently being developed at this time; LGC Geotechnical should be provided with updated project plans and any changes to structural loads when they become available, in order to either confirm or modify the recommendations provided herein. Additional field work and/or laboratory testing may be necessary.

1.3 Existing Conditions

The site is approximately 12 acres and is bound to the south by Lampson Avenue, to the east by a golf course, to the north by a park and to the west by vacant land. The site is currently occupied by the California Department of Fish and Wildlife with an associated parking lot and open space.

The site has minor relief, with the highest being the northern side of the site and gently slopes gently from north to south.

1.4 Background

Review of historical aerials indicates that the building and associated improvements were constructed after 1963, but prior to 1972 and remained relatively unchanged since (Historic Aerials, 2021). Aerial photos from 1952 and 1963 indicate the site was previously raw land.



FIGURE 1
Site Location Map

PROJECT NAME	MWIG - Los Alamitos
PROJECT NO.	21198-01
ENG. / GEOL.	RLD
SCALE	Not to Scale
DATE	December 2021

1.5 Subsurface Geotechnical Evaluation

LGC Geotechnical performed a subsurface geotechnical evaluation of the site consisting of the excavation of five hollow-stem auger borings and two hand-auger borings to evaluate onsite geotechnical conditions.

Five hollow-stem borings (HS-1 through HS-3, I-1, and I-2) were drilled to depths ranging from approximately 5 to 46.5 feet below existing grade. An LGC Geotechnical staff engineer observed the drilling operations, logged the borings, and collected soil samples for laboratory testing. The borings were excavated by Cal Pac Drilling, Inc. under subcontract to LGC Geotechnical using a truck-mounted drill rig equipped with 6 and 8-inch-diameter hollow-stem augers. Driven soil samples were collected by means of the Standard Penetration Test (SPT) and Modified California Drive (MCD) sampler generally obtained at 2.5 to 5-foot vertical increments. The MCD is a split-barrel sampler with a tapered cutting tip and lined with a series of 1-inch-tall brass rings. The SPT sampler (1.4-inch ID) and MCD sampler (2.4-inch ID, 3.0-inch OD) were driven using a 140-pound automatic hammer falling 30 inches to advance the sampler a total depth of 18 inches. The raw blow counts for each 6-inch increment of penetration were recorded on the boring logs. Bulk samples of the near-surface soils were also collected and logged at select borings for laboratory testing. At the completion of drilling, the borings were backfilled with the native soil cuttings and tamped. Some settlement of the backfill soils may occur over time.

Two hand auger borings (HA-1 and HA-2) were excavated to approximately 5 feet below the existing surface, sampled, logged, and backfilled. The approximate locations of our hand auger borings are presented on our Boring Location Map (Figure 2). The boring logs are presented in Appendix B.

Infiltration testing was performed within two of the borings (I-1 and I-2) to depths of approximately 5 feet below existing grade. An LGC Geotechnical geologist installed standpipes, backfilled the borings with crushed rock and pre-soaked the infiltration holes prior to testing. Infiltration testing was performed per the County of Orange testing guidelines. Standpipes were removed and the locations were subsequently backfilled with native soils at the completion of testing. Some settlement of the backfill soils may occur over time.

The approximate locations of our subsurface explorations are provided on the Boring Location Map (Figure 2). The boring logs are provided in Appendix B.

1.6 Laboratory Testing

Representative bulk and driven (relatively undisturbed) samples were obtained for laboratory testing during our field evaluation. Laboratory testing included in-situ moisture content and in-situ dry density, fines content, Atterberg Limits, expansion index, consolidation, direct shear, laboratory compaction and corrosion (sulfate, chloride, pH and minimum resistivity).

The following is a summary of the laboratory test results:

- Dry density of the samples collected ranged from approximately 87 pounds per cubic foot (pcf) to 111 pcf, with an average of 99 pcf. Field moisture contents ranged from approximately 9 to 35 percent, with an average of 25 percent.

- Two fines content tests were performed and indicated a fines content (passing No. 200 sieve) of approximately 15 and 16.5 percent. Based on the Unified Soils Classification System (USCS), the tested samples would be classified as “coarse-grained.”
- Four Atterberg Limit (liquid limit and plastic limit) tests were performed. Results indicated a Plasticity Index (PI) value ranging from 12 to 24.
- Two consolidation tests were performed. The load versus deformation plots are provided in Appendix C.
- One remolded direct shear test was performed. The plot is provided in Appendix C.
- One laboratory compaction test of a near surface sample indicated a maximum dry density of 116.0 pcf with an optimum moisture content of 13.0 percent.
- Two Expansion potential tests were performed and indicated an expansion index value of 30 and 32, corresponding to “Low” expansion potential.
- Corrosion testing indicated soluble sulfate contents ranging from approximately 0.032 to 0.254 percent, a chloride content ranging from 140 to 600 parts per million (ppm), pH of 8.92, and a minimum resistivity of 210 ohm-centimeters.

A summary of the laboratory test results is presented in Appendix C. The moisture and dry density results are presented on the boring logs in Appendix B.

2.0 GEOTECHNICAL CONDITIONS

2.1 Geologic Conditions

The subject site is located within the Orange County coastal plain, more generally located on the broad southern margin of the Los Angeles Basin. The site is located more specifically within the Santa Ana River drainage basin, and it is underlain at depth by poorly consolidated alluvial sediments mapped as Quaternary Young Alluvial Fan deposits "Unit 2" (Qya₂) (USGS, 2016).

2.2 Site-Specific Geology

Based on the results of our subsurface investigation, the site is underlain by a thin veneer of topsoil and older artificial fill over young alluvial deposits of Holocene age, per regional geologic mapping (USGS, 2016). The materials are described on the boring logs presented in Appendix B.

The young alluvial sediments encountered during our subsurface exploration generally consist of interbedded layers of gray and brown, silty clay, clay, silty sand, and clayey sand. The materials were observed to be very moist to wet with depth, soft to very stiff and medium dense to dense.

2.3 Groundwater

Groundwater was encountered in three of our borings (HS-1 through HS-3) at depths of approximately 11 to 13 feet below existing grade. Additionally, historic high groundwater is estimated to be about 10 feet below existing grade (CDMG, 1998). The location and approximate depth of groundwater is summarized in Table 1 below.

TABLE 1

Groundwater Summary

Boring Number	Total Drilled Depth of Boring (ft)	Groundwater Depth Below Existing Grade (ft)
HS-1	21.5	13
HS-2	46.5	11.5
HS-3	21.5	11

Seasonal fluctuations of groundwater elevations should be expected over time. In general, groundwater levels fluctuate with the seasons and local zones of perched groundwater may be present due to local seepage caused by irrigation and/or recent precipitation. Local perched groundwater conditions or surface seepage may develop once site development is completed.

2.4 Field Infiltration Testing

Two field percolation tests were performed in locations and depths per the direction of the project civil engineer, the location is depicted on Figure 2 – Boring Location Map. Test well installation consisted of placing a 3-inch diameter perforated PVC pipe in the excavated 8-inch diameter borehole and backfilling the annulus with crushed rock including the placement of approximately 2 inches of crushed rock at the bottom of the borehole. The infiltration test wells were presoaked the day of installation and testing took place within 24 hours of presoaking. During the pre-test, the water level was observed to drop less than 6 inches in 25 minutes for two consecutive readings. Therefore, the test procedure for fine-grained soils or “slow test” was followed. Test well installation and the estimation of infiltration rates were accomplished in general accordance with the guidelines set forth by the County of Orange (2013). In general, three-dimensional flow out of the test well (*percolation*), as observed in the field, is mathematically reduced to one-dimensional flow out of the bottom of the test well (*infiltration*). Infiltration tests are performed using relatively clean water, free of particulates, silt, etc. The results of our recent field infiltration testing are presented in Appendix D and summarized below.

TABLE 2

Summary of Field Infiltration Testing

Infiltration Test Identification	Approx. Depth Below Existing Grade (ft)	Observed Infiltration Rate* (in./hr.)
I-1	5	0.03
I-2	5	0.04

*Observed Infiltration Rates Do Not Include Factor of Safety.

The tested infiltration rates provided in this report are considered a general representation of the infiltration rates at the location of the proposed infiltration boring. Please note, the testing of infiltration rates is highly dependent upon the materials encountered at the point of testing (i.e., location and depth of testing). Varying subsurface conditions may exist outside of the test location which could alter the calculated infiltration rate. Please refer to Section 4.7 for subsurface water infiltration recommendations.

2.5 Seismic Design Criteria

The site seismic characteristics were evaluated per the guidelines set forth in Chapter 16, Section 1613 of the 2019 California Building Code (CBC). Since the site contains soils that are susceptible to liquefaction (refer to below Section “Liquefaction and Dynamic Settlement”), ASCE 7-16 which has been adopted by the CBC requires that site soils be assigned Site Class “F” and a site-specific response spectrum be performed. However, in accordance with Section 20.3.1 of ASCE 7-16, if the fundamental periods of vibration of the planned structure are equal to or less than 0.5 second, a site-specific response spectrum is not required and ASCE 7-16/2019 CBC site class and seismic parameters may be used in lieu of a site-specific response

spectrum. It should be noted that the seismic parameters provided herein are not applicable for any structure having a fundamental period of vibration greater than 0.5 second. **Please note that the following seismic parameters are only applicable for code-based acceleration response spectra and are not applicable for where site-specific ground motion procedures are required by ASCE 7-16.** Representative site coordinates of latitude 33.7815 degrees north and longitude -118.0510 degrees west were utilized in our analyses. The maximum considered earthquake (MCE) spectral response accelerations (S_{MS} and S_{M1}) and adjusted design spectral response acceleration parameters (S_{DS} and S_{D1}) for Site Class D are provided in Table 3 below. The structural designer should contact the geotechnical consultant if structural conditions (e.g., number of stories, seismically isolated structures, etc.) require site-specific ground motions.

TABLE 3
Seismic Design Parameters

Selected Parameters from 2019 CBC, Section 1613 - Earthquake Loads	Seismic Design Values	Notes/Exceptions
Distance to applicable faults classifies the site as a "Near-Fault" site.		Section 11.4.1 of ASCE 7
Site Class	D*	Chapter 20 of ASCE 7
S_s (Risk-Targeted Spectral Acceleration for Short Periods)	1.467g	From SEAOC, 2021
S_1 (Risk-Targeted Spectral Accelerations for 1-Second Periods)	0.524g	From SEAOC, 2021
F_a (per Table 1613.2.3(1))	1.000	For Simplified Design Procedure of Section 12.14 of ASCE 7, F_a shall be taken as 1.4 (Section 12.14.8.1)
F_v (per Table 1613.2.3(2))	1.776	Value is only applicable per requirements/exceptions per Section 11.4.8 of ASCE 7
S_{MS} for Site Class D [Note: $S_{MS} = F_a S_s$]	1.467g	-
S_{M1} for Site Class D [Note: $S_{M1} = F_v S_1$]	0.931g	Value is only applicable per requirements/exceptions per Section 11.4.8 of ASCE 7
S_{DS} for Site Class D [Note: $S_{DS} = (2/3)S_{MS}$]	0.978g	-
S_{D1} for Site Class D [Note: $S_{D1} = (2/3)S_{M1}$]	0.620g	Value is only applicable per requirements/exceptions per Section 11.4.8 of ASCE 7
C_{RS} (Mapped Risk Coefficient at 0.2 sec)	0.908	ASCE 7 Chapter 22
C_{R1} (Mapped Risk Coefficient at 1 sec)	0.913	ASCE 7 Chapter 22
*Since site soils are Site Class D and S_1 is greater than or equal to 0.2, the seismic response coefficient C_s is determined by Eq. 12.8-2 for values of $T \leq 1.5T_s$ and taken equal to 1.5 times the value calculated in accordance with either Eq. 12.8-3 for $T_L \geq T > T_s$, or Eq. 12.8-4 for $T > T_L$. Refer to ASCE 7-16.		

Section 1803.5.12 of the 2019 CBC (per Section 11.8.3 of ASCE 7) states that the maximum considered earthquake geometric mean (MCE_G) Peak Ground Acceleration (PGA) should be used for liquefaction potential. The PGA_M for the site is equal to 0.696g (SEAOC, 2021).

A deaggregation of the PGA based on a 2,475-year average return period indicates that an earthquake magnitude of 6.8 at a distance of approximately 10.6 km from the site would contribute the most to this ground motion (USGS, 2014).

2.6 Faulting

Prompted by damaging earthquakes in Northern and Southern California, State legislation and policies concerning the classification and land-use criteria associated with faults have been developed. Their purpose was to prevent the construction of urban developments across the trace of active faults, resulting in the Alquist-Priolo Earthquake Fault Zoning Act. Earthquake Fault Zones have been delineated along the traces of active faults within California. Where developments for human occupation are proposed within these zones, the state requires detailed fault evaluations be performed so that engineering geologists can mitigate the hazards associated with active faulting by identifying the location of active faults and allowing for a setback from the zone of previous ground rupture.

The subject site is not located within a State of California Earthquake Fault Zone (Alquist-Priolo) and no faults were identified on the site during our site evaluation (CGS, 2018). The possibility of damage due to ground rupture is considered low since no active faults are known to cross the site. The closest known active faults to the subject site are the Newport-Inglewood, Puente Hills, Palos Verdes and Elsinore Fault Zones (USGS 2016).

Secondary effects of seismic shaking resulting from large earthquakes on the major faults in the Southern California region, which may affect the site, include ground lurching and shallow ground rupture, soil liquefaction, and dynamic settlement. These secondary effects of seismic shaking are a possibility throughout the Southern California region and are dependent on the distance between the site and causative fault and the onsite geology. A discussion of these secondary effects is provided in the following sections.

2.6.1 Liquefaction and Dynamic Settlement

Liquefaction is a seismic phenomenon in which loose, saturated, granular soils behave similarly to a fluid when subject to high-intensity ground shaking. Liquefaction occurs when three general conditions coexist: 1) shallow groundwater; 2) low density non-cohesive (granular) soils; and 3) high-intensity ground motion. Studies indicate that saturated, loose near-surface cohesionless soils exhibit the highest liquefaction potential, while dry, dense, cohesionless soils and cohesive soils exhibit low to negligible liquefaction potential. In general, cohesive soils are not considered susceptible to liquefaction, depending on their plasticity and moisture content (Bray & Sancio, 2006). Effects of liquefaction on level ground include settlement, sand boils, and bearing capacity failures below structures. Dynamic settlement of dry loose sands can occur as the sand particles tend to settle and densify as a result of a seismic event.

Based on our review of the State of California Seismic Hazard Zone for liquefaction potential (CDMG, 1999), the site is located within a liquefaction hazard zone. Subsurface field data indicates that the site contains isolated sandy layers susceptible to liquefaction interfingering with fine-grained non-liquefiable soils and dense sands. The recent explored groundwater elevation of 11 feet below existing grade and historic high groundwater elevation of 10 feet below existing grade were both used in the liquefaction analysis. Liquefaction potential was evaluated using the procedures outlined by Special Publication 117A (SCEC, 1999 & CGS, 2008) and the applicable seismic criteria (e.g., 2019 CBC). Liquefaction induced settlement was estimated using the PGA_M per the 2019 CBC and a moment magnitude of 6.80 (USGS, 2014).

Results indicate total seismic settlement on the order of 2 inches. Differential seismic settlement can be estimated as half of the total estimated seismic settlement over a horizontal span of about 40 feet. This can be mitigated using a post-tensioned slab and interconnecting isolated pad footings with grade beams.

2.6.2 Liquefaction Surface Effects

Liquefaction induced surface effects, such as sand boils, can occur when shallow liquefiable soil layers trigger during a seismic event and are not contained deep enough below a non-liquefiable cap (i.e., non-liquefiable soils such as artificial fill or fine-grained soil). Based on analysis of the subsurface data, surface effects due to liquefaction are not anticipated to significantly affect the proposed surface improvements.

2.6.3 Lateral Spreading

Lateral spreading is a type of liquefaction-induced ground failure associated with the lateral displacement of surficial blocks of sediment resulting from liquefaction in a subsurface layer. Once liquefaction transforms the subsurface layer into a fluid mass, gravity plus the earthquake inertial forces may cause the mass to move downslope towards a free face (such as a river channel or an embankment). Lateral spreading may cause large horizontal displacements and such movement typically damages pipelines, utilities, bridges, and structures.

Due to the lack of a nearby “free face” condition and non-continuous nature of the subsurface layers, the potential for lateral spreading is considered very low.

2.7 Static Settlement

Although no grading plans were available during the preparation of this report, the subject site is sensitive to static settlement and grade changes. Static settlement would be induced by raising the planned grades and subjecting the new grades to building loads. Moderate increases in grades up to approximately 2 to 3 feet are estimated at this time.

The underlying soils were found to be generally stiff to very stiff silts and clays. Based on laboratory test data consisting of in-situ moisture content, consolidation tests, and blow counts,

fine-grained soils are considered generally normally consolidated. Based upon in-situ testing, visual examination, lab data, geotechnical evaluation and the proposed corrective grading and fill placement recommendations, static settlement induced by raising grades 1 to 3 feet is estimated to be on the order of 1-inch. LGC Geotechnical should be provided with the grading plans to for review to confirm or modify the recommendations for static settlement.

2.8 Expansion Potential

Based on the results of our laboratory testing, site soils are anticipated to have a “Low” expansion potential. Final expansion potential of site soils should be determined at the completion of grading. Results of expansion testing at finish grades will be utilized to confirm final foundation design.

3.0 CONCLUSIONS

Based on the results of our geotechnical evaluation, it is our opinion that the proposed development is feasible from a geotechnical standpoint, provided the following conclusions and recommendations are implemented.

The following is a summary of the primary geotechnical factors that may affect future development of the site:

- In general, our borings indicate the site is underlain by young alluvial fan deposits to the maximum explored depth of approximately 46.5 feet below existing grade. The material consists of clay, clayey sand, silty clay, and silty sand. The material was observed to be very moist to wet with depth and soft to stiff and medium dense to dense.
- Groundwater was encountered during our subsurface evaluation at depths of approximately 11 to 13 feet below existing grade. Historic high groundwater is estimated to be about 10 feet below existing grade (CDMG, 1998).
- The subject site is not located within a State of California Earthquake Fault Zone (Alquist-Priolo). The main seismic hazard that may affect the site is ground shaking from one of the active regional faults. The subject site will likely experience strong seismic ground shaking during its design life.
- Site soils are considered susceptible to liquefaction. The site is located in a State of California Seismic Hazard Zone for liquefaction (CDMG, 1999). Total seismic settlement is estimated to be on the order of 2.0 inches. Differential seismic settlement can be estimated at half of the total seismic settlement over a horizontal span of 40 feet for design of foundations.
- Based on the results of preliminary laboratory testing, site soils are anticipated to have “Low” expansion potential. Mitigation measures are required for foundations and site improvements like concrete flatwork to minimize the impacts of expansive site soils. Final design expansion potential must be determined at the completion of grading.
- Pre-soaking of the subgrade for building slabs will be required due to site expansive soils. The duration of this process varies greatly based on the chosen method and is also dependent on factors such as soil type and weather conditions. Time duration for presoaking from completion of rough grading to trenching of foundations should be accounted for in the construction schedule (typically 1 to 2 weeks).
- From a geotechnical perspective, the existing onsite soils are suitable material for use as general fill (not retaining wall backfill), provided that they are relatively free from rocks (larger than 8 inches in maximum dimension), construction debris, and significant organic material.
- The site contains soils that are not suitable for retaining wall backfill due to their fines content and expansion potential, therefore import of sandy soils will be required by the contractor for obtaining suitable backfill soil for planned site retaining walls.
- Excavations into the existing site soils should be feasible with heavy construction equipment in good working order.
- Due to the relatively shallow site groundwater (about 11 feet below existing ground surface) and soils above the groundwater table with high moisture contents, dewatering or stabilization of subgrade for removal bottoms or deep utility trenches may be locally required, prior to subsequent fill placement.

4.0 PRELIMINARY RECOMMENDATIONS

The following recommendations are to be considered preliminary and should be confirmed upon completion of grading and earthwork operations. In addition, they should be considered minimal from a geotechnical viewpoint, as there may be more restrictive requirements from the architect, structural engineer, building codes, governing agencies, or the owner.

It should be noted that the following geotechnical recommendations are intended to provide sufficient information to develop the site in general accordance with the 2019 CBC requirements. With regard to the potential occurrence of potentially catastrophic geotechnical hazards such as fault rupture, earthquake-induced landslides, liquefaction, etc. the following geotechnical recommendations should provide adequate protection for the proposed development to the extent required to reduce seismic risk to an “acceptable level.” The “acceptable level” of risk is defined by the California Code of Regulations as “that level that provides reasonable protection of the public safety, though it does not necessarily ensure continued structural integrity and functionality of the project” [Section 3721(a)]. Therefore, repair and remedial work of the proposed improvements may be required after a significant seismic event. With regards to the potential for less significant geologic hazards to the proposed development, the recommendations contained herein are intended as a reasonable protection against the potential damaging effects of geotechnical phenomena such as expansive soils, fill settlement, groundwater seepage, etc. It should be understood, however, that although our recommendations are intended to maintain the structural integrity of the proposed development and structures given the site geotechnical conditions, they cannot preclude the potential for some cosmetic distress or nuisance issues to develop as a result of the site geotechnical conditions.

The geotechnical recommendations contained herein must be confirmed to be suitable or modified based on the actual as-graded conditions.

4.1 Site Earthwork

We anticipate that earthwork at the site will consist of demolition of the existing site improvements, required earthwork removals, subgrade preparation, precise grading and construction of the proposed new improvements, including the residential structures, neighborhood amenities, subsurface utilities, interior streets, etc.

We recommend that earthwork onsite be performed in accordance with the following recommendations, future grading plan review report(s), the 2019 CBC/City of Los Alamitos grading requirements, and the General Earthwork and Grading Specifications included in Appendix E. In case of conflict, the following recommendations shall supersede those included in Appendix E. The following recommendations should be considered preliminary and may be revised based upon future evaluation and review of the project plans and/or based on the actual conditions encountered during site grading/construction.

4.1.1 Site Preparation

Prior to grading of areas to receive structural fill or engineered improvements, the areas should be cleared of existing building structures, asphalt, surface obstructions, and

demolition debris. Vegetation and debris should be removed and properly disposed of off-site. Holes resulting from the removal of buried obstructions, which extend below proposed finish grades, should be replaced with suitable compacted fill material. Any abandoned sewer or storm drain lines should be completely removed and replaced with properly placed compacted fill. Deeper demolition may be required in order to remove existing foundations. We recommend the trenches associated with demolition which extend below the remedial grading depth of 5 feet be backfilled and properly compacted prior to the demolition contractor leaving the site.

If cesspools or septic systems are encountered, they should be removed in their entirety. The resulting excavation should be backfilled with properly compacted fill soils. As an alternative, cesspools can be backfilled with lean sand-cement slurry. Any encountered wells should be properly abandoned in accordance with regulatory requirements. At the conclusion of the clearing operations, a representative of LGC Geotechnical should observe and accept the site prior to further grading.

4.1.2 Removal and Recompaction Depths and Limits

In order to provide a relatively uniform bearing condition for the planned residential building pads and improvements, we recommend the site soils be removed and recompacted according to the criteria outlined below.

Building Pads: We recommend that soils within building pads be removed and recompacted to a minimum depth of 5 feet below existing grade or 3 feet below the base of the foundations, whichever is deeper. Where space is available, the envelope for removal and recompaction should extend laterally a minimum distance equal to the depth of removal and recompaction below finish grade or 5 feet beyond the edges of the proposed building improvements, whichever is larger.

Minor Site Structures: For minor site structures such as free-standing walls, retaining walls, etc., removal and recompaction should extend at least 3 feet below existing grade or 2 feet below the base of foundations, whichever is deeper. Where space is available, the envelope for removal and recompaction should extend laterally a minimum distance of 3 feet beyond the edges of the proposed minor site structure improvements.

Pavement and Hardscape: Within pavement and hardscape areas, removal and recompaction should extend to a depth of at least 2 feet below the existing grade or 1-foot below finished subgrade (i.e., below planned aggregate base/asphalt concrete), whichever is deeper. In general, the envelope for removal and recompaction should extend laterally a minimum distance of 2 feet beyond the edges of the proposed pavement and hardscape improvements.

Based on our findings, the recommended removal and recompaction depths may extend to a depth in the proximity of the anticipated groundwater table and through clayey soils with high moisture contents. Care should be taken in order to avoid creating an unstable removal bottom during grading. Recommendations for subgrade stabilization are included in Section 4.1.4.

Local conditions may be encountered during excavation that could require additional over-excavation beyond the above noted minimum in order to obtain an acceptable subgrade. The actual depths and lateral extents of grading will be determined by the geotechnical consultant, based on subsurface conditions encountered during grading. Removal areas and areas to be over-excavated should be accurately staked in the field by the Project Surveyor.

4.1.3 Temporary Excavations

Temporary excavations should be performed in accordance with project plans, specifications, and all Occupational Safety and Health Administration (OSHA) requirements. Excavations should be laid back or shored in accordance with OSHA requirements before personnel or equipment are allowed to enter. Based on our field investigation, the majority of site soils are anticipated to be OSHA Type "B" soils (refer to the attached boring logs). Minor amounts of sandy soils are present and should be considered susceptible to caving. Soil conditions should be regularly evaluated during construction to verify conditions are as anticipated. The contractor shall be responsible for providing the "competent person" required by OSHA standards to evaluate soil conditions. Close coordination with the geotechnical consultant should be maintained to facilitate construction while providing safe excavations. Excavation safety is the sole responsibility of the contractor.

Vehicular traffic, stockpiles, and equipment storage should be set back from the perimeter of excavations a minimum distance equivalent to a 1:1 projection from the bottom of the excavation or 5 feet, whichever is greater, unless the cut is shored and designed for applicable surcharge load. Once an excavation has been initiated, it should be backfilled as soon as practical. Prolonged exposure of temporary excavations may result in some localized instability. Excavations should be planned so that they are not initiated without sufficient time to shore/fill them prior to weekends, holidays, or forecasted rain.

It should be noted that any excavation that extends below a 1:1 (horizontal to vertical) projection of an existing foundation will remove existing support of the structure foundation. If requested, temporary shoring parameters will be provided.

4.1.4 Removal Bottoms and Subgrade Preparation

In general, removal bottoms, over-excavation bottoms and areas to receive compacted fill should be scarified to a minimum depth of 6 inches, brought to a near-optimum moisture condition (generally within optimum and 2 percent above optimum moisture content), and re-compacted per project recommendations.

Based on the presence of shallow groundwater, shallow soils with very high moisture contents, and the potential to encounter very moist/wet alluvial materials near/at the estimated removal bottoms and deep utility trenches, some of the removal bottoms are anticipated to be wet and unstable. Pumping subgrade is possible. We recommend all wet/unstable removal bottoms and pumping subgrade be stabilized by the placement

and “working in” of 1 to 3-inch nominal diameter crushed aggregate or an approved alternate stabilization method. Based on our experience with similar projects, we anticipate the thickness of crushed rock (stabilization aggregate) needed to stabilize the removal bottoms will be on the order to 6 to 18 inches thick. The actual thickness of aggregate required to stabilize the excavation bottom shall be determined in the field based on the actual conditions and equipment used. It should be anticipated that the first lift of crushed aggregate will be worked into the pumping subgrade. Subsequent lifts should be properly compacted and will help bridge the pumping conditions. Thickness of required aggregate stabilization may be reduced by placing a layer of biaxial geogrid reinforcement (e.g., Tensar TX140 or acceptable equivalent) directly on the subgrade prior to aggregate base placement. The contractor may have to minimize construction traffic on the removal bottom to reduce disturbance. Soft and yielding subgrade should be evaluated on a case-by-case basis during earthwork operations.

Removal bottoms, over-excavation bottoms and areas to receive fill should be observed and accepted by the geotechnical consultant prior to subsequent fill placement. Soil subgrade for planned footings and improvements (e.g., slabs, etc.) should be firm and competent.

4.1.5 Material for Fill

From a geotechnical perspective, the onsite soils are generally considered suitable for use as general compacted fill, provided they are screened of organic materials, construction debris and oversized material (8 inches in greatest dimension).

From a geotechnical viewpoint, any required import soils for general fill (i.e., non-retaining wall backfill) should consist of soils of “Very Low” to “Low” expansion potential (expansion index 50 or less based on American Society for Testing and Materials [ASTM] D 4829), and free of organic materials, construction debris and any material greater than 3 inches in maximum dimension. Import for any required retaining wall backfill should meet the criteria outlined in the following paragraph. Source samples should be provided to the geotechnical consultant for laboratory testing a minimum of four working days prior to any planned importation.

The onsite soils are not suitable for retaining wall backfill due to their fines content and expansion index; therefore, import of soils will be required by the contractor for obtaining suitable retaining wall backfill soil. These preliminary findings will be confirmed during grading. Retaining wall backfill should consist of imported sandy soils with a maximum of 35 percent fines (passing the No. 200 sieve) per ASTM Test Method D1140 (or ASTM D6913/D422) and a “Very Low” expansion potential (EI of 20 or less per ASTM D4829). Soils should also be screened of organic materials, construction debris, and any material greater than 3 inches in maximum dimension.

Aggregate base (crushed aggregate base or crushed miscellaneous base) should conform to the requirements of Section 200-2 of the most recent version of the Standard Specifications for Public Works Construction (“Greenbook”) for untreated base materials (except processed miscellaneous base) and/or City of Los Alamitos requirements.

The placement of demolition materials in compacted fill is acceptable from a geotechnical viewpoint provided the demolition material is broken up into pieces not larger than typically used for aggregate base (approximately 1-inch in maximum dimension) and well blended into fill soils with essentially no resulting voids. Demolition material placed in fills must be free of construction debris (wood, organics, etc.) and reinforcing steel. If asphalt concrete fragments will be incorporated into the demolition materials, approval from an environmental viewpoint may be required and is not the purview of the geotechnical consultant. From our previous experience, we recommend that asphalt concrete fragments be limited to fill areas within planned street areas (i.e., not within building pad areas).

4.1.6 Placement and Compaction of Fills

Material to be placed as fill should be brought to near-optimum moisture content (generally within optimum and 2 percent above optimum moisture content) and recompacted to at least 90 percent relative compaction (per ASTM D1557). Moisture conditioning of site soils will be required in order to achieve adequate compaction. Significant drying and or mixing of very moist soils will be required prior to reusing the materials in compacted fills.

The optimum lift thickness to produce a uniformly compacted fill will depend on the type and size of compaction equipment used. In general, fill should be placed in uniform lifts not exceeding 8 inches in compacted thickness. Each lift should be thoroughly compacted and accepted prior to subsequent lifts. Generally, placement and compaction of fill should be performed in accordance with local grading ordinances and with observation and testing performed by the geotechnical consultant. Oversized material as previously defined should be removed from site fills.

During backfill of excavations, the fill should be properly benched into firm and competent soils of temporary backcut slopes as it is placed in lifts.

Aggregate base material should be compacted to at least 95 percent relative compaction at or slightly above optimum moisture content per ASTM D1557. Subgrade below aggregate base should be compacted to at least 90 percent relative compaction per ASTM D1557 at near-optimum moisture content (generally within optimum and 2 percent above optimum moisture content).

If gap-graded $\frac{3}{4}$ -inch rock is used for backfill (around storm drain storage chambers, retaining wall backfill, etc.) it will require compaction. Rock shall be placed in thin lifts (typically not exceeding 6 inches) and mechanically compacted with observation by geotechnical consultant. Backfill rock shall meet the requirements of ASTM D2321. Gap-graded rock is required to be wrapped in filter fabric (Mirafi 140N or approved alternative) to prevent the migration of fines into the rock backfill.

4.1.7 Trench and Retaining Wall Backfill and Compaction

The onsite soils may generally be suitable as trench backfill, provided the soils are screened of rocks and other material greater than 6 inches in diameter and organic

matter. If trenches are shallow or the use of conventional equipment may result in damage to the utilities, sand having a sand equivalent (SE) of 30 or greater (per California Test Method [CTM] 217) may be used to bed and shade the pipes. Based on our field evaluation, onsite soils will not meet this sand equivalent requirement. Sand backfill within the pipe bedding zone may be densified by jetting or flooding and then tamping to ensure adequate compaction. Subsequent trench backfill should be compacted in uniform thin lifts by mechanical means to at least the recommended minimum relative compaction (per ASTM D1557).

Retaining wall backfill should consist of sandy soils as outlined in preceding Section 4.1.5. The limits of select sandy backfill should extend at minimum $\frac{1}{2}$ the height of the retaining wall or the width of the heel (if applicable), whichever is greater (Figure 3). Retaining wall backfill soils should be compacted in relatively uniform thin lifts to at least 90 percent relative compaction (per ASTM D1557). Jetting or flooding of retaining wall backfill materials should not be permitted.

In backfill areas where mechanical compaction of soil backfill is impractical due to space constraints, typically sand-cement slurry may be substituted for compacted backfill. The slurry should contain about one sack of cement per cubic yard. When set, such a mix typically has the consistency of compacted soil. Sand cement slurry placed near the surface within landscape areas should be evaluated for potential impacts on planned improvements.

A representative from LGC Geotechnical should observe, probe, and test the backfill to verify compliance with the project recommendations.

4.1.8 Shrinkage and Subsidence

Allowance in the earthwork volumes budget should be made for an estimated 5 to 15 percent reduction in volume of near-surface (upper approximate 5 feet) soils. It should be stressed that these values are only estimates and that an actual shrinkage factor would be extremely difficult to predetermine. Subsidence, due to earthwork operations, is expected to be on the order of 0.1 feet. These values are estimates only and exclude losses due to removal of any vegetation or debris. The effective shrinkage of onsite soils will depend primarily on the type of compaction equipment and method of compaction used onsite by the contractor and accuracy of the topographic survey.

4.2 Preliminary Foundation Recommendations

Provided that the remedial grading recommendations provided herein are implemented, the site may be considered suitable for the support of the residential structures using a post-tensioned foundation system designed to resist the impacts of expansive soils and liquefaction induced differential settlement. Due to seismic settlement potential, we recommend isolated pad footings be interconnected with grade beams. The foundations designer should verify the foundation can accommodate the estimated settlement and differential settlement.

Site soils are anticipated to be “Low” expansion potential (EI of 50 or less per ASTM D4829) and special design considerations from a geotechnical perspective are required. Please note that the following foundation recommendations are preliminary and must be confirmed by LGC Geotechnical at the completion of grading. Recommended soil bearing and estimated settlement due to structural loads are provided in Section 4.3.

4.2.1 Provisional Post-Tensioned Foundation Design Parameters

The geotechnical parameters provided herein may be used for post-tensioned slab foundations. These parameters have been determined in general accordance with the Post-Tensioning Institute (PTI, 2012) Standard Requirements (PTI DC 10.5), referenced in Chapter 18 of the 2019 CBC. In utilizing these parameters, the foundation engineer should design the foundation system in accordance with the allowable deflection criteria of applicable codes and the requirements of the structural designer/architect. Other types of stiff slabs may be used in place of the CBC post-tensioned slab design provided that, in the opinion of the foundation structural designer, the alternative type of slab is at least as stiff and strong as that designed by the CBC/PTI method to resist expansive soils.

Our design parameters are based on our experience with similar residential projects and the anticipated nature of the soil (with respect to expansion potential). Please note that implementation of our recommendations will not eliminate foundation movement (and related distress) should the moisture content of the subgrade soils fluctuate. It is the intent of these recommendations to help maintain the integrity of the proposed structures and reduce (not eliminate) movement, based upon the anticipated site soil conditions. Should future owners not properly maintain the areas surrounding the foundation, for example by overwatering, then we anticipate for highly expansive soils the maximum differential movement of the perimeter of the foundation to the center of the foundation to be on the order of a couple of inches. Soils of lower expansion potential are anticipated to show less movement.

TABLE 4

Provisional Geotechnical Parameters for Post-Tensioned Foundation Slab Design

Parameter	PT Slab with Perimeter Footing	PT Mat with Thickened Edge
Expansion Index	Low ¹	Low ¹
Thorntwaite Moisture Index	-20	-20
Constant Soil Suction	PF 3.9	PF 3.9
Center Lift Edge moisture variation distance, e_m Center lift, y_m	9.0 feet 0.35 inch	9.0 feet 0.45 inch
Edge Lift Edge moisture variation distance, e_m Edge lift, y_m	5.0 feet 0.75 inch	5.0 feet 0.85 inch
Modulus of Subgrade Reaction, k (assuming presoaking as indicated below)	200 pci	200 pci
Minimum perimeter footing/thickened edge embedment below finish grade	12 inches	6 inches
Perimeter foundation reinforcement	N/A ²	N/A ²
Presoak (moisture conditioning)	100% optimum to depth of 12 inches	100% optimum to depth of 12 inches
<ol style="list-style-type: none">1. Assumed for preliminary design purposes. Further evaluation is needed at the completion of grading. PT slab parameters are based on expansive soil conditions as well as seismic settlement findings.2. Recommendations for foundation reinforcement and slab thickness are ultimately the purview of the foundation engineer/structural engineer based upon geotechnical criteria and structural engineering considerations.3. Recommendations for sand below slabs have traditionally been included with geotechnical foundation recommendations, although they are not the purview of the geotechnical consultant. The sand layer requirements are the purview of the foundation engineer/structural engineer and should be provided in accordance with ACI Publication 302 "Guide for Concrete Floor and Slab Construction".4. Recommendations for vapor retarders below slabs are also the purview of the foundation engineer/structural engineer and should be provided in accordance with applicable code requirements.		

4.2.2 Post-Tensioned Foundation Subgrade Preparation and Maintenance

Moisture conditioning (presoaking) of the subgrade soils is recommended prior to trenching the foundation. The duration of this process varies greatly based on the chosen method and is also dependent on factors such as soil type and weather conditions. Time duration for presoaking from completion of rough grading to trenching of foundations should be accounted for in the construction schedule (typically 1 to 2 weeks). The recommendations specific to the anticipated site soil conditions, including recommended presoak, are presented in Table 4. The subgrade moisture

condition of the building pad soils should be maintained at near-optimum moisture content up to the time of concrete placement. This moisture content should be maintained around the immediate perimeter of the slab during construction and up to occupancy of the homes.

The geotechnical parameters provided herein assume that if the areas adjacent to the foundation are planted and irrigated, these areas will be designed with proper drainage and adequately maintained so that ponding, which causes significant moisture changes below the foundation, does not occur. Our recommendations do not account for excessive irrigation and/or incorrect landscape design. Plants should only be provided with sufficient irrigation for life and not overwatered to saturate subgrade soils. Sunken planters placed adjacent to the foundation, should either be designed with an efficient drainage system or liners to prevent moisture infiltration below the foundation. Some lifting of the perimeter foundation beam should be expected even with properly constructed planters.

In addition to the factors mentioned above, future homeowners should be made aware of the potential negative influences of trees and/or other large vegetation. Roots that extend near the vicinity of foundations can cause distress to foundations. Future homeowners (and the owner's landscape architect) should not plant trees/large shrubs closer to the foundations than a distance equal to half the mature height of the tree or 20 feet, whichever is more conservative unless specifically provided with root barriers to prevent root growth below the house foundation.

It is the homeowner's responsibility to perform periodic maintenance during hot and dry periods to ensure that adequate watering has been provided to keep soils from separating or pulling back from the foundation. Future homeowners should be informed and educated regarding the importance of maintaining a constant level of soil-moisture. The homeowners should be made aware of the potential negative consequences of both excessive watering, as well as allowing potentially expansive soils to become too dry. Expansive soils can undergo shrinkage during drying and swelling during the rainy winter season or when irrigation is resumed. This can result in distress to building structures and hardscape improvements. The builder should provide these recommendations to future homeowners.

4.2.3 Slab Underlayment Guidelines

The following is for informational purposes only since slab underlayment (e.g., moisture retarder, sand or gravel layers for concrete curing and/or capillary break) is unrelated to the geotechnical performance of the foundation and thereby not the purview of the geotechnical consultant. Post-construction moisture migration should be expected below the foundation. The foundation engineer/architect should determine whether the use of a capillary break (sand or gravel layer), in conjunction with the vapor retarder, is necessary or required by code. Sand layer thickness and location (above and/or below vapor retarder) should also be determined by the foundation engineer/architect.

4.3 Soil Bearing and Lateral Resistance

Provided our earthwork recommendations are implemented, an allowable soil bearing pressure of 1,500 pounds per square foot (psf) may be used for the design of footings having a minimum width of 12 inches and minimum embedment of 12 inches below lowest adjacent ground surface. This value may be increased by 300 psf for each additional foot of embedment and 150 psf for each additional foot of foundation width to a maximum value of 2,500 psf. A post-tensioned mat foundation a minimum of 6 inches below lowest adjacent grade may be designed for an allowable soil bearing pressure of 1,200 psf. These allowable bearing pressures are applicable for level (ground slope equal to or flatter than 5H:1V) conditions only. Bearing values indicated are for total dead loads and frequently applied live loads and may be increased by $\frac{1}{3}$ for short duration loading (i.e., wind or seismic loads).

In utilizing the above-mentioned allowable bearing capacity and provided our earthwork recommendations are implemented, foundation settlement due to consolidation and structural loads is anticipated to be less than 2 inches. Differential static settlement may be taken as half of the total settlement (i.e., 1-inch over a horizontal span of 40 feet due to structural loads). Seismically induced settlement is discussed in Section 2.6.1.

Resistance to lateral loads can be provided by friction acting at the base of foundations and by passive earth pressure. For concrete/soil frictional resistance, an allowable coefficient of friction of 0.25 may be assumed with dead-load forces. For slabs constructed over a moisture retarder, the allowable friction coefficient should be provided by the manufacturer. An allowable passive lateral earth pressure of 200 psf per foot of depth (or pcf) to a maximum of 2,000 psf may be used for the sides of footings poured against properly compacted fill. Allowable passive pressure may be increased to 270 pcf (maximum of 2,700 psf) for short duration seismic loading. This passive pressure is applicable for level (ground slope equal to or flatter than 5H:1V) conditions. Frictional resistance and passive pressure may be used in combination without reduction. We recommend that the upper foot of passive resistance be neglected if finished grade will not be covered with concrete or asphalt. The provided allowable passive pressures are based on a factor of safety of 1.5 and 1.1 for static and seismic loading conditions, respectively.

4.4 Lateral Earth Pressures for Retaining Walls

The following may be used for design of site retaining walls. Lateral earth pressures are provided as equivalent fluid unit weights, in psf per foot of depth (or pcf). These values do not contain an appreciable factor of safety, so the retaining wall designer should apply the applicable factors of safety and/or load factors during design. A soil unit weight of 120 pcf may be assumed for calculating the actual weight of soil over the wall footing.

The following lateral earth pressures are presented in Table 5 for approved imported granular soils with a maximum of 35 percent fines (passing the No. 200 sieve per ASTM D-421/422) and a "Very Low" expansion potential (EI of 20 or less per ASTM D4829). The onsite soils are not suitable for retaining wall backfill due to their fines content and expansion potential. Therefore, import of sandy soils meeting the criteria outlined above will be required by the contractor for obtaining suitable retaining wall backfill soil.

The wall designer should clearly indicate on the retaining wall plans the required select sandy soil backfill criteria. These preliminary findings should be confirmed during grading.

TABLE 5

Lateral Earth Pressures - Imported Sandy Soils

Conditions	Equivalent Fluid Unit Weight (pcf)	Equivalent Fluid Unit Weight (pcf)
	Level Backfill	2:1 Sloped Backfill
	Approved Sandy Soils (Import)	Approved Sandy Soils (Import)
Active	35	55
At-Rest	55	70

If the wall can yield enough to mobilize the full shear strength of the soil, it can be designed for “active” pressure. If the wall cannot yield under the applied load, the earth pressure will be higher. This would include 90-degree corners of retaining walls. Such walls should be designed for “at-rest.” The equivalent fluid pressure values assume free-draining conditions. If conditions other than those assumed above are anticipated, the equivalent fluid pressure values should be provided on an individual-case basis by the geotechnical engineer.

Retaining wall structures should be provided with appropriate drainage and appropriately waterproofed. To reduce, but not eliminate, saturation of near-surface (upper approximate 1-foot) soils in front of the retaining walls, the perforated subdrain pipe should be located as low as possible behind the retaining wall. The outlet pipe should be sloped to drain to a suitable outlet. In general, we do not recommend retaining wall outlet pipes be connected to area drains. If subdrains are connected to area drains, special care and information should be provided to homeowners to maintain these drains. Typical retaining wall drainage is illustrated in Figure 3. It should be noted that the recommended subdrain does not provide protection against seepage through the face of the wall and/or efflorescence. Efflorescence is generally a white crystalline powder (discoloration) that results when water containing soluble salts migrates over a period of time through the face of a retaining wall and evaporates. If such seepage or efflorescence is undesirable, retaining walls should be waterproofed to reduce this potential. Waterproofing and outlet systems are not the purview of the geotechnical consultant.

Surcharge loading effects from any adjacent structures should be evaluated by the retaining wall designer. In general, structural loads within a 1:1 (horizontal: vertical) upward projection from the bottom of the proposed retaining wall footing will surcharge the proposed retaining wall. In addition to the recommended earth pressure, retaining walls adjacent to streets should be designed to resist a uniform lateral pressure of 85 pounds per square foot (psf) due to normal street vehicle traffic, if applicable. Uniform lateral surcharges may be estimated using the applicable coefficient of lateral earth pressure using a rectangular distribution. A factor of 0.45 and 0.3 may be used for at-rest and active conditions, respectively. The retaining wall designer should contact the geotechnical consultant for any required geotechnical input in

estimating surcharge loads.

If a retaining wall greater than 6 feet in height is proposed, the retaining wall designer should contact the geotechnical engineer for specific seismic lateral earth pressure increments based on the configuration of the planned retaining wall structures.

Soil bearing and lateral resistance (friction coefficient and passive resistance) are provided in Section 4.3. Earthwork considerations (temporary backcuts, backfill, compaction, etc.) for retaining walls are provided in Section 4.1 (Site Earthwork) and the subsequent earthwork related sub-sections.

4.5 Soil Corrosivity

Although not corrosion engineers (LGC Geotechnical is not a corrosion consultant), several governing agencies in Southern California require the geotechnical consultant to determine the corrosion potential of soils to buried concrete and metal facilities. We therefore present the results of our testing with regard to corrosion for the use of the client and other consultants, as they determine necessary.

Corrosion testing of a near-surface bulk sample indicated a soluble sulfate content ranging from approximately 0.032 to 0.254 percent, a chloride content ranging from 140 to 600 parts per million (ppm), pH of 8.92, and a minimum resistivity of 210 ohm-centimeters. Based on Caltrans Corrosion Guidelines (Caltrans, 2021), soils are considered corrosive to structural elements if the pH is 5.5 or less, or the chloride concentration is 500 ppm or greater, or the sulfate concentration is 2,000 ppm (0.2 percent) or greater. Based on the preliminary test results, soils are considered corrosive using Caltrans criteria.

Based on preliminary laboratory sulfate test results, the near surface soils are designated to a class "S2" per ACI 318, Table 19.3.1.1 with respect to sulfates. Concrete in direct contact with the onsite soils can be designed according to ACI 318, Table 19.3.2.1 using the "S2" sulfate classification.

Laboratory testing may need to be performed at the completion of grading by the project corrosion engineer to further evaluate the as-graded soil corrosivity characteristics. Accordingly, revision of the corrosion potential may be needed, should future test results differ substantially from the conditions reported herein. The client and/or other members of the development team should consider this during the design and planning phase of the project and formulate an appropriate course of action.

4.6 Control of Surface Water and Drainage Control

From a geotechnical perspective, we recommend that compacted finished grade soils adjacent to proposed residences be sloped away from the proposed residence and towards an approved drainage device or unobstructed swale. Drainage swales, wherever feasible, should not be constructed within 5 feet of buildings. Where lot and building geometry necessitates that the side yard drainage swales be routed closer than 5 feet to structural foundations, we recommend the use of area drains together with drainage swales. Drainage swales used in

conjunction with area drains should be designed by the project civil engineer so that a properly constructed and maintained system will prevent ponding within 5 feet of the foundation. Code compliance of grades is not the purview of the geotechnical consultant.

Planters with open bottoms adjacent to buildings should be avoided. Planters should not be designed adjacent to buildings unless provisions for drainage, such as catch basins, liners, and/or area drains, are made. Overwatering must be avoided.

4.7 Subsurface Water Infiltration

Recent regulatory changes in some jurisdictions have recommended that low flow runoff be infiltrated rather than discharged via conventional storm drainage systems. Typically, a combination of methods is implemented to reduce surface water runoff and increase infiltration including; permeable pavements/pavers for roadways and walkways and directing surface water runoff to grass-lined swales, retention areas, and/or drywells. It should be noted that intentionally infiltrating storm water conflicts with the geotechnical engineering objective of directing surface water away from structures and improvements. The geotechnical stability and integrity of the project site is reliant upon appropriately handling all surface water. In general, the vast majority of geotechnical distress issues are directly related to improper drainage. In general, distress in the form of movement of improvements could occur as a result of soil saturation and loss of soil support, expansion, internal soil erosion, collapse and/or settlement. Infiltrated water may enter underground utility pipe zones and migrate along the pipe backfill, potentially impacting other improvements located far away from the point of infiltration.

Geotechnical stability and integrity of the project site is reliant upon appropriate handling of surface water. Due to the extremely low measured infiltration rate, low permeability fine-grained soils at depth, shallow groundwater and site liquefaction potential, we strongly recommend against the intentional infiltration of storm water into subsurface soils.

4.8 Preliminary Asphalt Concrete Pavement Sections

The following provisional minimum asphalt concrete (AC) street sections are provided in Table 6 for Traffic Indices (TI) of 5.0, 5.5 and 6.0. These sections are based on an assumed R-value of 10. These recommendations must be confirmed with R-value testing of representative near-surface soils at the completion of grading and after underground utilities have been installed and backfilled. Final pavement sections should be confirmed by the project civil engineer based upon the final design Traffic Index. If requested, LGC Geotechnical will provide sections for alternate TI values. Should the City of Los Alamitos have more stringent requirements, updated pavement recommendation can be provided.

TABLE 6

Preliminary Pavement Section Options

Assumed Traffic Index	5.0	5.5	6.0
R -Value Subgrade	10	10	10
AC Thickness	4.0 inches	4.0 inches	5.0 inches
Aggregate Base Thickness	7.0 inches	9.0 inches	9.0 inches

The pavement section thicknesses provided above are considered minimum thicknesses. Increasing the thickness of any or all of the above layers will reduce the likelihood of the pavement experiencing distress during its service life. The above recommendations are based on the assumption that proper maintenance and irrigation of the areas adjacent to the roadway will occur throughout the design life of the pavement. Failure to maintain a proper maintenance and/or irrigation program may jeopardize the integrity of the pavement.

Earthwork recommendations regarding aggregate base and subgrade are provided in the previous Section 4.1 (Site Earthwork) and the related sub-sections of this report.

4.9 Nonstructural Concrete Flatwork

Nonstructural concrete flatwork (such as walkways, private drives, patio slabs, etc.) has a potential for cracking due to changes in soil volume related to soil-moisture fluctuations. To reduce the potential for excessive cracking and lifting, concrete may be designed in accordance with the minimum guidelines outlined in Table 7 on the following page. These guidelines will reduce the potential for irregular cracking and promote cracking along construction joints but will not eliminate all cracking or lifting. Thickening the concrete and/or adding additional reinforcement will further reduce cosmetic distress.

TABLE 7

Nonstructural Concrete Flatwork for Low Expansion Potential

	Homeowner Sidewalks	Private Drives	Patios/ Entryways	City Sidewalk Curb and Gutters
Minimum Thickness (in.)	4 (nominal)	4 (full)	4 (full)	City/Agency Standard
Presoaking	Wet down prior to placing	Wet down prior to placing	Wet down prior to placing	City/Agency Standard
Reinforcement	—	No. 3 at 24 inches on centers	No. 3 at 24 inches on centers	City/Agency Standard
Thickened Edge (in.)	—	8 x 8	—	City/Agency Standard
Crack Control Joints	Saw cut or deep open tool joint to a minimum of $\frac{1}{3}$ the concrete thickness	Saw cut or deep open tool joint to a minimum of $\frac{1}{3}$ the concrete thickness	Saw cut or deep open tool joint to a minimum of $\frac{1}{3}$ the concrete thickness	City/Agency Standard
Maximum Joint Spacing	5 feet	10 feet or quarter cut whichever is closer	6 feet	City/Agency Standard
Aggregate Base Thickness (in.)	—	—	—	City/Agency Standard

To reduce the potential for driveways to separate from the garage slab, the builder may elect to install dowels to tie these two elements together. Similarly, future homeowners should consider the use of dowels to connect flatwork to the foundation.

4.10 Geotechnical Plan Review

When available, grading, retaining wall and foundation plans should be reviewed by LGC Geotechnical in order to verify our geotechnical recommendations are implemented. Updated recommendations and/or additional field work may be necessary.

4.11 Geotechnical Observation and Testing During Construction

The recommendations provided in this report are based on limited subsurface observations and geotechnical analysis. The interpolated subsurface conditions should be checked in the field during construction by a representative of LGC Geotechnical. Geotechnical observation and testing is required per Section 1705 of the 2019 California Building Code (CBC).

Geotechnical observation and/or testing should be performed by LGC Geotechnical at the following stages:

- During grading (removal bottoms, fill placement, etc);
- During retaining wall backfill and compaction;
- During utility trench backfill and compaction;
- After presoaking building pads and other concrete-flatwork subgrades, and prior to placement of aggregate base or concrete;
- Preparation of pavement subgrade and placement of aggregate base;
- After building and wall footing excavation and prior to placing steel reinforcement and/or concrete; and
- When any unusual soil conditions are encountered during any construction operation subsequent to issuance of this report.

5.0 LIMITATIONS

Our services were performed using the degree of care and skill ordinarily exercised, under similar circumstances, by reputable soils engineers and geologists practicing in this or similar localities. No other warranty, expressed or implied, is made as to the conclusions and professional advice included in this report.


This report is based on data obtained from limited observations of the site, which have been extrapolated to characterize the site. While the scope of services performed is considered suitable to adequately characterize the site geotechnical conditions relative to the proposed development, no practical evaluation can completely eliminate uncertainty regarding the anticipated geotechnical conditions in connection with a subject site. Variations may exist and conditions not observed or described in this report may be encountered during grading and construction.

This report is issued with the understanding that it is the responsibility of the owner, or of his/her representative, to ensure that the information and recommendations contained herein are brought to the attention of the other consultants (at a minimum the civil engineer, structural engineer, landscape architect) and incorporated into their plans. The contractor should properly implement the recommendations during construction and notify the owner if they consider any of the recommendations presented herein to be unsafe, or unsuitable.




The findings of this report are valid as of the present date. However, changes in the conditions of a site can and do occur with the passage of time, whether they be due to natural processes or the works of man on this or adjacent properties. The findings, conclusions, and recommendations presented in this report can be relied upon only if LGC Geotechnical has the opportunity to observe the subsurface conditions during grading and construction of the project, in order to confirm that our preliminary findings are representative for the site. This report is intended exclusively for use by the client, any use of or reliance on this report by a third party shall be at such party's sole risk.

In addition, changes in applicable or appropriate standards may occur, whether they result from legislation or the broadening of knowledge. Accordingly, the findings of this report may be invalidated wholly or partially by changes outside our control. Therefore, this report is subject to review and modification.

Approximate Site Limits

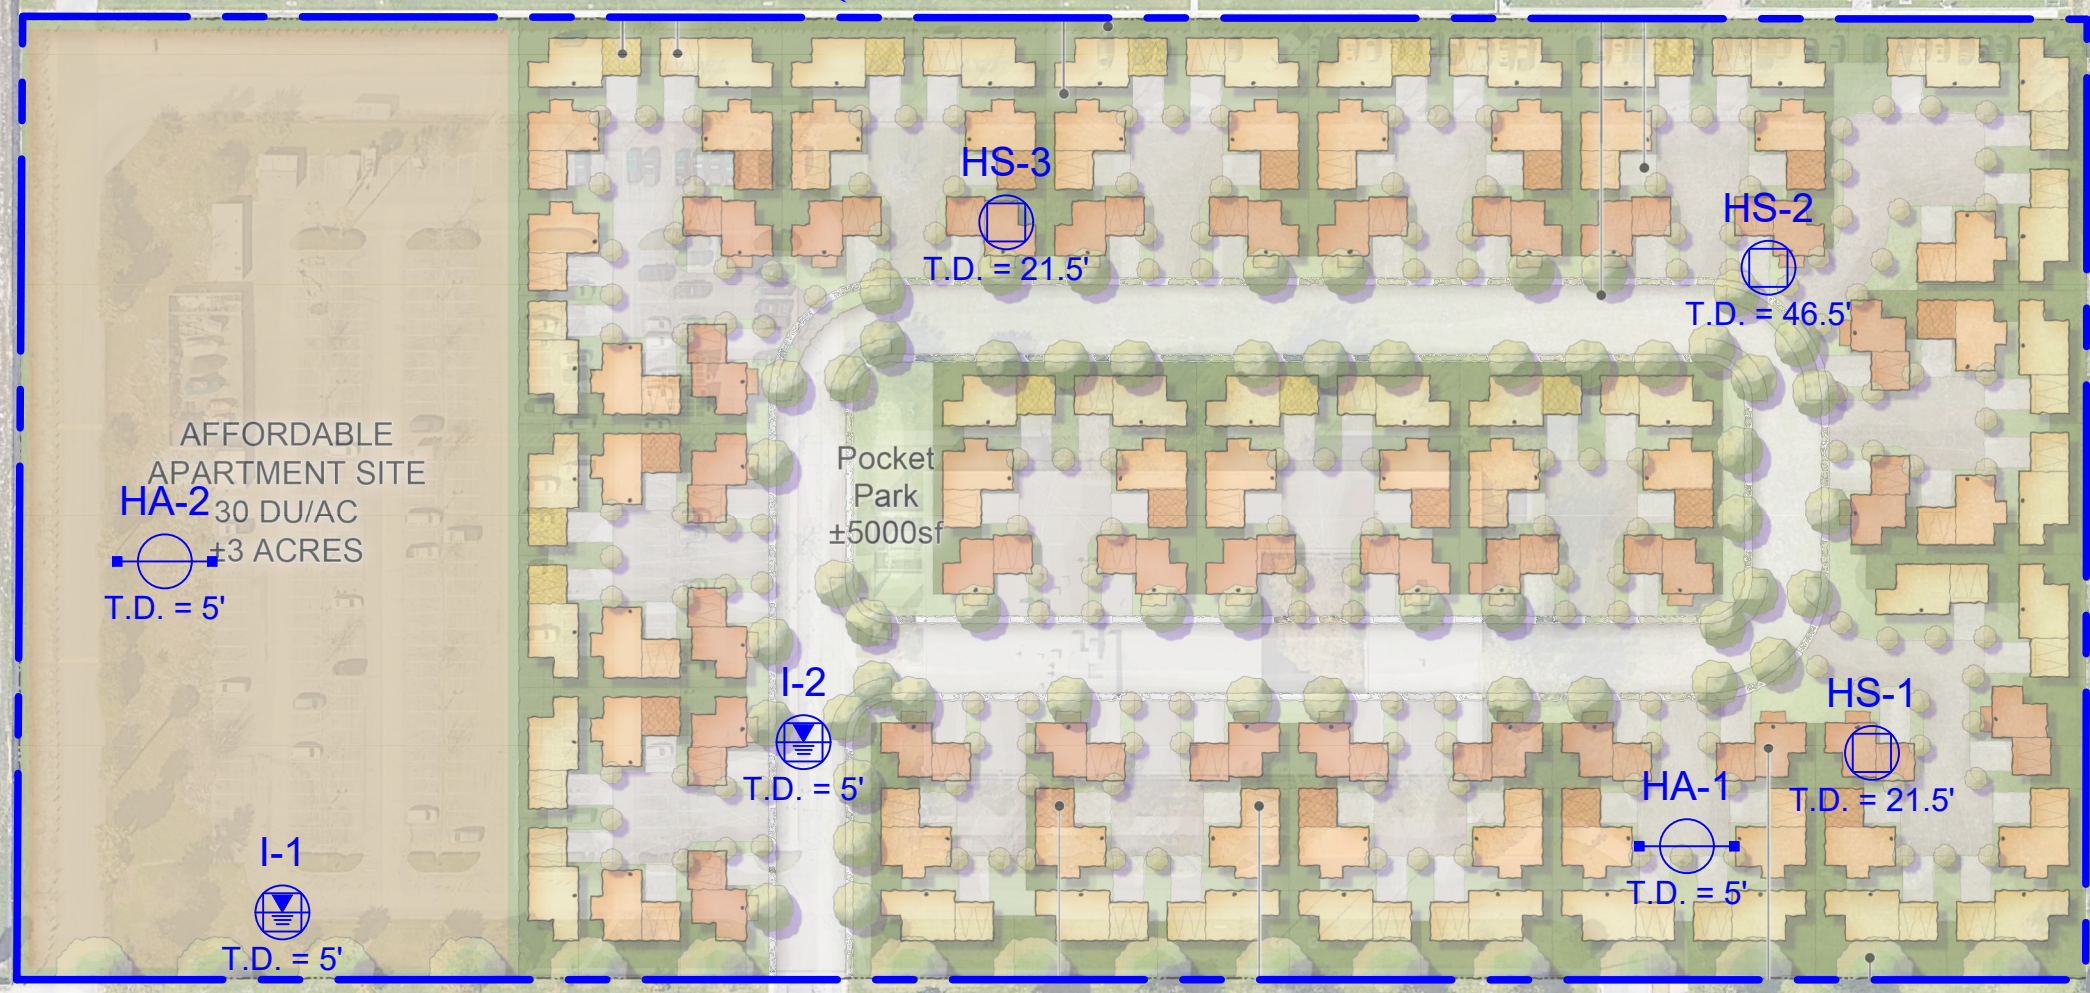

LEGEND

- 
HS-3
 Approximate Location of Hollow Stem Auger Boring by LGC Geotechnical, With Total Depth in Feet
- 
I-2
 Approximate Location of Hollow Stem Auger Infiltration Boring by LGC Geotechnical, With Total Depth in Feet
- 
HA-2
 Approximate Location of Hand Auger Boring by LGC Geotechnical, With Total Depth in Feet

PROJECT NAME	MWIG - Los Alamitos
PROJECT NO.	21198-01
ENG. / GEOL.	RLD
SCALE	1" = 100'
DATE	December 2021



LGC Geotechnical, Inc.
 131 Calle Iglesia, Ste. 200
 San Clemente, CA 92672
 TEL (949) 369-6141 FAX (949) 369-6142

FIGURE 2
Boring Location Map

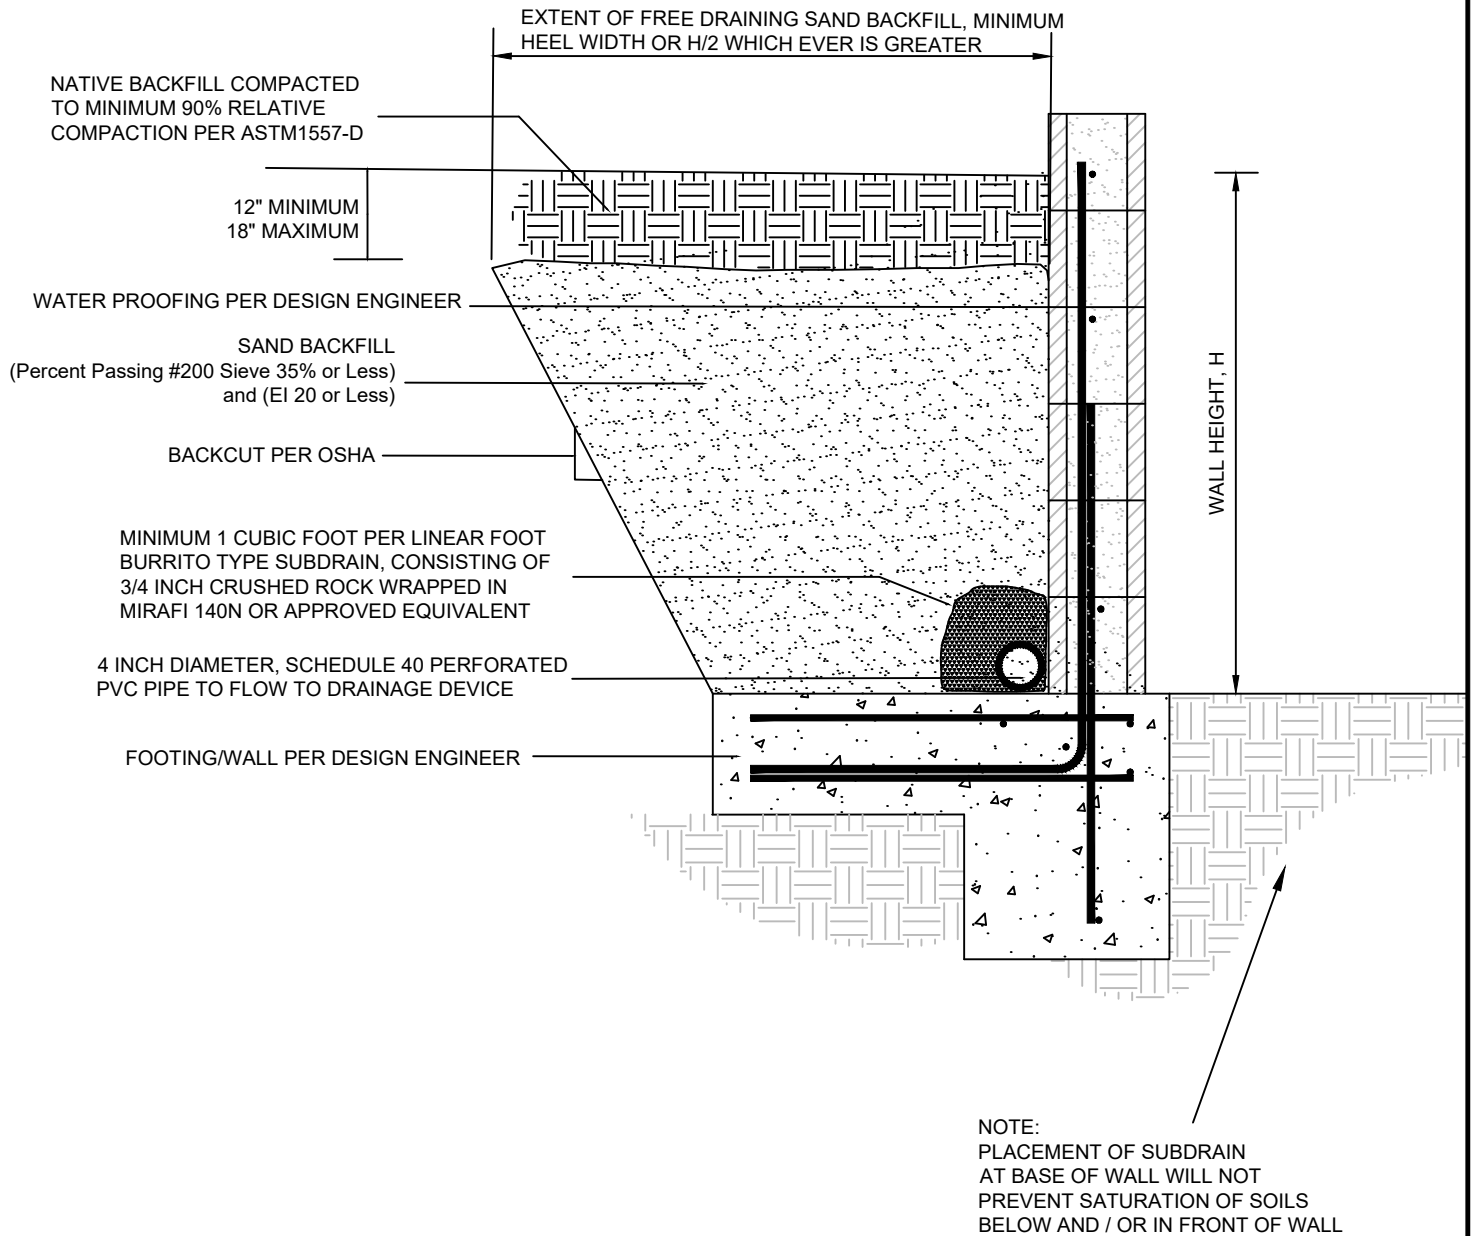


FIGURE 3
Retaining Wall
Backfill Detail

PROJECT NAME	MWIG - Los Alamitos
PROJECT NO.	21198-01
ENG. / GEOL.	RLD
SCALE	Not to Scale
DATE	December 2021

Appendix A
References

APPENDIX A

References

- American Concrete Institute, 2014, Building Code Requirements for Structural Concrete (ACI 318-14) and Commentary (ACI 318R-14).
- American Society of Civil Engineers (ASCE), 2017, Minimum Design Loads for Buildings and Other Structures, ASCE/SEI 7-16, Third Printing, 2017.
- _____, 2018, Standard 7-16, Minimum Design Loads for Buildings and Associated Criteria for Buildings and Other Structures, Supplement 1, effective: December 12, 2018.
- American Society for Testing and Materials (ASTM), Volume 04.08 Soil and Rock (I): D420 – D5876.
- Bray, J.D., and Sancio, R. B., 2006, Assessment of Liquefaction Susceptibility of Fine-Grained Soils, *Journal of Geotechnical and Geoenvironmental Engineering*, ASCE, pp. 1165-1177, dated September 2006.
- California Building Standards Commission, 2019, California Building Code, California Code of Regulations Title 24, Volumes 1 and 2, dated July 2019.
- California Department of Transportation (Caltrans), 2021, Corrosion Guidelines, Version 3.2, dated May 2021.
- California Division of Mines and Geology (CDMG), 1998, Seismic Hazard Evaluation of the Los Alamitos 7.5-Minute Quadrangle, Los Angeles and Orange Counties, California, Open-File Report 98-10.
- _____, 1999, Seismic Hazard Zones, Los Alamitos Quadrangle, California, dated March 25, 1999.
- California Geological Survey [CGS], 2008, California Geological Society Special Publication 117A: Guidelines for Evaluating and Mitigating Seismic Hazards in California.
- _____, 2018, Earthquake Fault Zones, Special Publication 42; A Guide for Government Agencies, Property Owners/Developers, and Geoscience Practitioners for Assessing Fault Rupture Hazards in California, Revised 2018.
- County of Orange, 2013, Technical Guidance Document for the Preparation of Conceptual/Preliminary and/or Project Water Quality Management Plans (WQMPs), Exhibit 7.III, December 20, 2013.
- Historic Aerials, 2021, viewed December 2, 2021, Aerials viewed from: 1952 through 2018, <https://www.historicaerials.com/>.
- KTYG Architecture and Planning, 2021, Conceptual Density Study, Lampson – Los Alamitos, dated August 24, 2021.
- NCEER, 1997, “Proceeding of the NCEER Workshop on Evaluation of Liquefaction Resistance of Soils”, T.L. Youd and I. M. Idriss Editors, Technical Report NCEER-97-0022, NCEER, Buffalo, NY.

- Post-Tensioning Institute (PTI), 2012, Standard Requirements for Design and Analysis of Shallow Post-Tensioned Concrete Foundations on Expansive Soils, PTI DC10.5-12.
- Southern California Earthquake Center (SCEC), 1999, "Recommended Procedure for Implementation of DMG Special Publication 117, Guidelines for Analyzing and Mitigation Liquefaction Hazards in California", Edited by Martin, G.R., and Lew, M., dated March 1999.
- Tokimatsu, K., and Seed, H. B., 1987, "Evaluation of Settlements in Sands Due to Earthquake Shaking", Journal of Geotechnical Engineering, ASCE, Vol. 113, No. 8, pp. 861-878.
- Structural Engineers Association of California (SEAOC), 2021, OSHPD Seismic Design Maps, Retrieved December 1, 2021, from: <https://seismicmaps.org/>.
- United States Geological Survey (USGS), 2014, Unified Hazard Tool, Dynamic: Conterminous U.S. 2014 (v4.2.0), Retrieved December 1, 2021, from: <https://earthquake.usgs.gov/hazards/interactive/>.
- _____, 2016, Geologic Map of the Long Beach 30' X 60' Quadrangle, California, Compiled by George J. Saucedo and others, Version 2.0, 2016.

Appendix B
Boring Logs

Geotechnical Boring Log Borehole HS-1

Date: 11/11/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 6"
Elevation of Top of Hole: ~24' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 1 of 1

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
0	0	B-1						@0' to T.D. - Quaternary Young Alluvium (Qya): @0'- 1' of Topsoil; Sandy SILT: brown/gray, slightly moist	
	5		R-1	10 7 9	92.9	8.6	CL-ML	@2.5'- Silty CLAY with Sand: grayish brown, slightly moist, stiff	
	10		R-2	4 6 8	94.5	24.6		@5'- Silty CLAY: olive brown, very moist, stiff	
	15		R-3	3 3 4	94.0	27.9	SM/CL	@7.5'- Top: Silty SAND: brown, wet, loose; Bottom: CLAY: brown, wet, medium stiff	
	20		R-4	3 4 5	99.0	26.3	CL-ML	@10'- Silty CLAY: olive brown, wet, medium stiff	
	25	▽	SPT-1	2 3 4		27.8		@15'- Silty CLAY: olive brown, wet, stiff	
	30		R-5	7 9 12	106.1	20.9	SM	@20'- Silty SAND: grayish brown, wet, medium dense	
	35							Total Depth = 21.5' Groundwater Encountered at Approximately 13' Backfilled with Cuttings on 11/11/2021	



THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.

SAMPLE TYPES: B BULK SAMPLE R RING SAMPLE (CA Modified Sampler) G GRAB SAMPLE SPT STANDARD PENETRATION TEST SAMPLE GROUNDWATER TABLE	TEST TYPES: DS DIRECT SHEAR MD MAXIMUM DENSITY SA SIEVE ANALYSIS S&H SIEVE AND HYDROMETER EI EXPANSION INDEX CN CONSOLIDATION CR CORROSION AL ATTERBERG LIMITS CO COLLAPSE/SWELL RV R-VALUE #200 % PASSING # 200 SIEVE
--	--

Last Edited: 12/16/2021

Geotechnical Boring Log Borehole HS-2

Date: 11/11/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 6"
Elevation of Top of Hole: ~25' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 1 of 2

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
	0							@0 to T.D. - Quaternary Young Alluvium (Qya): @0'- 1' of Topsoil; Sandy SILT: gray/brown, slightly moist @2.5'- Silty CLAY: olive brown, wet, stiff	
	5		R-1	13 7 11	94.9	25.1	CL-ML		
20	5		R-2	3 6 9	96.3	28.1		@5'- Silty CLAY: olive brown, wet, stiff	
	10		R-3	5 5 4	89.3	33.2	CL	@7.5'- CLAY: olive brown, wet, medium stiff	AL CN
15	10	▽ 	R-4	2 3 4	97.8	27.8		@10'- CLAY: brown, wet, medium stiff	
	15		R-5	5 5 8	101.2	26.2		@15'- CLAY: brown, wet, stiff	AL
5	20		SPT-1	4 6 8		22.9	ML	@20'- Sandy SILT: grayish brown, wet, medium dense	
0	25		R-6	6 6 5	99.1	30.4	CL	@25'- CLAY: dark gray, wet, stiff	
	30								





THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.

SAMPLE TYPES:	TEST TYPES:
B BULK SAMPLE	DS DIRECT SHEAR
R RING SAMPLE (CA Modified Sampler)	MD MAXIMUM DENSITY
G GRAB SAMPLE	SA SIEVE ANALYSIS
SPT STANDARD PENETRATION TEST SAMPLE	S&H SIEVE AND HYDROMETER
	EI EXPANSION INDEX
	CN CONSOLIDATION
	CR CORROSION
	AL ATTERBERG LIMITS
▽ GROUNDWATER TABLE	CO COLLAPSE/SWELL
	RV R-VALUE
	#200 % PASSING # 200 SIEVE

Geotechnical Boring Log Borehole HS-2

Date: 11/11/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 6"
Elevation of Top of Hole: ~25' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 2 of 2

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
	30		SPT-2	3 5 7		32.3	CL	@30'- CLAY: olive gray, wet, very stiff	AL
-5	35		R-7	6 21 33	110.9	17.4	SM	@35'- Silty SAND: gray, wet, dense	
-10	40		SPT-3	5 7 15		28.1		@40'- Silty SAND: dark gray, wet, medium dense	#200
-15	45		R-8	7 9 11	99.2	26.6		@45'- Silty SAND: dark gray, wet, medium dense	#200
-20	50							Total Depth = 46.5' Groundwater Encountered at Approximately 11.5' Backfilled with Cuttings on 11/11/2021	
-25	55								
	60								

	<p>THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.</p>	<p>SAMPLE TYPES: B BULK SAMPLE R RING SAMPLE (CA Modified Sampler) G GRAB SAMPLE SPT STANDARD PENETRATION TEST SAMPLE</p> <p> GROUNDWATER TABLE</p>	<p>TEST TYPES: DS DIRECT SHEAR MD MAXIMUM DENSITY SA SIEVE ANALYSIS S&H SIEVE AND HYDROMETER EI EXPANSION INDEX CN CONSOLIDATION CR CORROSION AL ATTERBERG LIMITS CO COLLAPSE/SWELL RV R-VALUE #200 % PASSING # 200 SIEVE</p>
---	--	--	---

Geotechnical Boring Log Borehole HS-3

Date: 11/11/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 6"
Elevation of Top of Hole: ~24' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 1 of 1

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
0	0	B-1						@0' to T.D. - Quaternary Young Alluvium (Qya): @0'- Topsoil; Sandy SILT: brown/gray, slightly moist	MD
			R-1	5 7 14	110.5	15.2	CL-ML	@2.5'- Silty CLAY: olive brown, moist, very stiff	DS EI CR
20	5		R-2	7 8 13	101.6	22.0	CL	@5'- CLAY: olive brown, very moist, very stiff	
			R-3	5 2 3	87.4	35.4		@7.5'- CLAY: olive brown, wet, soft	AL
15	10	▽	R-4	1 3 4	98.7	26.9		@10'- CLAY: olive brown, wet, medium stiff	CN
			SPT-1	2 3 3		24.7		@15'- CLAY: olive brown, wet, medium stiff	
10	20		R-5	3 6 6	107.9	20.7		@20'- CLAY: olive brown, wet, stiff	
0	25							Total Depth = 21.5' Groundwater Encountered at Approximately 11' Backfilled with Cuttings on 11/11/2021	
-5	30								



THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.

SAMPLE TYPES:	TEST TYPES:
B BULK SAMPLE	DS DIRECT SHEAR
R RING SAMPLE (CA Modified Sampler)	MD MAXIMUM DENSITY
G GRAB SAMPLE	SA SIEVE ANALYSIS
SPT STANDARD PENETRATION TEST SAMPLE	S&H SIEVE AND HYDROMETER
	EI EXPANSION INDEX
	CN CONSOLIDATION
	CR CORROSION
	AL ATTERBERG LIMITS
▽ GROUNDWATER TABLE	CO COLLAPSE/SWELL
	RV R-VALUE
	#200 % PASSING # 200 SIEVE

Last Edited: 12/16/2021

Geotechnical Boring Log Borehole I-1

Date: 11/11/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 8"
Elevation of Top of Hole: ~23' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 1 of 1

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
	0	B-1				22.0	SC	<p>@0' to 2.5' - Older Artificial Fill (afo): @0'- 3" of Asphalt over 5" of Base @1'- Clayey SAND: gray/brown, very moist @2.5' to T.D. - Quaternary Young Alluvium (Qya): @2.5'- Clayey SAND: gray/brown, very moist</p>	
	5							<p>Total Depth = 5' Groundwater Not Encountered 3" Perforated Pipe With Filter Sock Installed, Surrounded by Gravel, and Presoaked on 11/11/2021 Pipe Removed and Boring Backfilled With Cuttings on 11/12/2021</p>	
	15								
	10								
	10								
	15								
	5								
	20								
	0								
	25								
	-5								
	30								



THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.

SAMPLE TYPES:	TEST TYPES:
B BULK SAMPLE	DS DIRECT SHEAR
R RING SAMPLE (CA Modified Sampler)	MD MAXIMUM DENSITY
G GRAB SAMPLE	SA SIEVE ANALYSIS
SPT STANDARD PENETRATION TEST SAMPLE	S&H SIEVE AND HYDROMETER
	EI EXPANSION INDEX
	CN CONSOLIDATION
	CR CORROSION
	AL ATTERBERG LIMITS
	CO COLLAPSE/SWELL
	RV R-VALUE
	#200 % PASSING # 200 SIEVE



Geotechnical Boring Log Borehole I-2

Date: 11/11/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 8"
Elevation of Top of Hole: ~23' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 1 of 1

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
	0	B-1				16.9	SM	<p>@0' to 2.5'- Older Artificial Fill (afo): @0'- 3" of Asphalt over 5" of Base @1'- Silty SAND: dark gray, very moist @2.5' to T.D. - Quaternary Young Alluvium (Qya): @2.5'- Silty SAND: dark gray, very moist</p>	
	5							<p>Total Depth = 5' Groundwater Not Encountered 3" Perforated Pipe With Filter Sock Installed, Surrounded by Gravel, and Presoaked on 7/23/2021 Pipe Removed and Boring Backfilled With Cuttings on 11/12/2021</p>	
	15								
	10								
	10								
	15								
	5								
	20								
	0								
	25								
	-5								
	30								



THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.

SAMPLE TYPES:	TEST TYPES:
B BULK SAMPLE	DS DIRECT SHEAR
R RING SAMPLE (CA Modified Sampler)	MD MAXIMUM DENSITY
G GRAB SAMPLE	SA SIEVE ANALYSIS
SPT STANDARD PENETRATION TEST SAMPLE	S&H SIEVE AND HYDROMETER
	EI EXPANSION INDEX
	CN CONSOLIDATION
	CR CORROSION
	AL ATTERBERG LIMITS
	CO COLLAPSE/SWELL
	RV R-VALUE
	#200 % PASSING # 200 SIEVE



Geotechnical Boring Log Borehole HA-1

Date: 11/11/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 3"
Elevation of Top of Hole: ~24' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 1 of 1

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
	0	B-1				12.8	ML	@0' to T.D. - Quaternary Young Alluvium (Qya): @0'- 1' of Topsoil @1'- Sandy SILT: brown, slightly moist @3'- Silty CLAY: brown, moist	
20	5	[Graphic Log]				12.8	CL		
15	10							Total Depth = 5' Groundwater Not Encountered Backfilled with Cuttings on 11/11/2021	
10	15								
5	20								
0	25								
-5	30								

Last Edited: 12/16/2021



THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.

SAMPLE TYPES:
 B BULK SAMPLE
 R RING SAMPLE (CA Modified Sampler)
 G GRAB SAMPLE
 SPT STANDARD PENETRATION TEST SAMPLE

GROUNDWATER TABLE

TEST TYPES:
 DS DIRECT SHEAR
 MD MAXIMUM DENSITY
 SA SIEVE ANALYSIS
 S&H SIEVE AND HYDROMETER
 EI EXPANSION INDEX
 CN CONSOLIDATION
 CR CORROSION
 AL ATTERBERG LIMITS
 CO COLLAPSE/SWELL
 RV R-VALUE
 #200 % PASSING # 200 SIEVE

Geotechnical Boring Log Borehole HA-2

Date: 11/12/2021	Drilling Company: Cal Pac Drilling
Project Name: MWIG - Los Alamitos	Type of Rig: Track Mounted
Project Number: 21198-01	Drop: 30" Hole Diameter: 3"
Elevation of Top of Hole: ~24' MSL	Drive Weight: 140 pounds
Hole Location: See Geotechnical Map	Page 1 of 1

Elevation (ft)	Depth (ft)	Graphic Log	Sample Number	Blow Count	Dry Density (pcf)	Moisture (%)	USCS Symbol	DESCRIPTION	Type of Test
	0	B-1					SM	@0' to 2.5'- Undocumented Artificial Fill (afu): @0'- Silty SAND: grayish brown, dry @2.5' to T.D. - Quaternary Young Alluvium (Qya): @2.5'- Clayey SAND: grayish brown, very moist	EI CR
20	5					SC			
								Total Depth = 5' Groundwater Not Encountered Backfilled with Cuttings on 11/12/2021	
15	10								
10	15								
5	20								
0	25								
-5	30								

Last Edited: 12/16/2021



THIS SUMMARY APPLIES ONLY AT THE LOCATION OF THIS BORING AND AT THE TIME OF DRILLING. SUBSURFACE CONDITIONS MAY DIFFER AT OTHER LOCATIONS AND MAY CHANGE AT THIS LOCATION WITH THE PASSAGE OF TIME. THE DATA PRESENTED IS A SIMPLIFICATION OF THE ACTUAL CONDITIONS ENCOUNTERED. THE DESCRIPTIONS PROVIDED ARE QUALITATIVE FIELD DESCRIPTIONS AND ARE NOT BASED ON QUANTITATIVE ENGINEERING ANALYSIS.

SAMPLE TYPES:
 B BULK SAMPLE
 R RING SAMPLE (CA Modified Sampler)
 G GRAB SAMPLE
 SPT STANDARD PENETRATION TEST SAMPLE

GROUNDWATER TABLE

TEST TYPES:
 DS DIRECT SHEAR
 MD MAXIMUM DENSITY
 SA SIEVE ANALYSIS
 S&H SIEVE AND HYDROMETER
 EI EXPANSION INDEX
 CN CONSOLIDATION
 CR CORROSION
 AL ATTERBERG LIMITS
 CO COLLAPSE/SWELL
 RV R-VALUE
 #200 % PASSING # 200 SIEVE

Appendix C
Laboratory Test Results

APPENDIX C

Laboratory Testing Procedures and Test Results

The laboratory testing program was formulated towards providing data relating to the relevant engineering properties of the soils with respect to residential construction. Samples considered representative of site conditions were tested in general accordance with American Society for Testing and Materials (ASTM) procedure and/or California Test Methods (CTM), where applicable. The following summary is a brief outline of the test type and a table summarizing the test results.

Moisture and Density Determination Tests: Moisture content (ASTM D2216) and dry density determinations (ASTM D2937) were performed on relatively undisturbed samples obtained from the test borings and/or trenches. The results of these tests are presented in the boring logs. Where applicable, only moisture content was determined from undisturbed or disturbed samples.

Expansion Index: The expansion potential of selected samples was evaluated by the Expansion Index Test, Standard ASTM D4829. Specimens are molded under a given compactive energy to approximately the optimum moisture content and approximately 50 percent saturation or approximately 90 percent relative compaction. The prepared 1-inch-thick by 4-inch-diameter specimens are loaded to an equivalent 144 psf surcharge and are inundated with tap water until volumetric equilibrium is reached. The results of these tests are presented in the table below.

Sample Location	Expansion Index	Expansion Potential*
HS-3 @ 1-5 feet	32	Low
HA-2 @ 1-5 feet	30	Low

* ASTM D4829

Grain Size Distribution/Fines Content: Representative samples were dried, weighed and soaked in water until individual soil particles were separated (per ASTM D421) and then washed on a No. 200 sieve (ASTM D1140). Where applicable, the portion retained on the No. 200 sieve and dried and then sieved on a U.S. Standard brass sieve set in accordance with ASTM D6913 (sieve).

Sample Location	Description	% Passing # 200 Sieve
HS-2 @ 40 feet	Silty Sand	16.5
HS-2 @ 45 feet	Silty Sand	15

APPENDIX C (Cont'd)

Laboratory Testing Procedures and Test Results

Atterberg Limits: The liquid and plastic limits (“Atterberg Limits”) were determined per ASTM D4318 for engineering classification of fine-grained material and presented in the table below. The USCS soil classification indicated in the table below is based on the portion of sample passing the No. 40 sieve and may not necessarily be representative of the entire sample. The plot is provided in this Appendix.

Sample Location	Liquid Limit (%)	Plastic Limit (%)	Plasticity Index (%)	USCS Soil Classification
HS-2 @ 7.5 feet	31	19	12	CL
HS-2 @ 15 feet	34	17	17	CL
HS-2 @ 30 feet	35	16	19	CL
HS-3 @ 7.5 feet	48	24	24	CL

Consolidation: Two consolidation tests were performed per ASTM D2435. A sample (2.4 inches in diameter and 1 inch in height) was placed in a consolidometer and increasing loads were applied. The sample was allowed to consolidate under “double drainage” and total deformation for each loading step was recorded. The percent consolidation for each load step was recorded as the ratio of the amount of vertical compression to the original sample height. The consolidation pressure curve is provided in this Appendix.

Direct Shear: One direct shear test was performed on remolded samples, which was soaked for a minimum of 24 hours prior to testing. The samples were tested under various normal loads using a motor-driven, strain-controlled, direct-shear testing apparatus (ASTM D3080). The plot is provided in this Appendix.

Maximum Density Tests: The maximum dry density and optimum moisture content of typical materials were determined in accordance with ASTM D1557. The results of these tests are presented in the table below:

Sample Location	Sample Description	Maximum Dry Density (pcf)	Optimum Moisture Content (%)
HS-3 @ 1-5 feet	Dark Olive Brown Clayey Sand	116.0	13.0

APPENDIX C (Cont'd)

Laboratory Testing Procedures and Test Results

Chloride Content: Chloride content was tested in accordance with Caltrans Test Method (CTM) 422. The results are presented below.

Sample Location	Chloride Content, ppm
HS-3 @ 1-5 feet	600
HA-2 @ 1-5 feet	140

Soluble Sulfates: The soluble sulfate contents of selected samples were determined by standard geochemical methods (CTM 417). The soluble sulfate content is used to determine the appropriate cement type and maximum water-cement ratios. The test results are presented in the table below.

Sample Location	Sulfate Content (ppm)	Sulfate Exposure Class *
HS-3 @ 1-5 feet	2535	S2
HA-2 @ 1-5 feet	317	S0

*Based on ACI 318R-14, Table 19.3.1.1

Minimum Resistivity and pH Tests: Minimum resistivity and pH tests were performed in general accordance with CTM 643 and standard geochemical methods. The results are presented in the table below.

Sample Location	pH	Minimum Resistivity (ohms-cm)
HS-3 @ 1-5 feet	8.92	210

ATTERBERG LIMITS ASTM D 4318

Project Name: Los Alamitos Tested By: S. Felter Date: 12/03/21
 Project No. : 21198-01 Input By: J. Ward Date: 12/14/21
 Boring No.: HS-2 Checked By: J. Ward
 Sample No.: R-3 Depth (ft.) 7.5
 Soil Identification: Light olive brown lean clay (CL)


TEST NO.	PLASTIC LIMIT		LIQUID LIMIT			
	1	2	1	2	3	4
Number of Blows [N]			34	27	17	
Wet Wt. of Soil + Cont. (g)	10.70	10.61	21.36	20.43	20.11	
Dry Wt. of Soil + Cont. (g)	9.13	9.08	16.65	15.91	15.53	
Wt. of Container (g)	1.08	1.12	1.11	1.06	1.04	
Moisture Content (%) [W _n]	19.50	19.22	30.31	30.44	31.61	

Liquid Limit	31
Plastic Limit	19
Plasticity Index	12
Classification	CL

PI at "A" - Line = $0.73(LL-20)$ 8.03


One - Point Liquid Limit Calculation

$$LL = W_n(N/25)^{0.121}$$

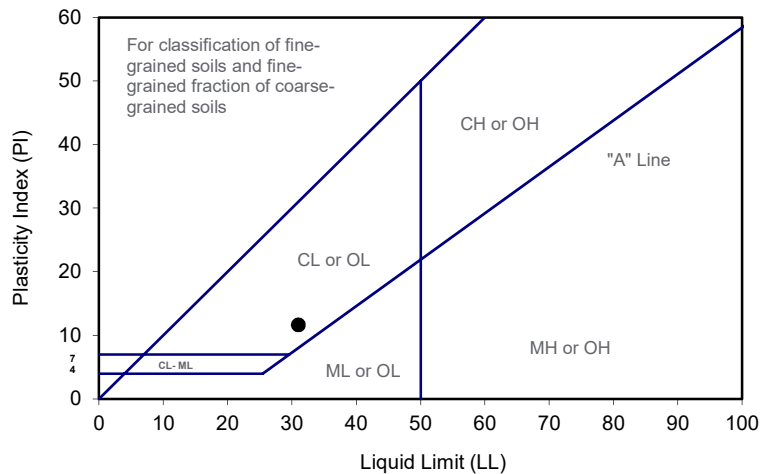

PROCEDURES USED

- Wet Preparation
Multipoint - Wet
- Dry Preparation
Multipoint - Dry
- Procedure A
Multipoint Test
- Procedure B
One-point Test

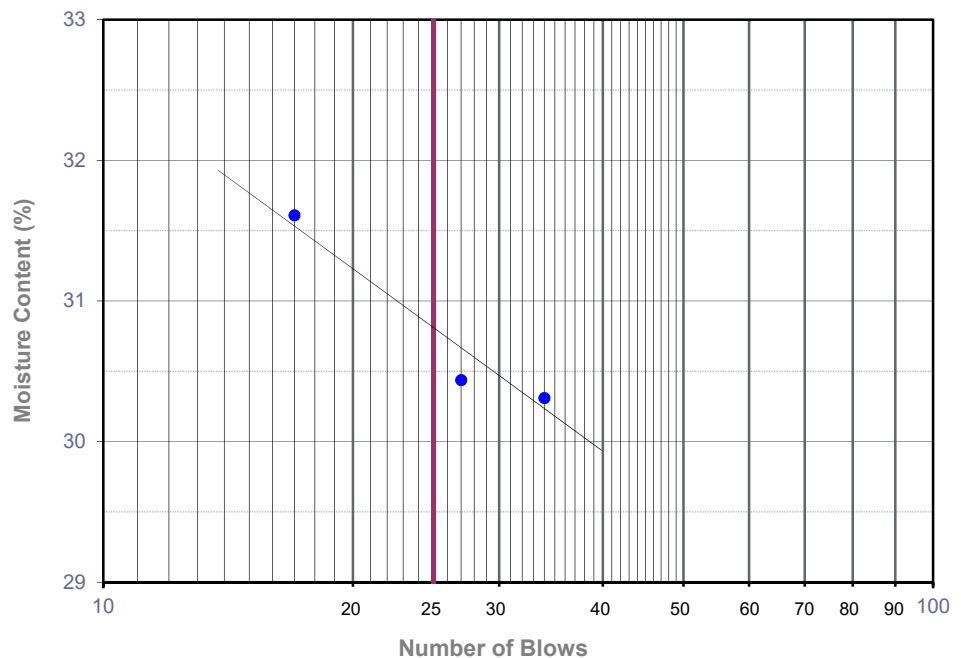

ATTERBERG LIMITS

ASTM D 4318

Project Name: Los Alamitos Tested By: S. Felter Date: 12/03/21
 Project No. : 21198-01 Input By: J. Ward Date: 12/14/21
 Boring No.: HS-2 Checked By: J. Ward
 Sample No.: R-5 Depth (ft.) 15.0
 Soil Identification: Brown lean clay (CL)


TEST NO.	PLASTIC LIMIT		LIQUID LIMIT			
	1	2	1	2	3	4
Number of Blows [N]			34	25	15	
Wet Wt. of Soil + Cont. (g)	10.21	10.20	20.36	20.23	21.00	
Dry Wt. of Soil + Cont. (g)	8.90	8.89	15.65	15.33	15.77	
Wt. of Container (g)	1.08	1.06	1.10	1.09	1.12	
Moisture Content (%) [W _n]	16.75	16.73	32.37	34.41	35.70	

Liquid Limit	34
Plastic Limit	17
Plasticity Index	17
Classification	CL

PI at "A" - Line = $0.73(LL-20)$ 10.22


One - Point Liquid Limit Calculation

$$LL = W_n(N/25)^{0.121}$$

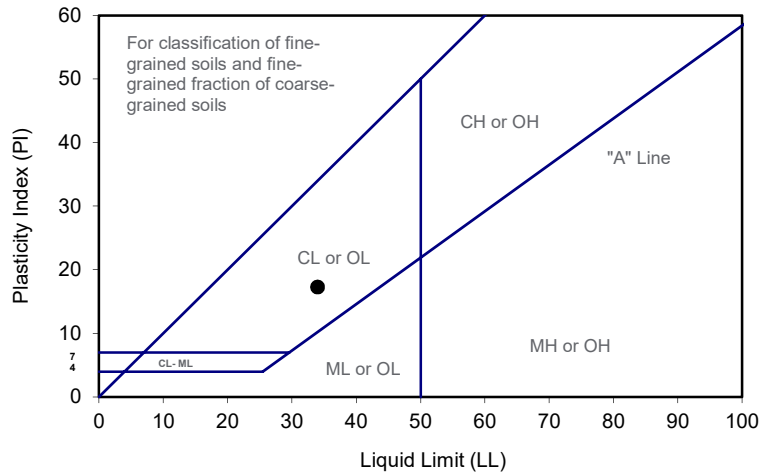

PROCEDURES USED

- Wet Preparation
Multipoint - Wet
- Dry Preparation
Multipoint - Dry
- Procedure A
Multipoint Test
- Procedure B
One-point Test

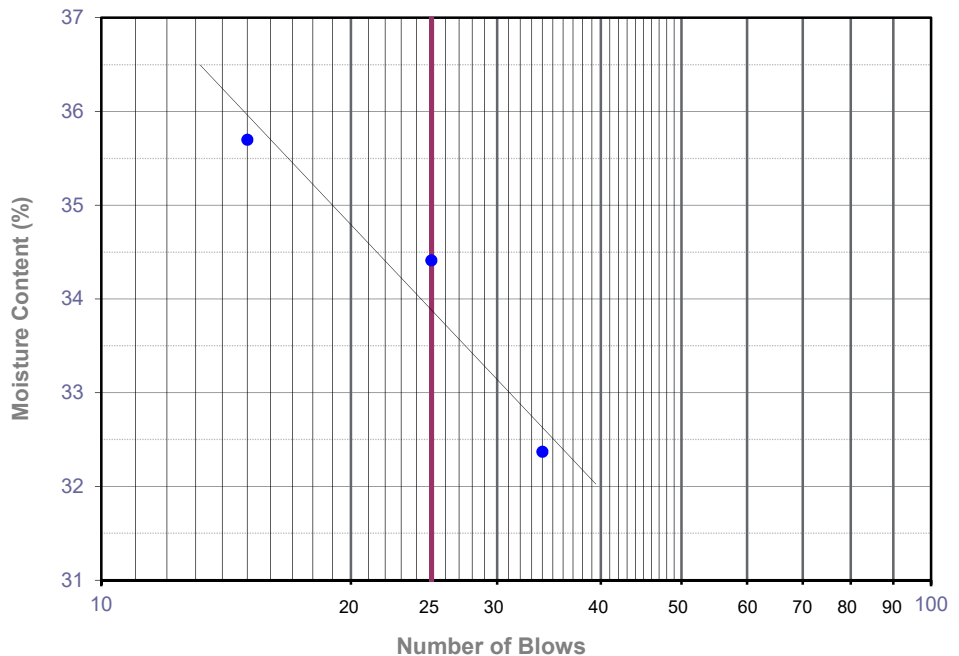

ATTERBERG LIMITS ASTM D 4318

Project Name: Los Alamitos Tested By: S. Felter Date: 12/03/21
 Project No. : 21198-01 Input By: J. Ward Date: 12/14/21
 Boring No.: HS-2 Checked By: J. Ward
 Sample No.: SPT-2 Depth (ft.) 30.0
 Soil Identification: Olive gray lean clay (CL)


TEST NO.	PLASTIC LIMIT		LIQUID LIMIT			
	1	2	1	2	3	4
Number of Blows [N]			35	25	18	
Wet Wt. of Soil + Cont. (g)	10.49	10.83	20.53	20.10	21.13	
Dry Wt. of Soil + Cont. (g)	9.24	9.48	15.72	15.13	15.74	
Wt. of Container (g)	1.08	1.06	1.12	1.07	1.08	
Moisture Content (%) [Wn]	15.32	16.03	32.95	35.35	36.77	

Liquid Limit	35
Plastic Limit	16
Plasticity Index	19
Classification	CL

PI at "A" - Line = $0.73(LL-20)$ 10.95


One - Point Liquid Limit Calculation

$$LL = Wn(N/25)^{0.121}$$

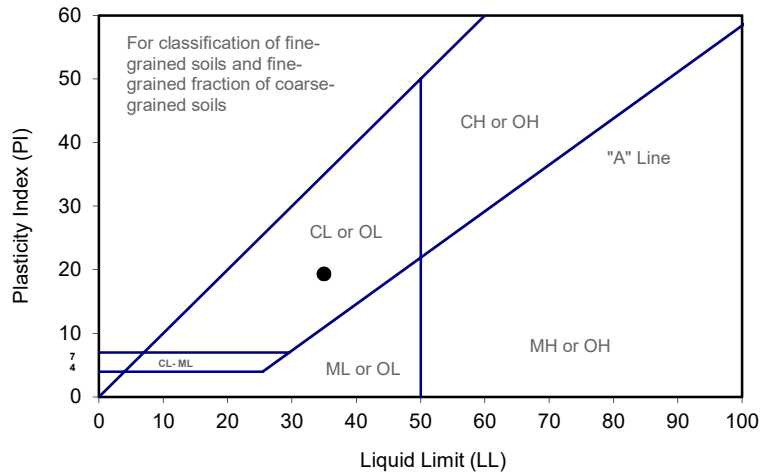

PROCEDURES USED

- Wet Preparation
Multipoint - Wet
- Dry Preparation
Multipoint - Dry
- Procedure A
Multipoint Test
- Procedure B
One-point Test

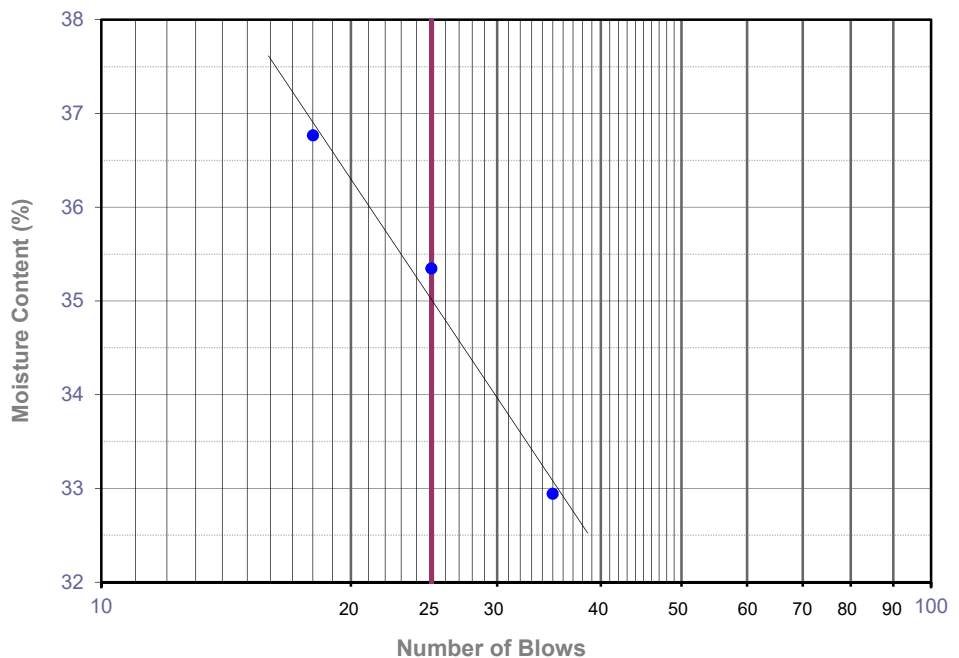

ATTERBERG LIMITS ASTM D 4318

Project Name: Los Alamitos Tested By: S. Felter Date: 12/03/21
 Project No. : 21198-01 Input By: J. Ward Date: 12/14/21
 Boring No.: HS-3 Checked By: J. Ward
 Sample No.: R-3 Depth (ft.) 7.5
 Soil Identification: Olive brown lean clay (CL)


TEST NO.	PLASTIC LIMIT		LIQUID LIMIT			
	1	2	1	2	3	4
Number of Blows [N]			34	28	21	
Wet Wt. of Soil + Cont. (g)	10.09	10.02	20.94	20.13	20.15	
Dry Wt. of Soil + Cont. (g)	8.36	8.30	14.72	14.05	13.85	
Wt. of Container (g)	1.04	1.14	1.05	1.03	1.01	
Moisture Content (%) [Wn]	23.63	24.02	45.50	46.70	49.07	

Liquid Limit	48
Plastic Limit	24
Plasticity Index	24
Classification	CL

PI at "A" - Line = $0.73(LL-20)$ 20.44


One - Point Liquid Limit Calculation

$$LL = Wn(N/25)^{0.121}$$



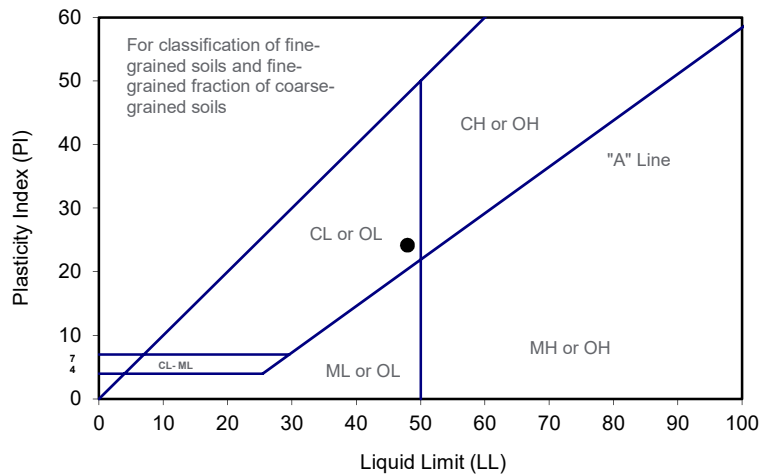


PROCEDURES USED

- Wet Preparation
Multipoint - Wet
- Dry Preparation
Multipoint - Dry
- Procedure A
Multipoint Test
- Procedure B
One-point Test

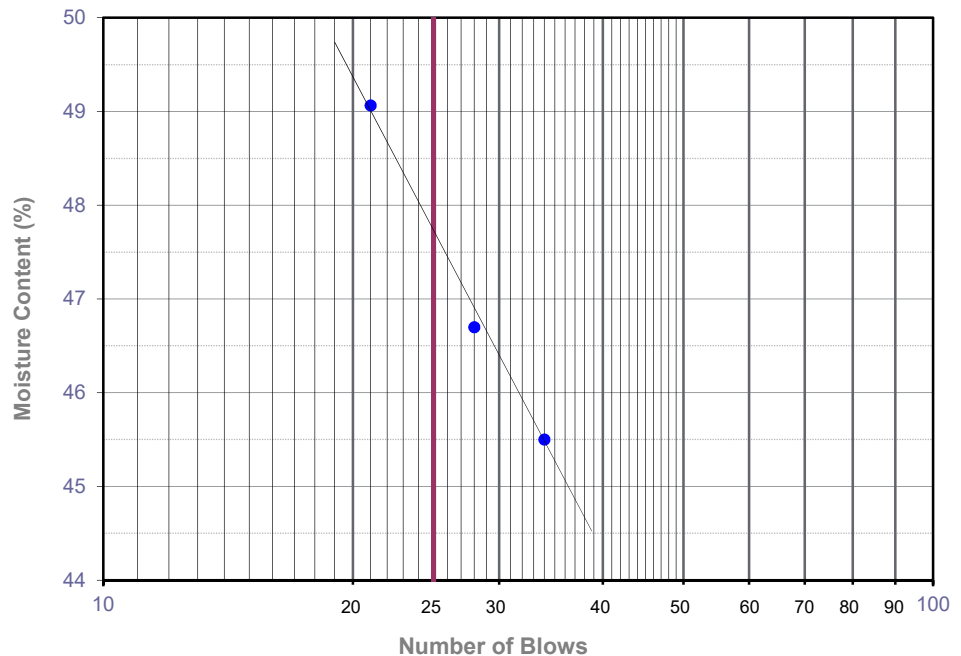

Time Readings

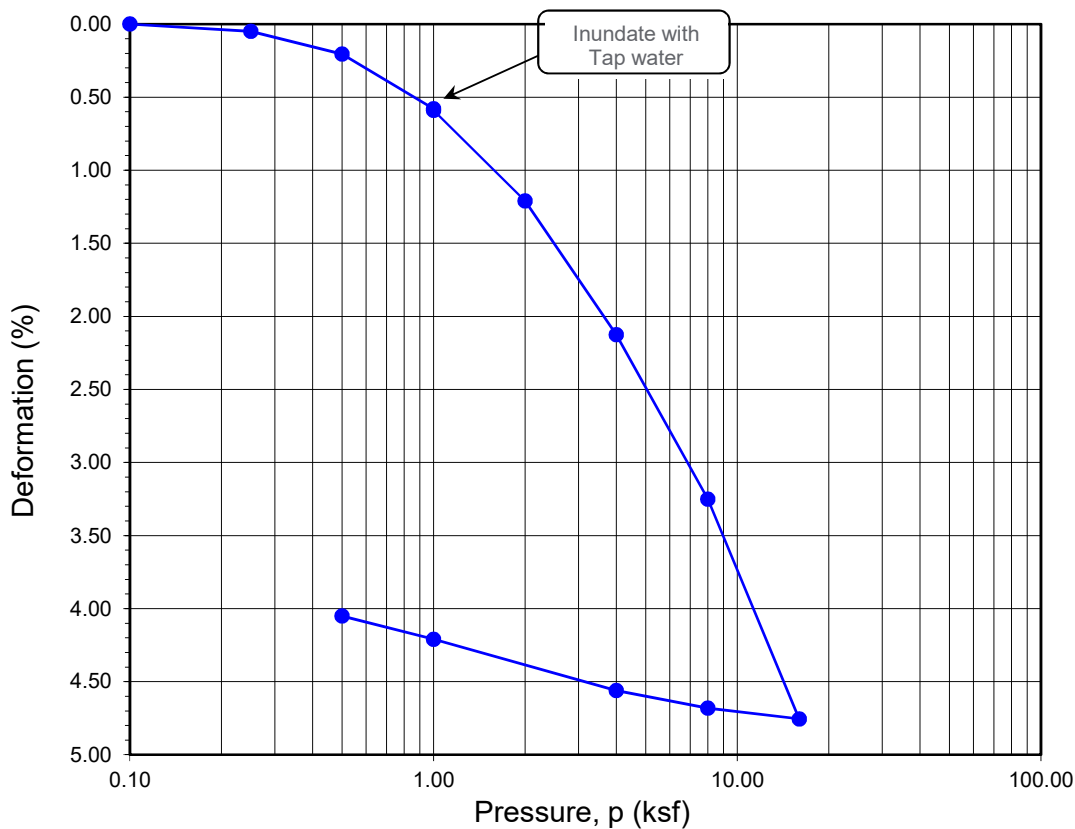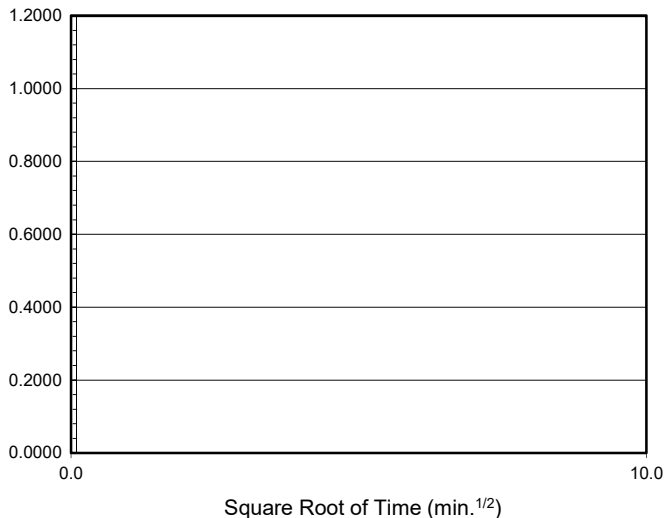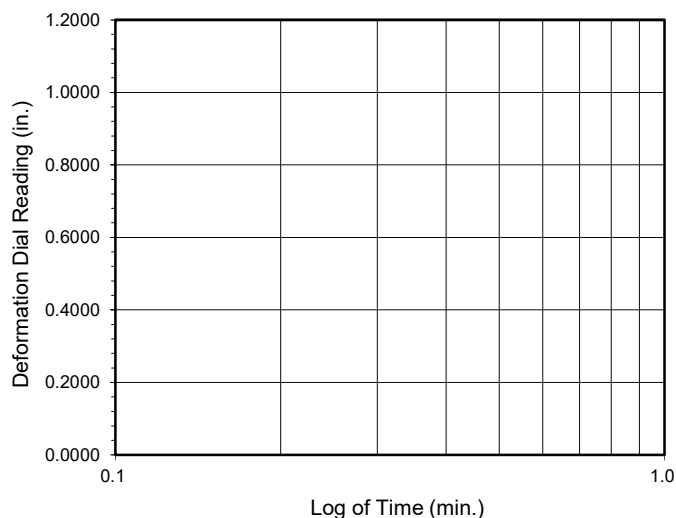

Boring No.	Sample No.	Depth (ft.)	Moisture Content (%)		Dry Density (pcf)		Void Ratio		Degree of Saturation (%)	
			Initial	Final	Initial	Final	Initial	Final	Initial	Final
HS-2	R-3	7.5	33.2	27.0	91.1	96.3	0.932	0.853	100	92




Soil Identification: Light olive brown lean clay (CL)

**ONE-DIMENSIONAL CONSOLIDATION
PROPERTIES of SOILS
ASTM D 2435**

Project No.: 21198-01

Los Alamitos

Time Readings

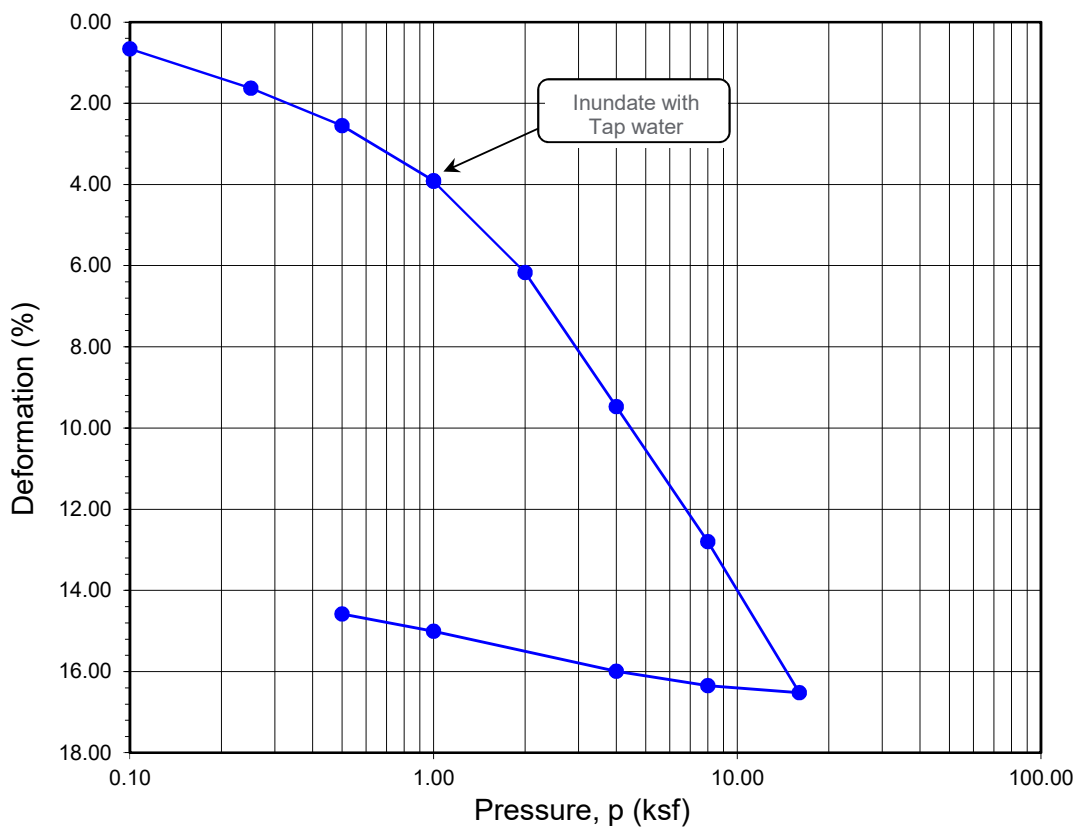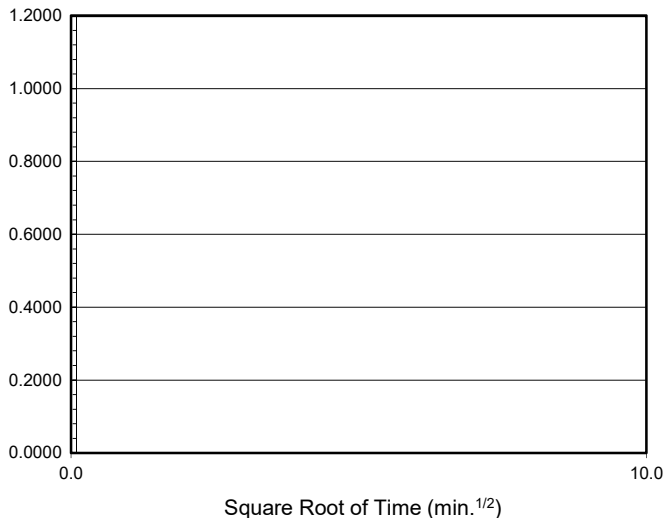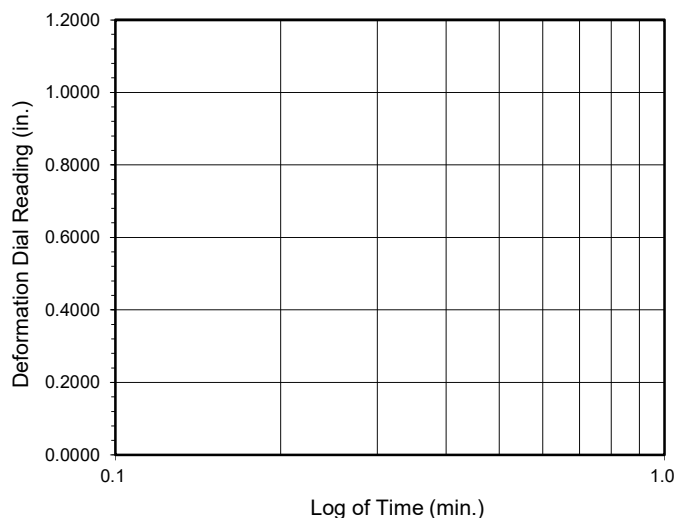

Boring No.	Sample No.	Depth (ft.)	Moisture Content (%)		Dry Density (pcf)		Void Ratio		Degree of Saturation (%)	
			Initial	Final	Initial	Final	Initial	Final	Initial	Final
HS-3	R-3	7.5	35.4	22.5	89.4	107.2	1.019	0.724	100	95

Soil Identification: Olive brown lean clay (CL)

**ONE-DIMENSIONAL CONSOLIDATION
PROPERTIES of SOILS
ASTM D 2435**

Project No.: 21198-01

Los Alamitos

DIRECT SHEAR TEST
Consolidated Drained - ASTM D 3080

Project Name: [Los Alamos](#) Tested By: [G. Bathala](#) Date: [12/07/21](#)
 Project No.: [21198-01](#) Checked By: [J. Ward](#) Date: [12/14/21](#)
 Boring No.: [HS-3](#) Sample Type: [Ring](#)
 Sample No.: [B-1](#) Depth (ft.): [1-5](#)
 Soil Identification: [Dark olive brown clayey sand \(SC\)](#)



Sample Diameter(in):	2.415	2.415	2.415
Sample Thickness(in.):	1.000	1.000	1.000
Weight of Sample + ring(gm):	187.01	186.85	187.84
Weight of Ring(gm):	45.35	44.87	45.57

Before Shearing

Weight of Wet Sample+Cont.(gm):	163.89	163.89	163.89
Weight of Dry Sample+Cont.(gm):	151.63	151.63	151.63
Weight of Container(gm):	57.48	57.48	57.48
Vertical Rdg.(in): Initial	0.2546	0.2461	0.0000
Vertical Rdg.(in): Final	0.2615	0.2585	-0.0239

After Shearing

Weight of Wet Sample+Cont.(gm):	213.85	185.81	215.32
Weight of Dry Sample+Cont.(gm):	188.00	160.70	191.32
Weight of Container(gm):	64.02	36.53	68.15
Specific Gravity (Assumed):	2.70	2.70	2.70
Water Density(pcf):	62.43	62.43	62.43

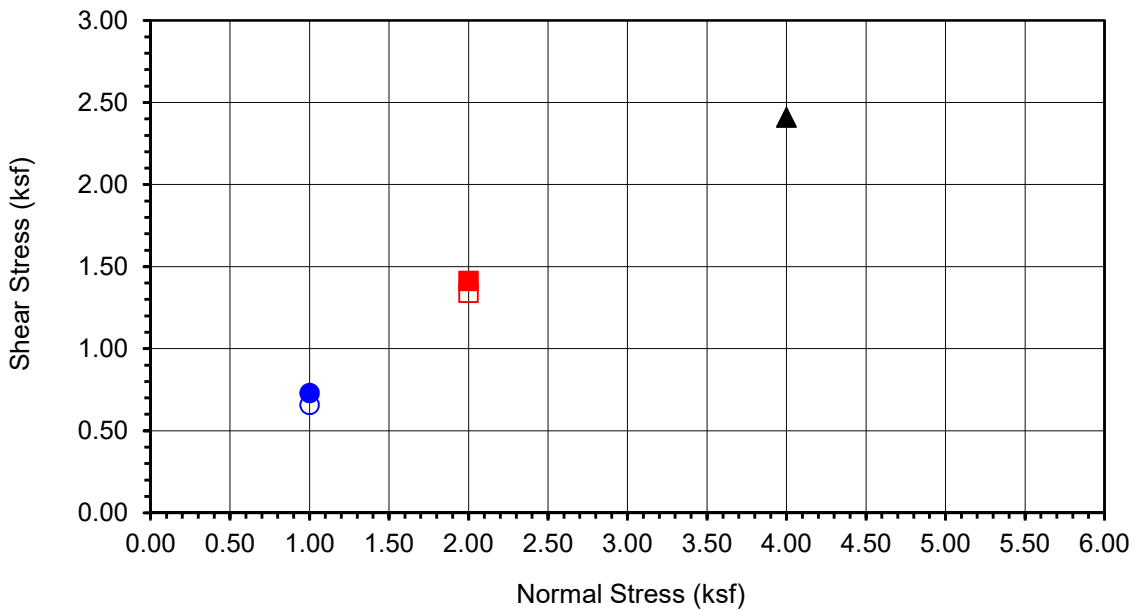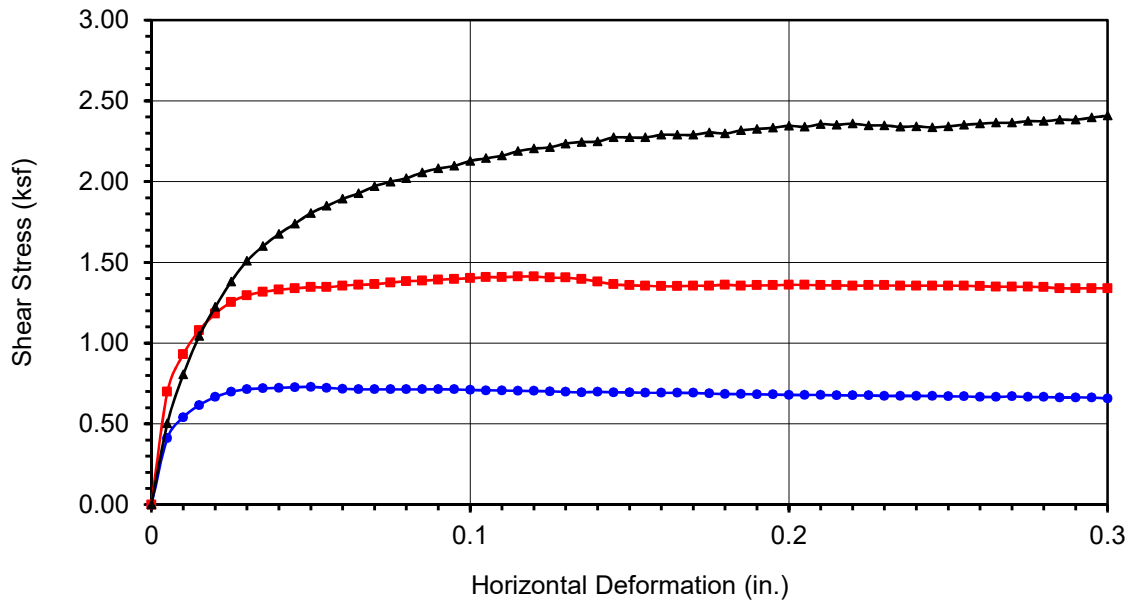

Boring No.	HS-3
Sample No.	B-1
Depth (ft)	1-5
<u>Sample Type:</u>	
Ring	
<u>Soil Identification:</u>	
Dark olive brown clayey sand (SC)	

Normal Stress (kip/ft ²)	1.000	2.000	4.000
Peak Shear Stress (kip/ft ²)	● 0.729	■ 1.412	▲ 2.408
Shear Stress @ End of Test (ksf)	○ 0.657	□ 1.339	△ 2.408
Deformation Rate (in./min.)	0.0017	0.0017	0.0017
Initial Sample Height (in.)	1.000	1.000	1.000
Diameter (in.)	2.415	2.415	2.415
Initial Moisture Content (%)	13.02	13.02	13.02
Dry Density (pcf)	104.2	104.5	104.7
Saturation (%)	57.0	57.3	57.6
Soil Height Before Shearing (in.)	0.9931	0.9876	0.9761
Final Moisture Content (%)	20.9	20.2	19.5

DIRECT SHEAR TEST RESULTS
Consolidated Drained - ASTM D 3080

Project No.: 21198-01

Los Alamitos

Appendix D
Infiltration Test Data

Infiltration Test Data Sheet

LGC Geotechnical, Inc

131 Calle Iglesia Suite 200, San Clemente, CA 92672 tel. (949) 369-6141

Project Name: MWIG - Los Alamitos
Project Number: 21198-01
Date: 11/12/2021
Boring Number: I-1

Test hole dimensions (if circular)	
Boring Depth (feet)*:	<u>5</u>
Boring Diameter (inches):	<u>8</u>
Pipe Diameter (inches):	<u>3</u>

Test pit dimensions (if rectangular)	
Pit Depth (feet):	<u> </u>
Pit Length (feet):	<u> </u>
Pit Breadth (feet):	<u> </u>

Pre-Test (Sandy Soil Criteria)*

Trial No.	Start Time (24:HR)	Stop Time (24:HR)	Time Interval (min)	Initial Depth to Water (feet)	Final Depth to Water (feet)	Total Change in Water Level (feet)	Greater Than or Equal to 0.5 feet (yes/no)
1	8:47	9:12	25.0	2.52	2.54	0.02	No
2	9:12	9:37	25.0	2.54	2.56	0.02	No

*If two consecutive measurements show that six inches of water seeps away in less than 25 minutes, the test shall be run for an additional hour with measurements taken every 10 minutes. Otherwise, pre-soak (fill) overnight, and then obtain at least twelve measurements per hole over at least six hours (approximately 30 minute intervals) with a precision of at least 0.25 inches

Main Test Data

Trial No.	Start Time (24:HR)	Stop Time (24:HR)	Time Interval, Δt (min)	Initial Depth to Water, D_o (feet)	Final Depth to Water, D_f (feet)	Change in Water Level, ΔD (feet)	Calculated Infiltration Rate(in/hr)
1	9:37	10:07	30.0	2.56	2.57	0.01	0.02
2	10:07	10:37	30.0	2.57	2.58	0.01	0.02
3	10:37	11:07	30.0	2.58	2.59	0.01	0.02
4	11:07	11:37	30.0	2.59	2.60	0.01	0.02
5	11:37	12:07	30.0	2.60	2.61	0.01	0.02
6	12:07	12:37	30.0	2.61	2.62	0.01	0.02
7	12:37	13:07	30.0	2.62	2.63	0.01	0.02
8	13:07	13:37	30.0	2.63	2.64	0.01	0.02
9	13:37	14:07	30.0	2.64	2.66	0.02	0.03
10	14:07	14:37	30.0	2.66	2.67	0.01	0.02
11	14:37	15:07	30.0	2.67	2.68	0.01	0.02
12	15:07	15:37	30.0	2.68	2.70	0.02	0.03

Calculated Infiltration Rate (No factors of safety)	0.03
Factor of Safety	
Calculated Infiltration Rate (With Factor of Safety)	

Sketch:

Notes:



Infiltration Test Data Sheet

LGC Geotechnical, Inc

131 Calle Iglesia Suite 200, San Clemente, CA 92672 tel. (949) 369-6141

Project Name: MWIG - Los Alamitos
Project Number: 21198-01
Date: 11/12/2021
Boring Number: I-2

Test hole dimensions (if circular)	
Boring Depth (feet)*:	<u>5</u>
Boring Diameter (inches):	<u>8</u>
Pipe Diameter (inches):	<u>3</u>

Test pit dimensions (if rectangular)	
Pit Depth (feet):	<u> </u>
Pit Length (feet):	<u> </u>
Pit Breadth (feet):	<u> </u>

Pre-Test (Sandy Soil Criteria)*

Trial No.	Start Time (24:HR)	Stop Time (24:HR)	Time Interval (min)	Initial Depth to Water (feet)	Final Depth to Water (feet)	Total Change in Water Level (feet)	Greater Than or Equal to 0.5 feet (yes/no)
1	8:54	9:19	25.0	2.72	2.74	0.02	No
2	9:19	9:44	25.0	2.74	2.75	0.01	No

*If two consecutive measurements show that six inches of water seeps away in less than 25 minutes, the test shall be run for an additional hour with measurements taken every 10 minutes. Otherwise, pre-soak (fill) overnight, and then obtain at least twelve measurements per hole over at least six hours (approximately 30 minute intervals) with a precision of at least 0.25 inches

Main Test Data

Trial No.	Start Time (24:HR)	Stop Time (24:HR)	Time Interval, Δt (min)	Initial Depth to Water, D_o (feet)	Final Depth to Water, D_f (feet)	Change in Water Level, ΔD (feet)	Calculated Infiltration Rate(in/hr)
1	9:44	10:14	30.0	2.75	2.76	0.01	0.02
2	10:14	10:44	30.0	2.76	2.77	0.01	0.02
3	10:44	11:14	30.0	2.77	2.78	0.01	0.02
4	11:14	11:44	30.0	2.78	2.80	0.02	0.03
5	11:44	12:14	30.0	2.80	2.81	0.01	0.02
6	12:14	12:44	30.0	2.81	2.82	0.01	0.02
7	12:44	13:14	30.0	2.82	2.83	0.01	0.02
8	13:14	13:44	30.0	2.83	2.85	0.02	0.03
9	13:44	14:14	30.0	2.85	2.87	0.02	0.03
10	14:14	14:44	30.0	2.87	2.88	0.01	0.02
11	14:44	15:14	30.0	2.88	2.89	0.01	0.02
12	15:14	15:44	30.0	2.89	2.91	0.02	0.04

Calculated Infiltration Rate (No factors of safety)	0.04
Factor of Safety	
Calculated Infiltration Rate (With Factor of Safety)	

Sketch:

Notes:



Appendix E
General Earthwork and Grading Specifications for
Rough Grading

General Earthwork and Grading Specifications for Rough Grading

1.0 General

1.1 Intent

These General Earthwork and Grading Specifications are for the grading and earthwork shown on the approved grading plan(s) and/or indicated in the geotechnical report(s). These Specifications are a part of the recommendations contained in the geotechnical report(s). In case of conflict, the specific recommendations in the geotechnical report shall supersede these more general Specifications. Observations of the earthwork by the project Geotechnical Consultant during the course of grading may result in new or revised recommendations that could supersede these specifications or the recommendations in the geotechnical report(s).

1.2 The Geotechnical Consultant of Record

Prior to commencement of work, the owner shall employ a qualified Geotechnical Consultant of Record (Geotechnical Consultant). The Geotechnical Consultant shall be responsible for reviewing the approved geotechnical report(s) and accepting the adequacy of the preliminary geotechnical findings, conclusions, and recommendations prior to the commencement of the grading.

Prior to commencement of grading, the Geotechnical Consultant shall review the "work plan" prepared by the Earthwork Contractor (Contractor) and schedule sufficient personnel to perform the appropriate level of observation, mapping, and compaction testing.

During the grading and earthwork operations, the Geotechnical Consultant shall observe, map, and document the subsurface exposures to verify the geotechnical design assumptions. If the observed conditions are found to be significantly different than the interpreted assumptions during the design phase, the Geotechnical Consultant shall inform the owner, recommend appropriate changes in design to accommodate the observed conditions, and notify the review agency where required.

The Geotechnical Consultant shall observe the moisture-conditioning and processing of the subgrade and fill materials and perform relative compaction testing of fill to confirm that the attained level of compaction is being accomplished as specified. The Geotechnical Consultant shall provide the test results to the owner and the Contractor on a routine and frequent basis.

1.3 The Earthwork Contractor

The Earthwork Contractor (Contractor) shall be qualified, experienced, and knowledgeable in earthwork logistics, preparation and processing of ground to receive fill, moisture-conditioning and processing of fill, and compacting fill. The Contractor shall review and accept the plans, geotechnical report(s), and these Specifications prior to commencement of grading. The Contractor shall be solely responsible for performing the grading in accordance with the project plans and specifications. The Contractor shall prepare and submit to the owner and the Geotechnical Consultant a work plan that indicates the sequence of earthwork grading, the number of "equipment" of work and the estimated quantities of daily earthwork

contemplated for the site prior to commencement of grading. The Contractor shall inform the owner and the Geotechnical Consultant of changes in work schedules and updates to the work plan at least 24 hours in advance of such changes so that appropriate personnel will be available for observation and testing. The Contractor shall not assume that the Geotechnical Consultant is aware of all grading operations.

The Contractor shall have the sole responsibility to provide adequate equipment and methods to accomplish the earthwork in accordance with the applicable grading codes and agency ordinances, these Specifications, and the recommendations in the approved geotechnical report(s) and grading plan(s). If, in the opinion of the Geotechnical Consultant, unsatisfactory conditions, such as unsuitable soil, improper moisture condition, inadequate compaction, insufficient buttress key size, adverse weather, etc., are resulting in a quality of work less than required in these specifications, the Geotechnical Consultant shall reject the work and may recommend to the owner that construction be stopped until the conditions are rectified. It is the contractor's sole responsibility to provide proper fill compaction.

2.0 Preparation of Areas to be Filled

2.1 Clearing and Grubbing

Vegetation, such as brush, grass, roots, and other deleterious material shall be sufficiently removed and properly disposed of in a method acceptable to the owner, governing agencies, and the Geotechnical Consultant.

The Geotechnical Consultant shall evaluate the extent of these removals depending on specific site conditions. Earth fill material shall not contain more than 1 percent of organic materials (by volume). Nesting of the organic materials shall not be allowed.

If potentially hazardous materials are encountered, the Contractor shall stop work in the affected area, and a hazardous material specialist shall be informed immediately for proper evaluation and handling of these materials prior to continuing to work in that area.

As presently defined by the State of California, most refined petroleum products (gasoline, diesel fuel, motor oil, grease, coolant, etc.) have chemical constituents that are considered to be hazardous waste. As such, the indiscriminate dumping or spillage of these fluids onto the ground may constitute a misdemeanor, punishable by fines and/or imprisonment, and shall not be allowed. The contractor is responsible for all hazardous waste relating to his work. The Geotechnical Consultant does not have expertise in this area. If hazardous waste is a concern, then the Client should acquire the services of a qualified environmental assessor.

2.2 Processing

Existing ground that has been declared satisfactory for support of fill by the Geotechnical Consultant shall be scarified to a minimum depth of 6 inches. Existing ground that is not satisfactory shall be over-excavated as specified in the following section. Scarification shall continue until soils are broken down and free of oversize material and the working surface is reasonably uniform, flat, and free of uneven features that would inhibit uniform compaction.

2.3 Over-excavation

In addition to removals and over-excavations recommended in the approved geotechnical report(s) and the grading plan, soft, loose, dry, saturated, spongy, organic-rich, highly fractured or otherwise unsuitable ground shall be over-excavated to competent ground as evaluated by the Geotechnical Consultant during grading.

2.4 Benching

Where fills are to be placed on ground with slopes steeper than 5:1 (horizontal to vertical units), the ground shall be stepped or benched. Please see the Standard Details for a graphic illustration. The lowest bench or key shall be a minimum of 15 feet wide and at least 2 feet deep, into competent material as evaluated by the Geotechnical Consultant. Other benches shall be excavated a minimum height of 4 feet into competent material or as otherwise recommended by the Geotechnical Consultant. Fill placed on ground sloping flatter than 5:1 shall also be benched or otherwise over-excavated to provide a flat subgrade for the fill.

2.5 Evaluation/Acceptance of Fill Areas

All areas to receive fill, including removal and processed areas, key bottoms, and benches, shall be observed, mapped, elevations recorded, and/or tested prior to being accepted by the Geotechnical Consultant as suitable to receive fill. The Contractor shall obtain a written acceptance from the Geotechnical Consultant prior to fill placement. A licensed surveyor shall provide the survey control for determining elevations of processed areas, keys, and benches.

3.0 Fill Material

3.1 General

Material to be used as fill shall be essentially free of organic matter and other deleterious substances evaluated and accepted by the Geotechnical Consultant prior to placement. Soils of poor quality, such as those with unacceptable gradation, high expansion potential, or low strength shall be placed in areas acceptable to the Geotechnical Consultant or mixed with other soils to achieve satisfactory fill material.

3.2 Oversize

Oversize material defined as rock, or other irreducible material with a maximum dimension greater than 8 inches, shall not be buried or placed in fill unless location, materials, and placement methods are specifically accepted by the Geotechnical Consultant. Placement operations shall be such that nesting of oversized material does not occur and such that oversize material is completely surrounded by compacted or densified fill. Oversize material shall not be placed within 10 vertical feet of finish grade or within 2 feet of future utilities or underground construction.

3.3 Import

If importing of fill material is required for grading, proposed import material shall meet the requirements of the geotechnical consultant. The potential import source shall be given to the Geotechnical Consultant at least 48 hours (2 working days) before importing begins so that its suitability can be determined and appropriate tests performed.

4.0 Fill Placement and Compaction

4.1 Fill Layers

Approved fill material shall be placed in areas prepared to receive fill (per Section 3.0) in near-horizontal layers not exceeding 8 inches in loose thickness. The Geotechnical Consultant may accept thicker layers if testing indicates the grading procedures can adequately compact the thicker layers. Each layer shall be spread evenly and mixed thoroughly to attain relative uniformity of material and moisture throughout.

4.2 Fill Moisture Conditioning

Fill soils shall be watered, dried back, blended, and/or mixed, as necessary to attain a relatively uniform moisture content at or slightly over optimum. Maximum density and optimum soil moisture content tests shall be performed in accordance with the American Society of Testing and Materials (ASTM Test Method D1557).

4.3 Compaction of Fill

After each layer has been moisture-conditioned, mixed, and evenly spread, it shall be uniformly compacted to not less than 90 percent of maximum dry density (ASTM Test Method D1557). Compaction equipment shall be adequately sized and be either specifically designed for soil compaction or of proven reliability to efficiently achieve the specified level of compaction with uniformity.

4.4 Compaction of Fill Slopes

In addition to normal compaction procedures specified above, compaction of slopes shall be accomplished by backrolling of slopes with sheepsfoot rollers at increments of 3 to 4 feet in fill elevation, or by other methods producing satisfactory results acceptable to the Geotechnical Consultant. Upon completion of grading, relative compaction of the fill, out to the slope face, shall be at least 90 percent of maximum density per ASTM Test Method D1557.

4.5 Compaction Testing

Field tests for moisture content and relative compaction of the fill soils shall be performed by the Geotechnical Consultant. Location and frequency of tests shall be at the Consultant's discretion based on field conditions encountered. Compaction test locations will not necessarily be selected on a random basis. Test locations shall be selected to verify adequacy of compaction levels in areas that are judged to be prone to inadequate compaction (such as close to slope faces and at the fill/bedrock benches).

4.6 Frequency of Compaction Testing

Tests shall be taken at intervals not exceeding 2 feet in vertical rise and/or 1,000 cubic yards of compacted fill soils embankment. In addition, as a guideline, at least one test shall be taken on slope faces for each 5,000 square feet of slope face and/or each 10 feet of vertical height of slope. The Contractor shall assure that fill construction is such that the testing schedule can be accomplished by the Geotechnical Consultant. The Contractor shall stop or slow down the earthwork construction if these minimum standards are not met.

4.7 Compaction Test Locations

The Geotechnical Consultant shall document the approximate elevation and horizontal coordinates of each test location. The Contractor shall coordinate with the project surveyor to assure that sufficient grade stakes are established so that the Geotechnical Consultant can determine the test locations with sufficient accuracy. At a minimum, two grade stakes within a horizontal distance of 100 feet and vertically less than 5 feet apart from potential test locations shall be provided.

5.0 Subdrain Installation

Subdrain systems shall be installed in accordance with the approved geotechnical report(s), the grading plan, and the Standard Details. The Geotechnical Consultant may recommend additional subdrains and/or changes in subdrain extent, location, grade, or material depending on conditions encountered during grading. All subdrains shall be surveyed by a land surveyor/civil engineer for line and grade after installation and prior to burial. Sufficient time should be allowed by the Contractor for these surveys.

6.0 Excavation

Excavations, as well as over-excavation for remedial purposes, shall be evaluated by the Geotechnical Consultant during grading. Remedial removal depths shown on geotechnical plans are estimates only. The actual extent of removal shall be determined by the Geotechnical Consultant based on the field evaluation of exposed conditions during grading. Where fill-over-cut slopes are to be graded, the cut portion of the slope shall be made, evaluated, and accepted by the Geotechnical Consultant prior to placement of materials for construction of the fill portion of the slope, unless otherwise recommended by the Geotechnical Consultant.

7.0 Trench Backfills


7.1 The Contractor shall follow all OSHA and Cal/OSHA requirements for safety of trench excavations.

7.2 All bedding and backfill of utility trenches shall be done in accordance with the applicable provisions of Standard Specifications of Public Works Construction. Bedding material shall have a Sand Equivalent greater than 30 (SE>30). The bedding shall be placed to 1 foot over


the top of the conduit and densified by jetting. Backfill shall be placed and densified to a minimum of 90 percent of maximum from 1 foot above the top of the conduit to the surface.

- 7.3 The jetting of the bedding around the conduits shall be observed by the Geotechnical Consultant.
- 7.4 The Geotechnical Consultant shall test the trench backfill for relative compaction. At least one test should be made for every 300 feet of trench and 2 feet of fill.
- 7.5 Lift thickness of trench backfill shall not exceed those allowed in the Standard Specifications of Public Works Construction unless the Contractor can demonstrate to the Geotechnical Consultant that the fill lift can be compacted to the minimum relative compaction by his alternative equipment and method.

Fill Slope

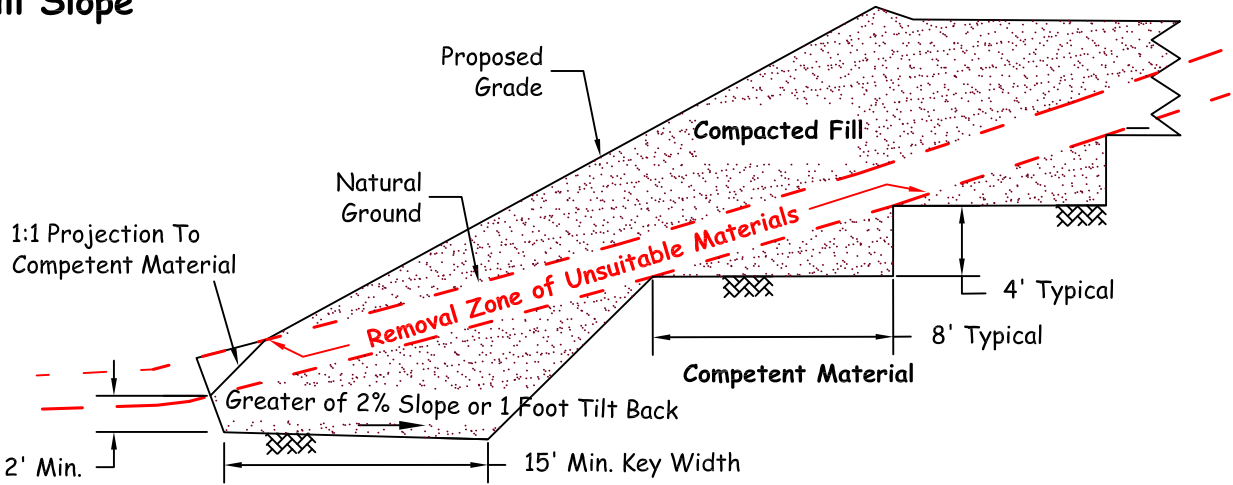


Fill-Over-Cut Slope

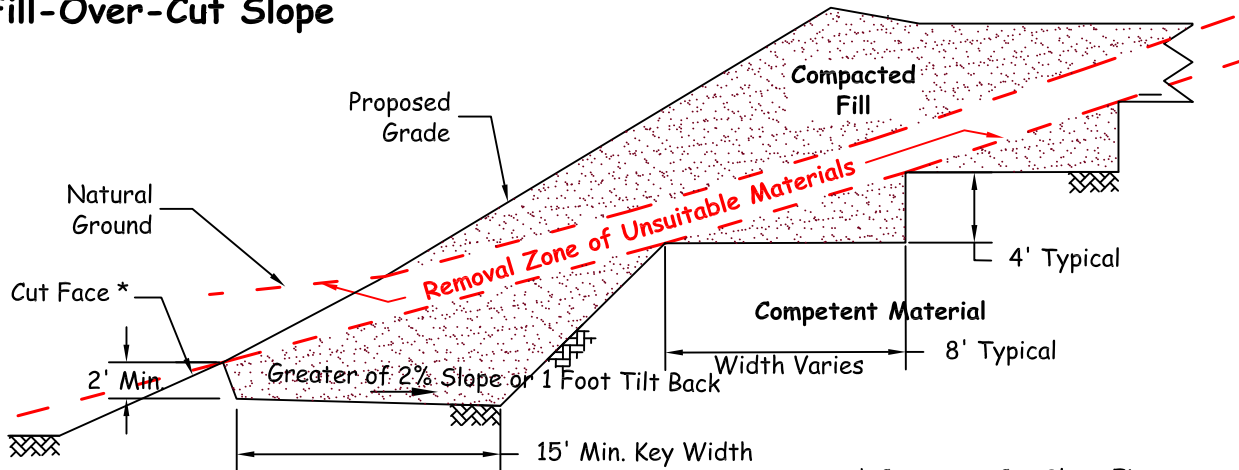

* Construct Cut Slope First


Cut-Over-Fill Slope

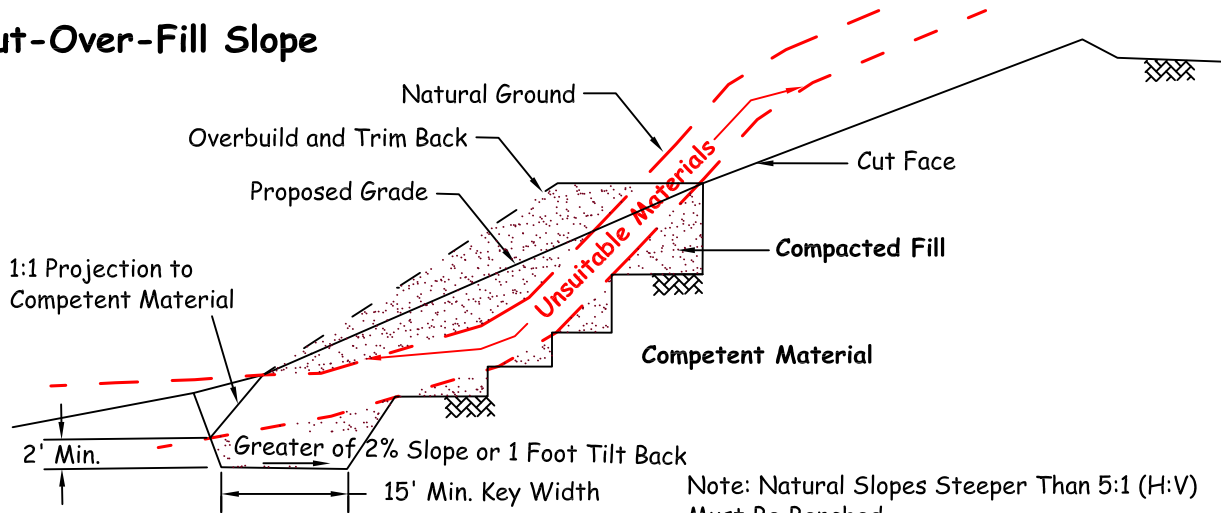


Note: Natural Slopes Steeper Than 5:1 (H:V) Must Be Benched.



KEYING AND BENCHING

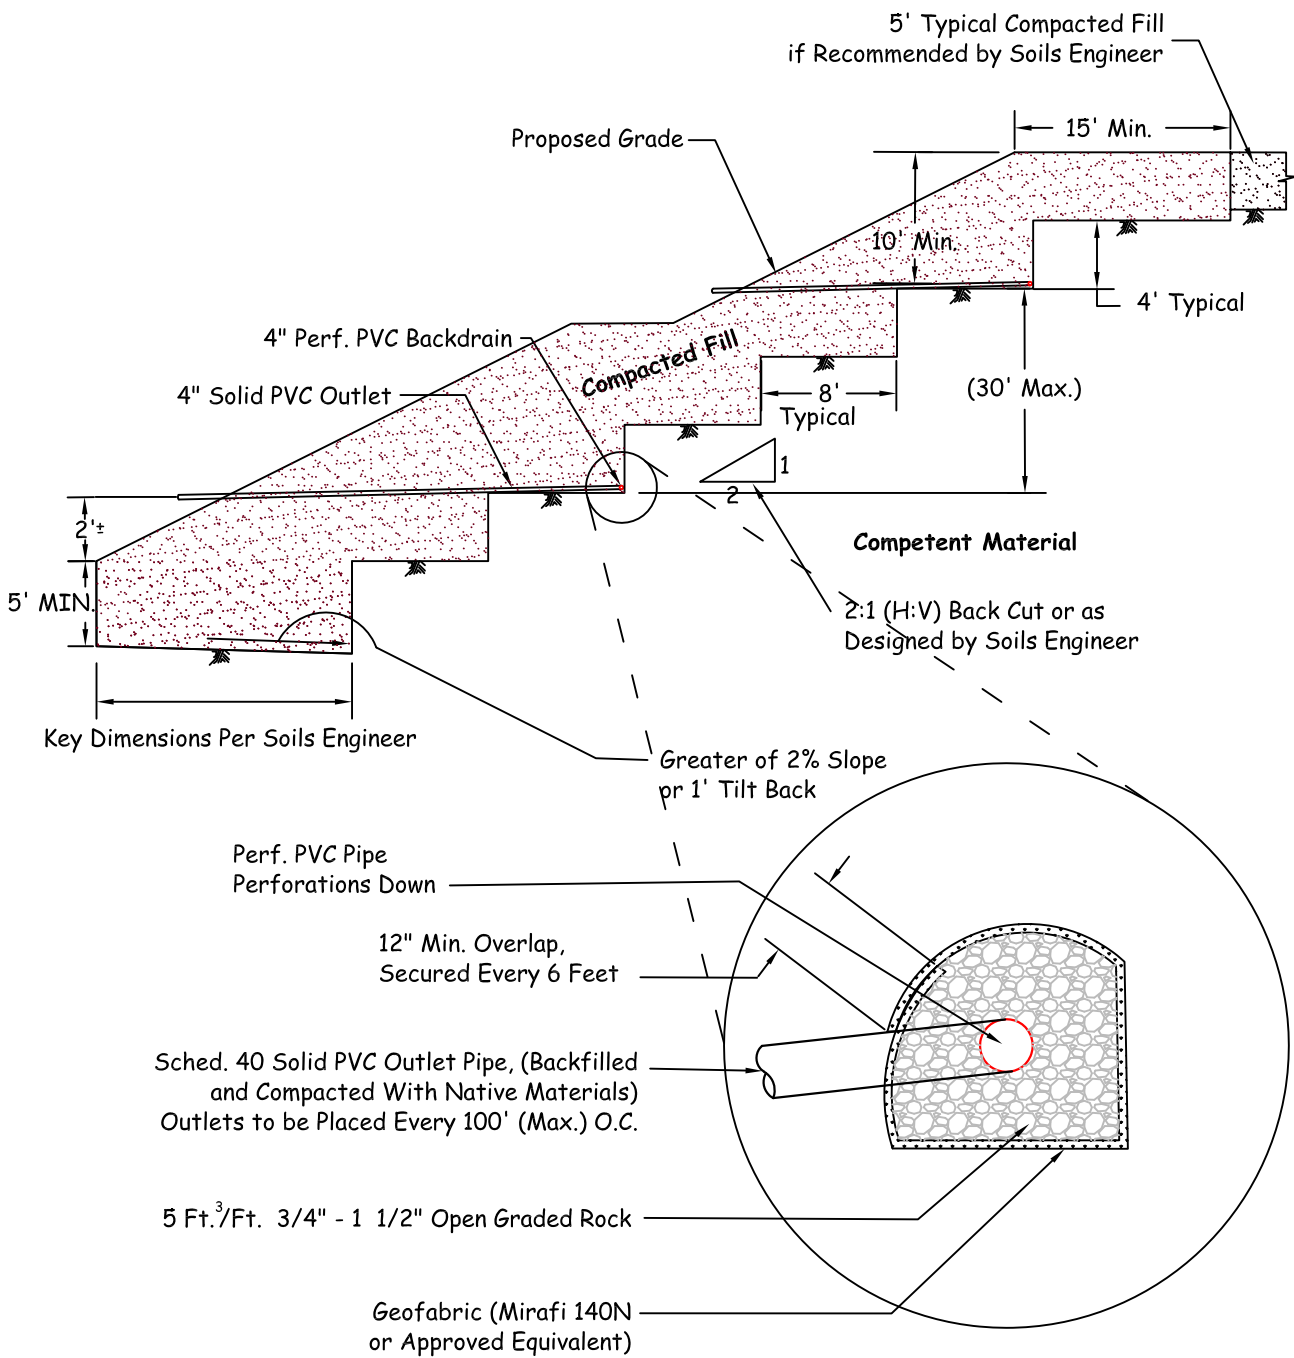


TYPICAL BUTTRESS DETAIL

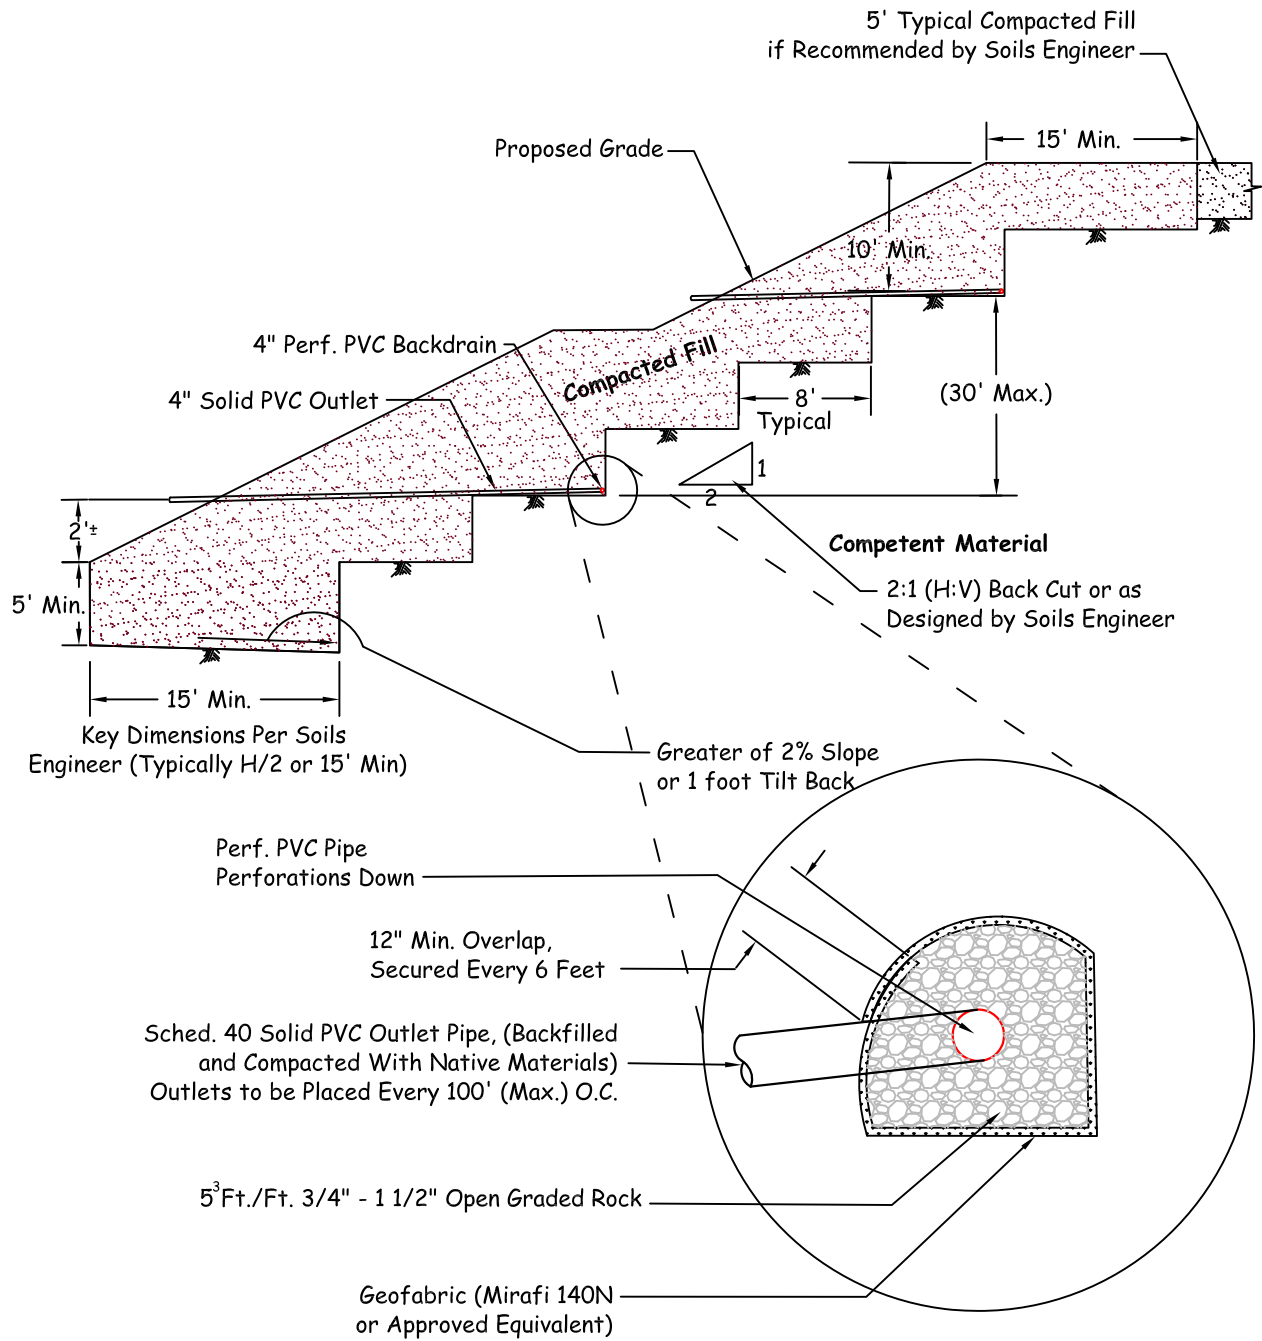


TYPICAL STABILIZATION FILL DETAIL

SUBDRAIN OUTLET MARKER -6" & 8" PIPE

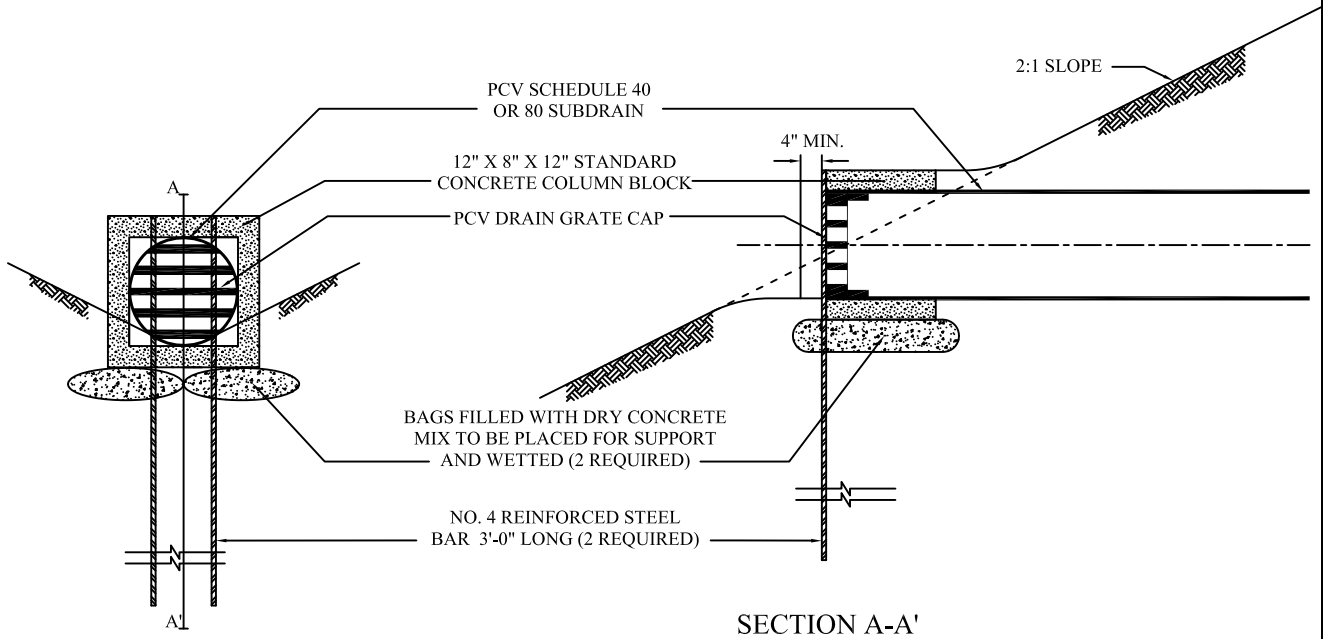


SUBDRAIN OUTLET MARKER -4" PIPE

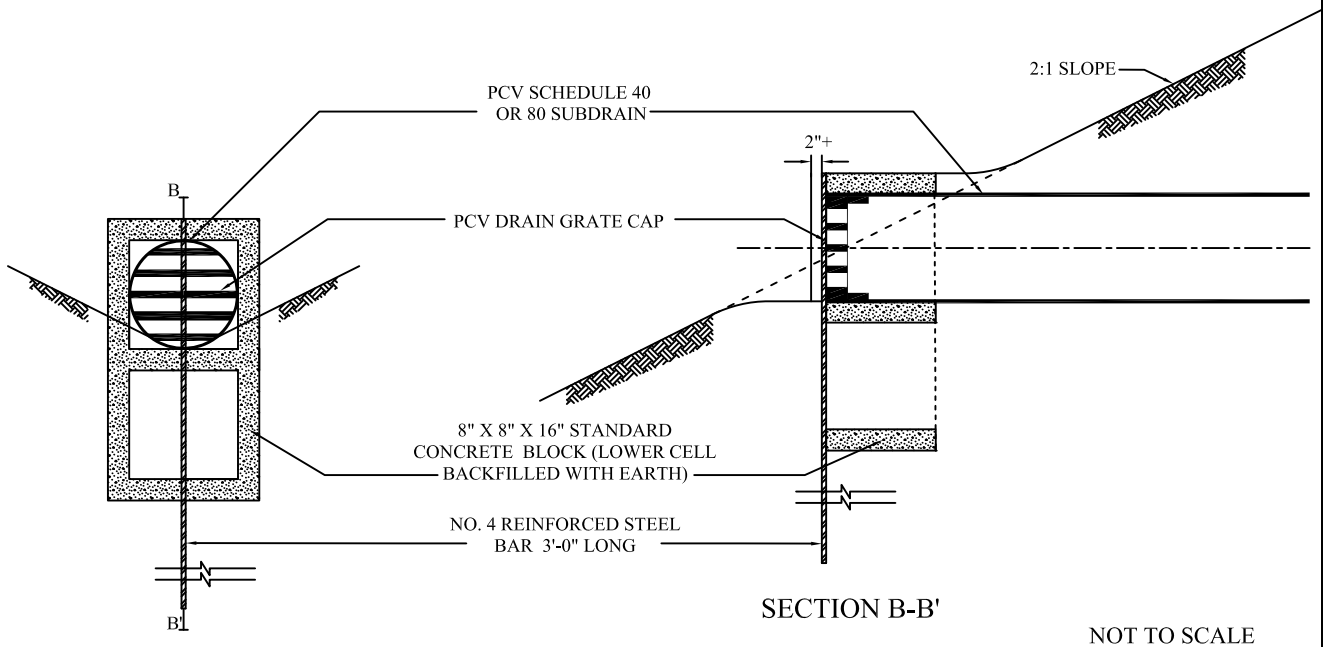

**SUBDRAIN OUTLET
MARKER DETAIL**


Cut Lot (Exposing Unsuitable Soils at Design Grade)

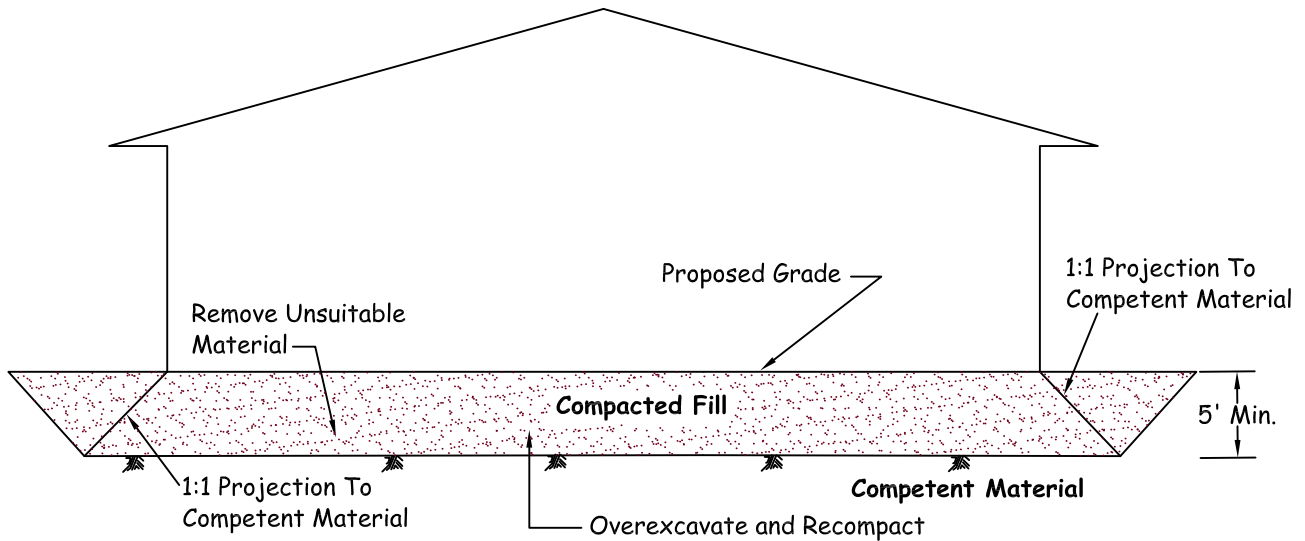

Note 1: Removal Bottom Should be Graded With Minimum 2% Fall Towards Street or Other Suitable Area (as Determined by Soils Engineer) to Avoid Ponding Below Building

Note 2: Where Design Cut Lots are Excavated Entirely Into Competent Material, Overexcavation May Still be Required for Hard-Rock Conditions or for Materials With Variable Expansion Characteristics.


Cut/Fill Transition Lot

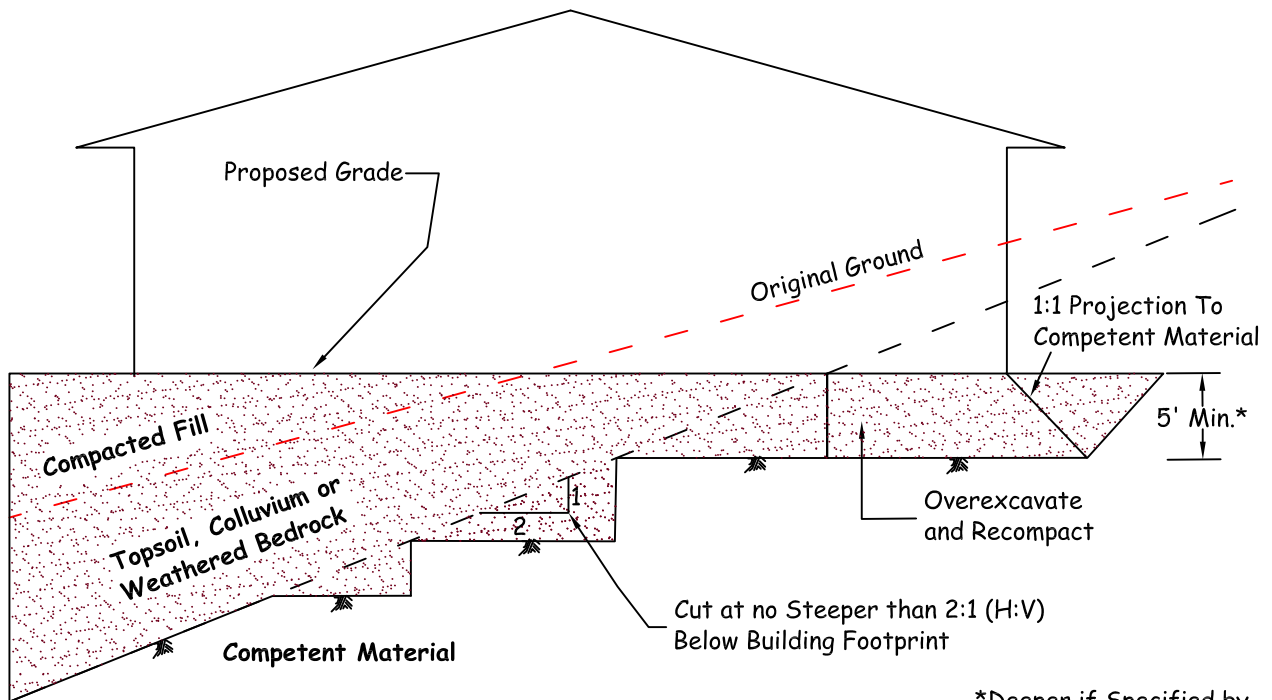

*Deeper if Specified by Soils Engineer



CUT AND TRANSITION LOT OVEREXCAVATION DETAIL

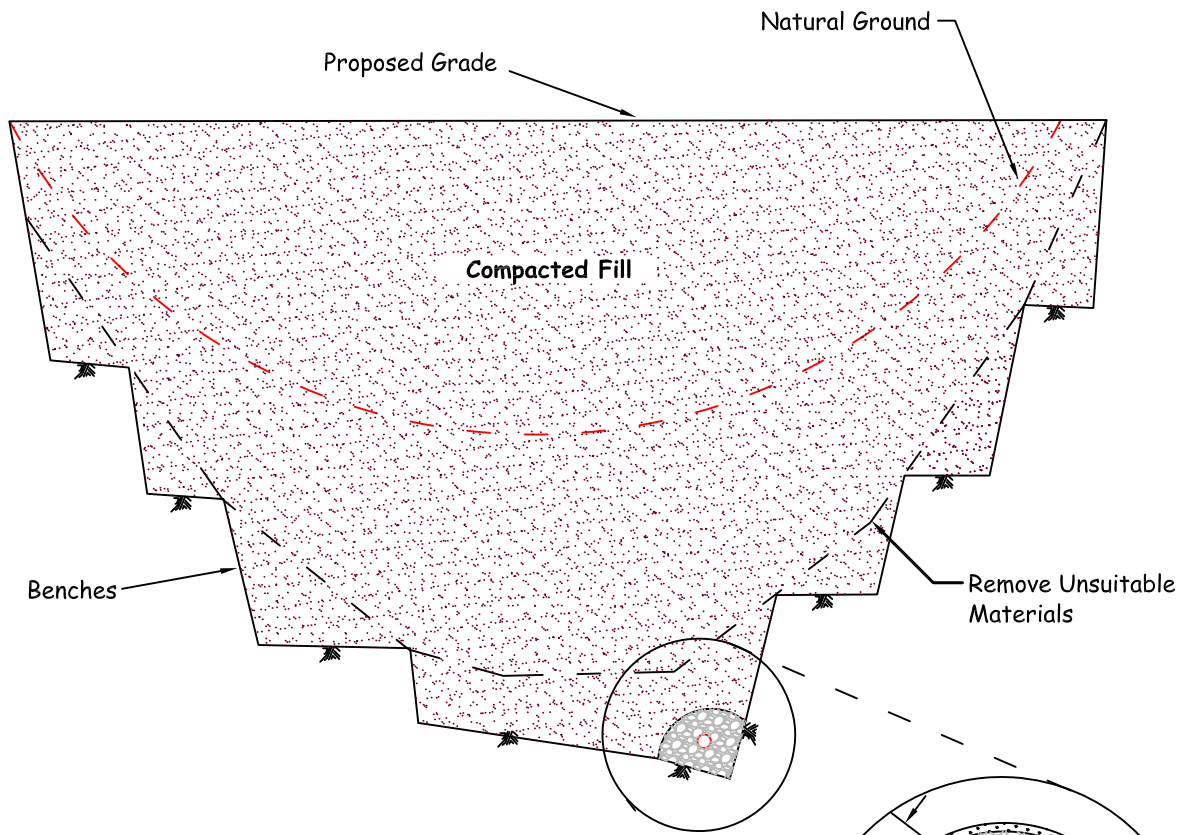

Notes:


- 1) Continuous Runs in Excess of 500' Shall Use 8" Diameter Pipe.
- 2) Final 20' of Pipe at Outlet Shall be Solid and Backfilled with Fine-grained Material.

12" Min. Overlap,
Secured Every 6 Feet


6" Collector Pipe
(Sched. 40, Perf. PVC)

9 Ft.³/Ft.
3/4" - 1 1/2" Crushed Rock


Geofabric (Mirafi 140N
or Approved Equivalent)

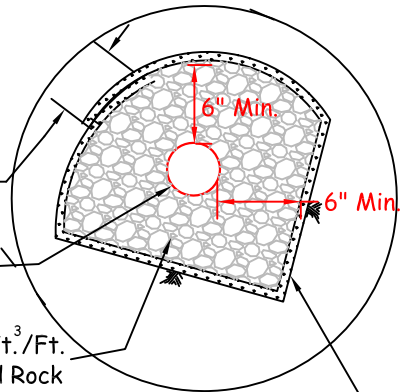

Proposed Outlet Detail

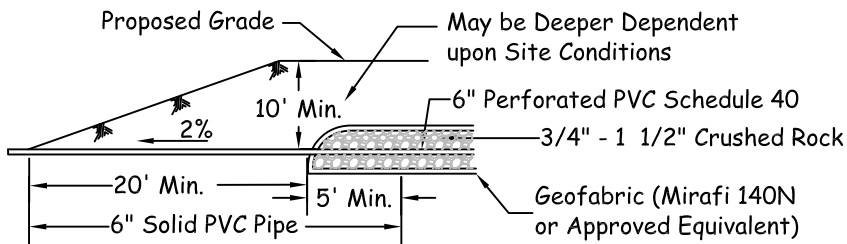

CANYON SUBDRAINS


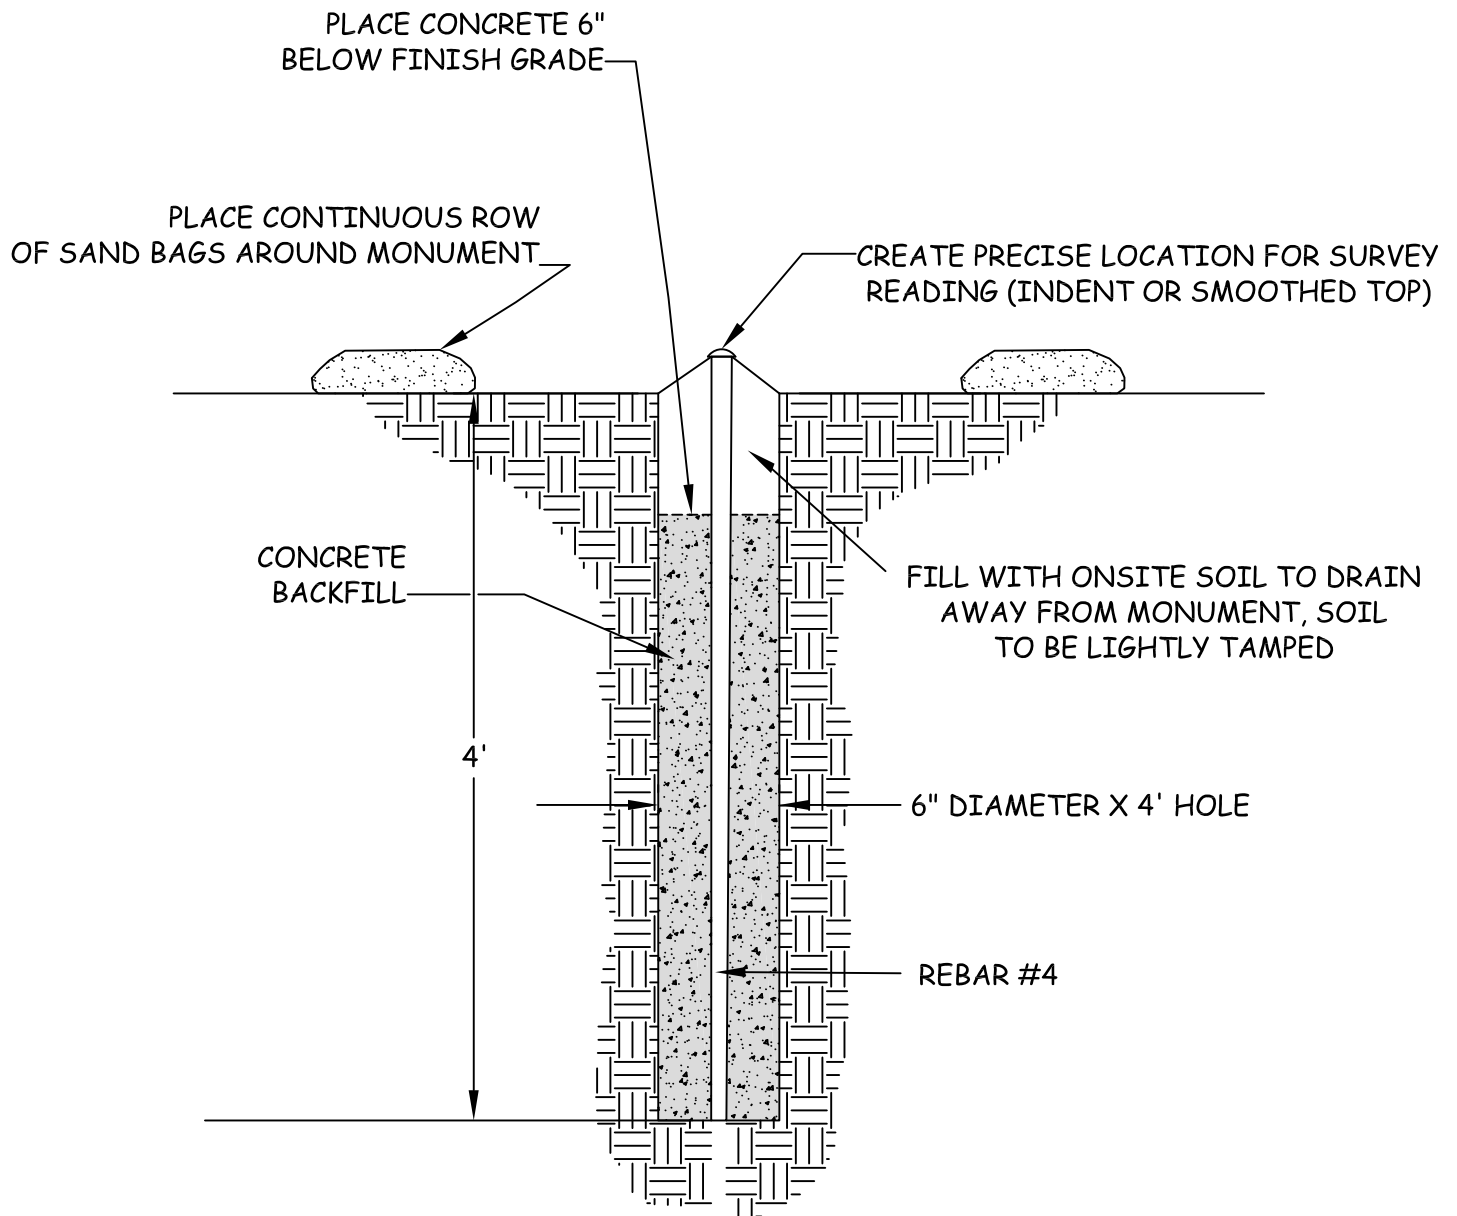


NO CONSTRUCTION EQUIPMENT WITHIN 25 FEET OF ANY INSTALLED SETTLEMENT MONUMENTS



TYPICAL SURFACE SETTLEMENT MONUMENT



TOP VIEW

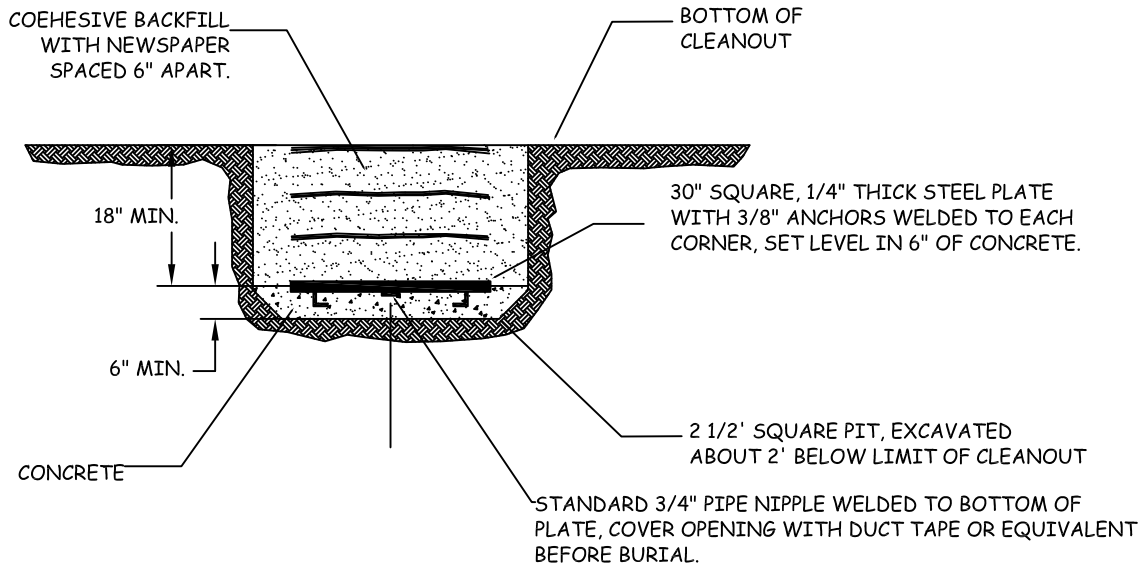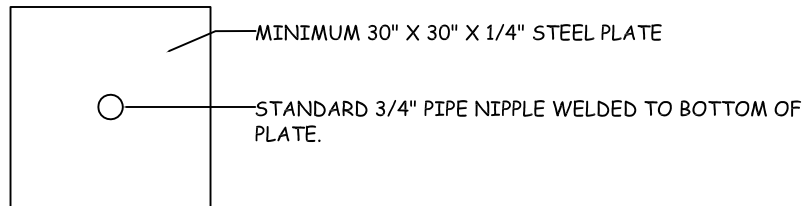

1. SURVEY FOR HORIZONTAL AND VERTICAL LOCATION TO NEAREST .01 INCH PRIOR TO BACKFILL USING KNOW LOCATIONS THAT WILL REMAIN INTACT DURING THE DURATION OF THE MONITORING PROGRAM. KNOW POINTS EXPLICITLY NOT ALLOWED ARE THOSE LOCATED ON FILL OR THAT WILL BE DESTROYED DURING GRADING.
2. IN THE EVENT OF DAMAGE TO SETTLEMENT PLATE DURING GRADING, CONTRACTOR SHALL IMMEDIATELY NOTIFY THE GEOTECHNICAL ENGINEER AND SHALL BE RESPONSIBLE FOR RESTORING THE SETTLEMENT PLATES TO WORKING ORDER.
3. DRILL TO RECOVER AND ATTACH RISER PIPE.



TYPICAL SETTLEMENT PLATE AND RISER

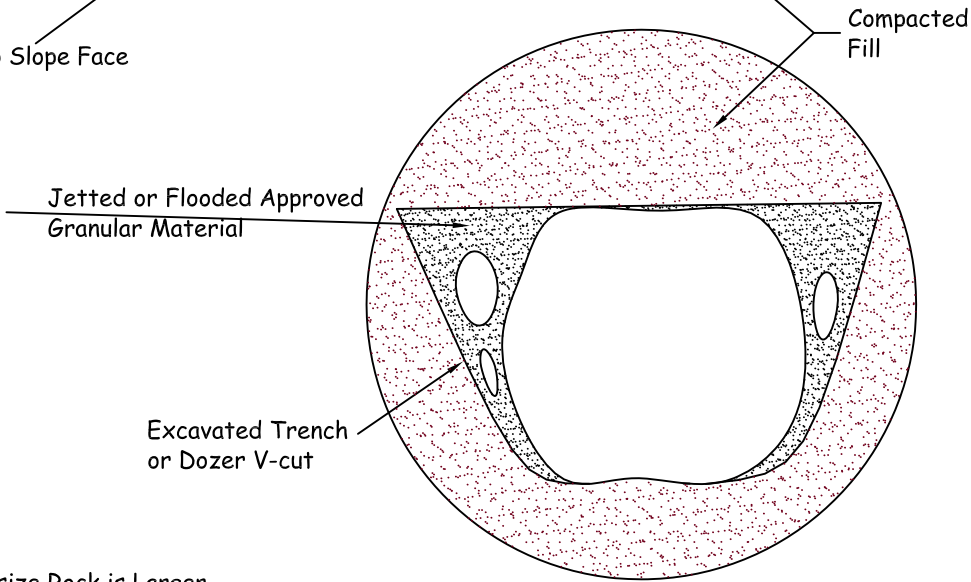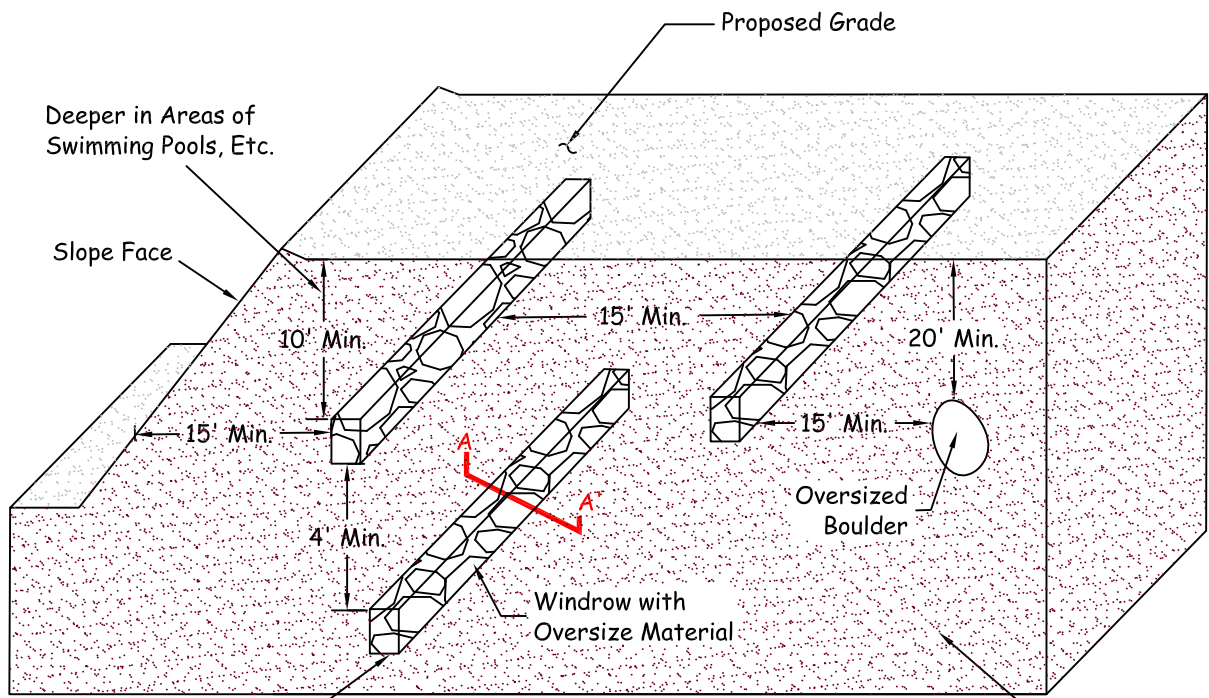

Note: Oversize Rock is Larger than 8" in Maximum Dimension.

Section A-A'



OVERSIZE ROCK DISPOSAL DETAIL