

Appendix D

Geotechnical Engineering Investigation



SALEM
engineering group, inc.

GEOTECHNICAL ENGINEERING INVESTIGATION

**PROPOSED ASSISTED LIVING AND MEMORY CARE
80134 WINCHESTER ROAD
TEMECULA, CALIFORNIA**

**SALEM PROJECT NO. 3-222-0213
APRIL 4, 2022**

PREPARED FOR:

**MR. COREY FILE
WILLIS DEVELOPMENT
755 N. PEACH AVENUE, SUITE E6
CLOVIS, CA 93611**

PREPARED BY:

**SALEM ENGINEERING GROUP, INC.
8711 MONROE COURT, SUITE A
RANCHO CUCAMONGA, CA 91730
P: (909) 980-6455
F: (909) 980-6435
www.salem.net**



8711 Monroe Court, Suite A
Rancho Cucamonga, CA 91730
Phone (909) 980-6455
Fax (909) 980-6435

April 4, 2022

Project No. 3-222-0213

Mr. Corey File
Willis Development
755 N. Peach Avenue, Suite E6
Clovis, CA 93611

**SUBJECT: GEOTECHNICAL ENGINEERING INVESTIGATION
PROPOSED ASSISTED LIVING AND MEMORY CARE
80134 WINCHESTER ROAD
TEMECULA, CALIFORNIA**

Dear Mr. File:

At your request and authorization, SALEM Engineering Group, Inc. (SALEM) has prepared this Geotechnical Engineering Investigation report for the Proposed Assisted Living and Memory Care Facility to be located at the subject site.

The accompanying report presents our findings, conclusions, and recommendations regarding the geotechnical aspects of designing and constructing the project as presently proposed. In our opinion, the proposed project is feasible from a geotechnical viewpoint provided our recommendations are incorporated into the design and construction of the project.

We appreciate the opportunity to assist you with this project. Should you have questions regarding this report or need additional information, please contact the undersigned at (909) 980-6455.

Respectfully Submitted,

SALEM ENGINEERING GROUP, INC.

A handwritten signature in blue ink, appearing to read 'Ibrahim Foud Ibrahim'.

Ibrahim Foud Ibrahim, PE
Senior Managing Engineer
RCE 86724

A handwritten signature in blue ink, appearing to read 'Clarence Jiang'.

Clarence Jiang, GE
Senior Geotechnical Engineer
RCE 52762 / RGE 2549

TABLE OF CONTENTS

1. PURPOSE AND SCOPE.....	1
2. PROJECT DESCRIPTION.....	1
3. SITE LOCATION AND DESCRIPTION	2
4. FIELD EXPLORATION	2
5. LABORATORY TESTING	3
6. GEOLOGIC SETTING	3
7. GEOLOGIC HAZARDS	3
7.1 Faulting and Seismicity.....	3
7.2 Surface Fault Rupture	4
7.3 Ground Shaking.....	4
7.4 Liquefaction.....	5
7.5 Lateral Spreading.....	5
7.6 Flood	6
7.7 Tsunamis and Seiches.....	6
8. SOIL AND GROUNDWATER CONDITIONS	6
8.1 Subsurface Conditions	6
8.2 Groundwater	6
8.3 Soil Corrosion Screening	7
8.4 Percolation Testing	7
9. CONCLUSIONS AND RECOMMENDATIONS	9
9.1 General	9
9.2 Seismic Design Criteria	12
9.3 Soil and Excavation Characteristics	13
9.4 Materials for Fill	13
9.5 Grading.....	14
9.6 Option 1 - Shallow Foundations with Geogrid.....	16
9.7 Option 2 – Structural Slabs	18
9.8 Concrete Slabs-on-Grade	19
9.9 Lateral Earth Pressures and Frictional Resistance	20
9.10 Retaining Walls	21
9.11 Temporary Excavations	22
9.12 Underground Utilities	23
9.13 Surface Drainage	23
9.14 Pavement Design	24
10. PLAN REVIEW, CONSTRUCTION OBSERVATION AND TESTING.....	25
10.1 Plan and Specification Review.....	25
10.2 Construction Observation and Testing Services.....	25
11. LIMITATIONS AND CHANGED CONDITIONS.....	25
REFERENCES	27

TABLE OF CONTENTS (cont.)

FIGURES

Figure 1, Vicinity Map

Figure 2, Site Plan

APPENDIX A – FIELD INVESTIGATION

Figures A-1 through A-11, Logs of Exploratory Soil Borings B-1 through B-11

Percolation Testing Results, P-1 through P-4

Liquefaction Analysis Report

APPENDIX B – LABORATORY TESTING

Consolidation Test Results

Direct Shear Test Results

Gradation Curves

Corrosivity Test Results

Maximum Density and Optimum Moisture Test Results

APPENDIX C – EARTHWORK AND PAVEMENT SPECIFICATIONS

**GEOTECHNICAL ENGINEERING INVESTIGATION
PROPOSED ASSISTED LIVING AND MEMORY CARE
80134 WINCHESTER ROAD
TEMECULA, CALIFORNIA**

1. PURPOSE AND SCOPE

This report presents the results of our Geotechnical Engineering Investigation for the Proposed Assisted Living and Memory Care Facility to be located at 80134 Winchester Road in Temecula, California (see Figure 1, Vicinity Map).

The purpose of our geotechnical engineering investigation was to observe and sample the subsurface conditions encountered at the site, and provide conclusions and recommendations relative to the geotechnical aspects of constructing the project as presently proposed. The scope of our services for the investigation does not include a slope stability evaluation of the site. The scope of work of this investigation does not include a slope stability analysis

The scope of this investigation included a field exploration, percolation testing, laboratory testing, engineering analysis and the preparation of this report. Our field exploration was performed on March 15 and 16, 2022, and included the drilling of eleven (11) small-diameter soil borings to a maximum depth of 51½ feet at the site. Additionally, four (4) percolation test holes were performed on March 16, 2022, at depths of 2 to 10 feet below existing grade for determination of the percolation rate. The locations of the soil borings and percolation tests are depicted on the Site Plan, Figure 2. A detailed discussion of our field investigation, exploratory boring logs are presented in Appendix A.

Laboratory tests were performed on selected soil samples obtained during the investigation to evaluate pertinent physical properties for engineering analyses. Appendix B presents the laboratory test results in tabular and graphic format.

The recommendations presented herein are based on analysis of the data obtained during the investigation and our experience with similar soil and geologic conditions. If project details vary significantly from those described herein, SALEM should be contacted to determine the necessity for review and possible revision of this report. Earthwork and Pavement Specifications are presented in Appendix C. If text of the report conflict with the specifications in Appendix C, the recommendations in the text of the report have precedence.

2. PROJECT DESCRIPTION

Based on the Site Plan provided to us, we understand that the proposed development of the site will include construction of a 2-story, 95,741 square-foot Assisted Living and Memory Care Building on a 6.28-acre vacant land. The Assisted Living portion of the building will include 13 Studio units, 55 One-

Bedroom units, and 9 Two-Bedroom units for a total of 77 Units with 86 Bedrooms. The Memory Care portion of the building will include 8 One-Bedroom units and 8 Two-Bedroom units for a total of 16 Units with 24 Bedrooms. Maximum wall load is expected to be on the order of 5 kips per linear foot. Maximum column load is expected to be on the order of 100 kips. Floor slab soil bearing pressure is expected to be on the order of 150 psf.

Based on the Grading Plan¹ dated December 24, 2021, we anticipate that most of the site will receive approximately 5 to 7 feet of fill soils for providing a level building pad and positive site drainage. In the event that changes occur in the nature or design of the project, the conclusions and recommendations contained in this report will not be considered valid unless the changes are reviewed and the conclusions of our report are modified. The site configuration and locations of proposed improvements are shown on the Site Plan, Figure 2.

3. SITE LOCATION AND DESCRIPTION

The subject site is irregular in shape and encompasses approximately 6.28 acres. The site is located near the northeast corner of the intersection of Winchester Road and Rustic Glen Drive in the City of Temecula, California (see Vicinity Plan, Figure 1).

The site is currently a vacant land with scattered weeds and vegetation. The southern portion of the site is approximately 3 to 4 feet higher in grade than that of the major northern portion of the site. The western boundary of the site is a 10 to 12 foot descending slope that separates Winchester Road right-of-way and the flatter area of the site. Tualota Creek Chanel is located adjacent to the southeastern boundary of the subject site. An approximately 5-foot ascending slope, followed by a dirt road and then followed by an approximately 10 to 12-foot descending slope separate the site from the bottom of Tualota Creek Chanel. The flatter area of the site is slightly sloping to the southeast with elevations ranging between 1,095 to 1,090 feet above mean sea level based on Google Earth imagery.

4. FIELD EXPLORATION

Our field exploration consisted of site surface reconnaissance and subsurface exploration. The exploratory test borings (B-1 through B-11) were drilled on March 15 and 16, 2022, in the area shown on the Site Plan, Figure 2. The test borings were advanced with 6½-inch hollow stem augers rotated by a truck-mounted CME 75 drill rig. The test borings were extended to a maximum depth of 51½ feet below existing grade.

The materials encountered in the test borings were visually classified in the field, and logs were recorded by a field engineer and stratification lines were approximated on the basis of observations made at the time of drilling. Visual classification of the materials encountered in the test borings were generally made in accordance with the Unified Soil Classification System (ASTM D2488).

A soil classification chart and key to sampling is presented on the Unified Soil Classification Chart, in Appendix "A." The logs of the test borings are presented in Appendix "A." The Boring Logs include the soil type, color, moisture content, dry density, and the applicable Unified Soil Classification System symbol.

¹ Diamond West (DW), Grading Plan, Willis Development Winchester Temecula, December 24, 2021

The location of the test borings were determined by measuring from features shown on the Site Plan, provided to us. Hence, accuracy can be implied only to the degree that this method warrants. The actual boundaries between different soil types may be gradual and soil conditions may vary. For a more detailed description of the materials encountered, the Boring Logs in Appendix "A" should be consulted. Soil samples were obtained from the test borings at the depths shown on the logs of borings. The MCS samples were recovered and capped at both ends to preserve the samples at their natural moisture content; SPT samples were recovered and placed in a sealed bag to preserve their natural moisture content. After completion of the drilling, the borings were backfilled with soil cuttings.

5. LABORATORY TESTING

Laboratory tests were performed on selected soil samples to evaluate their physical characteristics and engineering properties. The laboratory-testing program was formulated with emphasis on the evaluation of natural moisture, density, shear strength, consolidation potential, maximum density and optimum moisture determination, and gradation of the materials encountered.

In addition, chemical tests were performed to evaluate the corrosivity of the soils to buried concrete and metal. Details of the laboratory test program and the results of laboratory test are summarized in Appendix "B." This information, along with the field observations, was used to prepare the final boring logs in Appendix "A."

6. GEOLOGIC SETTING

The subject site is located within the Peninsular Ranges Geomorphic Province of California. The province varies from approximately 30 miles to 100 miles in width. In general, the province consists of rugged mountains underlain by Jurassic metavolcanic and metasedimentary rocks and Cretaceous igneous rocks of the Southern California batholith. The subject site is more specifically located in an area of relatively low relief (Temecula Valley) between the Elsinore Mountains portion of the Santa Ana Mountains to the west, and the Temecula Hills to the east. The site lies close to the contact of the Santa Ana Mountains in the Perris structural blocks. The Perris block to the east is underlain by lithologically diverse prebatholithic metasedimentary rocks intruded by plutons of the Cretaceous Peninsular Ranges batholith. Supra-batholithic volcanic rocks are preserved in the western part of the block. Several erosional and depositional surfaces are developed on the Perris block and thin to relatively thick sections of nonmarine, mainly Quaternary sediments discontinuously cover the basement.

7. GEOLOGIC HAZARDS

7.1 Faulting and Seismicity

Based on the proximity of several dominant active faults and seismogenic structures, as well as the historic seismic record, the area of the subject site is considered subject to relatively high seismicity. The seismic hazard most likely to impact the site is ground-shaking due to a large earthquake on one of the major active regional faults. Moderate to large earthquakes have affected the area of the subject site within historic time.

There are no known active fault traces in the project vicinity. The project area is not within an Alquist-Priolo Earthquake Fault (Special Studies) Zone and will not require a special site investigation by an

Engineering Geologist. Soils on site are classified as Site Class D in accordance with Chapter 16 of the California Building Code. The proposed structures are determined to be in Seismic Design Category D.

To determine the distance of known active faults within 100 miles of the site, we used the United States Geological Survey (USGS) web-based application *2008 National Seismic Hazard Maps - Fault Parameters*. Site latitude is 33.5434° North; site longitude is -117.1426° West. The ten closest active faults are summarized below in Table 7.1.

**TABLE 7.1
REGIONAL FAULT SUMMARY**

Fault Name	Distance to Site (miles)	Maximum Earthquake Magnitude, M_w
Elsinore; W+GI+T+J+CM	2.0	7.9
Elsinore; W+GI	9.6	7.3
Elsinore; J+CM	16.0	7.5
San Jacinto; A+CC+B+SM	18.3	7.6
San Jacinto; SBV+SJV+A+CC+B+SM	18.7	7.9
San Jacinto; SBV+SJV	20.1	7.4
Newport Inglewood Connected alt 2	30.1	7.5
San Joaquin Hills	30.9	7.1
Chino, alt 2	31.2	6.8
Elsinore; W	32.5	7.0

The faults tabulated above and numerous other faults in the region are sources of potential ground motion. However, earthquakes that might occur on other faults throughout California are also potential generators of significant ground motion and could subject the site to intense ground shaking.

7.2 Surface Fault Rupture

The site is not within a currently established State of California Earthquake Fault Zone or Riverside County Fault Zone for surface fault rupture hazards.

No active faults with the potential for surface fault rupture are known to pass directly beneath the site. Fault rupture-related surface features were not observed during site reconnaissance. Therefore, the potential for surface rupture due to faulting occurring beneath the site during the design life of the proposed development is considered low.

7.3 Ground Shaking

Seismic coefficients and spectral response acceleration values were developed based on the 2019 California Building Code (CBC). The CBC methodology for determining design ground motion values is based on the Office of Statewide Health Planning and Development (OSHPD) Seismic Design Maps, which incorporate both probabilistic and deterministic seismic ground motion.

Based on the 2019 CBC, a Site Class D represents the on-site soil conditions. A table providing the recommended design acceleration parameters for the project site, based on a Site Class D designation, is included in Section 9.2.1 of this report. Based on the Office of Statewide Health Planning and Development (OSHPD) Seismic Design Maps, the estimated design peak ground acceleration adjusted for site class effects (PGA_M) was determined to be 0.748g (based on both probabilistic and deterministic seismic ground motion).

7.4 Liquefaction

Soil liquefaction is a state of soil particles suspension caused by a complete loss of strength when the effective stress drops to zero. Liquefaction normally occurs under saturated conditions in soils such as sand in which the strength is purely frictional. Primary factors that trigger liquefaction are: moderate to strong ground shaking (seismic source), relatively clean, loose granular soils (primarily poorly graded sands and silty sands), and saturated soil conditions (shallow groundwater). Due to the increasing overburden pressure with depth, liquefaction of granular soils is generally limited to the upper 50 feet of a soil profile. However, liquefaction has occurred in soils other than clean sand.

The soils on the project site consisted predominately of loose to very dense silty sand, silty sand/sandy silt, clayey sand, well-graded sand with silt and various amounts of gravel, poorly graded sand with silt, poorly graded sand with clay, well-graded sand, and poorly graded sand; and stiff to very stiff sandy silt. Groundwater was not encountered during this investigation. The historically highest groundwater is estimated to be at a depth of approximately 20 feet below ground surface based on Seismic Hazard Zone Report 115, Murrieta Quadrangle, Plate 1.2.

Based on the Riverside County Office of Information Technology GIS website, the site is located within a moderate to very high liquefaction zone. The potential for soil liquefaction during a seismic event was evaluated using LiqIT computer program (version 4.7.5) developed by GeoLogismiki of Greece. For the analysis, a maximum earthquake magnitude of 7.9 Mw, a peak horizontal ground surface acceleration of 0.75g and a groundwater depth of 20 feet were considered appropriate for the liquefaction analysis. The liquefaction analysis indicated that the site soils had a moderate potential for liquefaction under seismic conditions and the total liquefaction-induced settlement was calculated to be 1.48 inches. Liquefaction-induced differential settlement is estimated to be 1 inch over a horizontal distance of 30 feet. The liquefaction analysis is included in Appendix A. The proposed site preparation methods recommended on our geotechnical report should address these geotechnical issues.

7.5 Lateral Spreading

Lateral spreading is a phenomenon in which soils move laterally during seismic shaking and is often associated with liquefaction. The amount of movement depends on the soil strength, duration and intensity of seismic shaking, topography, and free face geometry.

Tucalota Creek is located near the east/southeast boundary of the subject property. Based on Grading Plan, dated December 24, 2021, the invert/bottom of the creek is shown to be approximately at 1,085 feet above mean sea level (approximately 5 feet lower than the current elevation of the major area of the site, approximately 10 to 12 feet lower than the proposed elevation of the major area of the site). Groundwater was not encountered during our investigation. The historically highest groundwater is estimated to be at a depth of approximately 20 feet below ground surface based on Seismic Hazard Zone Report 115, Murrieta

Quadrangle, Plate 1.2. This historically high groundwater level is below invert/bottom of creek level. Based on our liquefaction analysis, all of the potentially liquefiable (loose to slightly medium dense saturated cohesionless soils) were identified to be below a depth of 20 feet below existing site grades. Based on this, all liquefiable soils will have vertical and lateral confinement from overlaying soils. In addition, the fines corrected $(N1)_{60}$ for all of the saturated cohesionless sediments (potentially liquefiable layers) is above 15. Due to the depth of groundwater, confinement pressure, and the fines corrected $(N1)_{60}$ of saturated cohesionless sediments (potentially liquefiable layers) being more than 15, we judge the likelihood of lateral spreading to be low.

7.6 Flood

The Riverside County Office of Information Technology GIS website shows the subject site is not located in a flood zone.

7.7 Tsunamis and Seiches

The site is not located within a coastal area. Therefore, tsunamis (seismic sea waves) are not considered a significant hazard at the site. Seiches are large waves generated in enclosed bodies of water in response to ground shaking. No major water-retaining structures are located immediately up gradient from the project site. Flooding from a seismically-induced seiche is considered unlikely.

8. SOIL AND GROUNDWATER CONDITIONS

8.1 Subsurface Conditions

The subsurface conditions encountered appear typical of those found in the geologic region of the site. In general, the soils within the exploration consisted of loose to very dense silty sand, silty sand/sandy silt clayey sand, well-graded sand with silt and various amounts of gravel, poorly graded sand with silt, poorly graded sand with clay, well-graded sand, and poorly graded sand; and stiff to very stiff sandy silt.

Fill soils may be present onsite between our test boring locations. Verification of the extent of fill should be determined during site grading. Field and laboratory tests suggest that the deeper native soils are moderately strong and slightly compressible. These soils extended to the termination depth of our borings.

The soils were classified in the field during the drilling and sampling operations. The stratification lines were approximated by the field engineer on the basis of observations made at the time of drilling. The actual boundaries between different soil types may be gradual and soil conditions may vary. For a more detailed description of the materials encountered, the Boring Logs in Appendix "A" should be consulted. The Boring Logs include the soil type, color, moisture content, dry density, and the applicable Unified Soil Classification System symbol. The locations of the test borings were determined by measuring from feature shown on the Site Plan, provided to us. Hence, accuracy can be implied only to the degree that this method warrants.

8.2 Groundwater

The test boring locations were checked for the presence of groundwater during and after the drilling operations. Free groundwater was not encountered during this investigation. The historically highest

groundwater is estimated to be at a depth of approximately 20 feet below ground surface based on Seismic Hazard Zone Report 115, Murrieta Quadrangle Plate 1.2.

It should be recognized that water table elevations may fluctuate with time, being dependent upon seasonal precipitation, irrigation, land use, localized pumping, and climatic conditions as well as other factors. Therefore, water level observations at the time of the field investigation may vary from those encountered during the construction phase of the project. The evaluation of such factors is beyond the scope of this report.

8.3 Soil Corrosion Screening

Excessive sulfate in either the soil or native water may result in an adverse reaction between the cement in concrete and the soil. The 2014 Edition of ACI 318 (ACI 318) has established criteria for evaluation of sulfate and chloride levels and how they relate to cement reactivity with soil and/or water.

A soil sample was obtained from the project site and was tested for the evaluation of the potential for concrete deterioration or steel corrosion due to attack by soil-borne soluble salts and soluble chloride. The water-soluble sulfate concentration in the saturation extract from the soil sample was detected to be 153 mg/kg. ACI 318 Tables 19.3.1.1 and 19.3.2.1 outline exposure categories, classes, and concrete requirements by exposure class. ACI 318 requirements for site concrete based upon soluble sulfate are summarized in Table 8.3 below.

**TABLE 8.3
WATER SOLUBLE SULFATE EXPOSURE REQUIREMENTS**

Water Soluble Sulfate (SO ₄) in Soil, Percentage by Weight	Exposure Severity	Exposure Class	Maximum w/cm Ratio	Minimum Concrete Compressive Strength	Cementations Materials Type
0.0153	Not Severe	S0	N/A	2,500 psi	II

The water-soluble chloride concentration detected in saturation extract from the soil samples was 35 mg/kg. This level of chloride concentration is considered to be mildly corrosive. It is recommended that a qualified corrosion engineer be consulted regarding protection of buried steel or ductile iron piping and conduit or, at a minimum, applicable manufacturer's recommendations for corrosion protection of buried metal pipe be closely followed.

8.4 Percolation Testing

Four percolation tests (P-1 through P-4) were performed within assumed infiltration areas and were conducted in accordance with the guidelines established by the County of Riverside. The approximate locations of the percolation tests are shown on the attached Site Plan, Figure 2.

The boreholes were advanced to the depths shown on the percolation test worksheets. The holes were pre-saturated before percolation testing commenced. Percolation rates were measured by filling the test holes with clean water and measuring the water drops at a certain time interval.

The percolation rate data are presented in tabular format at the end of this Report. The difference in the percolation rates are reflected by the varied type of soil materials at the bottom of the test holes. The test results are shown on the table below.

TABLE 8.4
PERCOLATION TEST RESULTS

Test No.	Depth (feet)	Measured Percolation Rate (min/inch)	Infiltration Rate* (inch/hour)	Soil Type**
P-1	9.6	13.9	0.60	Poorly graded SAND with Silt (SP-SM)
P-2	2.0	11.9	0.77	Poorly graded SAND with Silt (SP-SM)
P-3	9.7	19.2	0.55	Poorly graded SAND with Silt (SP-SM)
P-4	2.4	27.8	0.41	Silty SAND (SM)

* Tested infiltration Rate = $(\Delta H \ 60 \ r) / (\Delta t(r + 2H_{avg}))$, no factor of safety applied

**At bottom of test hole.

The soil infiltration or percolation rates are based on tests conducted with clear water. The infiltration/percolation rates may vary with time as a result of soil clogging from water impurities. The infiltration/percolation rates will deteriorate over time due to the soil conditions and an appropriate factor of safety (FS) may be applied. The owner or civil engineer may elect to use a lower FS for the design; however, more frequent maintenance will be expected. The soils may also become less permeable to impermeable if the soil is compacted. Thus, periodic maintenance consisting of clearing the bottom of the drainage system of clogged soils should be expected.

The infiltration/percolation rate may become slower if the surrounding soil is wet or saturated due to prolonged rainfalls. Additional percolation tests should be conducted at bottom of the drainage system during construction to verify the infiltration/percolation rate. Groundwater, if closer to the bottom of the drainage system, will also reduce the infiltration/percolation rate.

The scope of our services did not include a groundwater study and was limited to the performance of percolation testing and soil profile description, and the submitted data only. Our services did not include those associated with septic system design. Neither did services include an Environmental Site Assessment for the presence or absence of hazardous and/or toxic materials in the soil, groundwater, or atmosphere; or the presence of wetlands. Any statements, or absence of statements, in this report or on any boring logs regarding odors, unusual or suspicious items, or conditions observed, are strictly for descriptive purposes and are not intended to convey engineering judgment regarding potential hazardous and/or toxic assessment.

The geotechnical engineering information presented herein is based upon professional interpretation utilizing standard engineering practices. The work conducted through the course of this investigation, including the preparation of this report, has been performed in accordance with the generally accepted standards of geotechnical engineering practice, which existed in the geographic area at the time the report was written. No other warranty, express or implied, is made. Please be advised that when performing percolation testing services in relatively small diameter borings, that the testing may not fully model the

actual full scale long term performance of a given site. This is particularly true where percolation test data is to be used in the design of large infiltration system such as may be proposed for the site. The measured percolation rate includes dispersion of the water at the sidewalls of the boring as well as into the underlying soils. Subsurface conditions, including percolation rates, can change over time as fine-grained soils migrate. It is not warranted that such information and interpretation cannot be superseded by future geotechnical engineering developments. We emphasize that this report is valid for the project outlined above and should not be used for any other sites.

9. CONCLUSIONS AND RECOMMENDATIONS

9.1 General

- 9.1.1 Based upon the data collected during this investigation, and from a geotechnical engineering standpoint, it is our opinion that the site is suitable for the proposed construction of improvements at the site as planned, provided the recommendations contained in this report are incorporated into the project design and construction. Conclusions and recommendations provided in this report are based on our review of available literature, analysis of data obtained from our field exploration and laboratory testing program, and our understanding of the proposed development at this time.
- 9.1.2 The scope of our services for the investigation does not include a slope stability evaluation of the site. Slope construction to a maximum height of approximately 8 to 10 feet is anticipated for the proposed development.
- 9.1.3 The primary geotechnical constraints identified in our investigation is the presence of potentially compressible material and potentially liquefiable material at the site. Recommendations to mitigate the effects of these soils are provided in this report.
- 9.1.4 Fill materials might be present on site between boring locations. Undocumented fill materials are not suitable to support any future structure and should be replaced with Engineered Fill. Prior to fill placement, Salem Engineering Group, Inc. should inspect the bottom of the excavation to verify the fill condition.
- 9.1.5 Site demolition activities shall include removal of all surface obstructions not intended to be incorporated into final site design. In addition, underground buried structures and/or utility lines encountered during demolition and construction should be properly removed and the resulting excavations backfilled with Engineered Fill. It is suspected that possible demolition activities of the existing structures may disturb the upper soils. After demolition activities, it is recommended that disturbed soils be removed and/or recompacted.
- 9.1.6 Surface vegetation consisting of grasses and other similar vegetation should be removed by stripping to a sufficient depth to remove organic-rich topsoil. The upper 4 to 6 inches of the soils containing, vegetation, roots and other objectionable organic matter encountered at the time of grading should be stripped and removed from the surface. Deeper stripping may be required in localized areas. The stripped vegetation, will not be suitable for use as Engineered Fill or within 5 feet of building pads or within pavement areas. However, stripped topsoil may be stockpiled and reused in landscape or non-structural areas or exported from the site.

- 9.1.7 Loose sandy soils were encountered within the soil borings at the project site. A seismic hazard, which could cause damage to the proposed development during seismic shaking, is the post-liquefaction settlement of liquefied sands. Liquefaction potential at the site was evaluated using the “LiqIT” computer program. Based on our evaluation, the potential for liquefaction at the site is moderately high. Mitigation measures are recommended to minimize structural damage due to the liquefaction. The potential for structural damage at the site can be minimized by using geogrid (see Section 9.6), a structural slab system (see Section 9.7), stone columns, or supporting the building on a deep foundation system.
- 9.1.8 Geogrid is a commonly and economically method to reduce structural damage due to liquefaction. This method has been accepted by cities and counties throughout California, and implemented into design and construction of many retail buildings. However, this method may not be accepted by some local jurisdictions. We have no control for the acceptance of this method for this project. To use the geogrid method, it’s recommended the proposed building be designed and the structural drawings be prepared after this report is approved by the City of Temecula or the County of Riverside.
- 9.1.9 Recommendations for the geogrid system (option 1) are provided herein. As an alternative to the use of geogrid, the proposed structure may be supported by a structural slab system. A structural slab system will help reduce structural damage caused by liquefaction. Recommendations for a structural slab system (option 2) are provided in the Foundation’s section of this report.
- 9.1.10 In lieu of the geogrid reinforcement method or the structural slab system, the building may be supported on deep foundations or by utilizing stone columns. Recommendations for a deep foundation system or the stone column method may be provided to the client by Salem Engineering Group, Inc. upon request.
- 9.1.11 All Engineered Fill (including scarified ground surfaces and backfill) should be placed in thin lifts to allow for adequate bonding and compaction (typically 6- to 8-inches in loose thickness).
- 9.1.12 Engineered Fill should be moisture conditioned to near optimum moisture content and compacted to at least 95 percent relative compaction.
- 9.1.13 All grading and earthwork should be done in accordance with the Grading Ordinances of the City of Temecula or the County of Riverside and the applicable portions of the General Earthwork / Pavement Specifications in Appendix C and the following provisions.
- 9.1.14 All slopes should be constructed in accordance with the typical figures and details as shown in the General Earthwork and Pavement Specifications, Appendix C (i.e. Stabilization Fill, Buttress Fill, Daylight Shear key, Shear Key, Fill Slope above Natural Ground, Fill Slope Above Cut Slope, Backdrain, Geofabric Subdrain, Benching for Compacted Fill, Rock Disposal, Canyon Subdrain and Transition Lot).
- 9.1.15 Fill and cut slopes should not be constructed steeper than at a gradient of 2:1 (horizontal to vertical).

- 9.1.16 Where fill slopes are to be constructed on original ground that slopes steeper than 6:1 (horizontal to vertical), the ground should be stepped or benched. The benches should be cut into the dense slope as the grading operations proceed. The first bench (base or key bench) should be at least 15 feet wide. Each bench should consist of a minimum 8 feet wide of level terrace, with the rise to the next bench held for 4 feet or less.
- 9.1.17 The horizontal distance between the outer edges of the footing bottom and the adjacent slope face should be at least 10 feet.
- 9.1.18 For the proposed buildings adjacent to the descending slopes, a setback equals to one-third (1/3) of the slope height but needs not exceed 40 feet should be provided between the footing bottom and the slope face.
- 9.1.19 For the buildings below slopes, it should be set a sufficient distance from the slope to provide protection from slope drainage, erosion and shallow failure. The setback, between the footing bottom and the slope face, should equal to one-half (1/2) of the slope height but needs not exceed 20 feet.
- 9.1.20 For the buildings above slopes, it should be set a sufficient distance from the slope to provide protection from slope drainage, erosion and shallow failure. The setback, between the footing bottom and the slope face, should equal to one-thirds (1/3) of the slope height but needs not exceed 40 feet.
- 9.1.21 To reduce the erosion of graded slopes, it is recommended that all slopes be planted with ground cover vegetation and deep rooted vegetation as soon as practical. The proper maintenance of proper lot drainage and vegetation should be performed. Over-irrigation should be prevented. A rodent control program should be established and maintained.
- 9.1.22 All surface runoff should be directed away from the slope and toward approved drainage devices.
- 9.1.23 SALEM shall review the project grading plans and foundation plans prior to final design submittal to assess whether our recommendations have been properly implemented and evaluate if additional analysis and/or recommendations are required. If SALEM is not provided plans and specifications for review, we cannot assume any responsibility for the future performance of the project.
- 9.1.24 SALEM shall be present at the site during site demolition and preparation to observe site clearing/demolition, preparation of exposed surfaces after clearing, and placement, treatment and compaction of fill material.
- 9.1.25 SALEM's observations should be supplemented with periodic compaction tests to establish substantial conformance with these recommendations. Moisture content of footings and slab subgrade should be tested immediately prior to concrete placement. SALEM should observe foundation excavations prior to placement of reinforcing steel or concrete to assess whether the actual bearing conditions are compatible with the conditions anticipated during the preparation of this report.

9.2 Seismic Design Criteria

9.2.1 For seismic design of the structures, and in accordance with the seismic provisions of the 2019 CBC, our recommended parameters are shown below. These parameters were determined using California’s Office of Statewide Health Planning and Development (OSHPD) Seismic Design Map Tool Website (<https://seismicmaps.org/>) in accordance with the 2019 CBC. The Site Class was determined based on the soils encountered during our field exploration.

**TABLE 9.2.1
SEISMIC DESIGN PARAMETERS**

Seismic Item	Symbol	Value	ASCE 7-16 or 2019 CBC Reference
Site Coordinates (Datum = NAD 83)		33.5434 Lat -117.1426 Lon	
Site Class	--	D	ASCE 7 Table 20.3-1
Soil Profile Name	--	Stiff Soil	ASCE 7 Table 20.3-1
Risk Category	--	II	Table 1604.5
Site Coefficient for PGA	F_{PGA}	1.1	ASCE 7 Table 11.8-1
Peak Ground Acceleration (adjusted for Site Class effects)	PGA_M	0.748g	ASCE 7 Equation 11.8-1
Seismic Design Category	SDC	D	Table 1613.2.5
Mapped Spectral Acceleration (Short period - 0.2 sec)	S_S	1.537 g	Figure 1613.2.1(1-8)
Mapped Spectral Acceleration (1.0 sec. period)	S_1	0.574 g	Figure 1613.2.1(1-8)
Site Class Modified Site Coefficient	F_a	1	Table 1613.2.3(1)
Site Class Modified Site Coefficient	F_v	1.726*	Table 1613.2.3(2)
MCE Spectral Response Acceleration (Short period - 0.2 sec) $S_{MS} = F_a S_S$	S_{MS}	1.537 g	Equation 16-36
MCE Spectral Response Acceleration (1.0 sec. period) $S_{M1} = F_v S_1$	S_{M1}	0.991 g*	Equation 16-37
Design Spectral Response Acceleration $S_{DS} = \frac{2}{3} S_{MS}$ (short period - 0.2 sec)	S_{DS}	1.024 g	Equation 16-38
Design Spectral Response Acceleration $S_{D1} = \frac{2}{3} S_{M1}$ (1.0 sec. period)	S_{D1}	0.660 g*	Equation 16-39
Short Term Transition Period (S_{D1}/S_{DS}), Seconds	T_S	0.645	ASCE 7-16, Section 11.4.6
Long Period Transition Period (seconds)	T_L	8	ASCE 7-16, Figure 22-14

* Determined per ASCE Table 11.4-2 for use in calculating T_s only.

9.2.2 A Site Specific Ground Motion Analysis was not included in the scope of this investigation. Per ASCE 11.4.8, structures on Site Class D with S_1 greater than or equal to 0.2 may require Site Specific Ground Motion Analysis. However, a site specific motion analysis may not be required based on Exceptions listed in ASCE 11.4.8. The Structural Engineer should verify whether

Exception No. 2 of ASCE 7-16, Section 11.4.8 is valid for the site. In the event that a site specific ground motion analysis is required, SALEM should be contacted for these services.

- 9.2.3 Conformance to the criteria in the above table for seismic design does not constitute any kind of guarantee or assurance that significant structural damage or ground failure will not occur if a large earthquake occurs. The primary goal of seismic design is to protect life, not to avoid all damage, since such design may be economically prohibitive.

9.3 Soil and Excavation Characteristics

- 9.3.1 Based on the soil conditions encountered in our soil borings, the onsite soils can be excavated with moderate effort using conventional heavy-duty excavation equipment.
- 9.3.2 It is the responsibility of the contractor to ensure that all excavations and trenches are properly shored and maintained in accordance with applicable Occupational Safety and Health Administration (OSHA) rules and regulations to maintain safety and maintain the stability of adjacent existing improvements.
- 9.3.3 The near surface soils identified as part of our investigation are, generally slightly moist to moist due to the absorption characteristics of the soil. Earthwork operations may encounter very moist unstable soils which may require removal to a stable bottom. Exposed native soils exposed as part of site grading operations shall not be allowed to dry out and should be kept continuously moist prior to placement of subsequent fill.

9.4 Materials for Fill

- 9.4.1 Excavated soils generated from cut operations at the site are suitable for use as general Engineered Fill in structural areas, provided they have an expansion index of less than 20, do not contain deleterious matter, organic material, or rock material larger than 3 inches in maximum dimension.
- 9.4.2 The preferred materials specified for Engineered Fill are suitable for most applications with the exception of exposure to erosion. Project site winterization and protection of exposed soils during the construction phase should be the sole responsibility of the Contractor, since they have complete control of the project site.
- 9.4.3 Environmental characteristics and corrosion potential of import soil materials should also be considered.
- 9.4.4 Proposed import materials should be sampled, tested, and approved by SALEM prior to its transportation to the site.
- 9.4.5 Import soil shall be well-graded, slightly cohesive silty fine sand or sandy silt, with relatively impervious characteristics when compacted. A clean sand or very sandy soil is not acceptable for this purpose. This material should be approved by the Engineer prior to use and should typically possess the soil characteristics summarized below in Table 9.4.5.

**TABLE 9.4.5
IMPORT FILL REQUIREMENTS**

Minimum Percent Passing No. 200 Sieve	20
Maximum Percent Passing No. 200 Sieve	50
Minimum Percent Passing No. 4 Sieve	80
Maximum Particle Size	3"
Maximum Plasticity Index	12
Maximum CBC Expansion Index	20

9.5 Grading

- 9.5.1 A representative of our firm should be present during all site clearing and grading operations to test and observe earthwork construction. This testing and observation is an integral part of our service as acceptance of earthwork construction is dependent upon compaction of the material and the stability of the material. The Geotechnical Engineer may reject any material that does not meet compaction and stability requirements. Further recommendations of this report are predicated upon the assumption that earthwork construction will conform to recommendations set forth in this section as well as other portions of this report.
- 9.5.2 A preconstruction conference should be held at the site prior to the beginning of grading operations with the owner, contractor, civil engineer and geotechnical engineer in attendance.
- 9.5.3 Site preparation should begin with removal of existing surface/subsurface structures, underground utilities (as required), any existing uncertified fill, and debris. Excavations or depressions resulting from site clearing operations, or other existing excavations or depressions, should be restored with Engineered Fill in accordance with the recommendations of this report.
- 9.5.4 Surface vegetation consisting of grasses and other similar vegetation should be removed by stripping to a sufficient depth to remove organic-rich topsoil. The upper 4 to 6 inches of the soils containing, vegetation, roots and other objectionable organic matter encountered at the time of grading should be stripped and removed from the surface. Deeper stripping may be required in localized areas. The stripped vegetation, will not be suitable for use as Engineered Fill or within 5 feet of building pads or within pavement areas. However, stripped topsoil may be stockpiled and reused in landscape or non-structural areas or exported from the site.
- 9.5.5 Any fill materials encountered during grading should be removed and replaced with engineered fill. The actual depth of the overexcavation and recompaction should be determined by our field representative during construction.
- 9.5.6 Within pavement areas, it is recommended overexcavation and recompaction be performed to a minimum depth of **two (2) feet** below existing grade or **two (2) feet** below proposed grade, whichever is deeper. The overexcavation and recompaction should also extend laterally to a minimum of 2 feet beyond the pavement.

- 9.5.7 Prior to placement of fill soils, the upper 8 to 10 inches of native subgrade soils should be scarified, moisture-conditioned to no less than the optimum moisture content and recompacted to a minimum of 95 percent for granular non-expansive soils of the maximum dry density based on ASTM D1557-12e1 Test Method.
- 9.5.8 All Engineered Fill (including scarified ground surfaces and backfill) should be placed in thin lifts to allow for adequate bonding and compaction (typically 6 to 8 inches in loose thickness).
- 9.5.9 Engineered Fill soils should be placed, moisture conditioned to near optimum moisture content, and compacted to at least 95% relative compaction.
- 9.5.10 Final pavement subgrade should be finished to a smooth, unyielding surface. We further recommend proof-rolling the subgrade with a loaded water truck (or similar equipment with high contact pressure) to verify the stability of the subgrade prior to placing aggregate base.
- 9.5.11 An integral part of satisfactory fill placement is the stability of the placed lift of soil. If placed materials exhibit excessive instability as determined by a SALEM field representative, the lift will be considered unacceptable and shall be remedied prior to placement of additional fill material. Additional lifts should not be placed if the previous lift did not meet the required dry density or if soil conditions are not stable.
- 9.5.12 The most effective site preparation alternatives will depend on site conditions prior to grading. We should evaluate site conditions and provide supplemental recommendations immediately prior to grading, if necessary.
- 9.5.13 We do not anticipate groundwater or seepage to adversely affect construction if conducted during the drier months of the year (typically summer and fall). However, groundwater and soil moisture conditions could be significantly different during the wet season (typically winter and spring) as surface soil becomes wet; perched groundwater conditions may develop. Grading during this time period will likely encounter wet materials resulting in possible excavation and fill placement difficulties. Project site winterization consisting of placement of aggregate base and protecting exposed soils during construction should be performed. If the construction schedule requires grading operations during the wet season, we can provide additional recommendations as conditions warrant.
- 9.5.14 Wet soils may become non conducive to site grading as the upper soils yield under the weight of the construction equipment. Therefore, mitigation measures should be performed for stabilization. Typical remedial measures include: discing and aerating the soil during dry weather; mixing the soil with dryer materials; removing and replacing the soil with an approved fill material or placement of slurry, crushed rocks or aggregate base material; or mixing the soil with an approved lime or cement product.

The most common remedial measure of stabilizing the bottom of the excavation due to wet soil condition is to reduce the moisture of the soil to near the optimum moisture content by having the subgrade soils scarified and aerated or mixed with drier soils prior to compacting. However, the drying process may require an extended period of time and delay the construction operation.

To expedite the stabilizing process, slurry or crushed rock may be utilized for stabilization provided this method is approved by the owner for the cost purpose. If the use of slurry, crushed rock is considered, it is recommended that the upper soft and wet soils be replaced by 6 to 24 inches of 2-sack slurry or ¾-inch to 1-inch crushed rocks. The thickness of the slurry or rock layer depends on the severity of the soil instability. The recommended 6 to 24 inches of crushed rock material will provide a stable platform.

It is further recommended that lighter compaction equipment be utilized for compacting the crushed rock. A layer of geofabric is recommended to be placed on top of the compacted crushed rock to minimize migration of soil particles into the voids of the crushed rock, resulting in soil movement. Although it is not required, the use of geogrid (e.g. Tensar TX7) below the slurry or crushed rock will enhance stability and reduce the required thickness of crushed rock necessary for stabilization. Our firm should be consulted prior to implementing remedial measures to provide appropriate recommendations.

9.6 Option 1 - Shallow Foundations with Geogrid

9.6.1 The site is suitable for use of conventional shallow foundations consisting of continuous strip footings in combination with isolated spread footings bearing on geogrid reinforced Engineered Fill.

9.6.2 Subsurface soils within the site are prone to liquefaction under high ground shaking acceleration during an earthquake. Based on the Grading Study Plan, the building area will receive 5 to 6 feet of fill. Our preliminary calculations indicated that the building areas, and at least **5 feet** beyond, should be over-excavated to a depth of **2 feet below existing grade or 3 feet below proposed footings**, whichever is greater, and the resulting excavation should be backfilled with a layered system of Engineered Fill and geogrid reinforcing fabric.

Any undocumented and uncompacted fills encountered during grading should be removed and replaced with engineered fill. The depth of the over-excavation should be measured from existing ground or rough pad grade, whichever is greater. A preliminary design procedure is provided below. Final design will be provided by the geogrid manufacturer along with our office. Global seismic induced settlement of the site is still anticipated when liquefaction occurs.

Prior to placing the geogrid, the bottom of the subgrade should be scarified to a depth of 10 to 12 inches, moisture conditioned to near optimum moisture, and recompacted to a minimum of 95 percent relative compaction based on ASTM D 1557 latest edition.

The first layer of geogrid reinforcement will be placed directly on the prepared subgrade at a depth of 2 feet below existing grade or 3 feet below proposed footings, whichever is deeper. The geogrid material should be overlapped a minimum of 3 feet in all directions. The interlock between the geogrid and Engineered Fill will provide load transfer. No vehicles may traverse the geogrid prior to placement of the Engineered Fill cover.

The next layer of geogrid should be placed on top of the compacted Engineered Fill. This and subsequent layers need only be overlapped a minimum of 1 foot on all sides. The fill soils

excavated from the area beneath the structure may be moisture conditioned and recompacted between geogrid layers as reinforced fill. The reinforced fill should be moisture conditioned to near optimum moisture content and recompacted to a minimum of 95 percent of the maximum dry density based on ASTM D 1557-12e1 Test Method.

A total of two (2) geogrid layers, including the layer at the base of the excavation should be installed at vertical increments of 1 foot. The geogrid layers should extend to a minimum of 5 feet beyond the exterior footing perimeter of the structure. The geogrid reinforcement fabric should consist of Tensar® NX850 Geogrid. Any additional unstable soils within building areas should be excavated and backfilled with Engineered Fill.

It is recommended that the entire site be excavated at once, and soils be stockpiled on adjacent or nearby properties. The geogrid and excavated soil may then be placed and recompacted as recommended herein.

Alternatively, the contractor may elect to excavate the site in two stages, where excavated soil can be stockpiled over one-half of the site while the other half is mitigated. However, if the contractor elects the option of two stages over the preferred option of using one stage, a minimum of 5 feet of geogrid from the first half should overlap the second half. Furthermore, the overlapping geogrid should be protected from damages, which may be caused by operating equipment. It is further recommended that flexible utility connections be used for the project.

- 9.6.3 It is recommended that continuous bearing wall footings to be utilized for the building have a minimum width of 15 inches, and a minimum embedment depth of 18 inches below lowest adjacent pad grade. Isolated column footings should have a minimum width of 24 inches, and a minimum embedment depth of 18 inches below lowest adjacent pad grade.
- 9.6.4 Footing concrete should be placed into neat excavation. The footing bottoms shall be maintained free of loose and disturbed soil.
- 9.6.5 Footings proportioned as recommended above may be designed for the maximum allowable soil bearing pressures shown in the table below.

Loading Condition	Allowable Bearing
Dead Load Only	2,000 psf
Dead-Plus-Live Load	2,500 psf
Total Load, Including Wind or Seismic Loads	3,325 psf

- 9.6.6 For design purposes, total static settlement not exceeding 1 inch may be assumed for shallow foundations. Differential static settlement should not exceed ¼ inches over 20 feet, producing an angular distortion of 0.001. Most of the settlement is expected to occur during construction as the loads are applied. However, additional post-construction settlement may occur if the foundation soils are flooded or saturated. The footing excavations should not be allowed to dry out any time prior to pouring concrete. The total settlement due to severe seismic loads is

expected to be on the order of 1.48 inches. With the geogrid reinforcement, the seismic induced differential settlement is expected to be reduced to approximately ¼ inch over 20 feet.

- 9.6.7 Resistance to lateral footing displacement can be computed using an allowable coefficient of friction factor of 0.40 acting between the base of foundations and the supporting native subgrade.
- 9.6.8 Lateral resistance for footings can alternatively be developed using an equivalent fluid passive pressure of 350 pounds per cubic foot acting against the appropriate vertical native footing faces. The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance. An increase of one-third is permitted when using the alternate load combination in CBC that includes wind or earthquake loads.
- 9.6.9 Underground utilities running parallel to footings should not be constructed in the zone of influence of footings. The zone of influence may be taken to be the area beneath the footing and within a 1:1 plane extending out and down from the bottom edge of the footing.
- 9.6.10 The foundation subgrade should be sprinkled as necessary to maintain a moist condition without significant shrinkage cracks as would be expected in any concrete placement. Prior to placing rebar reinforcement, foundation excavations should be evaluated by a representative of SALEM for appropriate support characteristics and moisture content. Moisture conditioning may be required for the materials exposed at footing bottom, particularly if foundation excavations are left open for an extended period.

9.7 Option 2 – Structural Slabs

- 9.7.1 As an alternative to the geogrid method, the building may be supported on a reinforced structural slab foundation system (e.g. mat foundation, modified mat foundation, post-tensioned slab or stiffened footings with rigid grade beams) to resist damage due to seismic-induced differential settlement.
- 9.7.2 The foundation can be designed utilizing allowable bearing pressure of 1,500 pounds per square foot for dead-plus-live loads. This value may be increased by 1/3 for short duration loads such as wind or seismic. The thickness and reinforcement of the structural slab should be determined by the Structural Engineer.
- 9.7.3 The structural slab should have a minimum depth of 12 inches below the lowest adjacent exterior grade. The structural slab should be supported by at least 2 feet of Engineered Fill. Overexcavation and recompaction should be performed to a minimum depth of **two (2) feet** below existing grade prior to receiving fill. Any undocumented and uncompacted fills encountered during grading should be removed and replaced with engineered fill.
- 9.7.4 The total settlement due to foundation loads (static) is not expected to exceed 1 inch. Differential settlement due to static loads should be less than ½ inch over 20 feet. Most of the settlement is expected to occur during construction as the loads are applied. However, additional post-construction settlement may occur if the foundation soils are flooded or saturated.

9.7.5 The seismic-induced total and differential settlements are expected to be on the order of 1.48 inches and 1 inch over a horizontal distance of 30 feet, respectively. It is further recommended that flexible utility connectors be used for this project.

9.7.6 Resistance to lateral footing displacement can be computed using an allowable friction factor of 0.40 acting between the base of foundations and the supporting subgrade. Lateral resistance for footings can alternatively be developed using an equivalent fluid passive pressure of 350 pounds per cubic foot acting against the appropriate vertical slab faces. The frictional and passive resistance of the soil may be combined without reduction in determining the total lateral resistance.

9.8 Concrete Slabs-on-Grade

9.8.1 Slab thickness and reinforcement should be determined by the structural engineer based on the anticipated loading. We recommend that non-structural slabs-on-grade be at least 4 inches thick and underlain by six (6) inches of clean crushed aggregate base (CAB) compacted to at least 95% relative compaction. The CAB should meet the Greenbook specifications and requirements.

9.8.2 Crushed Miscellaneous or Recycled Base (CMB) containing recycled materials should not be used as granular aggregate subbase within the building areas.

9.8.3 We recommend reinforcing slabs, at a minimum, with No. 3 reinforcing bars placed 18 inches on center, each way.

9.8.4 Slabs subject to structural loading may be designed utilizing a modulus of subgrade reaction K of 150 pounds per square inch per inch. The K value was approximated based on inter-relationship of soil classification and bearing values (Portland Cement Association, Rocky Mountain Northwest).

9.8.5 The spacing of crack control joints should be designed by the project structural engineer. In order to regulate cracking of the slabs, we recommend that construction joints or control joints be provided at a maximum spacing of 15 feet in each direction for 5-inch thick slabs and 12 feet for 4-inch thick slabs.

9.8.6 Crack control joints should extend a minimum depth of one-fourth the slab thickness and should be constructed using saw-cuts or other methods as soon as practical after concrete placement. The exterior floors should be poured separately in order to act independently of the walls and foundation system.

9.8.7 It is recommended that the utility trenches within the structure be compacted, as specified in our report, to minimize the transmission of moisture through the utility trench backfill. Special attention to the immediate drainage and irrigation around the structures is recommended.

9.8.8 Moisture within the structure may be derived from water vapors, which were transformed from the moisture within the soils. This moisture vapor penetration can affect floor coverings and produce mold and mildew in the structure. To minimize moisture vapor intrusion, it is recommended that a vapor retarder be installed in accordance with manufacturer's

recommendations and/or ASTM guidelines, whichever is more stringent. In addition, ventilation of the structure is recommended to reduce the accumulation of interior moisture.

- 9.8.9 In areas where it is desired to reduce floor dampness where moisture-sensitive coverings are anticipated, construction should have a suitable waterproof vapor retarder (a minimum of 15 mils thick polyethylene vapor retarder sheeting, Raven Industries “VaporBlock 15, Stego Industries 15 mil “StegoWrap” or W.R. Meadows Sealtight 15 mil “Perminator”) incorporated into the floor slab design. The water vapor retarder should be decay resistant material complying with ASTM E96 not exceeding 0.04 perms, ASTM E154 and ASTM E1745 Class A. The vapor barrier should be placed between the concrete slab and the compacted granular aggregate subbase material. The water vapor retarder (vapor barrier) should be installed in accordance with ASTM Specification E 1643-94.
- 9.8.10 The concrete may be placed directly on vapor retarder. The vapor retarder should be inspected prior to concrete placement. Cut or punctured retarder should be repaired using vapor retarder material lapped 6 inches beyond damaged areas and taped.
- 9.8.11 The recommendations of this report are intended to reduce the potential for cracking of slabs due to soil movement. However, even with the incorporation of the recommendations presented herein, foundations, stucco walls, and slabs-on-grade may exhibit some cracking due to soil movement. This is common for project areas that contain expansive soils since designing to eliminate potential soil movement is cost prohibitive. The occurrence of concrete shrinkage cracks is independent of the supporting soil characteristics. Their occurrence may be reduced and/or controlled by limiting the slump of the concrete, proper concrete placement and curing, and by the placement of crack control joints at periodic intervals, in particular, where re-entrant slab corners occur.
- 9.8.12 Proper finishing and curing should be performed in accordance with the latest guidelines provided by the American Concrete Institute, Portland Cement Association, and ASTM.

9.9 Lateral Earth Pressures and Frictional Resistance

9.9.1 Active, at-rest and passive unit lateral earth pressures against footings and walls are summarized in the table below:

Lateral Pressure Drained and Level Backfill Conditions	Equivalent Fluid Pressure, pcf
Active Pressure	40
At-Rest Pressure	60
Passive Pressure	350
Related Parameters	
Allowable Coefficient of Friction	0.40
In-Place Soil Density (lbs/ft ³)	120

- 9.9.2 Active pressure applies to walls, which are free to rotate. At-rest pressure applies to walls, which are restrained against rotation. The preceding lateral earth pressures assume sufficient drainage behind retaining walls to prevent the build-up of hydrostatic pressure.
- 9.9.3 The top one-foot of adjacent subgrade should be deleted from the passive pressure computation.
- 9.9.4 A safety factor consistent with the design conditions should be included in the usage of the values presented in the above table. For stability against lateral sliding, which is resisted solely by the passive pressure, we recommend a minimum safety factor of 1.5. For stability against lateral sliding, which is resisted by the combined passive and frictional resistance, a minimum safety factor of 2.0 is recommended. For lateral stability against seismic loading conditions, we recommend a minimum safety factor of 1.1.
- 9.9.5 For dynamic seismic lateral loading the following equation shall be used:

Dynamic Seismic Lateral Loading Equation
Dynamic Seismic Lateral Load = $\frac{3}{8}\gamma K_h H^2$
Where: γ = In-Place Soil Density
K_h = Horizontal Acceleration = $\frac{2}{3}PGAM$
H = Wall Height

9.10 Retaining Walls

- 9.10.1 Retaining and/or below grade walls should be drained with either perforated pipe encased in free-draining gravel or a prefabricated drainage system. The gravel zone should have a minimum width of 12 inches wide and should extend upward to within 12 inches of the top of the wall. The upper 12 inches of backfill should consist of native soils, concrete, asphaltic-concrete or other suitable backfill to minimize surface drainage into the wall drain system. The gravel should be completely wrapped in nonwoven polypropylene geotextiles to minimize migration of soil particles into the voids of the crushed rock.
- 9.10.2 Prefabricated drainage systems, such as Miradrain®, Enkadrain®, or an equivalent substitute, are acceptable alternatives in lieu of gravel provided they are installed in accordance with the manufacturer’s recommendations. If a prefabricated drainage system is proposed, our firm should review the system for final acceptance prior to installation.
- 9.10.3 Drainage pipes should be placed with perforations down and should discharge in a non-erosive manner away from foundations and other improvements. The top of the perforated pipe should be placed at or below the bottom of the adjacent floor slab or pavements. The pipe should be placed in the center line of the drainage blanket and should have a minimum diameter of 4 inches. Slots should be no wider than 1/8-inch in diameter, while perforations should be no more than 1/4-inch in diameter.
- 9.10.4 If retaining walls are less than 5 feet in height, the perforated pipe may be omitted in lieu of weep holes on 4 feet maximum spacing. The weep holes should consist of 2-inch minimum diameter

holes (concrete walls) or unmortared head joints (masonry walls) and placed no higher than 18 inches above the lowest adjacent grade. Two 8-inch square overlapping patches of geotextile fabric (conforming to the CalTrans Standard Specifications for "edge drains") should be affixed to the rear wall opening of each weep hole to retard soil piping.

- 9.10.5 During grading and backfilling operations adjacent to any walls, heavy equipment should not be allowed to operate within a lateral distance of 5 feet from the wall, or within a lateral distance equal to the wall height, whichever is greater, to avoid developing excessive lateral pressures. Within this zone, only hand operated equipment ("whackers," vibratory plates, or pneumatic compactors) should be used to compact the backfill soils.

9.11 Temporary Excavations

- 9.11.1 We anticipate that the majority of the sandy site soils will be classified as Cal-OSHA "Type C" soil when encountered in excavations during site development and construction. Excavation sloping, benching, the use of trench shields, and the placement of trench spoils should conform to the latest applicable Cal-OSHA standards. The contractor should have a Cal-OSHA-approved "competent person" onsite during excavation to evaluate trench conditions and make appropriate recommendations where necessary.

- 9.11.2 It is the contractor's responsibility to provide sufficient and safe excavation support as well as protecting nearby utilities, structures, and other improvements which may be damaged by earth movements. All onsite excavations must be conducted in such a manner that potential surcharges from existing structures, construction equipment, and vehicle loads are resisted. The surcharge area may be defined by a 1:1 projection down and away from the bottom of an existing foundation or vehicle load.

- 9.11.3 Temporary excavations and slope faces should be protected from rainfall and erosion. Surface runoff should be directed away from excavations and slopes.

- 9.11.4 Open, unbraced excavations in undisturbed soils should be made according to the slopes presented in the following table:

RECOMMENDED EXCAVATION SLOPES

Depth of Excavation (ft)	Slope (Horizontal : Vertical)
0-5	1:1
5-10	2:1

- 9.11.5 If, due to space limitation, excavations near property lines or existing structures are performed in a vertical position, slot cuts, braced shorings or shields may be used for supporting vertical excavations. Therefore, in order to comply with the local and state safety regulations, a properly designed and installed shoring system would be required to accomplish planned excavations and installation. A Specialty Shoring Contractor should be responsible for the design and installation of such a shoring system during construction.

- 9.11.6 Braced shorings should be designed for a maximum pressure distribution of 30H, (where H is the depth of the excavation in feet). The foregoing does not include excess hydrostatic pressure or surcharge loading. Fifty percent of any surcharge load, such as construction equipment weight, should be added to the lateral load given herein. Equipment traffic should concurrently be limited to an area at least 3 feet from the shoring face or edge of the slope.
- 9.11.7 The excavation and shoring recommendations provided herein are based on soil characteristics derived from the borings within the area. Variations in soil conditions will likely be encountered during the excavations. SALEM Engineering Group, Inc. should be afforded the opportunity to provide field review to evaluate the actual conditions and account for field condition variations not otherwise anticipated in the preparation of this recommendation. Slope height, slope inclination, or excavation depth should in no case exceed those specified in local, state, or federal safety regulation, (e.g. OSHA) standards for excavations, 29 CFR part 1926, or Assessor's regulations.

9.12 Underground Utilities

- 9.12.1 Underground utility trenches should be backfilled with properly compacted material. The material excavated from the trenches should be adequate for use as backfill provided it does not contain deleterious matter, vegetation or rock larger than 3 inches in maximum dimension. Trench backfill should be placed in loose lifts not exceeding 8 inches and compacted to at least 95% relative compaction.
- 9.12.2 Bedding and pipe zone backfill typically extends from the bottom of the trench excavations to approximately 6 to 12 inches above the crown of the pipe. Pipe bedding and backfill material should conform to the requirements of the governing utility agency.
- 9.12.3 It is suggested that underground utilities crossing beneath new or existing structures be plugged at entry and exit locations to the building or structure to prevent water migration. Trench plugs can consist of on-site clay soils, if available, or sand cement slurry. The trench plugs should extend 2 feet beyond each side of individual perimeter foundations.
- 9.12.4 The contractor is responsible for removing all water-sensitive soils from the trench regardless of the backfill location and compaction requirements. The contractor should use appropriate equipment and methods to avoid damage to the utilities and/or structures during fill placement and compaction.

9.13 Surface Drainage

- 9.13.1 Proper surface drainage is critical to the future performance of the project. Uncontrolled infiltration of irrigation excess and storm runoff into the soils can adversely affect the performance of the planned improvements. Saturation of a soil can cause it to lose internal shear strength and increase its compressibility, resulting in a change to important engineering properties. Proper drainage should be maintained at all times.
- 9.13.2 The ground immediately adjacent to the foundation shall be sloped away from the building at a slope of not less than 5 percent for a minimum distance of 10 feet.

- 9.13.3 Impervious surfaces within 10 feet of the building foundation shall be sloped a minimum of 2 percent away from the building and drainage gradients maintained to carry all surface water to collection facilities and off site. These grades should be maintained for the life of the project. Ponding of water should not be allowed adjacent to the structure. Over-irrigation within landscaped areas adjacent to the structure should not be performed.
- 9.13.4 Roof drains should be installed with appropriate downspout extensions out-falling on splash blocks so as to direct water a minimum of 5 feet away from the structures or be connected to the storm drain system for the development.

9.14 Pavement Design

- 9.14.1 Based on site soil conditions, an R-value of 40 was used for the preliminary flexible asphaltic concrete pavement design. The R-value should be verified during grading of the pavement areas. City of Temecula minimum pavement design requirements were also considered.
- 9.14.2 The asphaltic concrete (flexible pavement) is based on a 20-year pavement life for traffic indexes of 5.0 and 6.0. If higher traffic loading is anticipated, SALEM should be contacted to provide revised pavement thickness recommendations.

**TABLE 9.14.2
ASPHALT CONCRETE PAVEMENT THICKNESSES**

Traffic Index	Asphaltic Concrete	Crushed Aggregate Base*	Compacted Subgrade*
5.0 (Parking and Vehicle Drive Areas)	3.0"	4.0"	12.0"
6.0 (Heavy Truck Areas)	3.0"	6.0"	12.0"

**95% compaction based on ASTM D1557-12e1 Test Method*

- 9.14.3 The following recommendations are for light-duty and heavy-duty Portland Cement Concrete pavement sections.

**TABLE 9.14.3
PORTLAND CEMENT CONCRETE PAVEMENT THICKNESSES**

Traffic Index	Portland Cement Concrete*	Crushed Aggregate Base**	Compacted Subgrade**
5.0 (Light Duty)	5.0"	4.0"	12.0"
6.0 (Heavy Duty)	6.0"	4.0"	12.0"

** Min Compressive Strength of 4,000 psi; Min Reinforcement of #4 bars at 18" O.C., E.W.*

*** 95% compaction based on ASTM D1557-12e1 Test Method*

10. PLAN REVIEW, CONSTRUCTION OBSERVATION AND TESTING

10.1 Plan and Specification Review

10.1.1 SALEM should review the project plans and specifications prior to final design submittal to assess whether our recommendations have been properly implemented and evaluate if additional analysis and/or recommendations are required.

10.2 Construction Observation and Testing Services

10.2.1 The recommendations provided in this report are based on the assumption that we will continue as Geotechnical Engineer of Record throughout the construction phase. It is important to maintain continuity of geotechnical interpretation and confirm that field conditions encountered are similar to those anticipated during design. If we are not retained for these services, we cannot assume any responsibility for others interpretation of our recommendations, and therefore the future performance of the project.

10.2.2 SALEM should be present at the site during site preparation to observe site clearing, preparation of exposed surfaces after clearing, and placement, treatment and compaction of fill material.

10.2.3 SALEM's observations should be supplemented with periodic compaction tests to establish substantial conformance with these recommendations. Moisture content of footings and slab subgrade should be tested immediately prior to concrete placement. SALEM should observe foundation excavations prior to placement of reinforcing steel or concrete to assess whether the actual bearing conditions are compatible with the conditions anticipated during the preparation of this report.

11. LIMITATIONS AND CHANGED CONDITIONS

The analyses and recommendations submitted in this report are based upon the data obtained from the test borings drilled at the approximate locations shown on the Site Plan, Figure 2. The report does not reflect variations which may occur between boring locations. The nature and extent of such variations may not become evident until construction is initiated. If variations then appear, a re-evaluation of the recommendations of this report will be necessary after performing on-site observations during the excavation period and noting the characteristics of such variations. The findings and recommendations presented in this report are valid as of the present and for the proposed construction.

If site conditions change due to natural processes or human intervention on the property or adjacent to the site, or changes occur in the nature or design of the project, or if there is a substantial time lapse between the submission of this report and the start of the work at the site, the conclusions and recommendations contained in our report will not be considered valid unless the changes are reviewed by SALEM and the conclusions of our report are modified or verified in writing. The validity of the recommendations contained in this report is also dependent upon an adequate testing and observations program during the construction phase. Our firm assumes no responsibility for construction compliance with the design concepts or recommendations unless we have been retained to perform the on-site testing and review during construction. SALEM has prepared this report for the exclusive use of the owner and project design consultants.

SALEM does not practice in the field of corrosion engineering. It is recommended that a qualified corrosion engineer be consulted regarding protection of buried steel or ductile iron piping and conduit or, at a minimum, that manufacturer's recommendations for corrosion protection be closely followed. Further, a corrosion engineer may be needed to incorporate the necessary precautions to avoid premature corrosion of concrete slabs and foundations in direct contact with native soil. The importation of soil and or aggregate materials to the site should be screened to determine the potential for corrosion to concrete and buried metal piping. The report has been prepared in accordance with generally accepted geotechnical engineering practices in the area. No other warranties, either express or implied, are made as to the professional advice provided under the terms of our agreement and included in this report.

If you have any questions, or if we may be of further assistance, please do not hesitate to contact our office at (909) 980-6455.

Respectfully Submitted,

SALEM ENGINEERING GROUP, INC.



Jared Christiansen, EIT
Geotechnical Staff Engineer



Ibrahim Foud Ibrahim, PE
Senior Managing Engineer
RCE 86724




Clarence Jiang, GE
Senior Geotechnical Engineer
RGE 2477



REFERENCES

- Tan, Siang S., and Kennedy, Michael P. (2000), Geologic Map of the Temecula, 7.5' Quadrangle, San Diego and Riverside Counties, California: U.S. Geological Survey, Scale 1:24,000.
- Bedrossian, T.L. and Roffers, P., 2010, Geologic Compilation of Quaternary Surficial Deposits in Southern California; California Geological Survey Special Report 217; Plate 16, Santa Ana 30 X 60 Quadrangle, scale 1:100,000.
- Bryant, W. A. [compiler] (2005) Digital Database of Quaternary and Younger Faults from the Fault Activity Map of California, version 2.0: California Geological Survey Web Page, <http://www.consrv.ca.gov/CGS/information/publications/QuaternaryFaults_ver2.htm
- California Division of Mines and Geology [CDMG] (1990) Revised Official Map, Special Studies Zones, Murrieta Quadrangle; scale; 1:24,000; effective Jan 1, 1990.
- CGS (2007) Seismic Hazard Zone Report for the Murrieta 7.5-Minute Quadrangle, Riverside County, CA; Seismic Hazard Zone Report 115.
- California State Water Resources Control Board [SWRCB]; Geotracker database web page; Availability: <http://geotracker.swrcb.ca.gov>
- City of Temecula, 2005 City of Temecula General Plan, Public Safety Element; available at: <http://www.cityoftemecula.org/Temecula/Government/CommDev/Planning/zoningdocuments/generalplan.htm>
- Riverside County General Plan (2003) Chapter 6: Safety Element; Transportation and Land Management Agency; available at: (<http://www.rctlma.org/genplan/content/gp/chapter06.html>)
- Riverside County Information Technology (RCIT), Map My County (ver. 10) website: http://mmc.rivcoit.org/MMC_Public/Custom/disclaimer/Default.htm
- USGS National Seismic Hazard Mapping Program Java applet tool to determine site-specific accelerations (available at <http://earthquake.usgs.gov/designmaps/us/application.php/>).
- Wills, C.J., Weldon, R.J., II, and Bryant, W.A. (2008) California fault parameters for the National Seismic Hazard Maps and Working Group on California Earthquake Probabilities, *Appendix A in The Uniform California Earthquake Rupture Forecast, version 2 (UCERF 2)*: U.S. Geological Survey Open-File Report 2007-1437A, and California Geological Survey Special Report 203A, 48 p. [<http://pubs.usgs.gov/of/2007/1437/a/>]

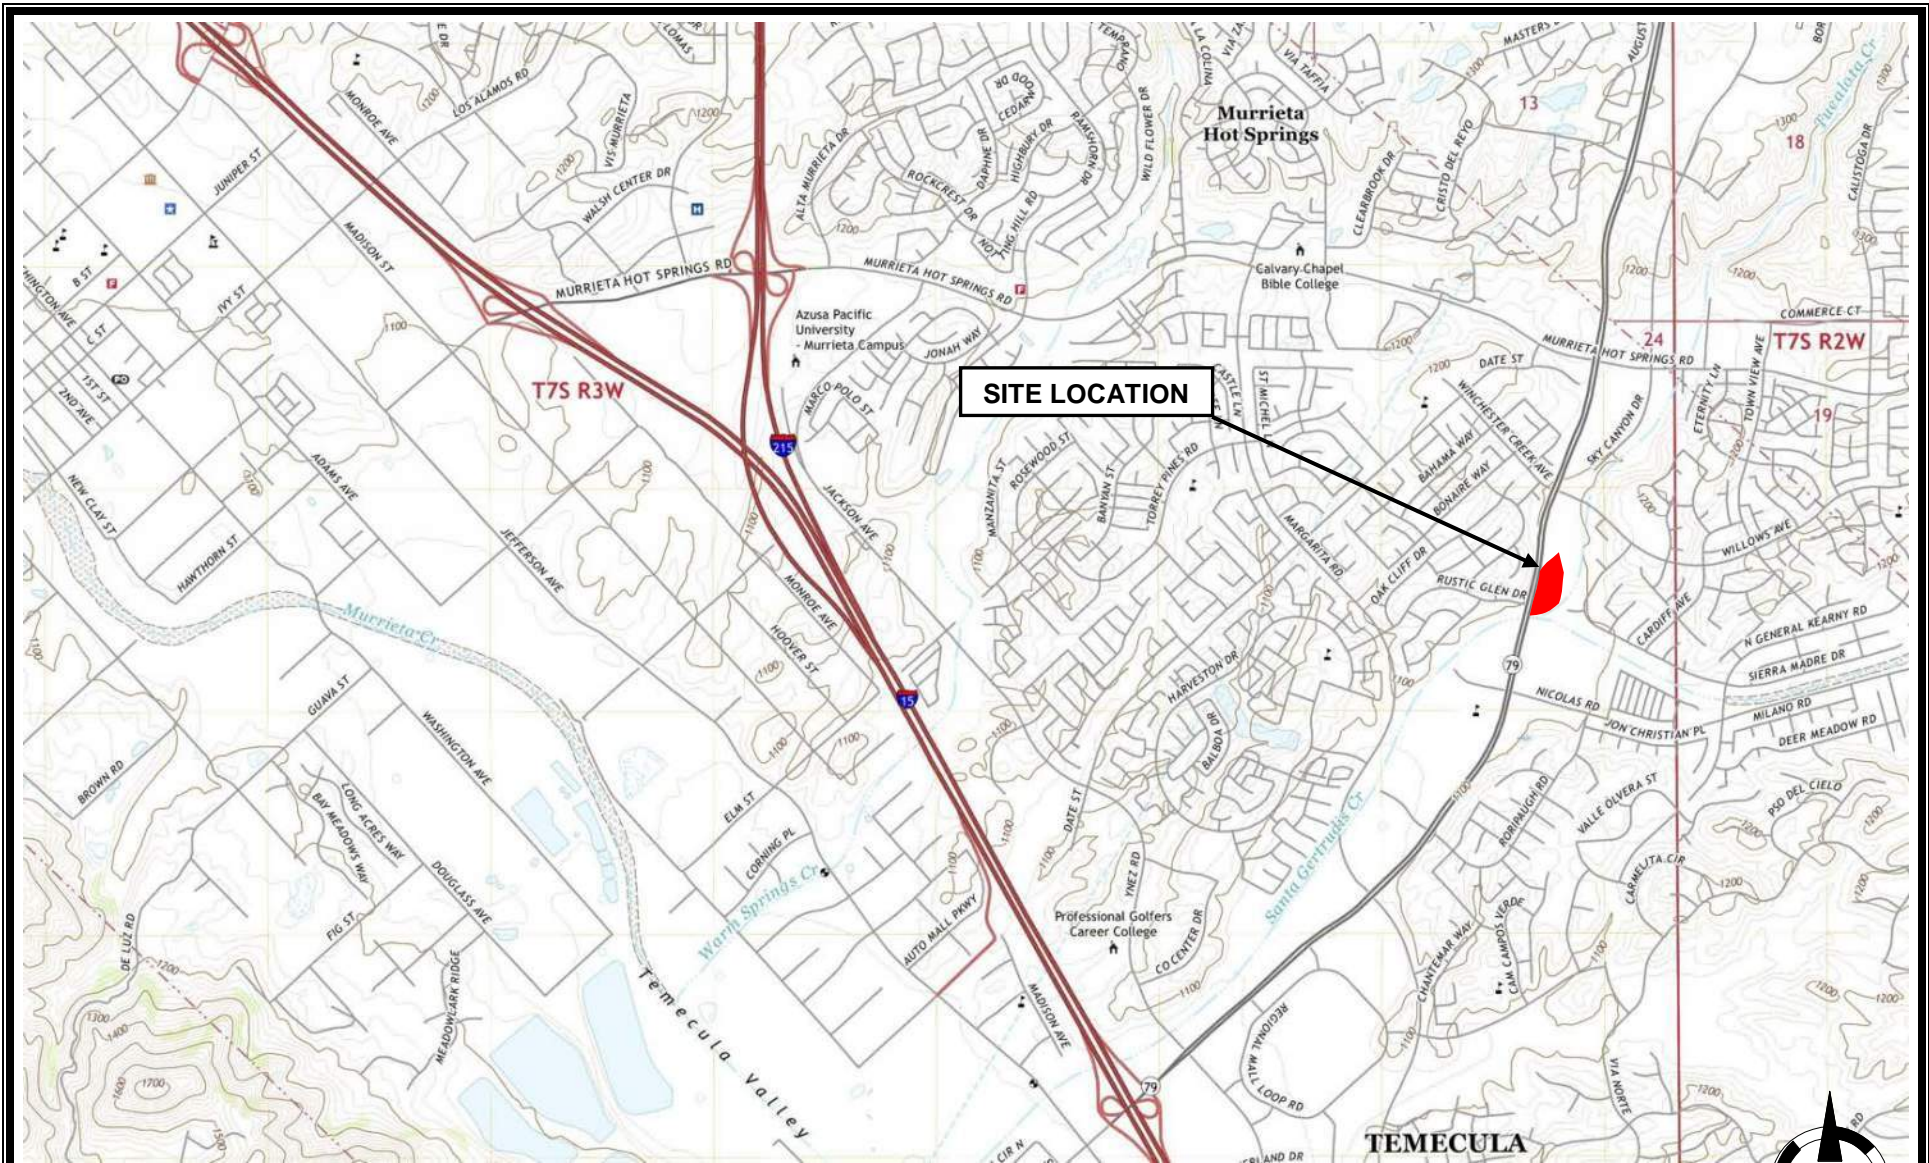


Source Image: U.S. Geological Survey, Murrieta, California, <https://ngmdb.usgs.gov/topview> (2022)



VICINITY MAP
GEOTECHNICAL ENGINEERING INVESTIGATION
Proposed Assisted Living & Memory Care
80134 Winchester Road
Temecula, California

SCALE: NOT TO SCALE	DATE: 03/2022
DRAWN BY: JC	APPROVED BY: CJ
PROJECT NO. 3-222-0213	FIGURE NO. 1



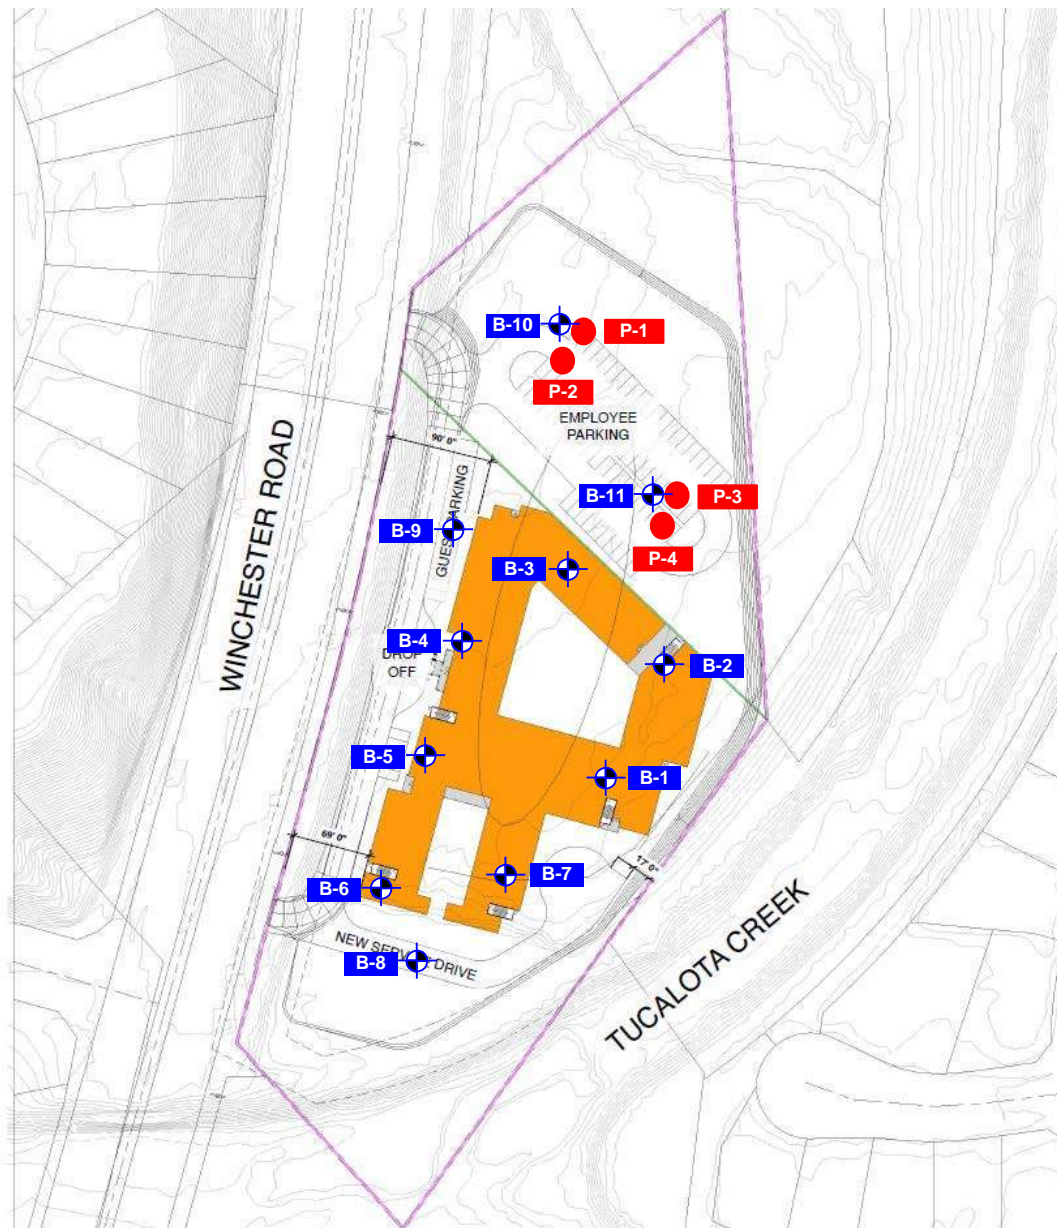



SITE PLAN
GEOTECHNICAL ENGINEERING INVESTIGATION
Proposed Assisted Living & Memory Care
80134 Winchester Road
Temecula, California

SCALE:
 NOT TO SCALE
 DRAWN BY:
 JC
 PROJECT NO.
 3-222-0213

DATE:
 03/2022
 APPROVED BY:
 II
 FIGURE NO.
 2

LEGEND:
 **B-1** Soil Boring Locations
 **P-1** Percolation Locations
 All Locations Approximate



A



APPENDIX A FIELD EXPLORATION

Fieldwork for our investigation (drilling) was conducted on March 15 and March 16, 2022 and included a site visit, subsurface exploration, percolation testing and soil sampling. The locations of the exploratory borings and percolation tests are shown on the Site Plan, Figure 2. Boring logs for our exploration are presented in figures following the text in this appendix. Borings were located in the field using existing reference points. Therefore, actual boring locations may deviate slightly.

In general, our borings were performed using a truck-mounted CME-75 drill rig equipped with a 6.5-inch hollow stem auger. Sampling in the borings was accomplished using a hydraulic 140-pound hammer with a 30-inch drop. Samples were obtained with a 3-inch outside-diameter (OD), split spoon (California Modified) sampler, and a 2-inch OD, Standard Penetration Test (SPT) sampler. The number of blows required to drive the sampler the last 12 inches (or fraction thereof) of the 18-inch sampling interval were recorded on the boring logs. The blow counts shown on the boring logs should not be interpreted as standard SPT “N” values; corrections have not been applied. Upon completion, the borings were backfilled with drill cuttings.

Subsurface conditions encountered in the exploratory borings were visually examined, classified and logged in general accordance with the American Society for Testing and Materials (ASTM) Practice for Description and Identification of Soils (Visual-Manual Procedure D2488). This system uses the Unified Soil Classification System (USCS) for soil designations. The logs depict soil and geologic conditions encountered and depths at which samples were obtained. The logs also include our interpretation of the conditions between sampling intervals. Therefore, the logs contain both observed and interpreted data. We determined the lines designating the interface between soil materials on the logs using visual observations, drill rig penetration rates, excavation characteristics and other factors. The transition between materials may be abrupt or gradual. Where applicable, the field logs were revised based on subsequent laboratory testing.



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75







Elevation: 1,090'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
1090 0	 8/6 12/6 13/6	SM/ML	Silty SAND/Sandy SILT Very stiff; moist; brown; fine grain sand.	25	7.6	100.2	
1085 5	 50/4 - -	SW	Well-graded SAND Very dense; moist; light brown; fine to coarse grain sand; with gravel and trace clay.	50/4"	2.2	-	Disturbed sample.
1080 10	 8/6 10/6 8/6	SW-SM	Well-graded SAND with Silt Medium dense; moist; light brown; fine to coarse grain sand.	18	3.1	110.1	Cu=6.67 Cc=1.07
1075 15	 6/6 7/6 7/6		Grades as above.	14	3.9	-	
1070 20	 5/6 4/6 5/6	ML	Sandy SILT Stiff; moist; brown; fine grain sand.	9	17.7	-	
1065 25	 9/6 24/6 11/6	SM	Silty SAND Medium dense; moist; brown; fine to coarse grain sand.	35	6.7	112.6	

Notes:

Figure Number A-1



SALEM
engineering group, inc.

Project Number: 3-222-0213

Date: 03/15/2022

Test Boring: B-1

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
1060 30		ML	Sandy SILT Stiff; very moist; dark gray; fine grain sand; with clay.	15	26.5	-	
1055 35		SW-SM	Well-graded SAND with Silt Very dense; slightly moist; light gray; fine to coarse grain sand; with gravel.	83	3.1	-	
1050 40		SC	Clayey SAND Dense; moist; light brown; fine to medium grain sand.	37	11.7	-	
1045 45		SM	Silty SAND Dense; very moist; brown; fine grain sand.	41	17.8	-	
1040 50		SM/ML	Silty SAND/Sandy SILT Medium dense; very moist; brown; fine grain sand. End of boring at 51.5 feet BSG.	25	21.4	-	
1035 55							
1030 60							

Notes:

Figure Number A-1



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,092'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0		SM	Silty SAND Loose; moist; brown; fine to medium grain sand.	9	10.4	93.3	
1090							
5		SP-SM	Poorly graded SAND with Silt Medium dense; slightly moist; light brown; fine to medium grain sand.	19	2.5	100.4	Cu=4.33 Cc=1.26
1085							
10			Grades as above.	19	3.0	-	
1080							
15		SM	Silty SAND Medium dense; moist; light brown; fine to medium grain sand; trace gravel.	18	12.5	115.2	
1075			End of boring at 16.5 feet BSG.				
20							
1070							
25							
1065							

Notes:

Figure Number A-2



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,093'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0		SW- SM	Well-graded SAND with Silt Medium dense; slightly moist; brown; fine to coarse grain sand.	26	3.9	115.5	
1090							
5			Grades as above.	22	3.6	114.5	
1085							
10		SM	Silty SAND Medium dense; moist; brown; fine to medium grain sand.	14	10.7	-	
1080							
15		SW	Well-graded SAND Medium dense; slightly moist; light gray; fine to coarse grain sand.	16	2.8	-	
1075							
20		SM	Silty SAND Loose; moist; brown; fine grain sand.	8	11.8	97.7	
1070							
25			End of boring at 21.5 feet BSG.				
1065							

Notes:

Figure Number A-3



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,094'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0		SM	Silty SAND Medium dense; moist; brown; fine to medium grain sand.	26	8.0	109.2	
1090							
5			Grades as above.	16	8.0	93.8	
1085							
10		SP-SM	Poorly graded SAND with Silt Medium dense; moist; light gray; fine to coarse grain sand.	30	5.4	100.4	
1080							
15		SC	Clayey SAND Loose; moist; mottled brown/light gray; fine to coarse grain sand.	9	13.6	-	
1075							
20			End of boring at 16.5 feet BSG.				
1070							
25							

Notes:

Figure Number A-4



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,092'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0							
1090	5/6 12/6 15/6	SM	Silty SAND Medium dense; moist; brown; fine to medium grain sand.	27	6.2	-	
5	8/6 9/6 10/6	SW-SM	Well-graded SAND with Silt Medium dense; moist; brown; fine to coarse grain sand.	19	4.5	107.2	Cu=8.00 Cc=1.53
1085							
10	6/6 5/6 6/6	SP-SC	Poorly graded SAND with Clay Medium dense; moist; mottled light brown/dark brown; fine to coarse grain sand.	11	6.2	-	
1080							
15	19/6 10/6 18/6	SW-SM	Well-graded SAND with Silt Medium dense; slightly moist; mottled light gray/light brown; fine to coarse grain sand; with gravel.	28	4.2	-	
1075							
20	13/6 12/6 13/6	SM	Silty SAND Medium dense; moist; light brown; fine to medium grain sand.	25	10.0	92.7	
1070			End of boring at 21.5 feet BSG.				
25							
1065							

Notes:

Figure Number A-5



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,095'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
1095 — 0		SM	Silty SAND Medium dense; moist; brown; fine to medium grain sand.	38	4.4	115.5	
1090 — 5			Grades as above.	23	5.2	110.9	
1085 — 10		SW-SM	Well-graded SAND with Silt Loose; slightly moist; gray; fine to medium grain sand.	10	5.3	-	
1080 — 15			Grades as above; medium dense.	14	2.1	-	
1075 — 20			End of boring at 16.5 feet BSG.				
1070 — 25							

Notes:

Figure Number A-6



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,093'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0							
1090	6/6 11/6 12/6	SM	Silty SAND Medium dense; slightly moist; brown; fine to medium grain sand.	23	4.2	101.8	
5	8/6 12/6 13/6		Grades as above; light brown.	25	4.5	108.0	
1085							
10	4/6 5/6 8/6		Grades as above; brownish gray; fine grain sand.	13	6.1	-	
1080							
15	4/6 6/6 8/6	SP-SM	Poorly graded SAND with Silt Medium dense; slightly moist; gray; fine to coarse grain sand.	14	4.4	-	
1075							
20	5/6 8/6 10/6	SM	Silty SAND Medium dense; slightly moist; light brown; fine to medium grain sand; trace gravel.	18	4.0	-	
1070			End of boring at 21.5 feet BSG.				
25							
1065							

Notes:

Figure Number A-7



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,097'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0		SM	Silty SAND Dense; moist; light brown; fine to medium grain sand.	47	4.2	114.1	
1095			Grades as above; medium dense.	34	6.6	114.3	
5			Grades as above.	21	4.6	-	
1090			End of boring at 11.5 feet BSG.				
10							
1085							
15							
1080							
20							
1075							
25							
1070							

Notes:

Figure Number A-8



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,095'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
1095 — 0		SM	Silty SAND Medium dense; slightly moist; brown; fine to medium grain sand.	25	3.8	115.1	
1090 — 5			Grades as above.	22	4.8	109.6	
1085 — 10		SP-SM	Poorly graded SAND with Silt Medium dense; slightly moist; mottled light gray/light brown; fine to coarse grain sand.	28	4.7	-	
			End of boring at 11.5 feet BSG.				
1080 — 15							
1075 — 20							
1070 — 25							

Notes:



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,094'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0		SM	Silty SAND Medium dense; moist; brown; fine to medium grain sand.	19	4.8	117.0	
1090							
5		SP-SM	Poorly graded SAND with Silt Medium dense; slightly moist; brown; fine to coarse grain sand.	26	3.2	-	
1085			Grades as above.	11	4.6	-	
10			End of boring at 10 feet BSG.				
1080							
15							
1075							
20							
1070							
25							

Notes:



Project: Proposed Assisted Living & Memory Care

Location: 80134 Winchester Road, Temecula, California

Drilled By: SALEM

Logged By: KY

Drill Type: CME 75

Elevation: 1,092'

Auger Type: 6.5 in. Hollow Stem Auger

Initial Depth to Groundwater: N/A

Hammer Type: Automatic Trip - 140 lb/30 in

Final Depth to Groundwater: N/A

ELEVATION/ DEPTH (feet)	SOIL SYMBOLS SAMPLER SYMBOLS AND FIELD TEST DATA	USCS	Soil Description	N-Values blows/ft.	Moisture Content %	Dry Density, PCF	Remarks
0		SM	Silty SAND Loose; moist; dark brown; fine to medium grain sand.	15	11.7	118.2	
1090		ML	Sandy SILT Very stiff; moist; brown; fine grain sand.	16	11.7	-	
5		SP	Poorly graded SAND Medium dense; slightly moist; light brown; fine to medium grain sand.	16	3.2	-	
1085			End of boring at 10 feet BSG.				
10							
1080							
15							
1075							
20							
1070							
25							
1065							

Notes:

KEY TO SYMBOLS

Symbol Description

Symbol Description

Strata symbols



Standard penetration test

Silty Sand/Sandy Silt

Well graded sand

Well graded sand with silt

Silt

Silty sand

Clayey sand

Poorly graded sand with silt

Poorly graded sand with clay

Poorly graded sand

Misc. Symbols

Boring continues

Soil Samplers

California sampler

Notes:

Granular Soils

Blows Per Foot (Uncorrected)

	MCS	SPT
Very loose	<5	<4
Loose	5-15	4-10
Medium dense	16-40	11-30
Dense	41-65	31-50
Very dense	>65	>50

Cohesive Soils

Blows Per Foot (Uncorrected)

	MCS	SPT
Very soft	<3	<2
Soft	3-5	2-4
Firm	6-10	5-8
Stiff	11-20	9-15
Very Stiff	21-40	16-30
Hard	>40	>30

MCS = Modified California Sampler

SPT = Standard Penetration Test Sampler

Percolation Test Worksheet

Project: Proposed Assisted Living & Memory Care
 80134 Winchester Road
 Temecula, California

Job No.: 3-222-0213

Date Drilled: 3/15/2022

Soil Classification: Poorly graded SAND with Silt (SP-SM) Hole Radius: 4 in.

Pipe Dia.: 3 in.

Test Hole No.: P-1

Presoaking Date: 3/15/2022

Total Depth of Hole: 115.2 in.

Tested by: KY

Test Date: 3/16/2022

Drilled Hole Depth: 9.6 ft.

Pipe Stick up: 4.6 ft.

Time Start	Time Finish	Depth of Test Hole (ft) [#]	Refill- Yes or No	Elapsed Time (hrs:min)	Initial Water Level [#] (ft)	Final Water Level [#] (ft)	Δ Water Level (in.)	Δ Min.	Meas. Perc Rate (min/in)	Initial Height of Water (in)	Final Height of Water (in)	Average Height of Water (in)	Infiltration Rate, It (in/hr)
9:10	9:40	14.2	Y	0:30	11.00	11.73	8.76	30	3.4	38.4	29.6	34.0	0.97
9:40	10:10	14.2	N	0:30	11.73	12.24	6.12	30	4.9	29.6	23.5	26.6	0.86
10:10	10:40	14.2	N	0:30	12.24	12.62	4.56	30	6.6	23.5	19.0	21.2	0.78
10:40	11:10	14.2	N	0:30	12.62	12.92	3.60	30	8.3	19.0	15.4	17.2	0.75
11:10	11:40	14.2	N	0:30	12.92	13.15	2.76	30	10.9	15.4	12.6	14.0	0.69
11:40	12:10	14.2	N	0:30	13.15	13.33	2.16	30	13.9	12.6	10.4	11.5	0.64
12:10	12:40	14.2	Y	0:30	11.22	11.68	5.52	30	5.4	35.8	30.2	33.0	0.63
12:40	13:10	14.2	N	0:30	11.68	12.06	4.56	30	6.6	30.2	25.7	28.0	0.61
13:10	13:40	14.2	N	0:30	12.06	12.38	3.84	30	7.8	25.7	21.8	23.8	0.60
13:40	14:10	14.2	N	0:30	12.38	12.66	3.36	30	8.9	21.8	18.5	20.2	0.61
14:10	14:40	14.2	N	0:30	12.66	12.90	2.88	30	10.4	18.5	15.6	17.0	0.61
14:40	15:10	14.2	N	0:30	12.90	13.11	2.52	30	11.9	15.6	13.1	14.3	0.62
											Infiltration Rate	0.60	

Percolation Test Worksheet

Project: Proposed Assisted Living & Memory Care
 80134 Winchester Road
 Temecula, California

Job No.: 3-222-0213

Date Drilled: 3/15/2022

Soil Classification: Poorly graded SAND with Silt (SP-SM) Hole Radius: 4 in.

Pipe Dia.: 3 in.

Test Hole No.: P-2

Presoaking Date: 3/15/2022

Total Depth of Hole: 24 in.

Tested by: KY

Test Date: 3/16/2022

Drilled Hole Depth: 2.0 ft.

Pipe Stick up: 4.2 ft.

Time Start	Time Finish	Depth of Test Hole (ft) [#]	Refill- Yes or No	Elapsed Time (hrs:min)	Initial Water Level [#] (ft)	Final Water Level [#] (ft)	Δ Water Level (in.)	Δ Min.	Meas. Perc Rate (min/in)	Initial Height of Water (in)	Final Height of Water (in)	Average Height of Water (in)	Infiltration Rate, It (in/hr)
9:10	9:40	6.2	Y	0:30	4.50	4.91	4.92	30	6.1	20.4	15.5	17.9	0.99
9:40	10:10	6.2	N	0:30	4.91	5.20	3.48	30	8.6	15.5	12.0	13.7	0.88
10:10	10:40	6.2	N	0:30	5.20	5.42	2.64	30	11.4	12.0	9.4	10.7	0.83
10:40	11:10	6.2	Y	0:30	4.53	4.88	4.20	30	7.1	20.0	15.8	17.9	0.84
11:10	11:40	6.2	N	0:30	4.88	5.15	3.24	30	9.3	15.8	12.6	14.2	0.80
11:40	12:10	6.2	N	0:30	5.15	5.37	2.64	30	11.4	12.6	10.0	11.3	0.80
12:10	12:40	6.2	Y	0:30	4.56	4.88	3.84	30	7.8	19.7	15.8	17.8	0.78
12:40	13:10	6.2	N	0:30	4.88	5.14	3.12	30	9.6	15.8	12.7	14.3	0.77
13:10	13:40	6.2	N	0:30	5.14	5.36	2.64	30	11.4	12.7	10.1	11.4	0.79
13:40	14:10	6.2	Y	0:30	4.60	4.91	3.72	30	8.1	19.2	15.5	17.3	0.77
14:10	14:40	6.2	N	0:30	4.91	5.17	3.12	30	9.6	15.5	12.4	13.9	0.78
14:40	15:10	6.2	N	0:30	5.17	5.38	2.52	30	11.9	12.4	9.8	11.1	0.77
											Infiltration Rate	0.77	

Percolation Test Worksheet

Project: Proposed Assisted Living & Memory Care
 80134 Winchester Road
 Temecula, California

Job No.: 3-222-0213

Date Drilled: 3/15/2022

Soil Classification: Poorly graded SAND with Silt (SP-SM) Hole Radius: 4 in.

Pipe Dia.: 3 in.

Total Depth of Hole: 116.4 in.

Test Hole No.: P-3

Presoaking Date: 3/15/2022

Tested by: KY

Test Date: 3/16/2022

Drilled Hole Depth: 9.7 ft.

Pipe Stick up: 3.0 ft.

Time Start	Time Finish	Depth of Test Hole (ft) [#]	Refill- Yes or No	Elapsed Time (hrs:min)	Initial Water Level [#] (ft)	Final Water Level [#] (ft)	Δ Water Level (in.)	Δ Min.	Meas. Perc Rate (min/in)	Initial Height of Water (in)	Final Height of Water (in)	Average Height of Water (in)	Infiltration Rate, It (in/hr)
9:05	9:35	12.7	Y	0:30	10.70	11.08	4.56	30	6.6	24.0	19.4	21.7	0.77
9:35	10:05	12.7	N	0:30	11.08	11.38	3.60	30	8.3	19.4	15.8	17.6	0.73
10:05	10:35	12.7	N	0:30	11.38	11.61	2.76	30	10.9	15.8	13.1	14.5	0.67
10:35	11:05	12.7	N	0:30	11.61	11.79	2.16	30	13.9	13.1	10.9	12.0	0.62
11:05	11:35	12.7	N	0:30	11.79	11.94	1.80	30	16.7	10.9	9.1	10.0	0.60
11:35	12:05	12.7	N	0:30	11.94	12.07	1.56	30	19.2	9.1	7.6	8.3	0.60
12:05	12:35	12.7	Y	0:30	10.85	11.12	3.24	30	9.3	22.2	19.0	20.6	0.57
12:35	13:05	12.7	N	0:30	11.12	11.35	2.76	30	10.9	19.0	16.2	17.6	0.56
13:05	13:35	12.7	N	0:30	11.35	11.55	2.40	30	12.5	16.2	13.8	15.0	0.56
13:35	14:05	12.7	N	0:30	11.55	11.72	2.04	30	14.7	13.8	11.8	12.8	0.55
14:05	14:35	12.7	N	0:30	11.72	11.87	1.80	30	16.7	11.8	10.0	10.9	0.56
14:35	15:05	12.7	N	0:30	11.87	12.00	1.56	30	19.2	10.0	8.4	9.2	0.56
											Infiltration Rate	0.55	

Percolation Test Worksheet

Project: Proposed Assisted Living & Memory Care
80134 Winchester Road
Temecula, California

Job No.: 3-222-0213
Date Drilled: 3/15/2022
Soil Classification: Silty SAND (SM)

Hole Radius: 4 in.

Pipe Dia.: 3 in.

Total Depth of Hole: 28.8 in.

Test Hole No.: P-4

Presoaking Date: 3/15/2022

Tested by: KY

Test Date: 3/16/2022

Drilled Hole Depth: 2.4 ft.

Pipe Stick up: 3.0 ft.

Time Start	Time Finish	Depth of Test Hole (ft) [#]	Refill- Yes or No	Elapsed Time (hrs:min)	Initial Water Level [#] (ft)	Final Water Level [#] (ft)	Δ Water Level (in.)	Δ Min.	Meas. Perc Rate (min/in)	Initial Height of Water (in)	Final Height of Water (in)	Average Height of Water (in)	Infiltration Rate, It (in/hr)
9:05	9:35	5.4	Y	0:30	3.90	4.16	3.12	30	9.6	18.0	14.9	16.4	0.68
9:35	10:05	5.4	N	0:30	4.16	4.35	2.28	30	13.2	14.9	12.6	13.7	0.58
10:05	10:35	5.4	N	0:30	4.35	4.49	1.68	30	17.9	12.6	10.9	11.8	0.49
10:35	11:05	5.4	N	0:30	4.49	4.60	1.32	30	22.7	10.9	9.6	10.3	0.43
11:05	11:35	5.4	N	0:30	4.60	4.70	1.20	30	25.0	9.6	8.4	9.0	0.44
11:35	12:05	5.4	N	0:30	4.70	4.79	1.08	30	27.8	8.4	7.3	7.9	0.44
12:05	12:35	5.4	Y	0:30	4.00	4.16	1.92	30	15.6	16.8	14.9	15.8	0.43
12:35	13:05	5.4	N	0:30	4.16	4.30	1.68	30	17.9	14.9	13.2	14.0	0.42
13:05	13:35	5.4	N	0:30	4.30	4.43	1.56	30	19.2	13.2	11.6	12.4	0.43
13:35	14:05	5.4	N	0:30	4.43	4.54	1.32	30	22.7	11.6	10.3	11.0	0.41
14:05	14:35	5.4	N	0:30	4.54	4.64	1.20	30	25.0	10.3	9.1	9.7	0.41
14:35	15:05	5.4	N	0:30	4.64	4.73	1.08	30	27.8	9.1	8.0	8.6	0.41
											Infiltration Rate	0.41	

LIQUEFACTION ANALYSIS REPORT


Project title : 3-222-0213

Project subtitle : Temecula


Input parameters and analysis data

In-situ data type:	Standard Penetration Test	Depth to water table:	20.00 ft
Analysis type:	Deterministic	Earthquake magnitude M_w :	7.90
Analysis method:	NCEER 1998	Peak ground acceleration:	0.75 g
Fines correction method:	Robertson & Wride	User defined F.S.:	1.30


SPT data graph

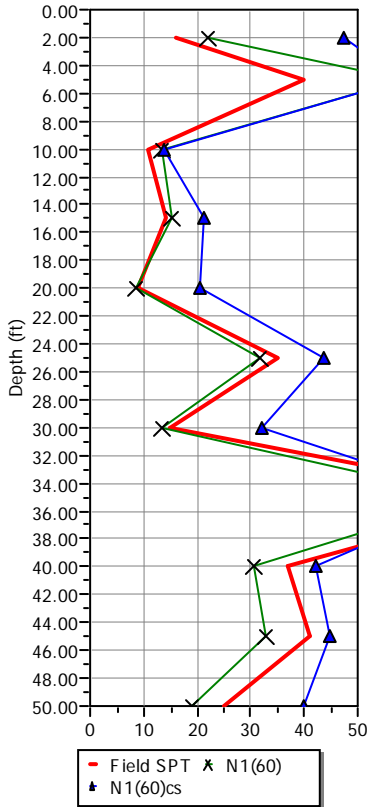


Shear stress ratio

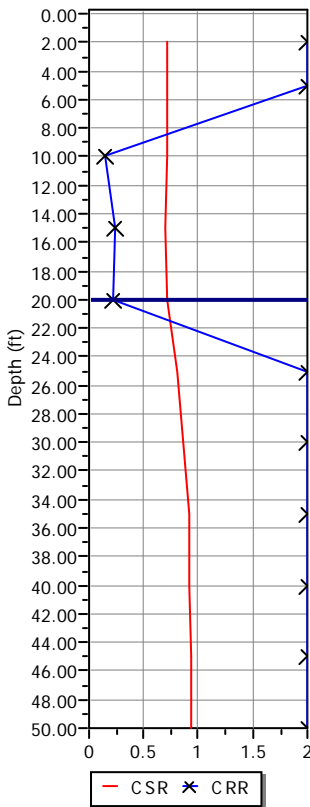


Factor of safety

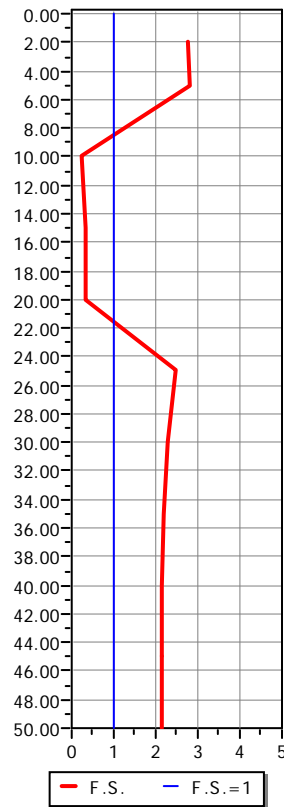

Settlements (in)

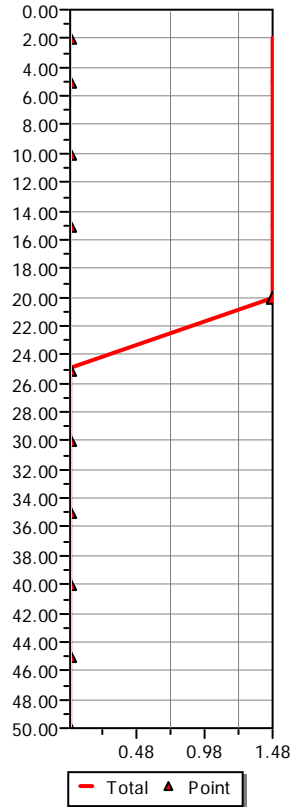

$M_w = 7^{1/2}$, $\sigma' = 1$ atm base curve

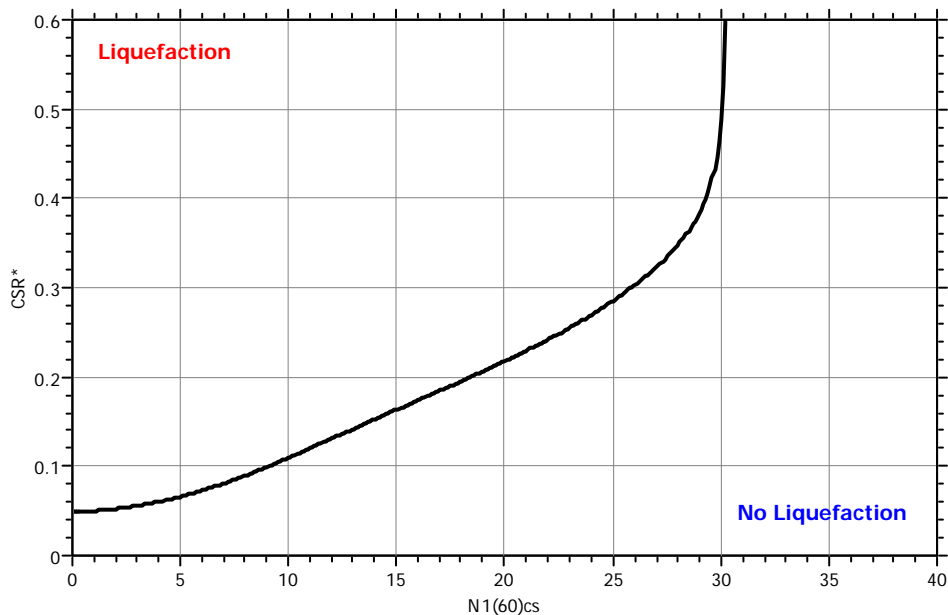

:: Field input data ::

Point ID	Depth (ft)	Field N _{SPT} (blows/feet)	Unit weight (pcf)	Fines content (%)
1	2.00	16.00	120.00	51.00
2	5.00	40.00	120.00	5.00
3	10.00	11.00	120.00	7.00
4	15.00	14.00	120.00	20.00
5	20.00	9.00	120.00	60.00
6	25.00	35.00	120.00	20.00
7	30.00	15.00	120.00	60.00
8	35.00	83.00	120.00	5.00
9	40.00	37.00	120.00	20.00
10	45.00	41.00	120.00	20.00
11	50.00	25.00	120.00	48.00

Depth : Depth from free surface, at which SPT was performed (ft)
 Field SPT : SPT blows measured at field (blows/feet)
 Unit weight : Bulk unit weight of soil at test depth (pcf)
 Fines content : Percentage of fines in soil (%)

:: Cyclic Stress Ratio calculation (CSR fully adjusted and normalized) ::

Point ID	Depth (ft)	Sigma (tsf)	u (tsf)	Sigma' (tsf)	r _d	CSR	MSF	CSR _{eq,M=7.5}	K _{sigma}	CSR*
1	2.00	0.12	0.00	0.12	1.00	0.49	0.88	0.55	1.00	0.55
2	5.00	0.30	0.00	0.30	0.99	0.48	0.88	0.55	1.00	0.55
3	10.00	0.60	0.00	0.60	0.98	0.48	0.88	0.54	1.00	0.54
4	15.00	0.90	0.00	0.90	0.97	0.47	0.88	0.54	1.00	0.54
5	20.00	1.20	0.00	1.20	0.95	0.46	0.88	0.53	0.97	0.55
6	25.00	1.50	0.16	1.34	0.94	0.51	0.88	0.59	0.95	0.62
7	30.00	1.80	0.31	1.49	0.93	0.55	0.88	0.63	0.93	0.67
8	35.00	2.10	0.47	1.63	0.89	0.56	0.88	0.64	0.91	0.70
9	40.00	2.40	0.62	1.78	0.85	0.56	0.88	0.64	0.90	0.71
10	45.00	2.70	0.78	1.92	0.81	0.55	0.88	0.63	0.89	0.72
11	50.00	3.00	0.94	2.06	0.77	0.54	0.88	0.62	0.87	0.71

Depth : Depth from free surface, at which SPT was performed (ft)
 Sigma : Total overburden pressure at test point, during earthquake (tsf)
 u : Water pressure at test point, during earthquake (tsf)
 Sigma' : Effective overburden pressure, during earthquake (tsf)
 r_d : Nonlinear shear mass factor
 CSR : Cyclic Stress Ratio
 MSF : Magnitude Scaling Factor
 CSR_{eq,M=7.5} : CSR adjusted for M=7.5
 K_{sigma} : Effective overburden stress factor
 CSR* : CSR fully adjusted

:: Cyclic Resistance Ratio calculation CRR_{7.5} ::

Point ID	Field SPT	C _n	C _e	C _b	C _r	C _s	N ₁₍₆₀₎	DeltaN	N _{1(60)cs}	CRR _{7.5}
1	16.00	1.70	0.90	1.00	0.75	1.20	22.03	25.34	47.37	2.00
2	40.00	1.70	0.90	1.00	0.80	1.20	58.75	0.00	58.75	2.00
3	11.00	1.32	0.90	1.00	0.85	1.20	13.32	0.67	13.99	0.15
4	14.00	1.08	0.90	1.00	0.95	1.20	15.47	5.80	21.27	0.23
5	9.00	0.93	0.90	1.00	0.95	1.20	8.61	11.84	20.46	0.22
6	35.00	0.88	0.90	1.00	0.95	1.20	31.65	11.87	43.52	2.00
7	15.00	0.84	0.90	1.00	1.00	1.20	13.57	18.66	32.23	2.00
8	83.00	0.80	0.90	1.00	1.00	1.20	71.71	0.00	71.71	2.00
9	37.00	0.77	0.90	1.00	1.00	1.20	30.64	11.49	42.14	2.00
10	41.00	0.74	0.90	1.00	1.00	1.20	32.66	12.25	44.91	2.00
11	25.00	0.71	0.90	1.00	1.00	1.20	19.21	20.65	39.86	2.00

:: Cyclic Resistance Ratio calculation $CRR_{7.5}$::

Point ID	Field SPT	C_n	C_e	C_b	C_r	C_s	$N_{1(60)}$	DeltaN	$N_{1(60)cs}$	$CRR_{7.5}$
C_n :	Overburden correction factor									
C_e :	Energy correction factor									
C_b :	Borehole diameter correction factor									
C_r :	Rod length correction factor									
C_s :	Liner correction factor									
$N_{1(60)}$:	Corrected N_{SPT}									
DeltaN :	Addition to corrected N_{SPT} value due to the presence of fines									
$N_{1(60)cs}$:	Corrected $N_{1(60)}$ value for fines									
$CRR_{7.5}$:	Cyclic resistance ratio for $M=7.5$									

:: Settlements calculation for saturated sands ::

Point ID	$N_{1(60)}$	N_1	FS_L	e_v (%)	Settle. (in)
1	47.37	39.47	2.77	0.00	0.00
2	58.75	48.96	2.79	0.00	0.00
3	13.99	11.66	0.22	3.21	0.00
4	21.27	17.73	0.33	2.40	0.00
5	20.46	17.05	0.31	2.47	1.48
6	43.52	36.27	2.50	0.00	0.00
7	32.23	26.86	2.29	0.00	0.00
8	71.71	59.76	2.20	0.00	0.00
9	42.14	35.11	2.16	0.00	0.00
10	44.91	37.42	2.15	0.00	0.00
11	39.86	33.21	2.16	0.00	0.00

Total settlement : 1.48

$N_{1(60)}$:	Stress normalized and corrected SPT blow count
N_1 :	Japanese equivalent corrected value
FS_L :	Calculated factor of safety
e_v :	Post-liquefaction volumetric strain (%)
Settle.:	Calculated settlement (in)

:: Liquefaction potential according to Iwasaki ::

Point ID	F	w_z	I_L
1	0.00	9.70	0.00
2	0.00	9.24	0.00
3	0.78	8.48	10.13
4	0.67	7.71	7.84
5	0.69	6.95	7.27
6	0.00	6.19	0.00
7	0.00	5.43	0.00
8	0.00	4.67	0.00
9	0.00	3.90	0.00
10	0.00	3.14	0.00
11	0.00	2.38	0.00

Overall potential I_L : 25.24

$I_L = 0.00$ - No liquefaction
 I_L between 0.00 and 5 - Liquefaction not probable
 I_L between 5 and 15 - Liquefaction probable
 $I_L > 15$ - Liquefaction certain

APPENDIX


B



APPENDIX B LABORATORY TESTING

Laboratory tests were performed in accordance with generally accepted test methods of the American Society for Testing and Materials (ASTM), Caltrans, or other suggested procedures. Selected samples were tested for in-situ dry density and moisture content, corrosivity, consolidation, shear strength, maximum density and optimum moisture content, and grain size distribution. The results of the laboratory tests are summarized in the following figures.

CONSOLIDATION - PRESSURE TEST DATA ASTM D2435

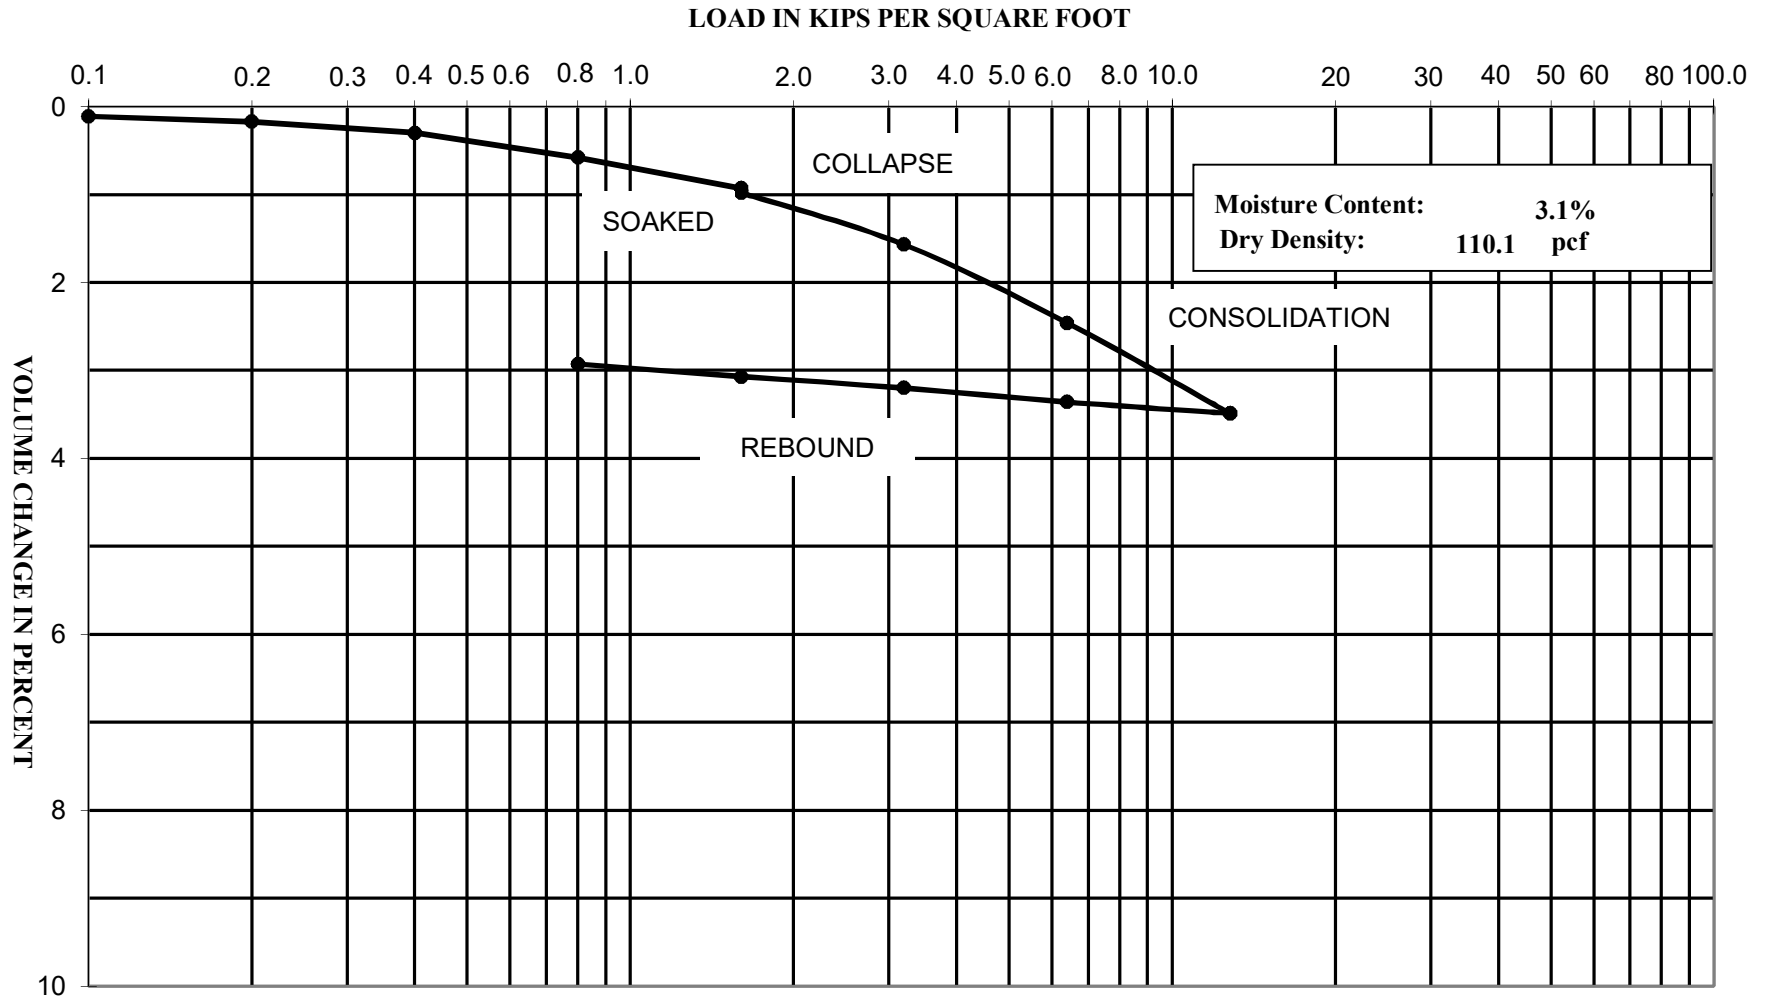


Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-1 @ 10'



CONSOLIDATION - PRESSURE TEST DATA ASTM D2435

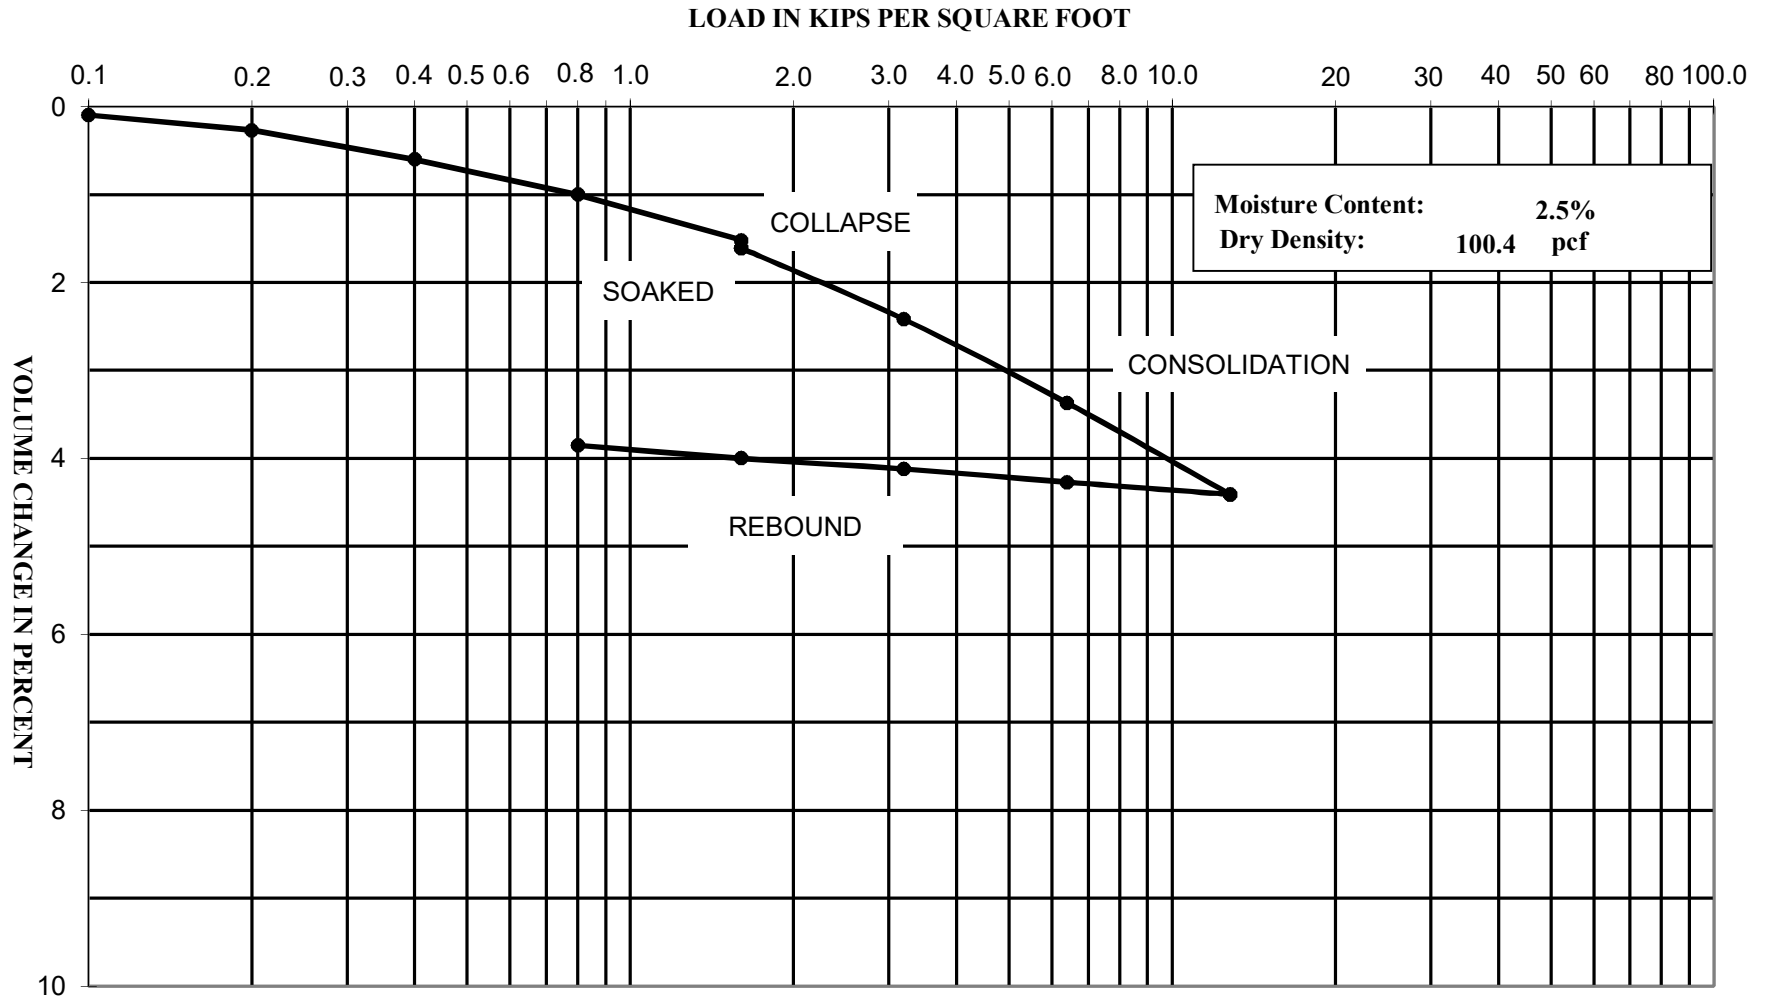


Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-2 @ 5'



CONSOLIDATION - PRESSURE TEST DATA ASTM D2435

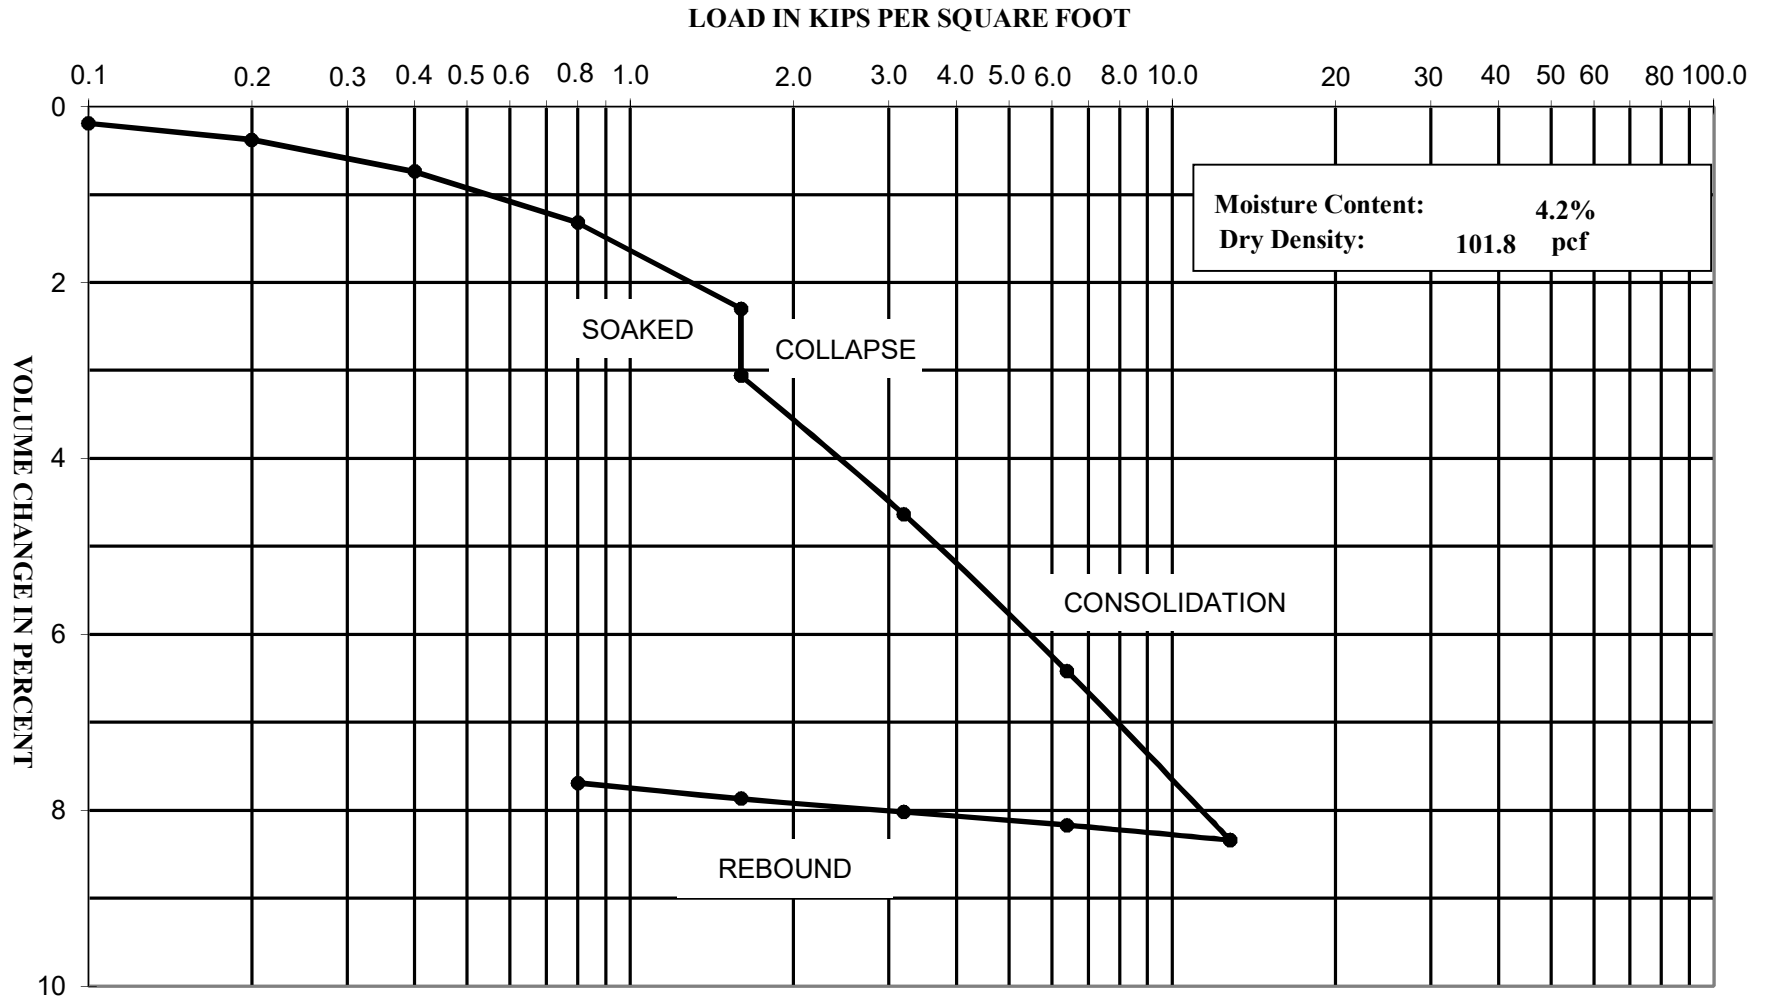

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-7 @ 2'





Direct Shear Test (ASTM D3080)

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA
Project Number: 3-222-0213
Client: Willis Development
Sample Location: B-1 @ 2'
Sample Type: Undisturbed Ring
Soil Classification: Silty SAND/Sandy SILT (SM/ML)
Tested By: M. Noorzay
Reviewed By: CJ
Date: 3/30/2022
Equipment Used: Geomatic Direct Shear Machine

	Sample 1	Sample 2	Sample 3
Normal Stress (ksf)	1.000	2.000	3.000
Shear Rate (in/min)	0.004		
Peak Shear Stress (ksf)	0.735	1.310	1.896
Residual Shear Stress (ksf)	0.000	0.000	0.000

Initial Height of Sample (in)	1.000	1.000	1.000
Height of Sample before Shear (in.)	1	1	1
Diameter of Sample (in)	2.416	2.416	2.416
Initial Moisture Content (%)	7.3		
Final Moisture Content (%)	23.4	23.1	23.1
Dry Density (pcf)	100.8	104.2	92.7

Peak Shear Strength Values	
Slope	0.58
Friction Angle	30.1
Cohesion (psf)	152

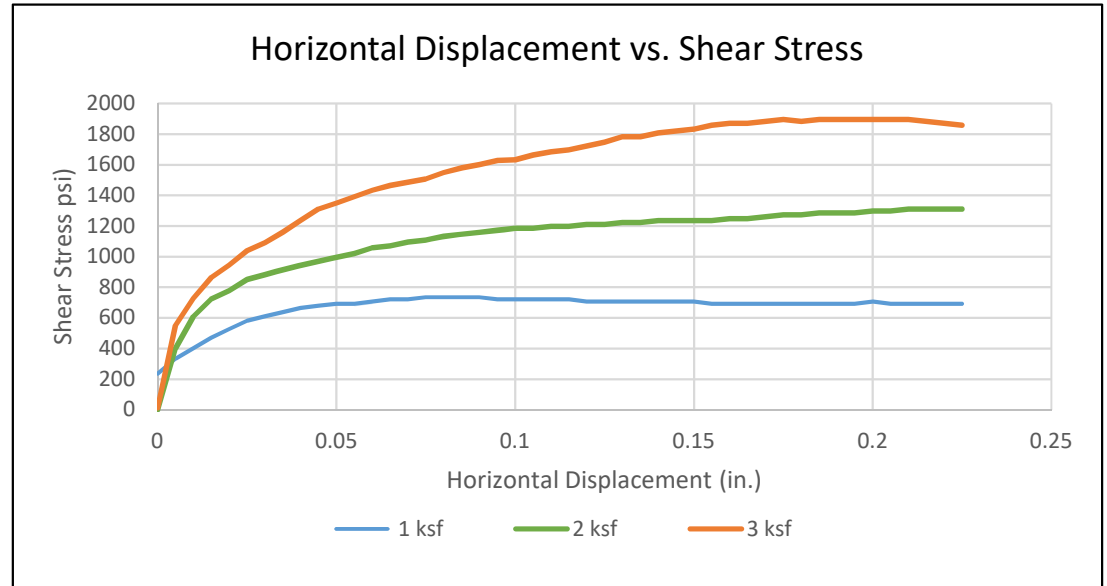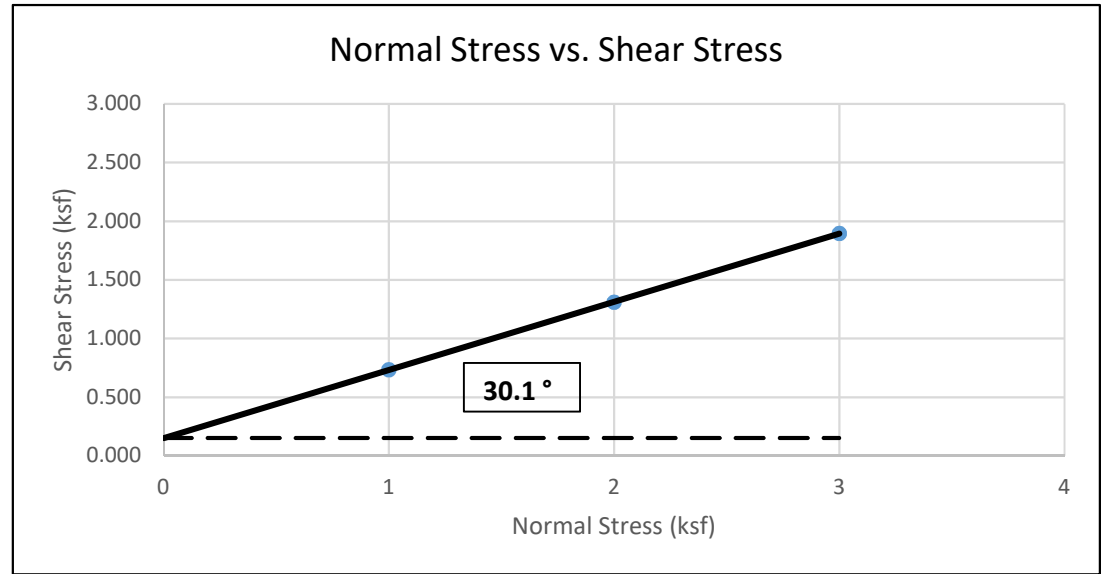



Direct Shear Test (ASTM D3080)

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA
Project Number: 3-222-0213
Client: Willis Development
Sample Location: B-5 @ 5'
Sample Type: Undisturbed Ring
Soil Classification: SAND with Silt (SW-SM)
Tested By: M. Noorzay
Reviewed By: CJ
Date: 3/29/2022
Equipment Used: Geomatic Direct Shear Machine


	Sample 1	Sample 2	Sample 3
Normal Stress (ksf)	1.000	2.000	3.000
Shear Rate (in/min)	0.004		
Peak Shear Stress (ksf)	0.816	1.560	2.364
Residual Shear Stress (ksf)	0.000	0.000	0.000

Initial Height of Sample (in)	1.000	1.000	1.000
Height of Sample before Shear (in.)	1	1	1
Diameter of Sample (in)	2.416	2.416	2.416
Initial Moisture Content (%)	4.4		
Final Moisture Content (%)	19.0	18.6	18.2
Dry Density (pcf)	104.4	106.8	105.9

Peak Shear Strength Values	
Slope	0.77
Friction Angle	37.7
Cohesion (psf)	32

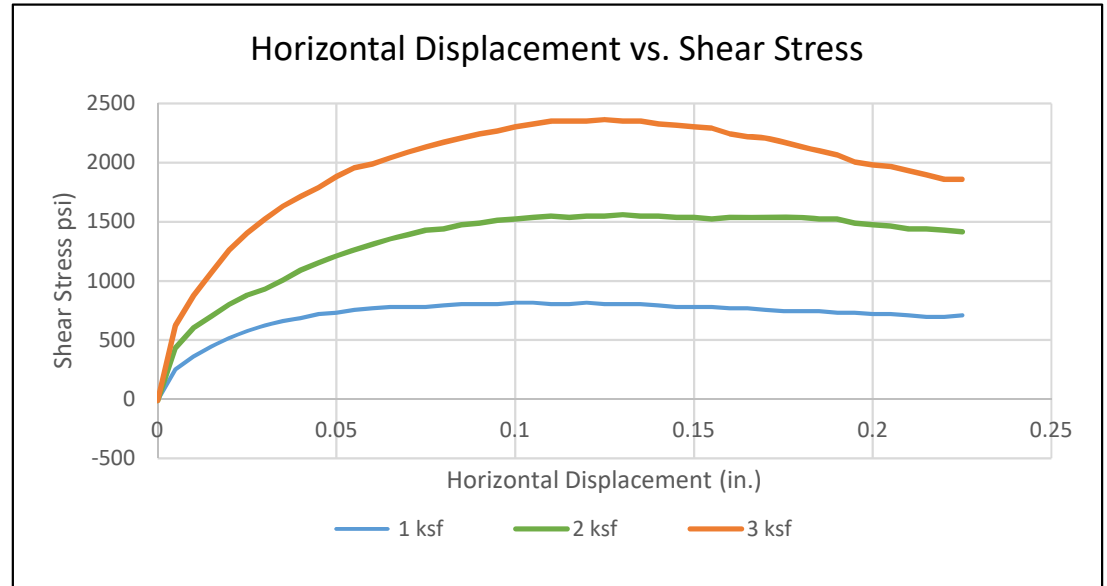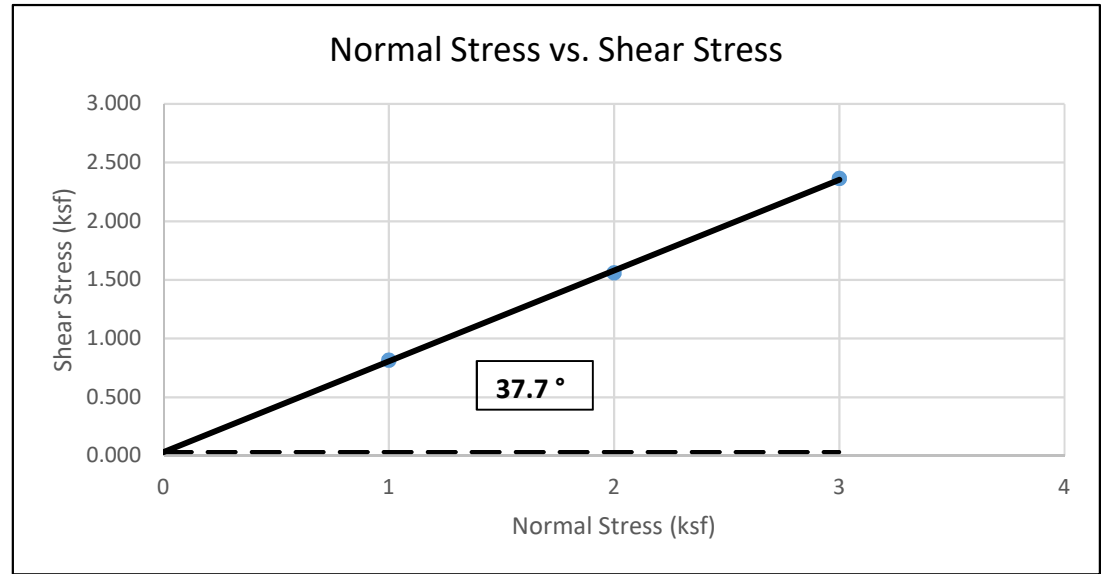

PARTICLE SIZE DISTRIBUTION DIAGRAM
GRADATION TEST - ASTM C136

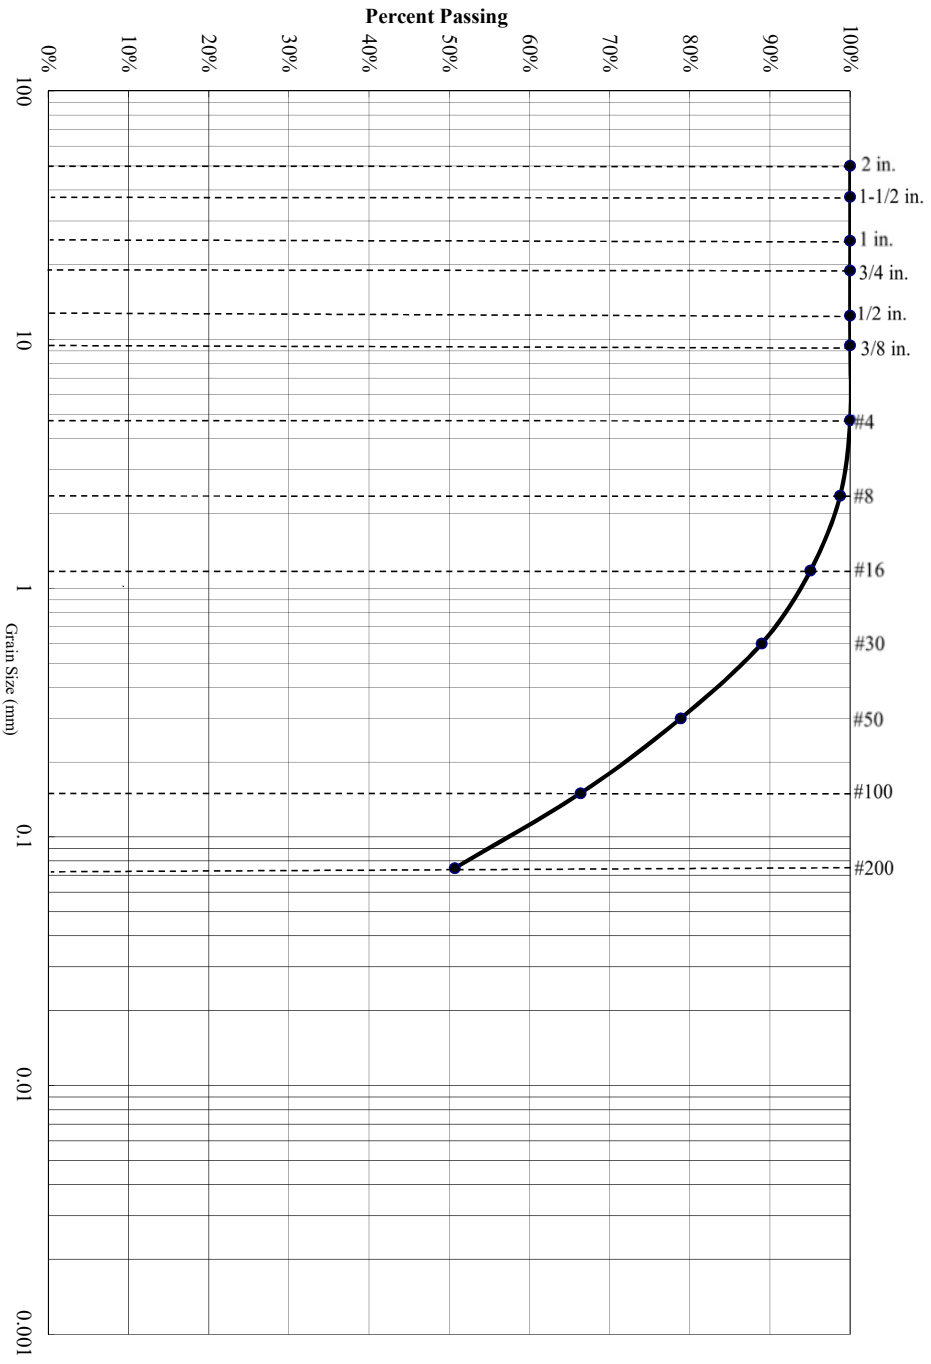

Percent Gravel	Percent Sand	Percent Silt/Clay
0%	49%	51%

Sieve Size	Percent Passing
3/4 inch	100.0%
1/2 inch	100.0%
3/8 inch	100.0%
#4	100.0%
#8	98.8%
#16	95.1%
#30	89.0%
#50	78.9%
#100	66.4%
#200	50.7%

Atterberg Limits	PI =	
LL =	PI =	
Coefficients		
D₈₅ =	D₆₀ =	D₅₀ =
D₃₀ =	D₁₅ =	D₁₀ =
C_u =	C_c =	N/A
USCS CLASSIFICATION		
Silty SAND/Sandy SILT (SM/ML)		


Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-1 @ 2'



**PARTICLE SIZE DISTRIBUTION DIAGRAM
GRADATION TEST - ASTM C136**

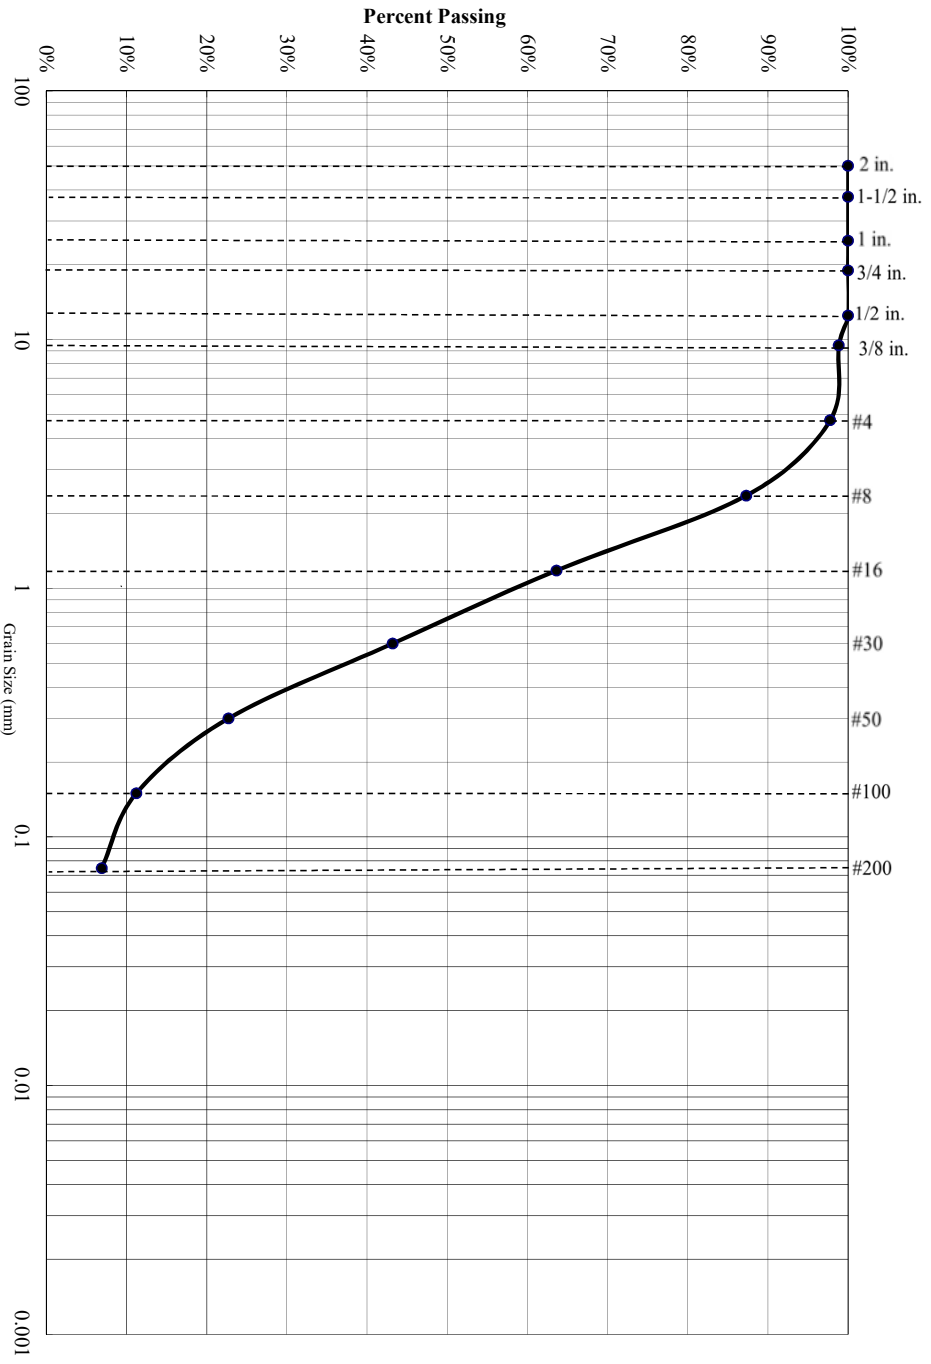

Percent Gravel	Percent Sand	Percent Silt/Clay
2%	91%	7%


Sieve Size	Percent Passing
3/4 inch	100.0%
1/2 inch	100.0%
3/8 inch	98.8%
#4	97.8%
#8	87.3%
#16	63.6%
#30	43.2%
#50	22.7%
#100	11.2%
#200	6.9%

Atterberg Limits	PI=	
LL=	PI=	
Coefficients		
D₈₅=	D₆₀= 1.0	D₅₀=
D₃₀= 0.4	D₁₅=	D₁₀= 0.15
C_u= 6.67	C_c= 1.07	
USCS CLASSIFICATION		
Well-graded SAND with Silt (SW-SM)		

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA
Project Number: 3-222-0213
Boring: B-1 @ 10'



PARTICLE SIZE DISTRIBUTION DIAGRAM
GRADATION TEST - ASTM C136

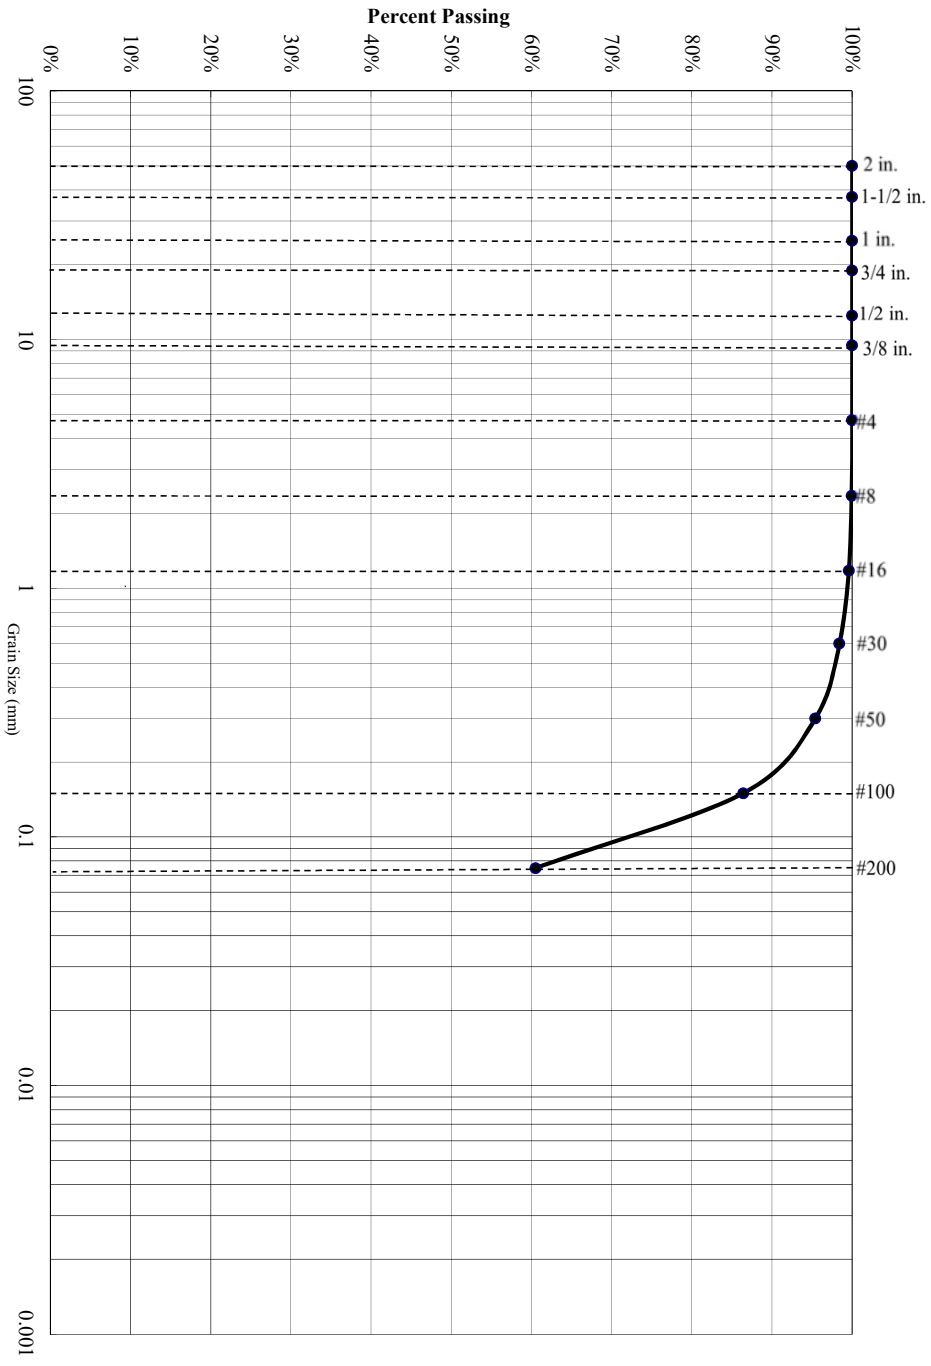

Percent Gravel	Percent Sand	Percent Silt/Clay
0%	39%	61%

Sieve Size	Percent Passing
3/4 inch	100.0%
1/2 inch	100.0%
3/8 inch	100.0%
#4	100.0%
#8	100.0%
#16	99.6%
#30	98.4%
#50	95.4%
#100	86.4%
#200	60.5%

Atterberg Limits	PI =	
LL =	PI =	
Coefficients		
D₈₅ =	D₆₀ =	D₅₀ =
D₃₀ =	D₁₅ =	D₁₀ =
C_u =	C_c =	N/A
USCS CLASSIFICATION		
Sandy SILT (ML)		


Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-1 @ 20'



PARTICLE SIZE DISTRIBUTION DIAGRAM
GRADATION TEST - ASTM C136

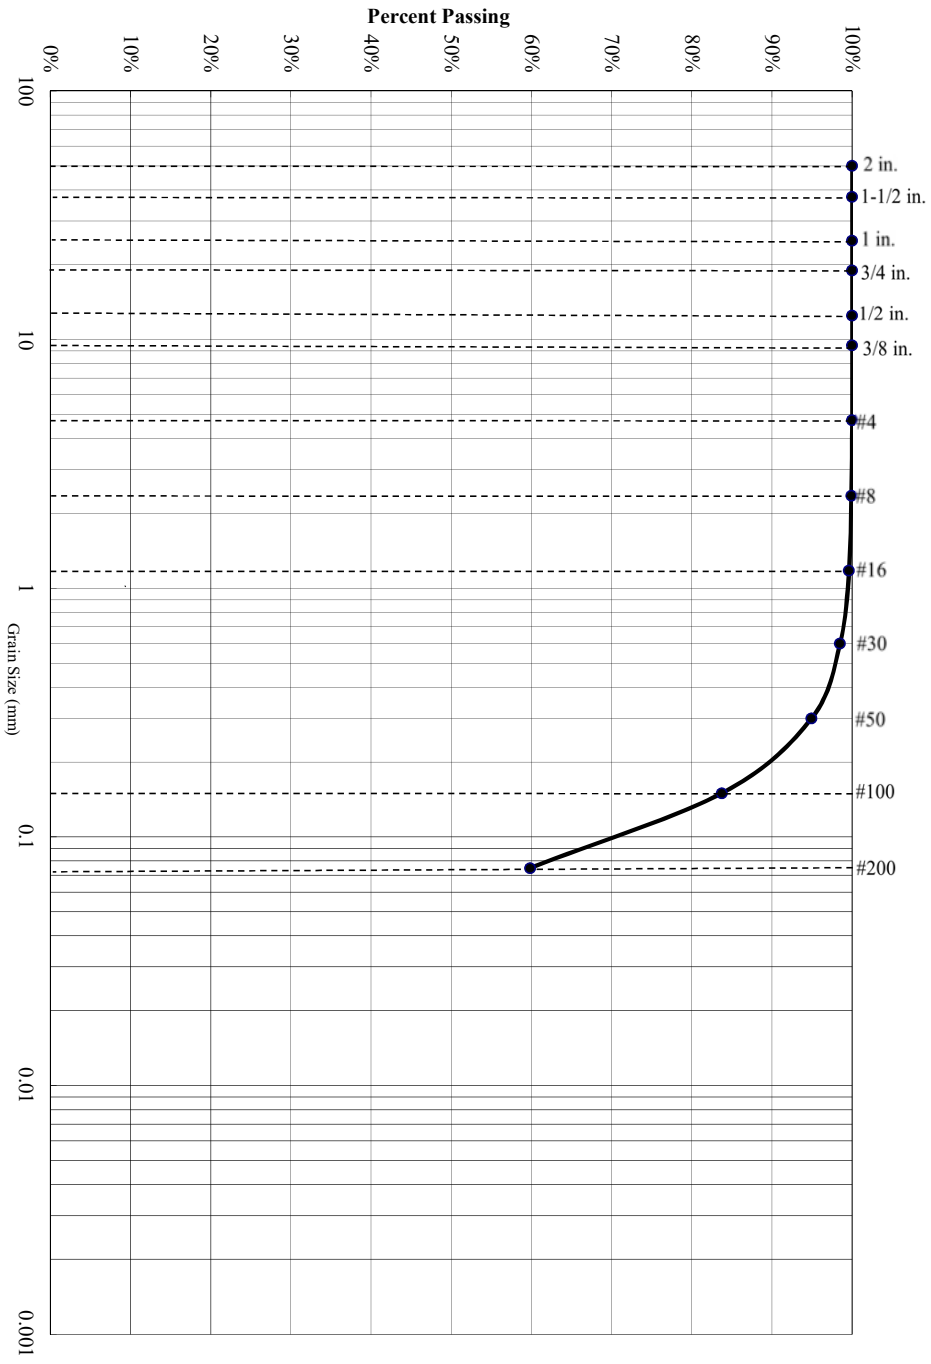

Percent Gravel	Percent Sand	Percent Silt/Clay
0%	40%	60%

Sieve Size	Percent Passing
3/4 inch	100.0%
1/2 inch	100.0%
3/8 inch	100.0%
#4	100.0%
#8	99.9%
#16	99.6%
#30	98.5%
#50	94.9%
#100	83.8%
#200	59.8%

Atterberg Limits	PI=	
LL=	PI=	
Coefficients		
D₈₅=	D₆₀=	D₅₀=
D₃₀=	D₁₅=	D₁₀=
C_u=	C_c=	N/A
USCS CLASSIFICATION		
Sandy SILT (ML)		


Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-1 @ 30'



PARTICLE SIZE DISTRIBUTION DIAGRAM
GRADATION TEST - ASTM C136

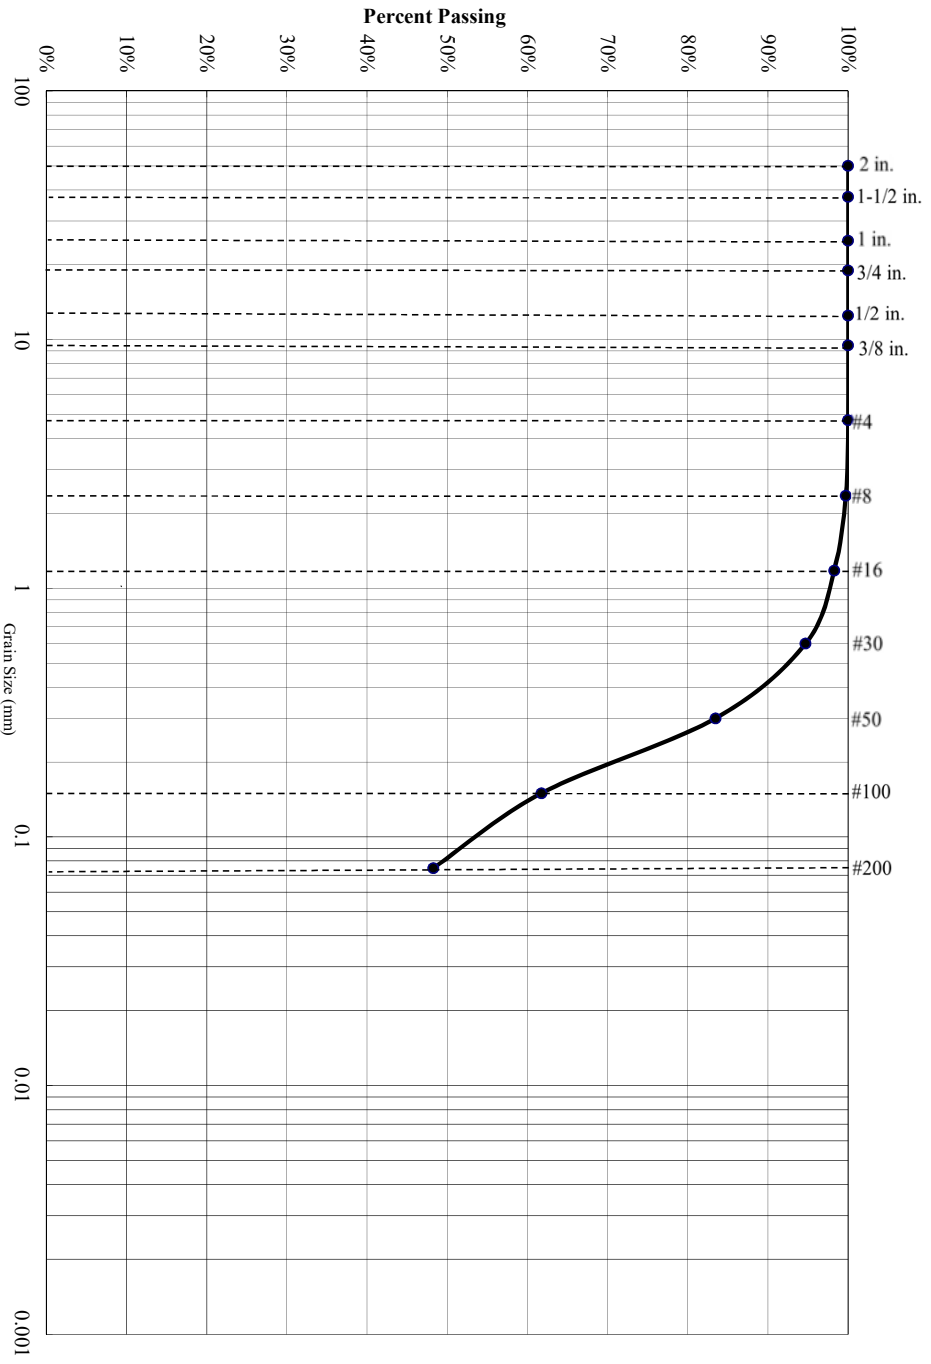

Percent Gravel	Percent Sand	Percent Silt/Clay
0%	52%	48%


Sieve Size	Percent Passing
3/4 inch	100.0%
1/2 inch	100.0%
3/8 inch	100.0%
#4	100.0%
#8	99.7%
#16	98.3%
#30	94.7%
#50	83.5%
#100	61.8%
#200	48.3%

Atterberg Limits	PI=	
LL=	PI=	
Coefficients		
D₈₅=	D₆₀=	D₅₀=
D₃₀=	D₁₅=	D₁₀=
C_u=	C_c=	N/A
USCS CLASSIFICATION		
Silty SAND/Sandy SILT (SM/ML)		

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA
Project Number: 3-222-0213
Boring: B-1 @ 50'



PARTICLE SIZE DISTRIBUTION DIAGRAM
GRADATION TEST - ASTM C136

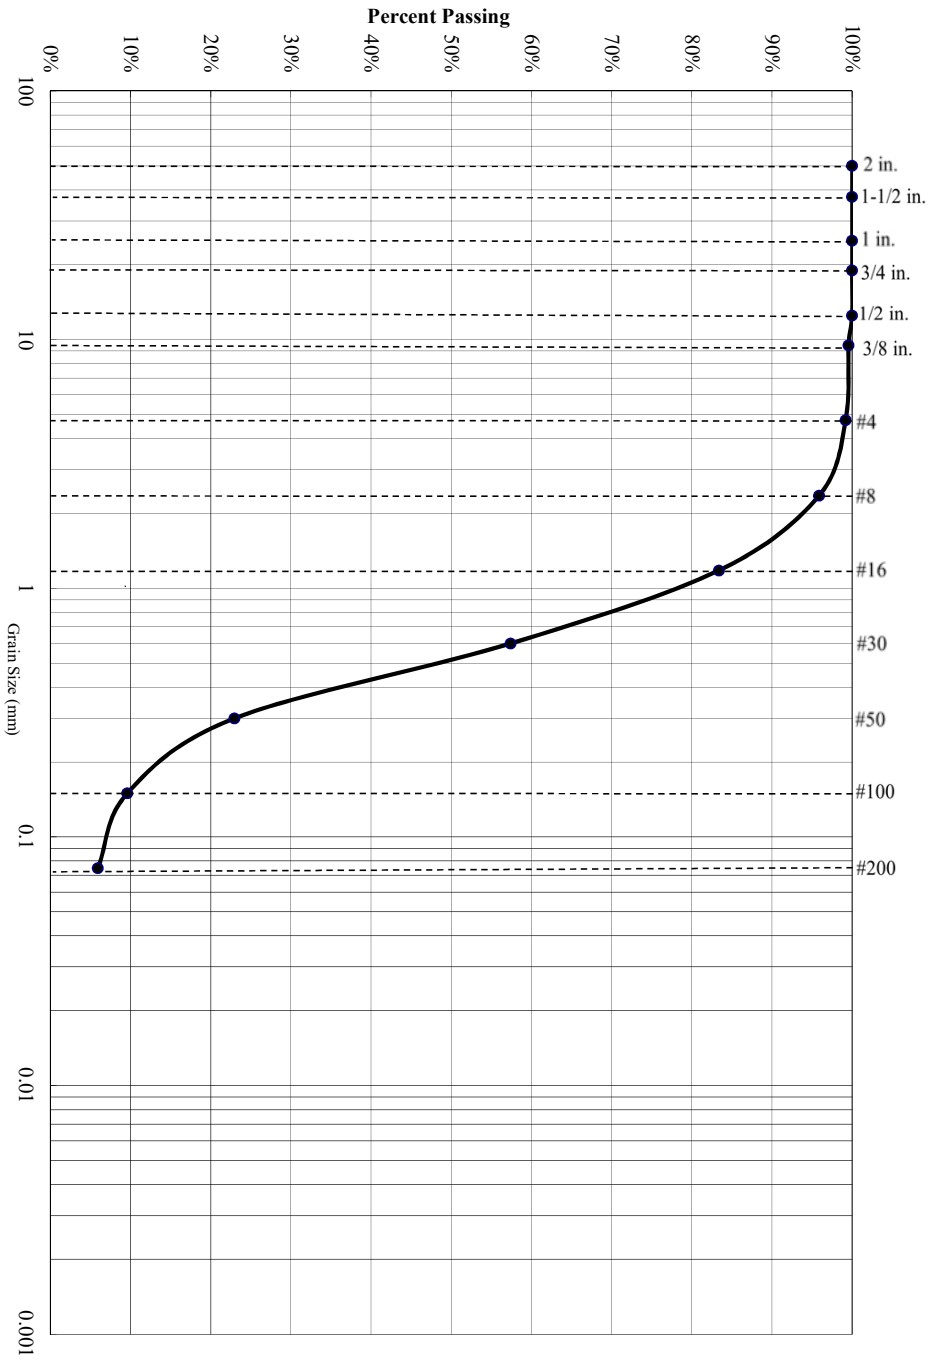

Percent Gravel	Percent Sand	Percent Silt/Clay
1%	93%	6%

Sieve Size	Percent Passing
3/4 inch	100.0%
1/2 inch	100.0%
3/8 inch	99.5%
#4	99.2%
#8	95.9%
#16	83.4%
#30	57.4%
#50	23.0%
#100	9.6%
#200	5.9%

Atterberg Limits	PI=	
LL=	PI=	
Coefficients		
D₈₅=	D₆₀= 0.65	D₅₀=
D₃₀= 0.35	D₁₅=	D₁₀= 0.15
C_u= 4.33	C_c= 1.26	
USCS CLASSIFICATION		
Poorly graded SAND with Silt (SP-SM)		


Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-2 @ 5'



PARTICLE SIZE DISTRIBUTION DIAGRAM
GRADATION TEST - ASTM C136

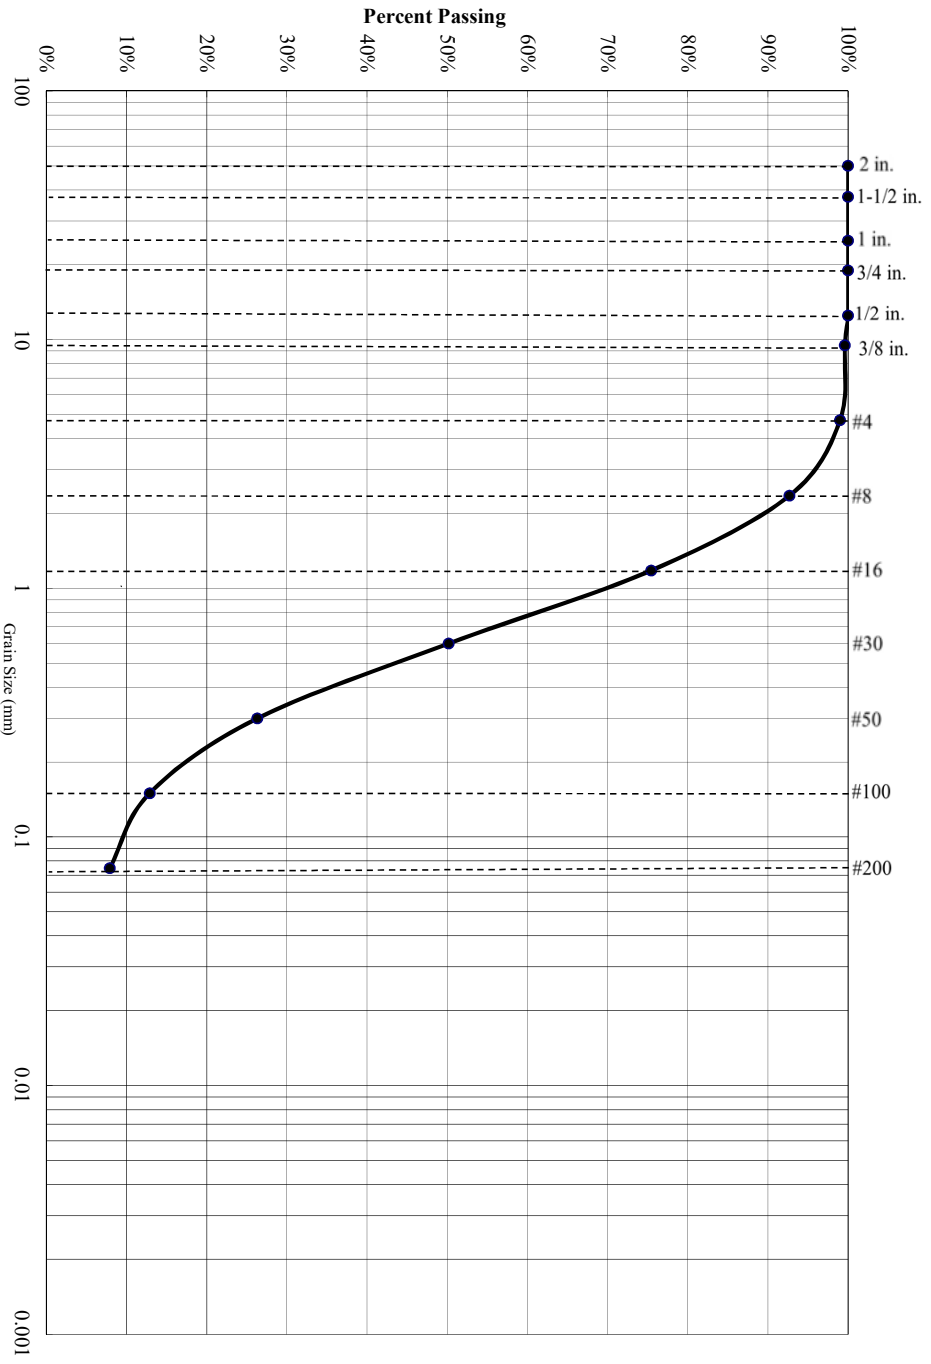

Percent Gravel	Percent Sand	Percent Silt/Clay
1%	91%	8%

Sieve Size	Percent Passing
3/4 inch	100.0%
1/2 inch	100.0%
3/8 inch	99.6%
#4	99.0%
#8	92.7%
#16	75.4%
#30	50.2%
#50	26.3%
#100	12.9%
#200	7.9%

Atterberg Limits	PI =		
LL =	PI =		
Coefficients			
D₈₅ =	D₆₀ =	0.8	D₅₀ =
D₃₀ =	D₁₅ =	0.35	D₁₀ =
C_u =	C_c =	8.00	1.53
USCS CLASSIFICATION			
Well-graded SAND with Silt (SW-SM)			

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Boring: B-5 @ 5'



CHEMICAL ANALYSIS

SO₄ - Modified CTM 417 & Cl - Modified CTM 417/422

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA

Project Number: 3-222-0213

Date Sampled: 3/15/2022- 3/16/2022

Date Tested: 3/30/2022

Sampled By: KY

Tested By: Mass N.


Soil Description: Brown Silty SAND/Sandy SILT (SM/ML)

Sample Number	Sample Location	Soluble Sulfate SO ₄ -S	Soluble Chloride Cl	pH
1a.	B-1 @ 0'-4'	150 mg/kg	36 mg/kg	7.7
1b.	B-1 @ 0'-4'	160 mg/kg	34 mg/kg	7.7
1c.	B-1 @ 0'-4'	150 mg/kg	34 mg/kg	7.7
Average:		153 mg/kg	35 mg/kg	7.7

Laboratory Compaction Curve ASTM D1557

Project Name: Proposed Assisted Living and Memory Care - Temecula, CA
 Project Number: 3-222-0213
 Date Sampled: 3/15/2022- 3/16/2022
 Date Tested: 3/30/2022
 Sampled By: KY
 Tested By: Mobin N.
 Sample Location: B-1 @ 0'-4'
 Soil Description: Brown Silty SAND/Sandy SILT (SM/ML)
 Test Method: Method B

	1	2	3	4
Weight of Moist Specimen & Mold, (g)	6261.6	6380.8	6417.0	6380.8
Weight of Compaction Mold, (g)	4290.9	4290.9	4290.9	4290.9
Weight of Moist Specimen, (g)	1970.7	2089.9	2126.1	2089.9
Volume of Mold, (ft ³)	0.0333	0.0333	0.0333	0.0333
Wet Density, (pcf)	130.3	138.2	140.6	138.2
Weight of Wet (Moisture) Sample, (g)	200.0	200.0	200.0	200.0
Weight of Dry (Moisture) Sample, (g)	190.1	185.7	183.5	179.5
Moisture Content, (%)	5.2%	7.7%	9.0%	11.4%
Dry Density, (pcf)	123.9	128.3	129.0	124.1

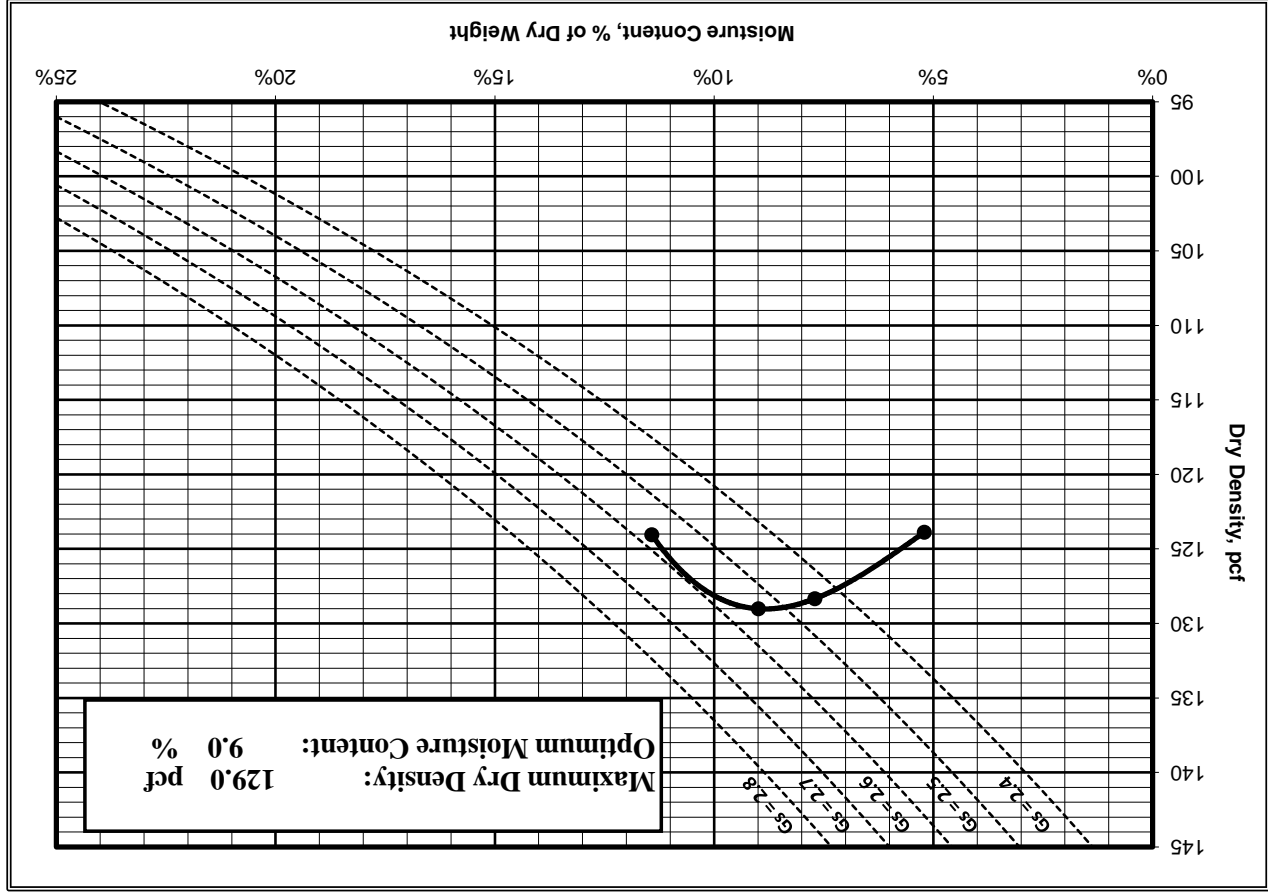

APPENDIX

C



APPENDIX C GENERAL EARTHWORK AND PAVEMENT SPECIFICATIONS

When the text of the report conflicts with the general specifications in this appendix, the recommendations in the report have precedence.

1.0 SCOPE OF WORK: These specifications and applicable plans pertain to and include all earthwork associated with the site rough grading, including, but not limited to, the furnishing of all labor, tools and equipment necessary for site clearing and grubbing, stripping, preparation of foundation materials for receiving fill, excavation, processing, placement and compaction of fill and backfill materials to the lines and grades shown on the project grading plans and disposal of excess materials.

2.0 PERFORMANCE: The Contractor shall be responsible for the satisfactory completion of all earthwork in accordance with the project plans and specifications. This work shall be inspected and tested by a representative of SALEM Engineering Group, Incorporated, hereinafter referred to as the Soils Engineer and/or Testing Agency. Attainment of design grades, when achieved, shall be certified by the project Civil Engineer. Both the Soils Engineer and the Civil Engineer are the Owner's representatives. If the Contractor should fail to meet the technical or design requirements embodied in this document and on the applicable plans, he shall make the necessary adjustments until all work is deemed satisfactory as determined by both the Soils Engineer and the Civil Engineer. No deviation from these specifications shall be made except upon written approval of the Soils Engineer, Civil Engineer, or project Architect.

No earthwork shall be performed without the physical presence or approval of the Soils Engineer. The Contractor shall notify the Soils Engineer at least 2 working days prior to the commencement of any aspect of the site earthwork.

The Contractor shall assume sole and complete responsibility for job site conditions during the course of construction of this project, including safety of all persons and property; that this requirement shall apply continuously and not be limited to normal working hours; and that the Contractor shall defend, indemnify and hold the Owner and the Engineers harmless from any and all liability, real or alleged, in connection with the performance of work on this project, except for liability arising from the sole negligence of the Owner or the Engineers.

3.0 TECHNICAL REQUIREMENTS: All compacted materials shall be densified to no less than 90 percent (95 percent for non-expansive granular soils) of relative compaction based on ASTM D1557-12e1 Test Method or as specified in the technical portion of the Soil Engineer's report. The location and frequency of field density tests shall be determined by the Soils Engineer. The results of these tests and compliance with these specifications shall be the basis upon which satisfactory completion of work will be judged by the Soils Engineer.

4.0 SOILS AND FOUNDATION CONDITIONS: The Contractor is presumed to have visited the site and to have familiarized himself with existing site conditions and the contents of the data presented in the Geotechnical Engineering Report. The Contractor shall make his own interpretation of the data contained in the Geotechnical Engineering Report and the Contractor shall not be relieved of liability for any loss sustained as a result of any variance between conditions indicated by or deduced from said report and the actual conditions encountered during the progress of the work.

5.0 DUST CONTROL: The work includes dust control as required for the alleviation or prevention of any dust nuisance on or about the site or the borrow area, or off-site if caused by the Contractor's operation either during the performance of the earthwork or resulting from the conditions in which the Contractor leaves the site. The Contractor shall assume all liability, including court costs of codefendants, for all claims related to dust or wind-blown materials attributable to his work. Site preparation shall consist of site clearing and grubbing and preparation of foundation materials for receiving fill.

6.0 CLEARING AND GRUBBING: The Contractor shall accept the site in this present condition and shall demolish and/or remove from the area of designated project earthwork all structures, both surface and subsurface, trees, brush, roots, debris, organic matter and all other matter determined by the Soils Engineer to be deleterious. Such materials shall become the property of the Contractor and shall be removed from the site.

Tree root systems in proposed improvement areas should be removed to a minimum depth of 3 feet and to such an extent which would permit removal of all roots greater than 1 inch in diameter. Tree roots removed in parking areas may be limited to the upper 1½ feet of the ground surface. Backfill of tree root excavations is not permitted until all exposed surfaces have been inspected and the Soils Engineer is present for the proper control of backfill placement and compaction. Burning in areas which are to receive fill materials shall not be permitted.

7.0 SUBGRADE PREPARATION: Surfaces to receive Engineered Fill and/or building or slab loads shall be prepared as outlined above, scarified to a minimum of 12 inches, moisture-conditioned as necessary, and recompacted to 90% (95% for non-expansive granular soils) relative compaction.

Loose soil areas and/or areas of disturbed soil shall be moisture-conditioned as necessary and recompacted to 90% (95% for non-expansive granular soils). All ruts, hummocks, or other uneven surface features shall be removed by surface grading prior to placement of any fill materials. All areas which are to receive fill materials shall be approved by the Soils Engineer prior to the placement of any fill material.

8.0 EXCAVATION: All excavation shall be accomplished to the tolerance normally defined by the Civil Engineer as shown on the project grading plans. All over-excavation below the grades specified shall be backfilled at the Contractor's expense and shall be compacted in accordance with the applicable technical requirements.

9.0 FILL AND BACKFILL MATERIAL: No material shall be moved or compacted without the presence or approval of the Soils Engineer. Material from the required site excavation may be utilized for construction site fills, provided prior approval is given by the Soils Engineer. All materials utilized for constructing site fills shall be free from vegetation or other deleterious matter as determined by the Soils Engineer.

10.0 PLACEMENT, SPREADING AND COMPACTION: The placement and spreading of approved fill materials and the processing and compaction of approved fill and native materials shall be the responsibility of the Contractor. Compaction of fill materials by flooding, ponding, or jetting shall not be permitted unless specifically approved by local code, as well as the Soils Engineer. Both cut and fill shall be surface-compacted to the satisfaction of the Soils Engineer prior to final acceptance.

11.0 SEASONAL LIMITS: No fill material shall be placed, spread, or rolled while it is frozen or thawing, or during unfavorable wet weather conditions. When the work is interrupted by heavy rains, fill

operations shall not be resumed until the Soils Engineer indicates that the moisture content and density of previously placed fill is as specified.


12.0 DEFINITIONS - The term "pavement" shall include asphaltic concrete surfacing, untreated aggregate base, and aggregate subbase. The term "subgrade" is that portion of the area on which surfacing, base, or subbase is to be placed. The term "Standard Specifications": hereinafter referred to, is the most recent edition of the Standard Specifications of the State of California, Department of Transportation. The term "relative compaction" refers to the field density expressed as a percentage of the maximum laboratory density as determined by ASTM D1557-12e1 Test Method.

13.0 PREPARATION OF THE SUBGRADE - The Contractor shall prepare the surface of the various subgrades receiving subsequent pavement courses to the lines, grades, and dimensions given on the plans. The upper 12 inches of the soil subgrade beneath the pavement section shall be compacted to a minimum relative compaction of 90% (95% for non-expansive granular soils) based upon ASTM D1557-12e1 Test Method. The finished subgrades shall be tested and approved by the Soils Engineer prior to the placement of additional pavement courses.


14.0 AGGREGATE BASE - The aggregate base material shall be spread and compacted on the prepared subgrade in conformity with the lines, grades, and dimensions shown on the plans. The aggregate base material shall conform to the requirements of Section 26 of the Standard Specifications for Class II material, ¾-inch or 1½-inches maximum size. The aggregate base material shall be compacted to a minimum relative compaction of 95 percent based upon ASTM D1557-12e1 Test Method. The aggregate base material shall be spread in layers not exceeding 6 inches and each layer of aggregate material course shall be tested and approved by the Soils Engineer prior to the placement of successive layers.

15.0 AGGREGATE SUBBASE - The aggregate subbase shall be spread and compacted on the prepared subgrade in conformity with the lines, grades, and dimensions shown on the plans. The aggregate subbase material shall conform to the requirements of Section 25 of the Standard Specifications for Class II Subbase material. The aggregate subbase material shall be compacted to a minimum relative compaction of 95 percent based upon ASTM D1557-12e1 Test Method, and it shall be spread and compacted in accordance with the Standard Specifications. Each layer of aggregate subbase shall be tested and approved by the Soils Engineer prior to the placement of successive layers.

16.0 ASPHALTIC CONCRETE SURFACING - Asphaltic concrete surfacing shall consist of a mixture of mineral aggregate and paving grade asphalt, mixed at a central mixing plant and spread and compacted on a prepared base in conformity with the lines, grades, and dimensions shown on the plans. The viscosity grade of the asphalt shall be PG 70-10, unless otherwise stipulated or local conditions warrant more stringent grade. The mineral aggregate shall be Type A or B, ½ inch maximum size, medium grading, and shall conform to the requirements set forth in Section 39 of the Standard Specifications. The drying, proportioning, and mixing of the materials shall conform to Section 39. The prime coat, spreading and compacting equipment, and spreading and compacting the mixture shall conform to the applicable chapters of Section 39, with the exception that no surface course shall be placed when the atmospheric temperature is below 50 degrees F. The surfacing shall be rolled with a combination steel-wheel and pneumatic rollers, as described in the Standard Specifications. The surface course shall be placed with an approved self-propelled mechanical spreading and finishing machine.

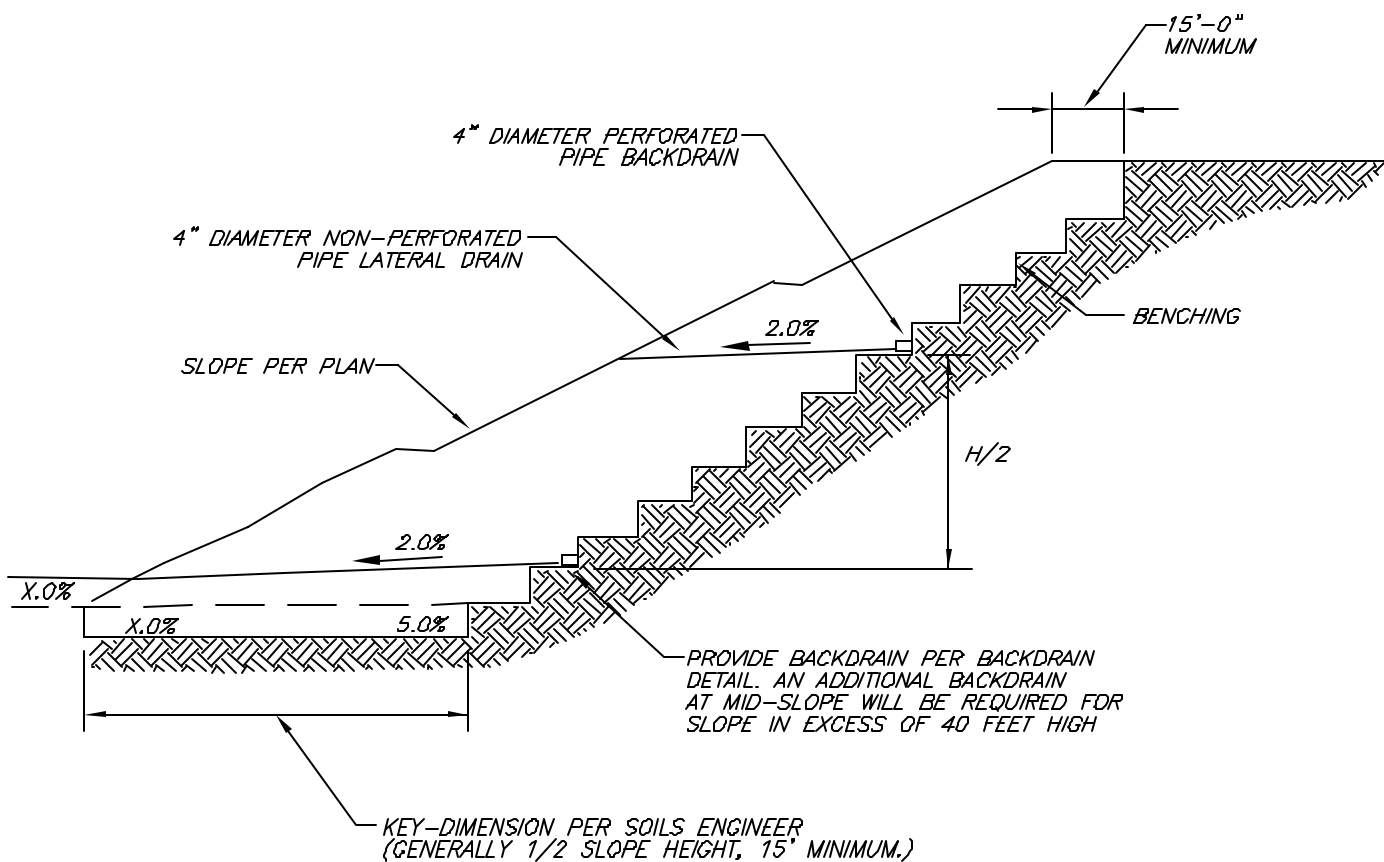


**TYPICAL STABILIZATION
FILL DETAIL**

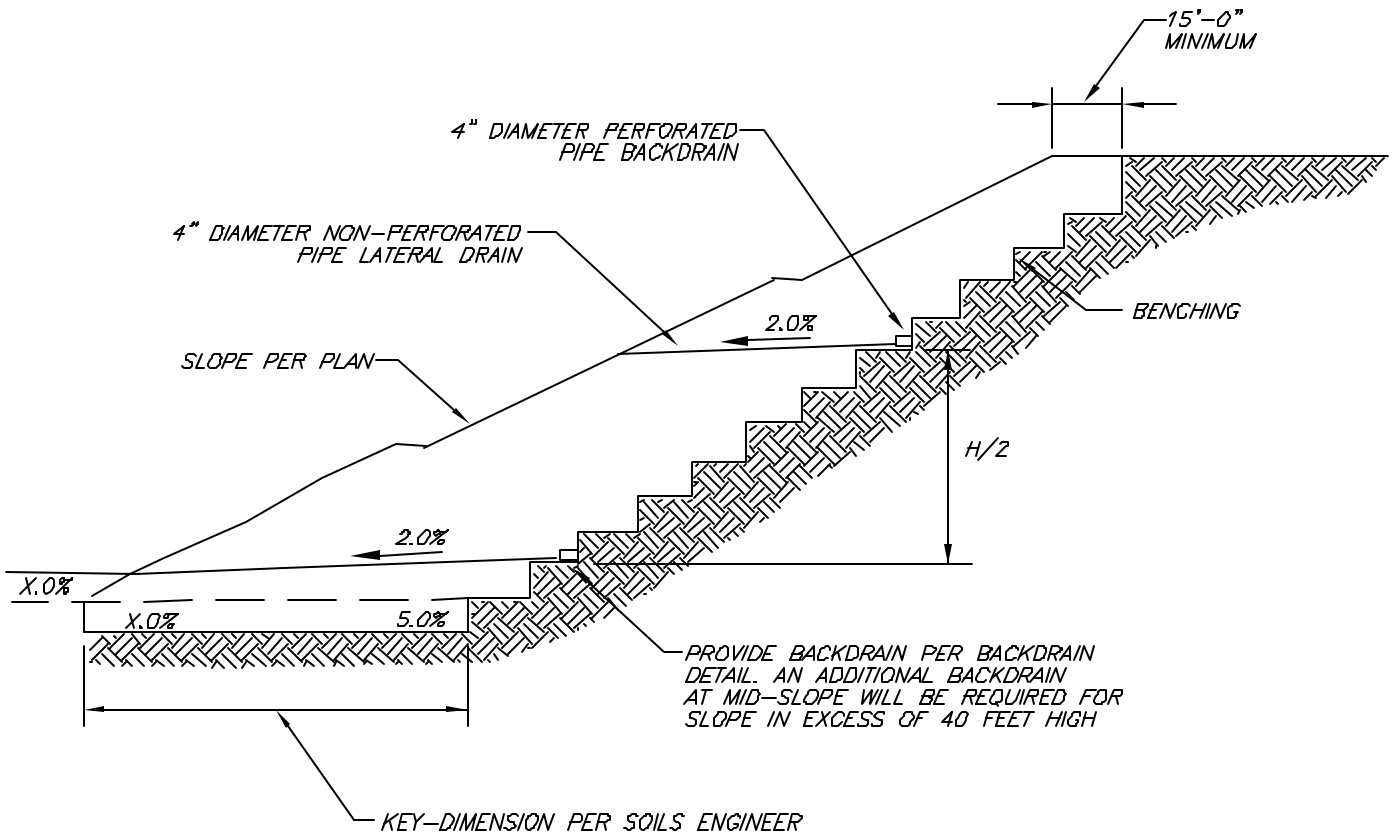


**TYPICAL BUTTRESS FILL
DETAIL**



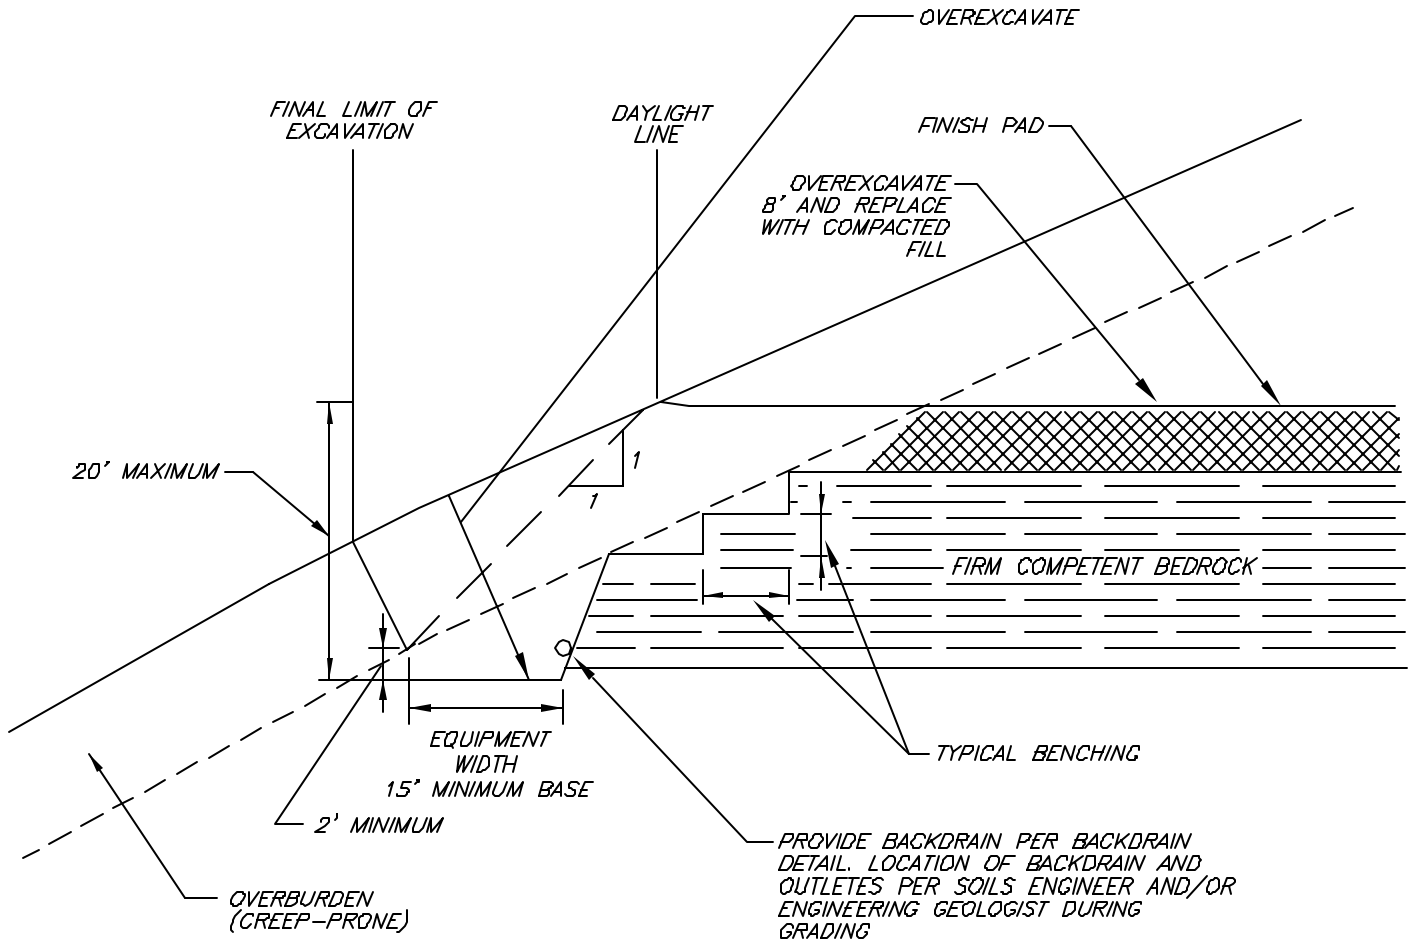


DAYLIGHT SHEAR KEY DETAIL



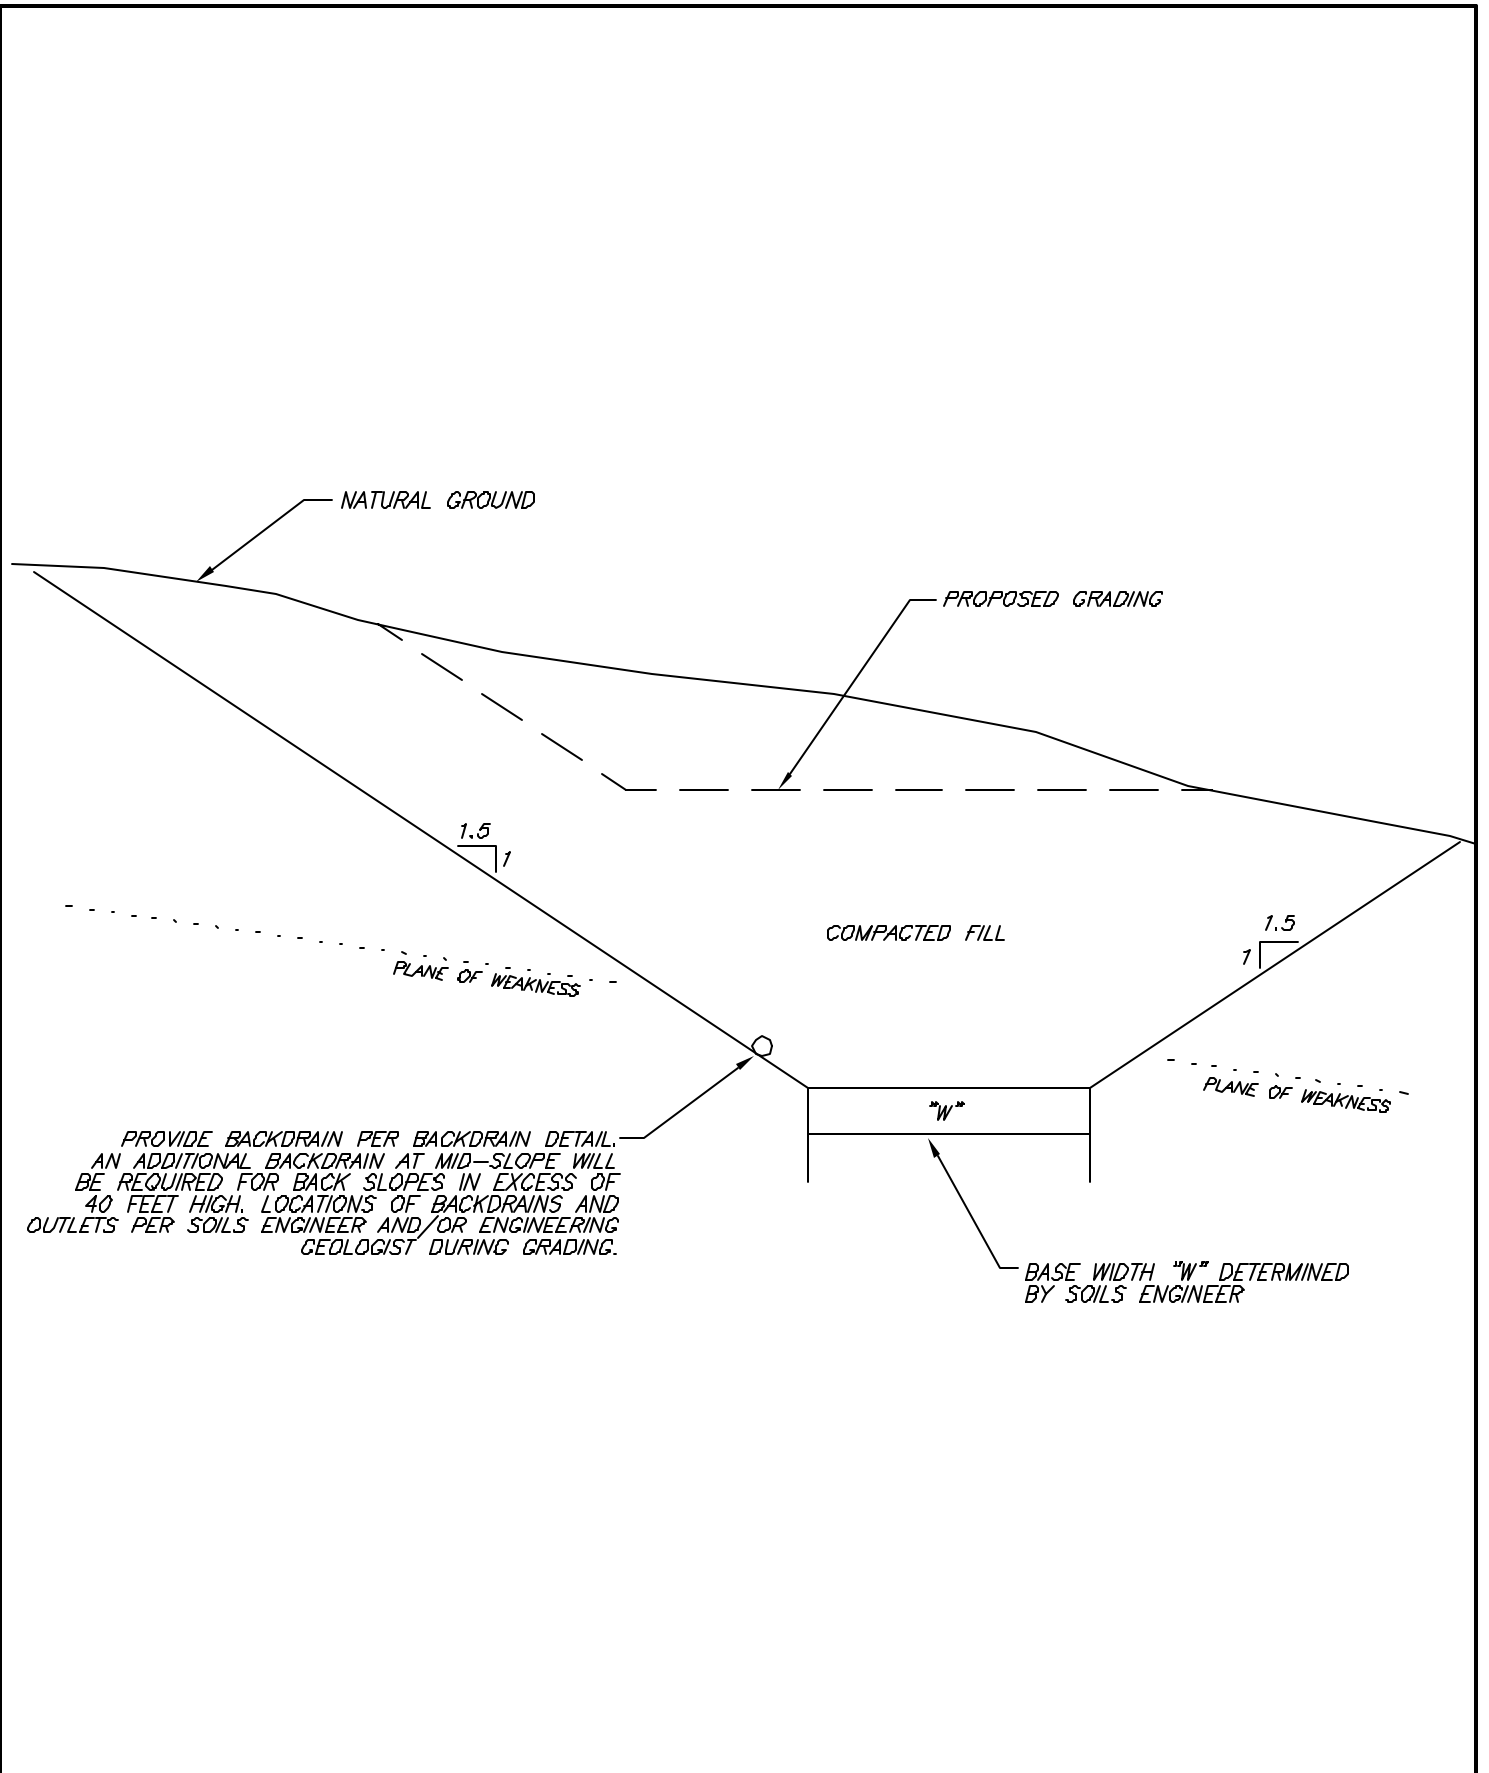


**TYPICAL SHEAR KEY
DETAIL**

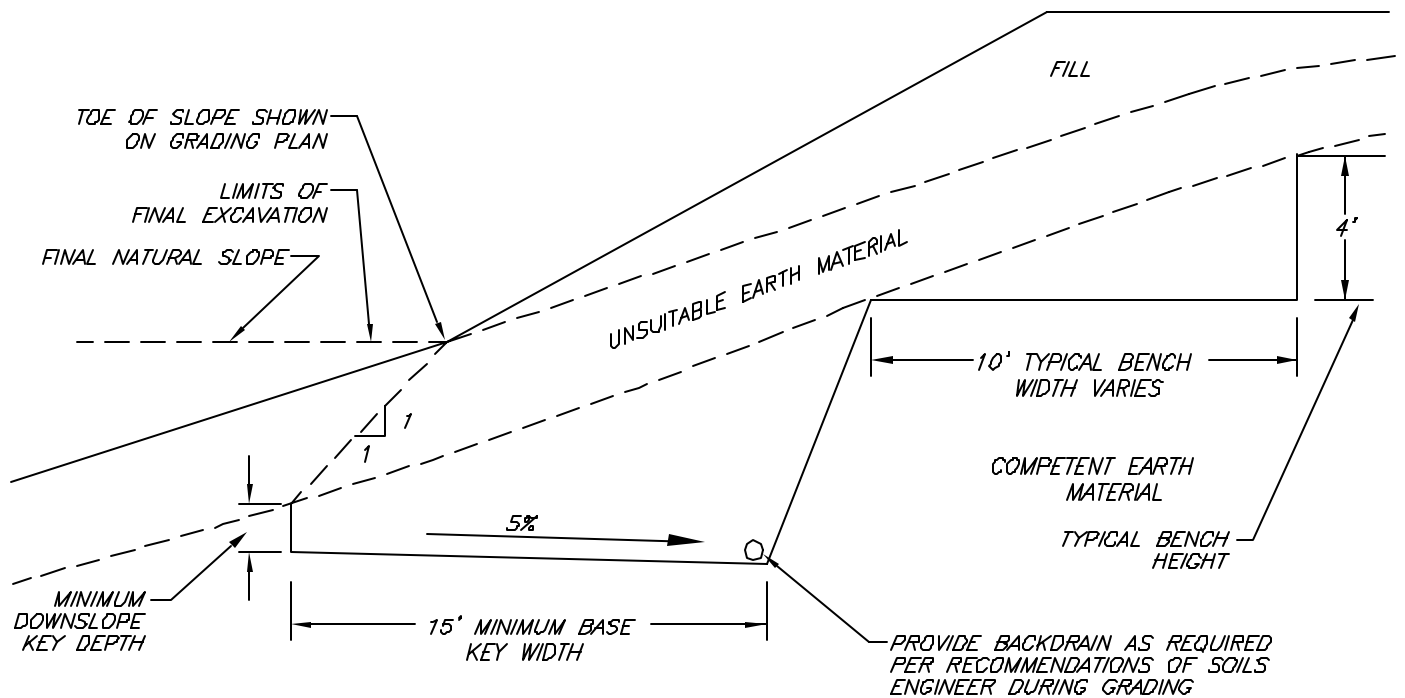

WHERE NATURAL SLOPE IS 5:1 OR LESS,
 BENCHING IS NOT NECESSARY, HOWEVER, FILL IS
 NOT TO BE PLACED ON COMPRESSIBLE OR
 UNSUITABLE MATERIAL.


**FILL SLOPE ABOVE
 NATURAL GROUND DETAIL**



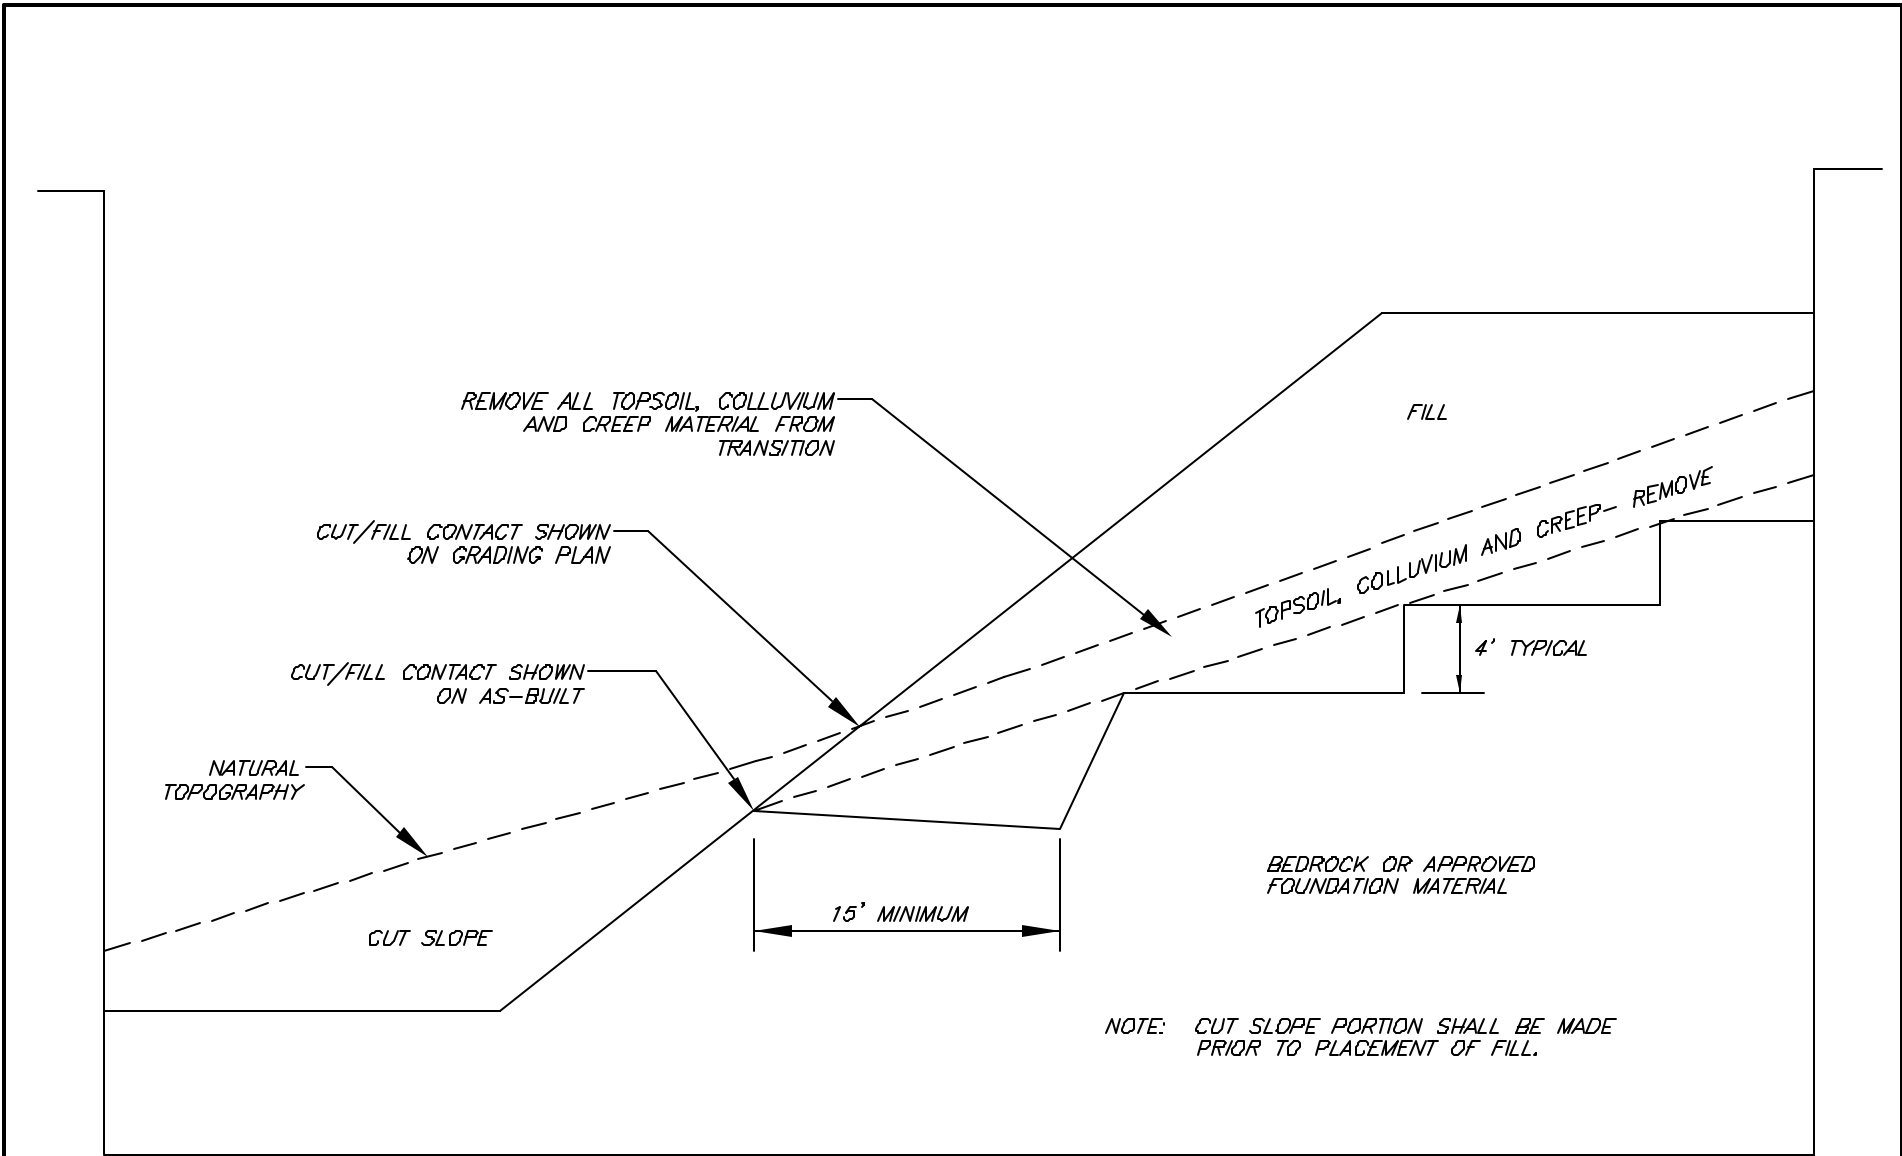


FILL SLOPE ABOVE CUT SLOPE DETAIL



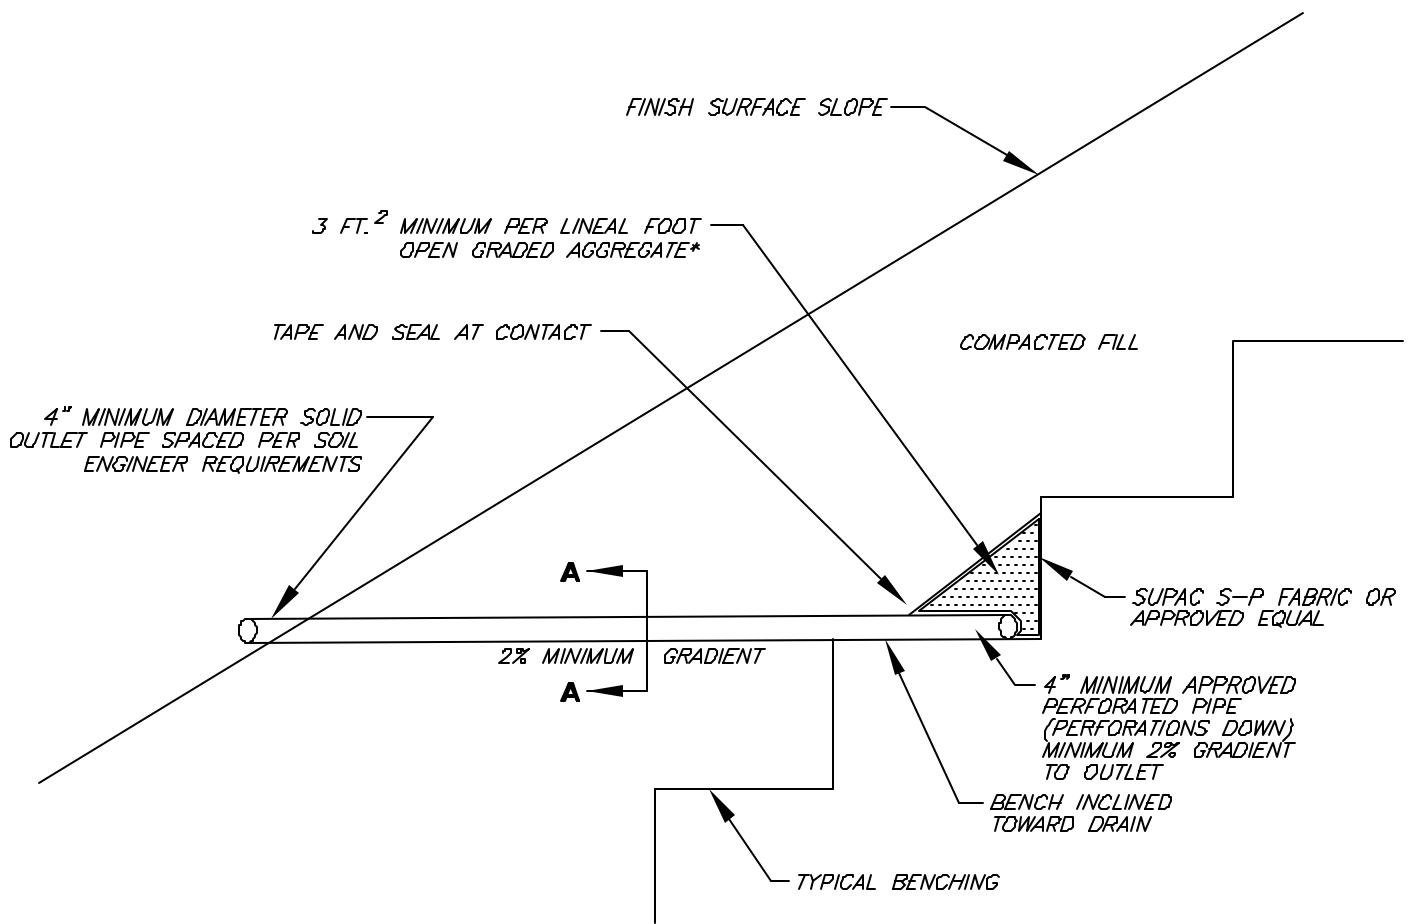

DETAIL A-A

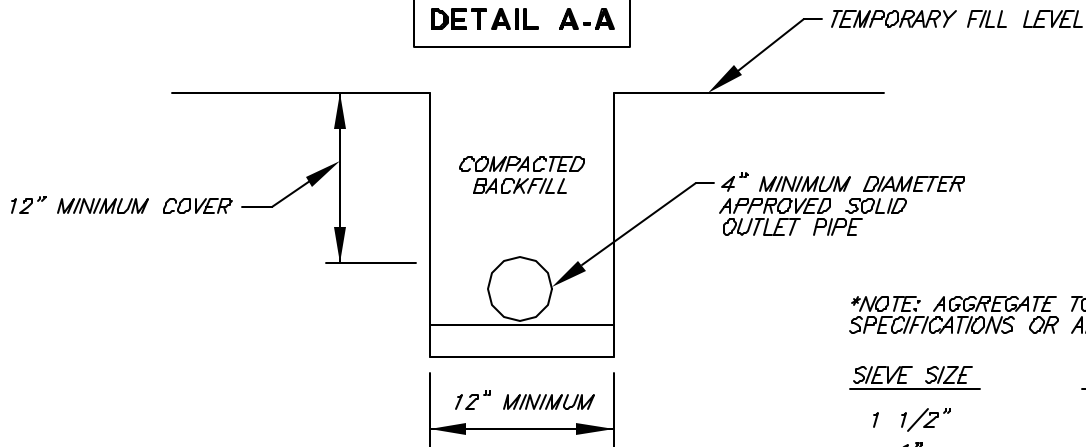


*NOTE: AGGREGATE TO MEET FOLLOWING
SPECIFICATIONS OR APPROVED EQUAL:


SIEVE SIZE	PERCENTAGE PASSING
1 1/2"	100
1"	5-40
3/4"	0-17
3/8"	0-7
NO. 200	0-3

**BACKDRAIN DETAIL
(GEOFABRIC)**



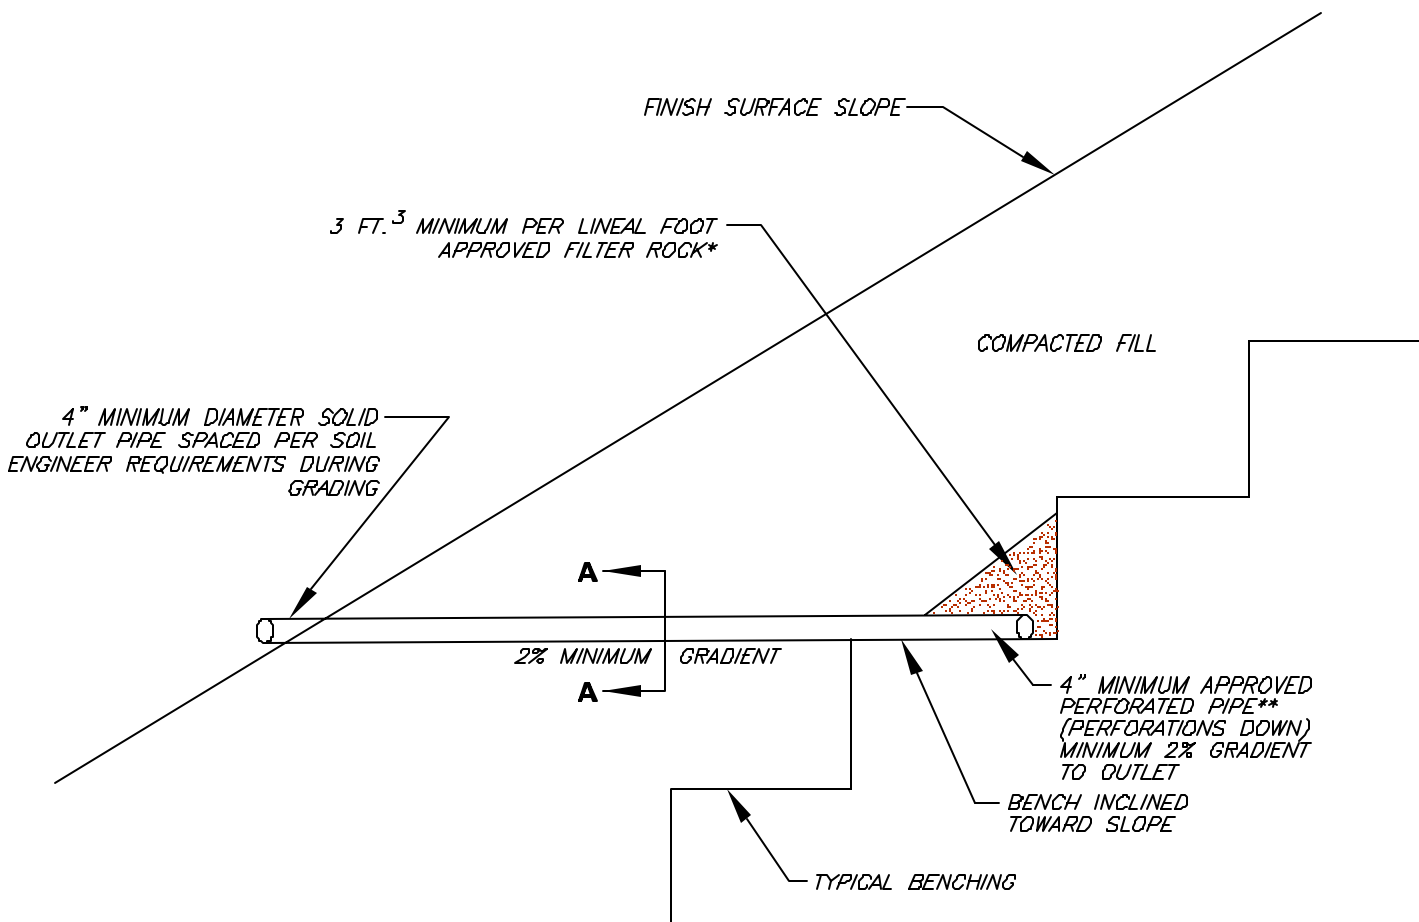

DETAIL A-A

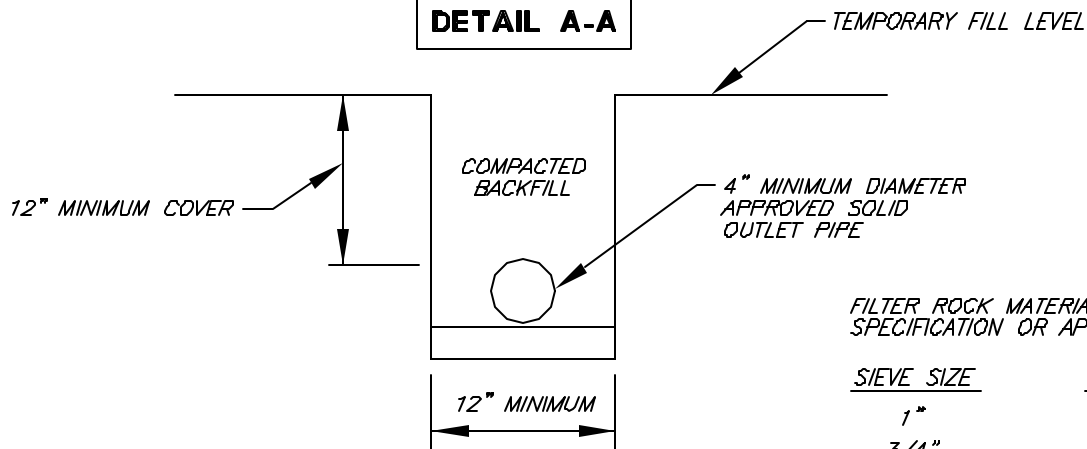

FILTER ROCK MATERIAL TO MEET FOLLOWING SPECIFICATION OR APPROVED EQUAL:


SIEVE SIZE	PERCENTAGE
1"	100
3/4"	90-100
3/8"	40-100
NO. 4	25-40
NO. 30	5-15
NO. 50	0-7
NO. 200	0-3

**APPROVED PIPE TYPE:

SCHEDULE 40 POLYVINYL CHLORIDE (P.V.C.) OR APPROVED EQUAL. MINIMUM CRUSH STRENGTH 1000 PSI.

TYPICAL BACKDRAIN DETAIL




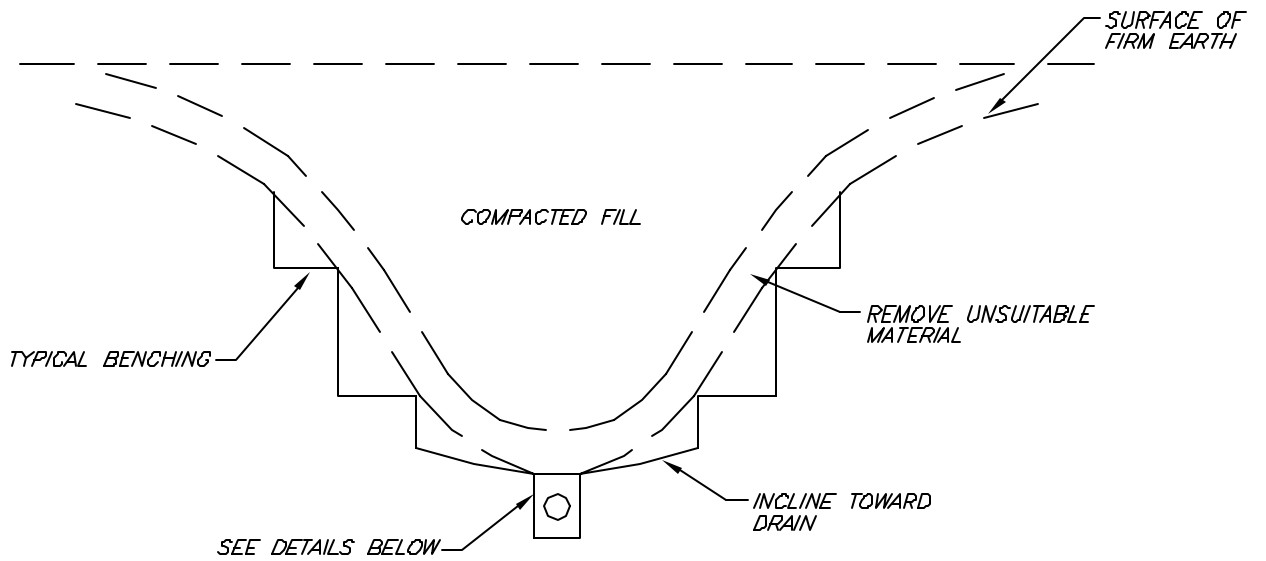

TRENCH DETAIL

6" MINIMUM OVERLAP

OPTIONAL V-DITCH DETAIL

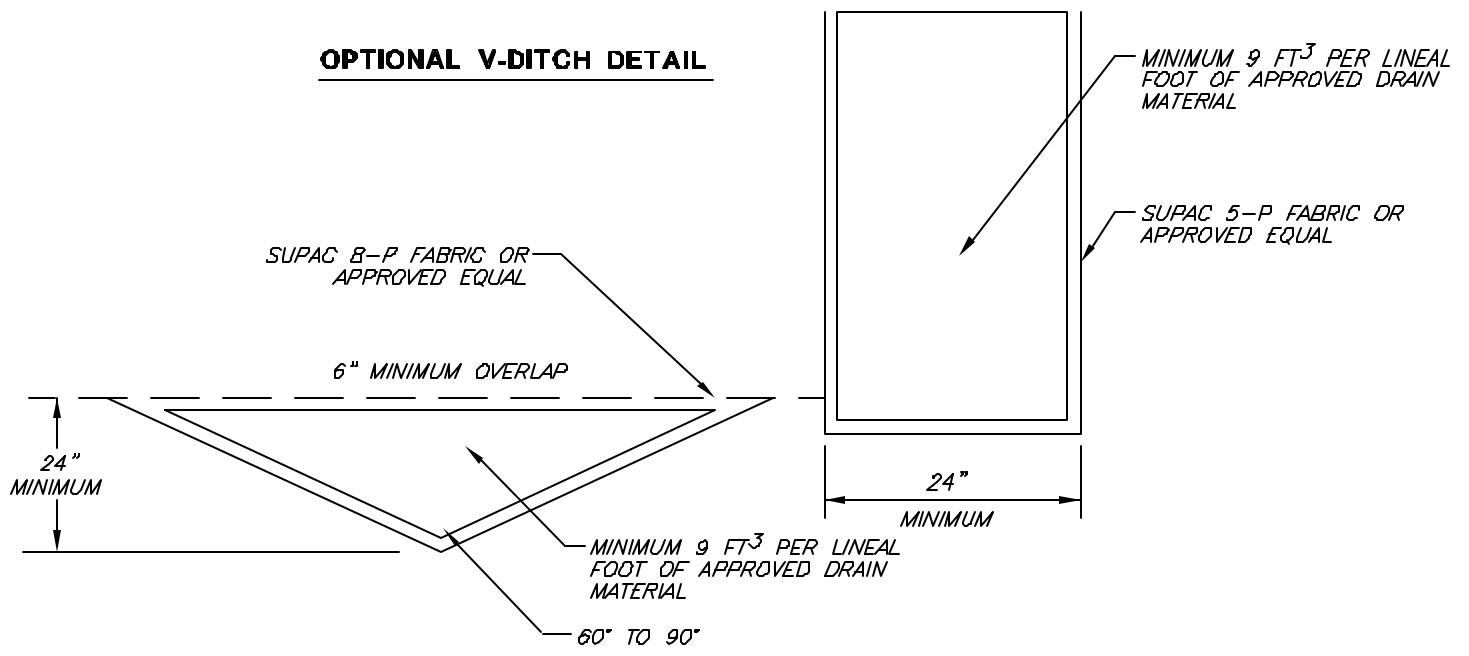

DRAIN MATERIAL TO MEET FOLLOWING SPECIFICATION OR APPROVED EQUAL:

SIEVE SIZE	PERCENTAGE PASSING
1-1/2"	88-100
1"	5-40
3/4"	0-17
3/8"	0-7
NO.:200	0-3


ADD MINIMUM 4" DIAMETER APPROVED PERFORATED PIPE WHEN GRADIENT IS LESS THAN 2%

APPROVED PIPE TO BE SCHEDULE 40 POLY-VINYL-CHLORIDE (P.V.C.) OR APPROVED EQUAL. MINIMUM CRUSH STRENGTH 1000 psi.


GEOFABRIC SUBDRAIN DETAIL



BENCHING FILL OVER NATURAL

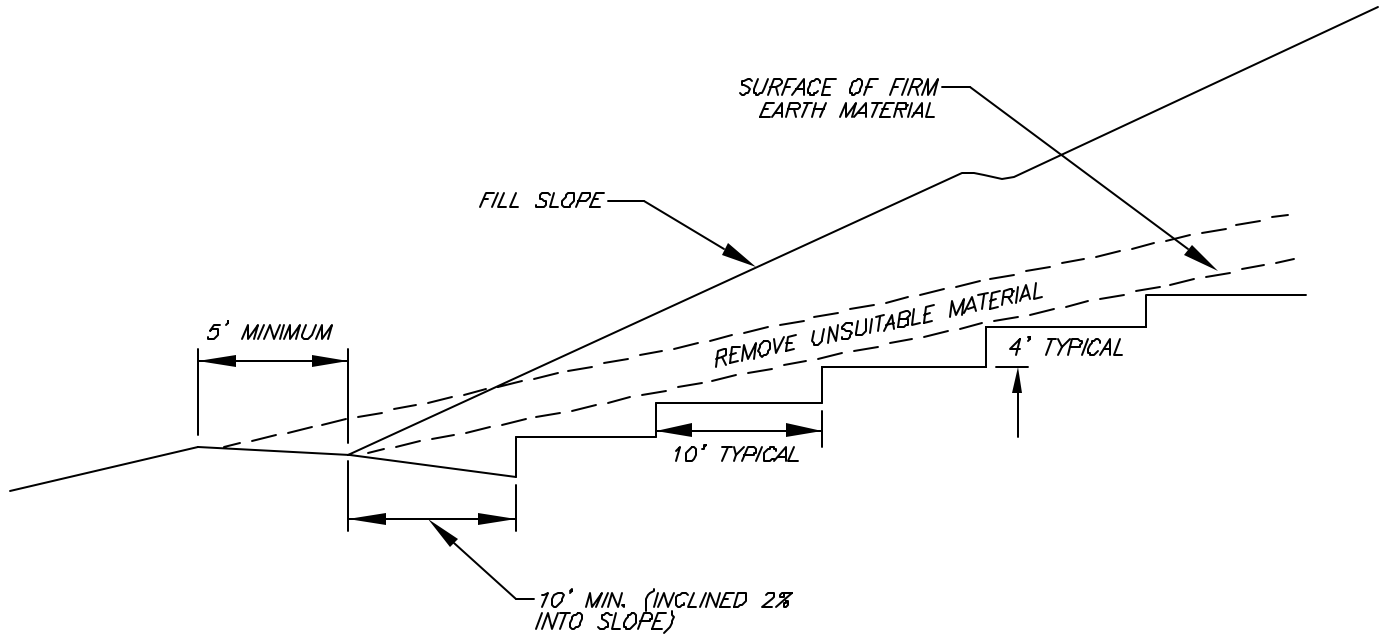


BENCHING FILL OVER CUT

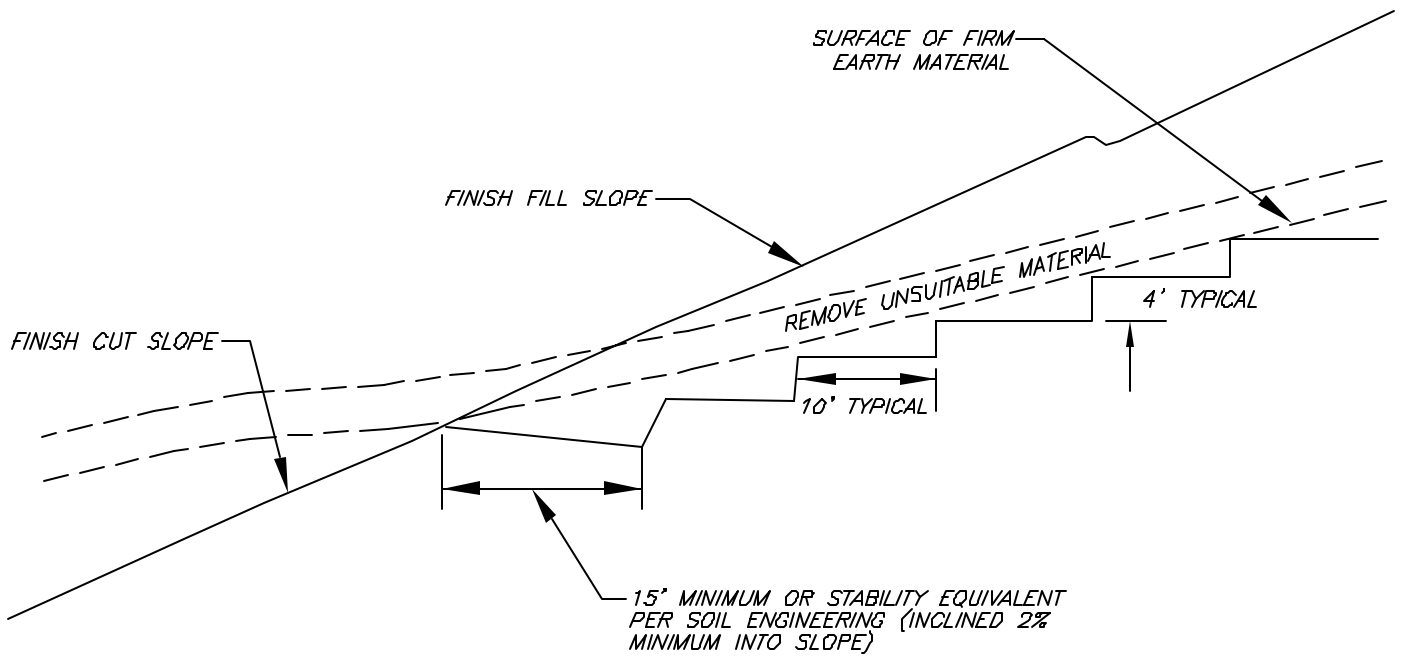


**BENCHING FOR COMPACTED
FILL DETAIL**




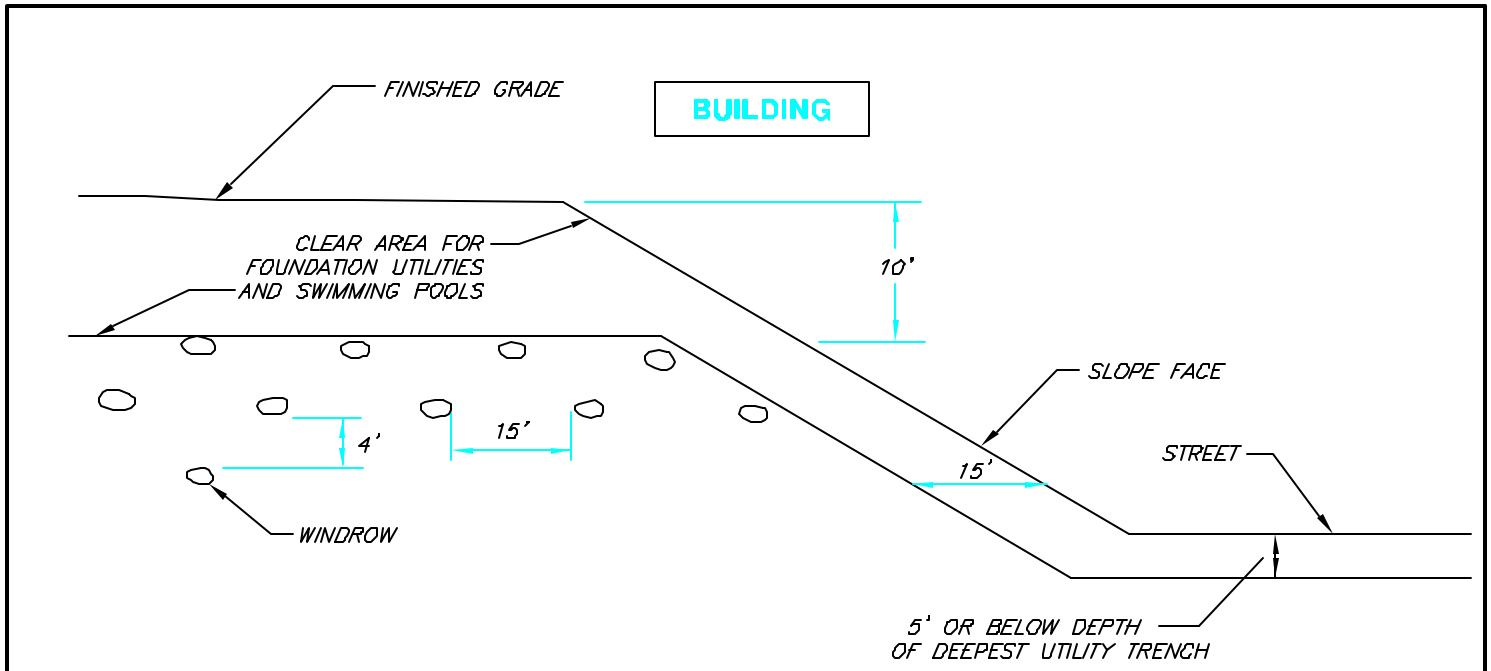

TYPICAL WINDROW DETAIL (EDGE VIEW)

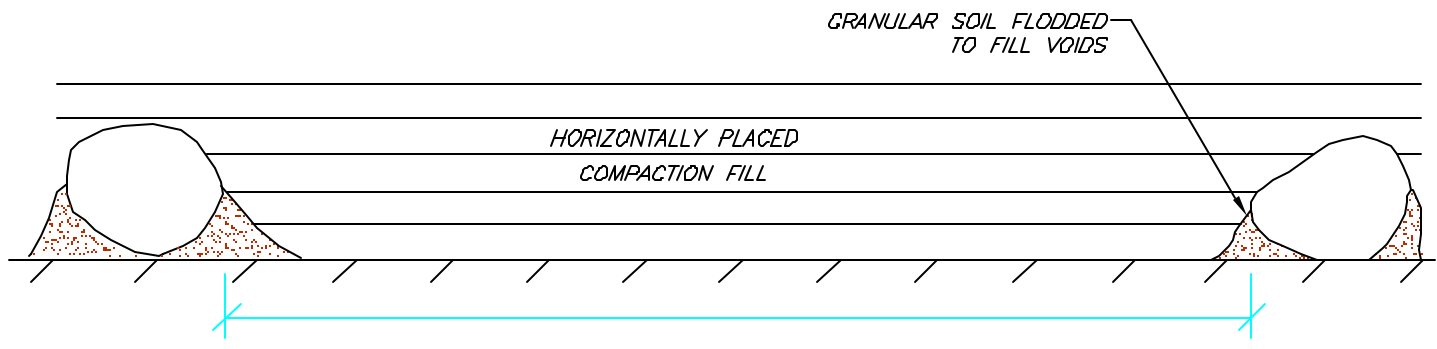


PROFILE VIEW

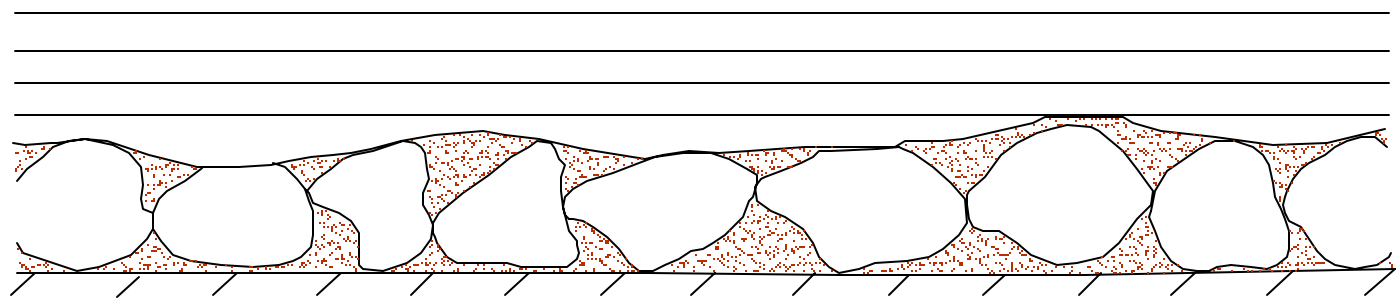


ROCK DISPOSAL DETAIL



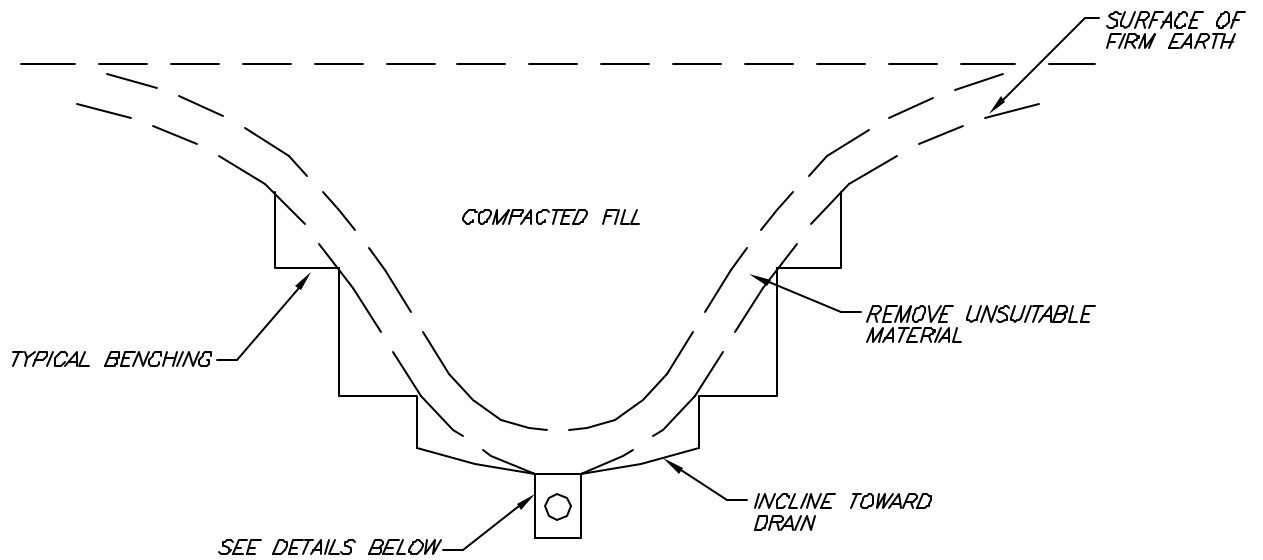

TRENCH DETAIL

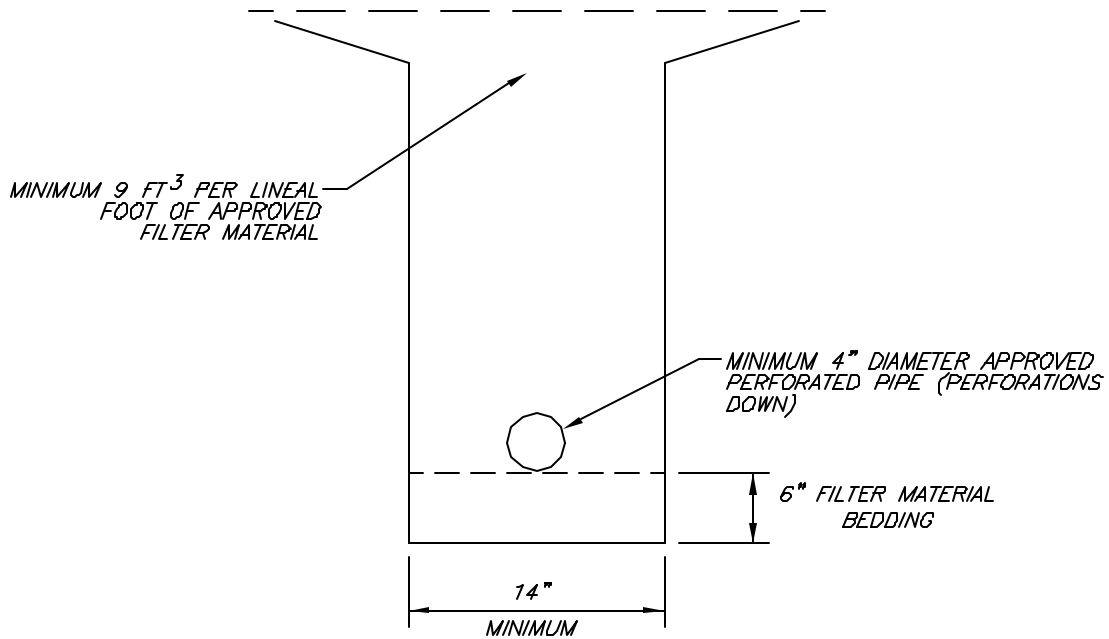

FILTER MATERIAL TO MEET FOLLOWING SPECIFICATION OR APPROVED EQUAL:

SIEVE SIZE	PERCENTAGE
1"	100
3/4"	90-100
3/8"	40-100
NO. 4	25-40
NO. 30	5-15
NO. 50	0-7
NO. 200	0-3


APPROVED PIPE TO BE SCHEDULE 40 POLY-VINYL-CHLORIDE (P.V.C.) OR APPROVED EQUAL. MINIMUM CRUSH STRENGTH 1000 psi.

PIPE DIAMETER TO MEET THE FOLLOWING CRITERIA. SUBJECT TO FIELD REVIEW BASED ON ACTUAL GEOTECHNICAL CONDITIONS ENCOUNTERED DURING GRADING.

LENGTH OF RUN	PIPE DIAMETER
UPPER 500'	4"
NEXT 1000'	6"
> 1500'	8"

**TYPICAL CANYON SUBDRAIN
DETAIL**



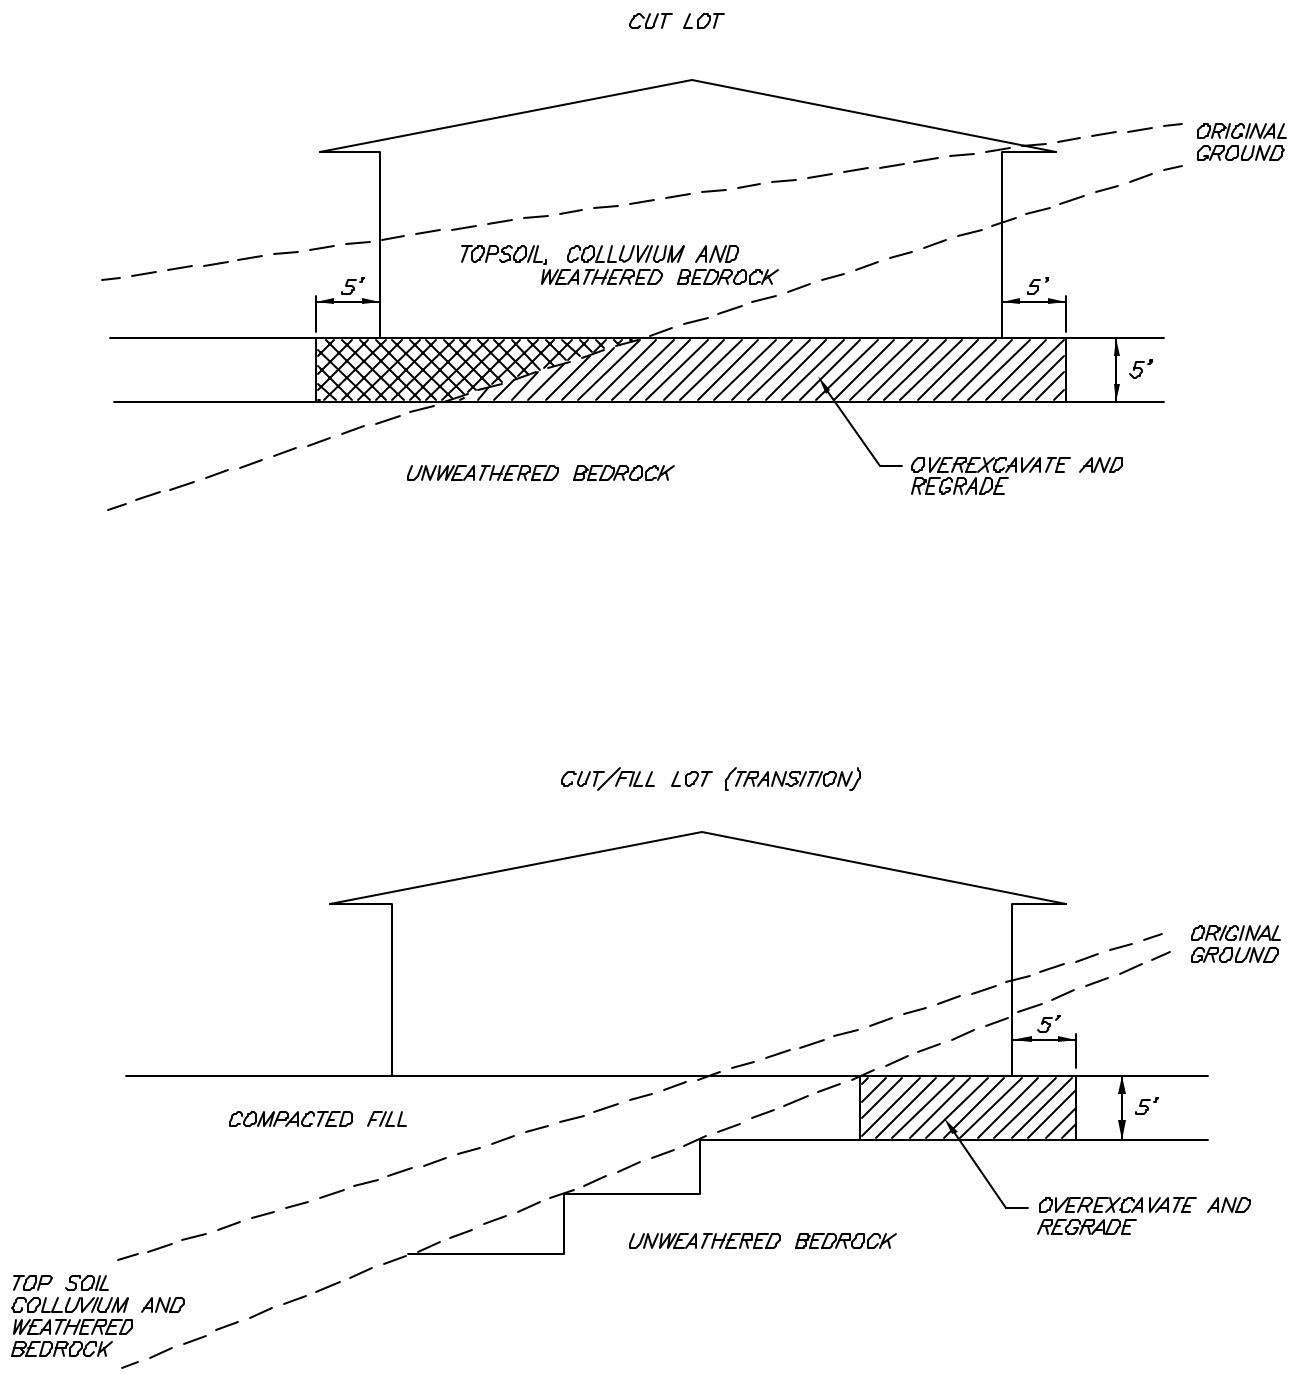

TRANSITION LOT DETAIL